
Phalcon PHP Framework Documentation

Release 3.1.1

Phalcon Team

Jun 23, 2017

Contents

1	Apa itu Phalcon	3
2	Daftar Isi	5
2.1	Installation	5
2.1.1	Installation	5
2.1.2	Phalcon Developer Tools	25
2.2	Tutorials	45
2.2.1	Tutorial 1: Let's learn by example	45
2.2.2	Tutorial 2: Introducing INVO	56
2.2.3	Tutorial 3: Securing INVO	61
2.2.4	Tutorial 4: Working with the CRUD	70
2.2.5	Tutorial 5: Customizing INVO	86
2.2.6	Tutorial 6: Vökuró	88
2.2.7	Tutorial 7: Creating a Simple REST API	92
2.2.8	List of examples	102
2.3	Components	103
2.3.1	Injeksi Ketergantungan/Lokasi Service	103
2.3.2	The MVC Architecture	116
2.3.3	Menggunakan Kontroler	117
2.3.4	Working with Models	124
2.3.5	Model Relationships	142
2.3.6	Model Events	156
2.3.7	Model Behaviors	162
2.3.8	Models Metadata	167
2.3.9	Model Transactions	172
2.3.10	Validating Models	176
2.3.11	Working with Models (Advanced)	179
2.3.12	Phalcon Query Language (PHQL)	189
2.3.13	Caching in the ORM	206
2.3.14	ODM (Object-Document Mapper)	219
2.3.15	Using Views	232
2.3.16	View Helpers (Tags)	252
2.3.17	Pengelolaan Aset	264
2.3.18	Volt: Template Engine	271
2.3.19	Aplikasi MVC	295
2.3.20	Routing	302

2.3.21	Dispatch Kontroler	323
2.3.22	Micro Applications	334
2.3.23	Working with Namespaces	349
2.3.24	Events Manager	351
2.3.25	Request Environment	358
2.3.26	Returning Responses	361
2.3.27	Pengelolaan Cookies	364
2.3.28	Generating URLs and Paths	366
2.3.29	Pesan Flash	369
2.3.30	Storing data in Session	373
2.3.31	Penyaringan dan Sanitasi	376
2.3.32	Escape Kontekstual	380
2.3.33	Validation	384
2.3.34	Forms	391
2.3.35	Membaca Konfigurasi	402
2.3.36	Pagination	406
2.3.37	Meningkatkan Performa dengan Cache	409
2.3.38	Security	417
2.3.39	Enkripsi/Dekripsi	421
2.3.40	Access Control Lists (ACL)	423
2.3.41	Multi-lingual Support	432
2.3.42	Class Autoloader	435
2.3.43	Logging	440
2.3.44	Parser Anotasi	446
2.3.45	Aplikasi Command Line	452
2.3.46	Images	456
2.3.47	Queueing	461
2.3.48	Lapisan Abstraksi Database	463
2.3.49	Internationalization	478
2.3.50	Database Migrations	480
2.3.51	Mendebug Aplikasi	488
2.3.52	Unit testing	492
2.4	In Depth Explanations / Further Reading	496
2.4.1	Increasing Performance: What's next?	496
2.4.2	Dependency Injection Explained	504
2.4.3	Understanding How Phalcon Applications Work	510
2.5	API	514
2.5.1	API Indice	514
2.6	Legal	1110
2.6.1	License	1110
3	Previous Versions	1111
4	Format lain	1113

Selamat datang di Phalcon framework. Misi kami adalah memberimu tool canggih untuk mengembangkan website dan aplikasi web yang lebih cepat dengan PHP.

CHAPTER 1

Apa itu Phalcon

Phalcon adalah framework PHP full stack open source, ditulis sebagai ekstensi C, dioptimasi untuk performa tinggi. Anda tidak perlu belajar atau menggunakan bahasa C, karena fungsionalitasnya disediakan sebagai kelas PHP siap untuk Anda gunakan. Phalcon juga loose-coupled, memungkinkan Anda menggunakan objek-objeknya sebagai komponen perekat sesuai kebutuhan aplikasi Anda.

Phalcon tidak hanya tentang performa, tujuan kami adalah membuatnya kokoh, kaya fitur dan mudah digunakan!

Installation

Installation

PHP extensions require a slightly different installation method to a traditional PHP-based library or framework. You can either download a binary package for the system of your choice or build it from the sources.

Windows

To use phalcon on Windows you can [download](#) a DLL library. Edit your php.ini file and then append at the end:

```
extension=php_phalcon.dll
```

Restart your webserver.

The following screencast is a step-by-step guide to install Phalcon on Windows:

Related Guides

Installation on XAMPP

XAMPP is an easy to install Apache distribution containing MySQL, PHP and Perl. Once you download XAMPP, all you have to do is extract it and start using it. Below are detailed instructions on how to install Phalcon on XAMPP for Windows. Using the latest XAMPP version is highly recommended.


Download the right version of Phalcon

XAMPP is always releasing 32 bit versions of Apache and PHP. You will need to download the x86 version of Phalcon for Windows from the download section.

After downloading the Phalcon library you will have a zip file like the one shown below:



Extract the library from the archive to get the Phalcon DLL:

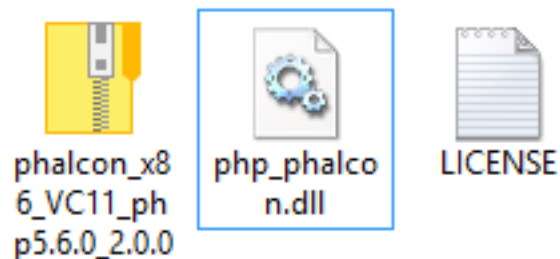

Copy the file `php_phalcon.dll` to the PHP extensions. If you have installed XAMPP in the `C:\xampp` folder, the extension needs to be in `C:\xampp\php\ext`

Edit the `php.ini` file, it is located at `C:\xampp\php\php.ini`. It can be edited with Notepad or a similar program. We recommend Notepad++ to avoid issues with line endings. Append at the end of the file: `extension=php_phalcon.dll` and save it.

Restart the Apache Web Server from the XAMPP Control Center. This will load the new PHP configuration.

Open your browser to navigate to <http://localhost>. The XAMPP welcome page will appear. Click on the link `phpinfo()`.

`phpinfo()` will output a significant amount of information on screen about the current state of PHP. Scroll down to check if the phalcon extension has been loaded correctly.


If you can see the phalcon version in the `phpinfo()` output, congrats!, You are now flying with Phalcon.


Screencast

The following screencast is a step by step guide to install Phalcon on Windows:

Related Guides

- *General Installation*
- *Detailed Installation on WAMP for Windows*

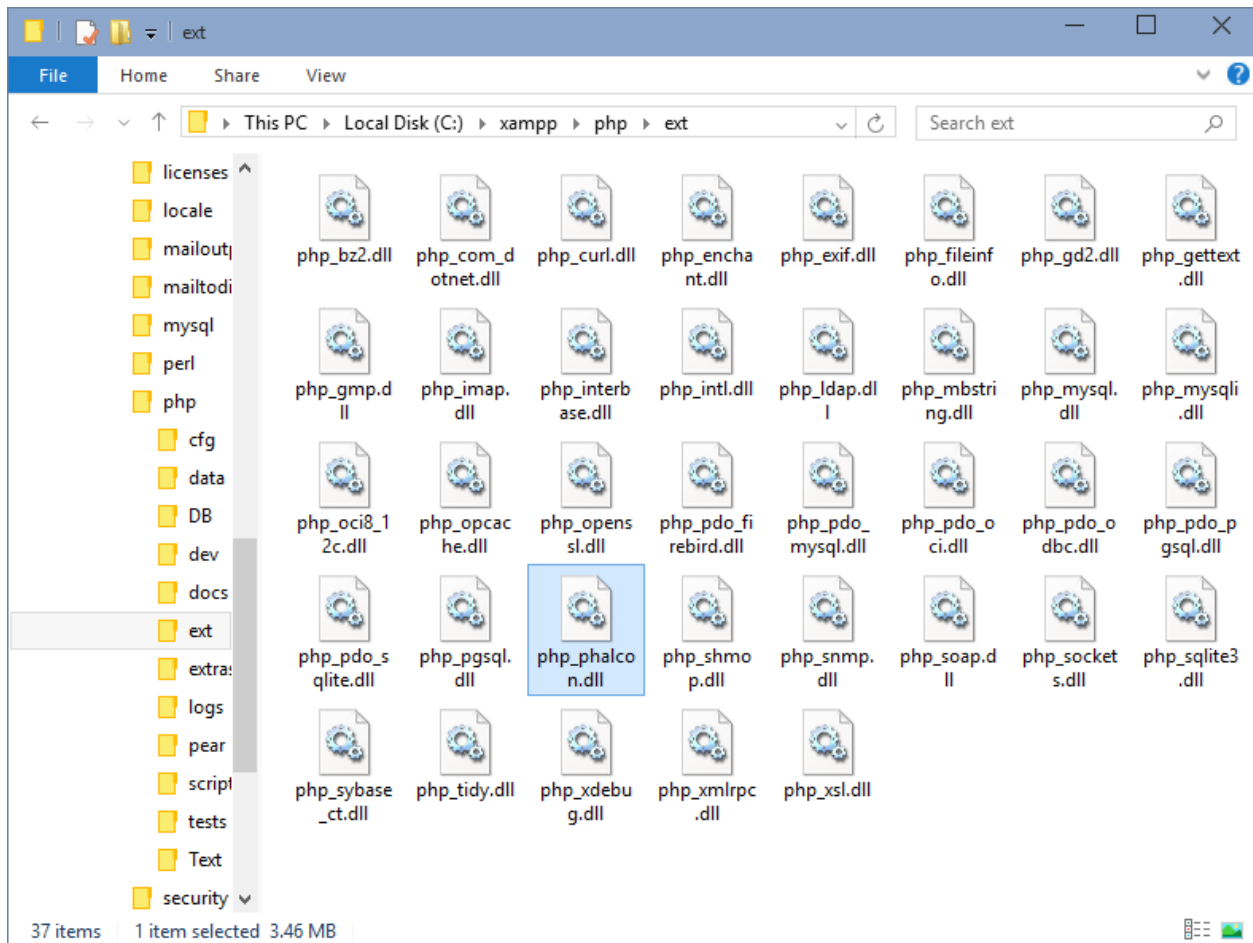

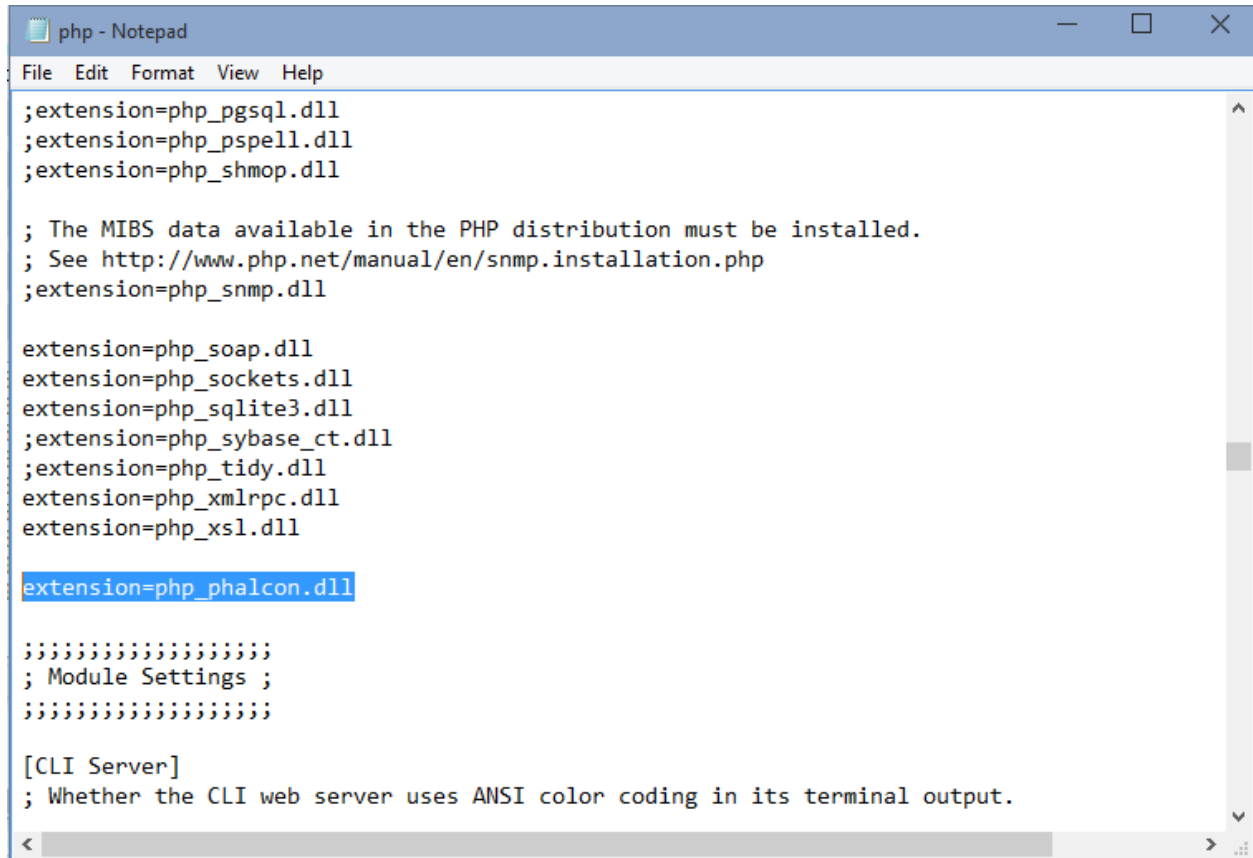

```

;extension=php_pgsqll.dll
;extension=php_pspell.dll
;extension=php_shmop.dll

; The MIBS data available in the PHP distribution must be installed.
; See http://www.php.net/manual/en/snmp.installation.php
;extension=php_snmp.dll


extension=php_soap.dll
extension=php_sockets.dll
extension=php_sqlite3.dll
;extension=php_sybase_ct.dll
;extension=php_tidy.dll
extension=php_xmlrpc.dll
extension=php_xsl.dll

extension=php_phalcon.dll

;;;;;;;;;;;;;;;;;;;;;;;;;
; Module Settings ;
;;;;;;;;;;;;;;;;;;;;;;;;;

[CLI Server]
; Whether the CLI web server uses ANSI color coding in its terminal output.

```

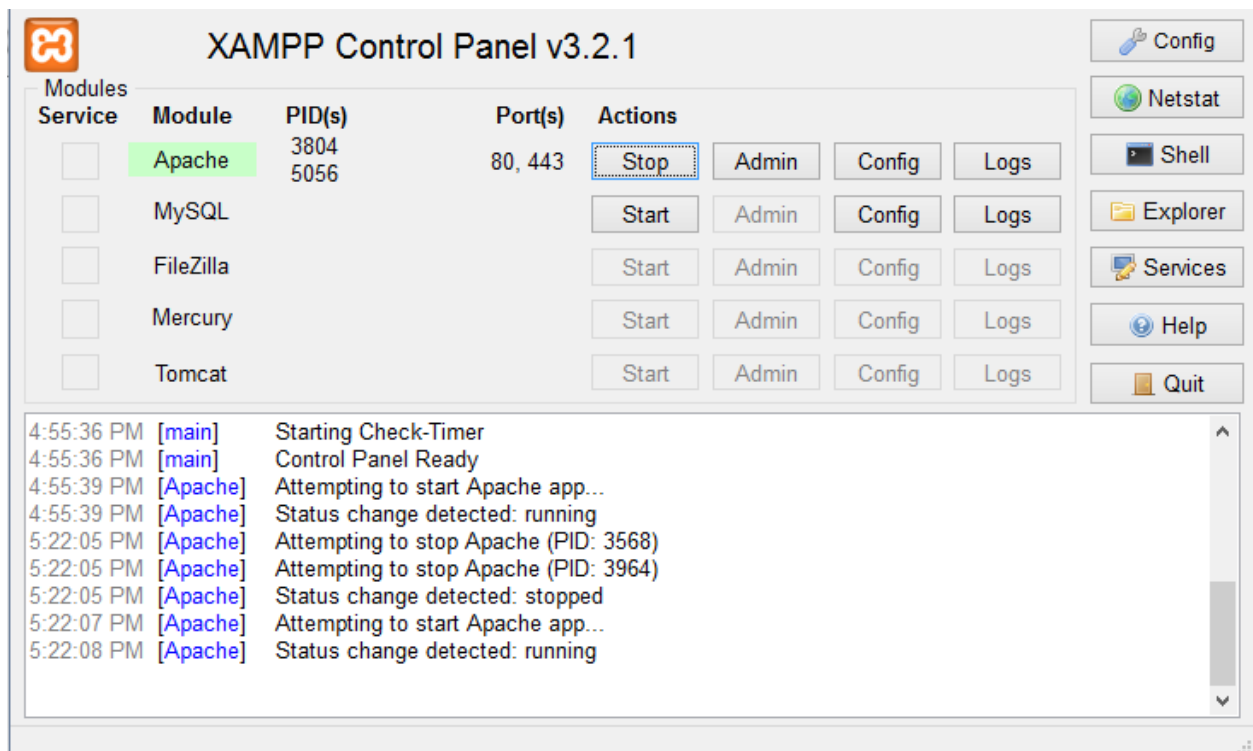

XAMPP Control Panel v3.2.1


Service	Module	PID(s)	Port(s)	Actions
<input type="checkbox"/>	Apache	3804 5056	80, 443	Stop Admin Config Logs
<input type="checkbox"/>	MySQL			Start Admin Config Logs
<input type="checkbox"/>	FileZilla			Start Admin Config Logs
<input type="checkbox"/>	Mercury			Start Admin Config Logs
<input type="checkbox"/>	Tomcat			Start Admin Config Logs

Log Window:

```

4:55:36 PM [main] Starting Check-Timer
4:55:36 PM [main] Control Panel Ready
4:55:39 PM [Apache] Attempting to start Apache app...
4:55:39 PM [Apache] Status change detected: running
5:22:05 PM [Apache] Attempting to stop Apache (PID: 3568)
5:22:05 PM [Apache] Attempting to stop Apache (PID: 3964)
5:22:05 PM [Apache] Status change detected: stopped
5:22:07 PM [Apache] Attempting to start Apache app...
5:22:08 PM [Apache] Status change detected: running

```

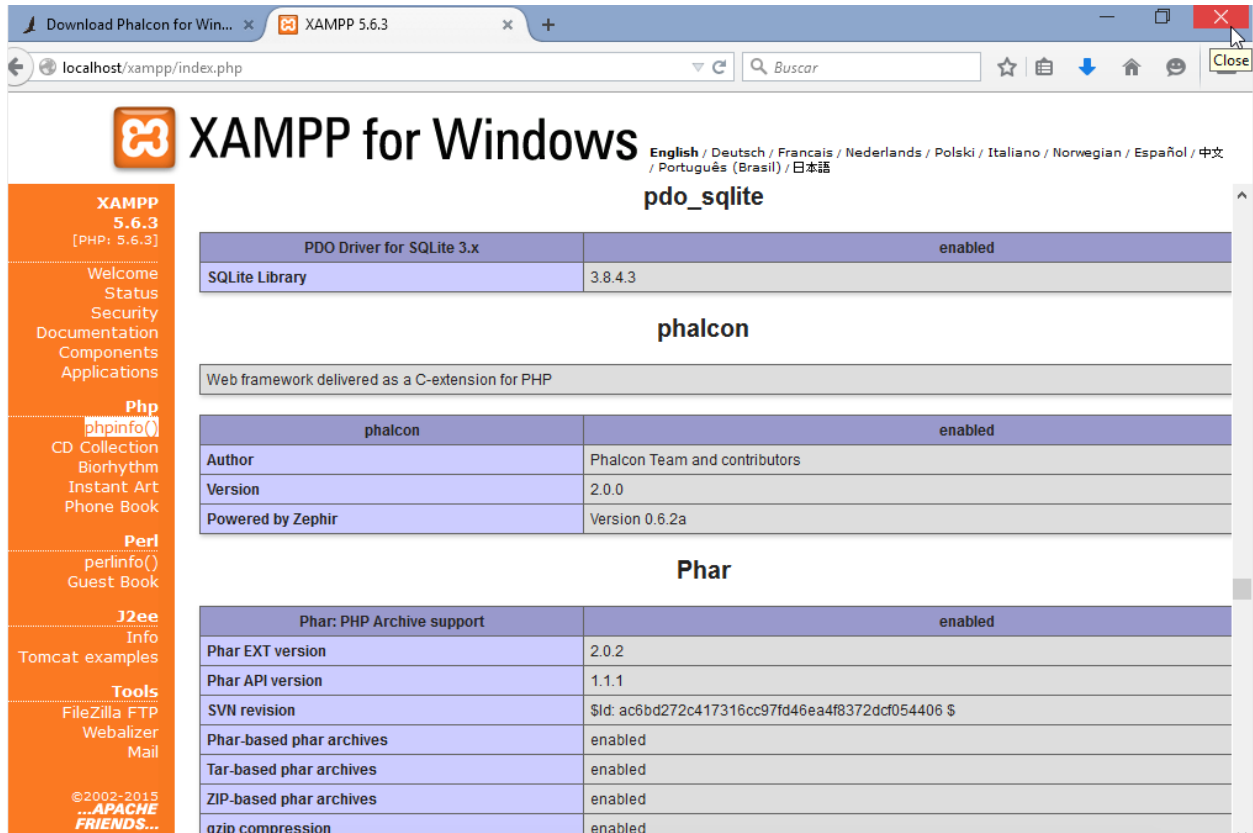

XAMPP for Windows English / Deutsch / Français / Nederlands / Polski / Italiano / Norwegian / Español / 中文 / Português (Brasil) / 日本語

pdo_sqlite

PDO Driver for SQLite 3.x		enabled
SQLite Library	3.8.4.3	

phalcon

Web framework delivered as a C-extension for PHP

phalcon		enabled
Author	Phalcon Team and contributors	
Version	2.0.0	
Powered by Zephir	Version 0.6.2a	

Phar

Phar: PHP Archive support		enabled
Phar EXT version	2.0.2	
Phar API version	1.1.1	
SVN revision	\$Id: ac8bd272c417316cc97fd46ea4f8372dcf054406 \$	
Phar-based phar archives	enabled	
Tar-based phar archives	enabled	
ZIP-based phar archives	enabled	
gzip compression	enabled	

phalcon

Web framework delivered as a C-extension for PHP

phalcon	enabled
Author	Phalcon Team and contributors
Version	2.0.0
Powered by Zephir	Version 0.6.2a

Installation on WAMP

WampServer is a Windows web development environment. It allows you to create web applications with Apache2, PHP and a MySQL database. Below are detailed instructions on how to install Phalcon on WampServer for Windows. Using the latest WampServer version is highly recommended.


Download the right version of Phalcon

WAMP has both 32 and 64 bit versions. From the download section, you can choose the Phalcon for Windows accordingly to your desired architecture.

After download the Phalcon library you will have a zip file like the one shown below:



Extract the library from the archive to get the Phalcon DLL:

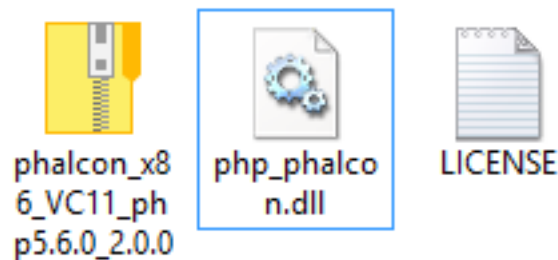

Copy the file `php_phalcon.dll` to the PHP extensions. If WAMP is installed in the `C:\wamp` folder, the extension needs to be in `C:\wamp\bin\php\php5.5.12\ext`



Edit the `php.ini` file, it is located at `C:\wamp\bin\php\php5.5.12\php.ini`. It can be edited with Notepad or a similar program. We recommend Notepad++ to avoid issues with line endings. Append at the end of the file: `extension=php_phalcon.dll` and save it.


Also edit another `php.ini` file, which is located at `C:\wamp\bin\apache\apache2.4.9\bin\php.ini`. Append at the end of the file: `extension=php_phalcon.dll` and save it.


Restart the Apache Web Server. Do a single click on the WampServer icon at system tray. Choose “Restart All Services” from the pop-up menu. Check out that tray icon will become green again.

Open your browser to navigate to <http://localhost>. The WAMP welcome page will appear. Look at the section “extensions loaded” to check if phalcon was loaded.

Congrats!, You are now flying with Phalcon.

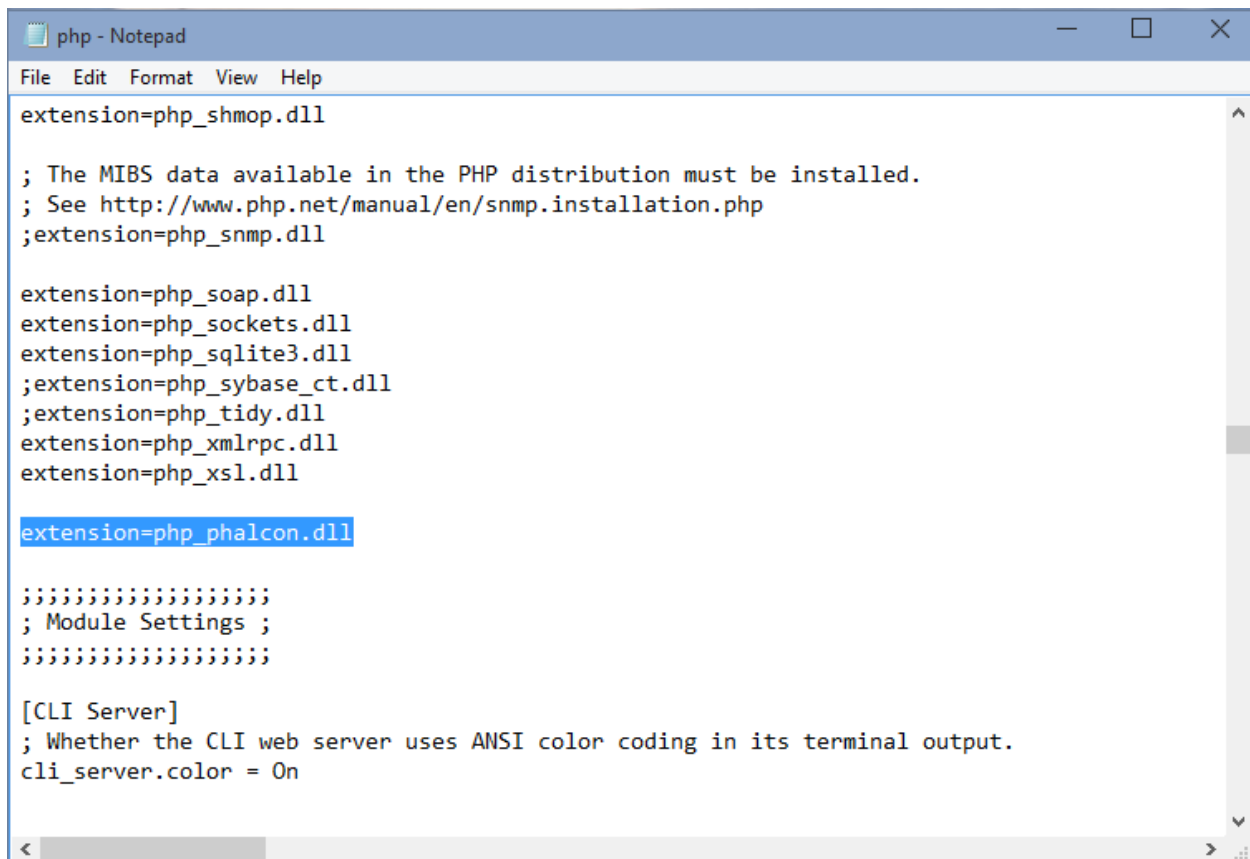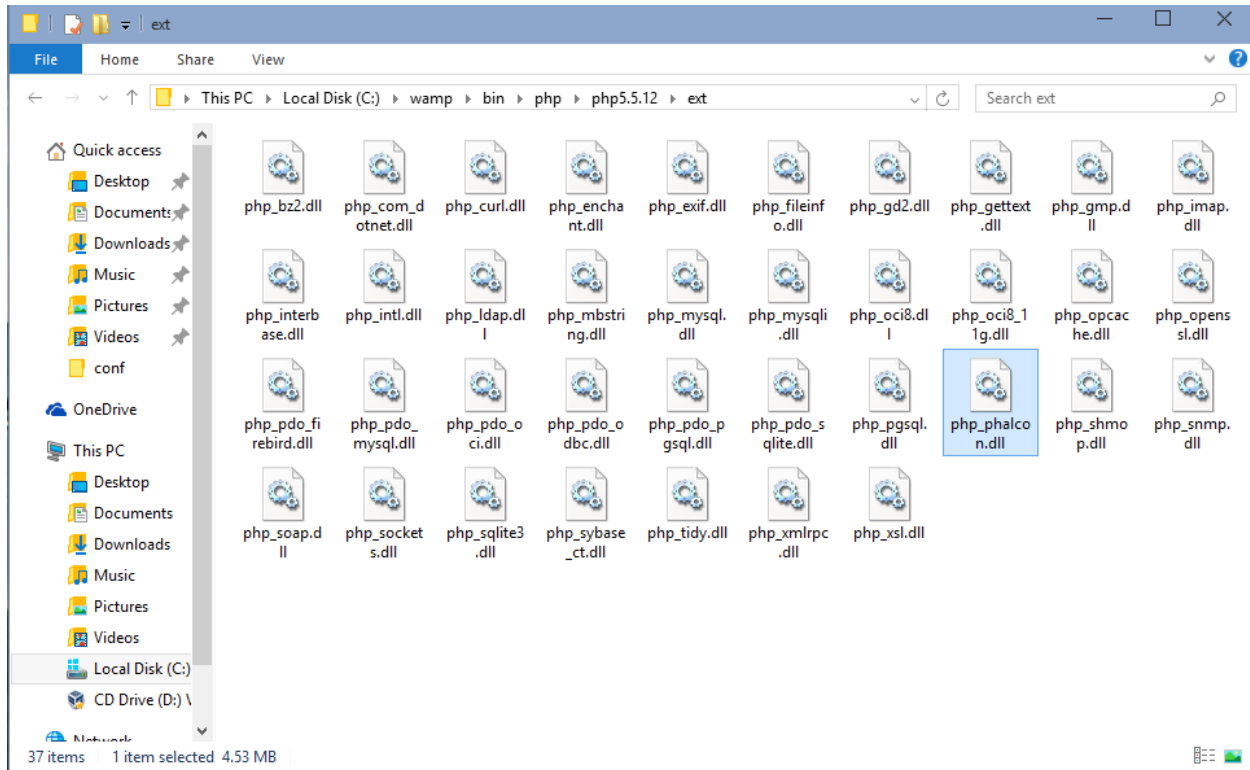

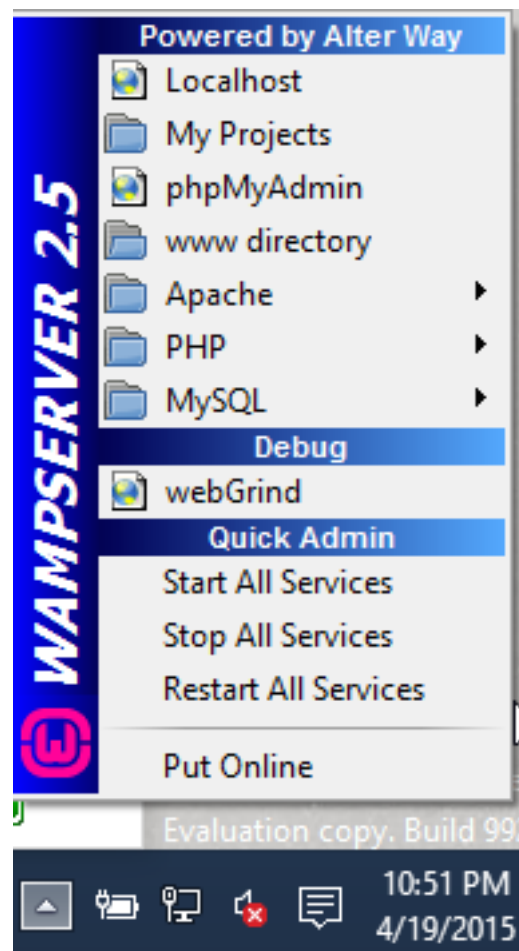



WampServer

Version 2.5 [Version Française](#)

Server Configuration

Apache Version : 2.4.9 - [Documentation](#)

PHP Version : 5.5.12 - [Documentation](#)

Server Software: Apache/2.4.9 (Win64) PHP/5.5.12

Loaded Extensions :

✱ apache2handler	✱ bcmath	✱ bz2	✱ calendar	✱ com_dotnet
✱ Core	✱ ctype	✱ curl	✱ date	✱ dom
✱ ereg	✱ exif	✱ fileinfo	✱ filter	✱ ftp
✱ gd	✱ gettext	✱ gmp	✱ hash	✱ iconv
✱ imap	✱ json	✱ libxml	✱ mbstring	✱ mcrypt
✱ mhash	✱ mysql	✱ mysqli	✱ mysqlnd	✱ odbc
✱ openssl	✱ pcres	✱ PDO	✱ pdo_mysql	✱ pdo_sqlite
✱ phalcon	✱ Phar	✱ Reflection	✱ session	✱ shmop
✱ SimpleXML	✱ soap	✱ sockets	✱ SPL	✱ sqlite3
✱ standard	✱ tokenizer	✱ wddx	✱ xdebug	✱ xml
✱ xmlreader	✱ xmlrpc	✱ xmlwriter	✱ xsl	✱ zip
✱ zlib				

MySQL Version : 5.6.17 - [Documentation](#)

Related Guides

- *General Installation*
- *Detailed Installation on XAMPP for Windows*

Linux/Solaris

Debian / Ubuntu

To add the repository to your distribution:

```
# Stable releases
curl -s https://packagecloud.io/install/repositories/phalcon/stable/script.deb.sh | ␣
↪ sudo bash

# Nightly releases
curl -s https://packagecloud.io/install/repositories/phalcon/nightly/script.deb.sh | ␣
↪ sudo bash
```

This only needs to be done only once, unless your distribution changes or you want to switch from stable to nightly builds.

To install Phalcon:


```
sudo apt-get install php5-phalcon


# or for PHP 7

sudo apt-get install php7.0-phalcon
```

RPM distributions (i.e. CentOS)

To add the repository to our distribution:

```
# Stable releases
curl -s https://packagecloud.io/install/repositories/phalcon/stable/script.rpm.sh | 
↪ sudo bash

# Nightly releases
curl -s https://packagecloud.io/install/repositories/phalcon/nightly/script.rpm.sh | 
↪ sudo bash
```

This only needs to be done only once, unless your distribution changes or you want to switch from stable to nightly builds.

To install Phalcon:

```
sudo yum install php56u-phalcon

# or for PHP 7

sudo yum install php70u-phalcon
```

Compile from source

On a Linux/Solaris system you can easily compile and install the extension from the source code:

Prerequisite packages are:

- PHP >= 5.5 development resources
- GCC compiler (Linux/Solaris)
- Git (if not already installed in your system - unless you download the package from GitHub and upload it on your server via FTP/SFTP)

Specific packages for common platforms:

```
# Ubuntu
sudo apt-get install php5-dev libpcre3-dev gcc make php5-mysql

# Suse
sudo yast -i gcc make autoconf php5-devel php5-pear php5-mysql

# CentOS/RedHat/Fedora
sudo yum install php-devel pcre-devel gcc make

# Solaris
pkg install gcc-45 php-56 apache-php56
```

Creating the extension:

```
git clone git://github.com/phalcon/cphalcon.git

cd cphalcon/build

sudo ./install
```

Add extension to your PHP configuration:

```
# Suse: Add a file called phalcon.ini in /etc/php5/conf.d/ with this content:
extension=phalcon.so

# CentOS/RedHat/Fedora: Add a file called phalcon.ini in /etc/php.d/ with this
↳ content:
extension=phalcon.so

# Ubuntu/Debian with apache2: Add a file called 30-phalcon.ini in /etc/php5/apache2/
↳ conf.d/ with this content:
extension=phalcon.so

# Ubuntu/Debian with php5-fpm: Add a file called 30-phalcon.ini in /etc/php5/fpm/conf.
↳ d/ with this content:
extension=phalcon.so

# Ubuntu/Debian with php5-cli: Add a file called 30-phalcon.ini in /etc/php5/cli/conf.
↳ d/ with this content:
extension=phalcon.so
```

Restart the webserver.

If you are running Ubuntu/Debian with php5-fpm, restart it:

```
sudo service php5-fpm restart
```

Phalcon automatically detects your architecture, however, you can force the compilation for a specific architecture:

```
cd cphalcon/build

# One of the following:
sudo ./install 32bits
sudo ./install 64bits
sudo ./install safe
```

If the automatic installer fails try building the extension manually:

```
cd cphalcon/build/64bits

export CFLAGS="-O2 --fvisibility=hidden"

./configure --enable-phalcon

make && sudo make install
```

Mac OS X

On a Mac OS X system you can compile and install the extension from the source code:

Requirements

Prerequisite packages are:

- PHP >= 5.5 development resources
- XCode

```
# brew
brew tap homebrew/homebrew-php
brew install php55-phalcon
brew install php56-phalcon

# MacPorts
sudo port install php55-phalcon
sudo port install php56-phalcon
```

Add extension to your PHP configuration.

FreeBSD

A port is available for FreeBSD. Just only need these simple line commands to install it:

```
pkg_add -r phalcon
```

or

```
export CFLAGS="-O2 --fvisibility=hidden"

cd /usr/ports/www/phalcon

make install clean
```

Checking your installation

Check your `phpinfo()` output for a section referencing “Phalcon” or execute the code snippet below:

```
<?php print_r(get_loaded_extensions()); ?>
```

The Phalcon extension should appear as part of the output:

```
Array
(
    [0] => Core
    [1] => libxml
    [2] => filter
    [3] => SPL
    [4] => standard
    [5] => phalcon
    [6] => pdo_mysql
)
```

Installation Notes

Installation notes for Web Servers:

Catatan Instalasi Apache

Apache adalah web server populer dan terkenal yang tersedia di beragam platform.

Konfigurasi Apache untuk Phalcon

Berikut ini adalah konfigurasi yang bisa anda gunakan untuk setup Apache dengan Phalcon. Catatan ini utamanya fokus pada konfigurasi modul `mod_rewrite` yang memungkinkan penggunaan URL yang ramah dan *router component*. Aplikasi biasanya menggunakan struktur berikut:

```
test/
  app/
    controllers/
    models/
    views/
  public/
    css/
    img/
    js/
    index.php
```

Directory dalam Document Root utama

Ini adalah kasus paling umum, aplikasi diinstall pada sembarang direktori dalam document root. Pada kasus ini, kita menggunakan dua file `.htaccess`, yang pertama untuk menyembunyikan kode aplikasi dengan mengarahkan semua request ke document root aplikasi (`public/`).

```
# test/.htaccess

<IfModule mod_rewrite.c>
    RewriteEngine on
    RewriteRule ^$ public/ [L]
    RewriteRule ((?s).*) public/$1 [L]
</IfModule>
```

File `.htaccess` kedua diletakkan di direktori `public/`, file ini menulis ulang semua URI ke file `public/index.php`:

```
# test/public/.htaccess

<IfModule mod_rewrite.c>
    RewriteEngine On
    RewriteCond %{REQUEST_FILENAME} !-d
    RewriteCond %{REQUEST_FILENAME} !-f
    RewriteRule ^((?s).*)$ index.php?url=/$1 [QSA,L]
</IfModule>
```

Jika anda tidak ingin menggunakan file `.htaccess` anda dapat memindahkan konfigurasi ini ke file konfigurasi utama Apache:

```
<IfModule mod_rewrite.c>

    <Directory "/var/www/test">
        RewriteEngine on
        RewriteRule ^$ public/ [L]
```

```
RewriteRule ((?s).*) public/$1 [L]
</Directory>

<Directory "/var/www/test/public">
    RewriteEngine On
    RewriteCond %{REQUEST_FILENAME} !-d
    RewriteCond %{REQUEST_FILENAME} !-f
    RewriteRule ^((?s).*)$ index.php?url=/$1 [QSA,L]
</Directory>

</IfModule>
```

Virtual Host

Konfigurasi kedua memungkinkan anda menginstall aplikasi Phalcon dalam sebuah virtual host:

```
<VirtualHost *:80>

    ServerAdmin admin@example.host
    DocumentRoot "/var/vhosts/test/public"
    DirectoryIndex index.php
    ServerName example.host
    ServerAlias www.example.host

    <Directory "/var/vhosts/test/public">
        Options All
        AllowOverride All
        Allow from all
    </Directory>

</VirtualHost>
```

Atau jika Anda menggunakan Apache 2.4 atau diatasnya:

```
<VirtualHost *:80>

    ServerAdmin admin@example.host
    DocumentRoot "/var/vhosts/test/public"
    DirectoryIndex index.php
    ServerName example.host
    ServerAlias www.example.host

    <Directory "/var/vhosts/test/public">
        Options All
        AllowOverride All
        Require all granted
    </Directory>

</VirtualHost>
```

Nginx Installation Notes

Nginx is a free, open-source, high-performance HTTP server and reverse proxy, as well as an IMAP/POP3 proxy server. Unlike traditional servers, Nginx doesn't rely on threads to handle requests. Instead it uses a much more

scalable event-driven (asynchronous) architecture. This architecture uses small, but more importantly, predictable amounts of memory under load.

The **PHP-FPM** (FastCGI Process Manager) is usually used to allow **Nginx** to process PHP files. Nowadays, **PHP-FPM** is bundled with any Unix PHP distribution. Phalcon + **Nginx** + **PHP-FPM** provides a powerful set of tools that offer maximum performance for your PHP applications.

Configuring Nginx for Phalcon

The following are potential configurations you can use to setup nginx with Phalcon:

Basic configuration

Using `$_GET['_url']` as source of URIs:

```
server {
    listen      80;
    server_name localhost.dev;
    root        /var/www/phalcon/public;
    index       index.php index.html index.htm;
    charset     utf-8;

    location / {
        try_files $uri $uri/ /index.php?url=$uri$args;
    }

    location ~ /\.php {
        fastcgi_pass   unix:/run/php-fpm/php-fpm.sock;
        fastcgi_index  /index.php;

        include fastcgi_params;
        fastcgi_split_path_info      ^(\.+\\.php)(/.+)$;
        fastcgi_param  PATH_INFO      $fastcgi_path_info;
        fastcgi_param  PATH_TRANSLATED $document_root$fastcgi_path_info;
        fastcgi_param  SCRIPT_FILENAME $document_root$fastcgi_script_name;
    }

    location ~ /\.ht {
        deny all;
    }
}
```

Using `$_SERVER['REQUEST_URI']` as source of URIs:

```
server {
    listen      80;
    server_name localhost.dev;
    root        /var/www/phalcon/public;
    index       index.php index.html index.htm;
    charset     utf-8;

    location / {
        try_files $uri $uri/ /index.php;
    }

    location ~ /\.php$ {
```

```
try_files      $uri =404;

fastcgi_pass   127.0.0.1:9000;
fastcgi_index  /index.php;

include fastcgi_params;
fastcgi_split_path_info    ^(\.+\.php) (/.+)$;
fastcgi_param PATH_INFO    $fastcgi_path_info;
fastcgi_param PATH_TRANSLATED $document_root$fastcgi_path_info;
fastcgi_param SCRIPT_FILENAME $document_root$fastcgi_script_name;
}

location ~ /\.ht {
    deny all;
}
}
```

Catatan Instalasi Cherokee

Cherokee adalah web server berkinerja tinggi. Ia sangat cepat, fleksibel dan mudah dikonfigurasi.

Mengkonfigurasi Cherokee untuk Phalcon

Cherokee menyediakan antarmuka grafis bersahabat untuk mengkonfigurasi hampir semua pengaturan yang tersedia di web server ini. Mulai sebagai administrator cherokee dengan menjalankan sebagai root `/path-to-cherokee/sbin/cherokee-admin`

Menitpakan virtual host baru dengan mengklik pada ‘vServers’, lalu menambahkan virtual server baru:

Virtual server yang baru ditambahkan muncul di sisi kiri layar. Di tab ‘Behaviors’ anda akan melihat default behaviors untuk virtual server ini. Klik tombol ‘Rule Management’. Hapus yang ditandai sebagai ‘Directory /cherokee_themes’ dan ‘Directory /icons’:

Tambahkan ‘PHP Language’ behavior menggunakan wizard. Behavior ini memungkinkan anda menjalankan aplikasi PHP:

Normalnya behavior ini tidak membutuhkan pengaturan tambahan. Tambahkan behavior lain, kali ini dibagian ‘Manual Configuration’. Di ‘Rule Type’ pilih ‘File Exists’, lalu pastikan pilihan ‘Match any file’ dihidupkan:

Di tab ‘Handler’ pilih ‘List & Send’ sebagai handler:

Edit behavior default ‘Default’ untuk menghidupkan URL-rewrite engine. Ubah handler ke ‘Redirection’, lalu tambahkan regular expression berikut ke engine `^(.*)$`:

Akhirnya, pastikan behavior memiliki urutan berikut:


Eksekusi aplikasi di browser:

Menggunakan Web Server bawaan PHP

Mulai PHP 5.4.0, anda dapt menggunakan web **server** bawaan PHP untuk pengembangan.

Untuk memulai server ketik:

```
php -S localhost:8000 -t /public
```

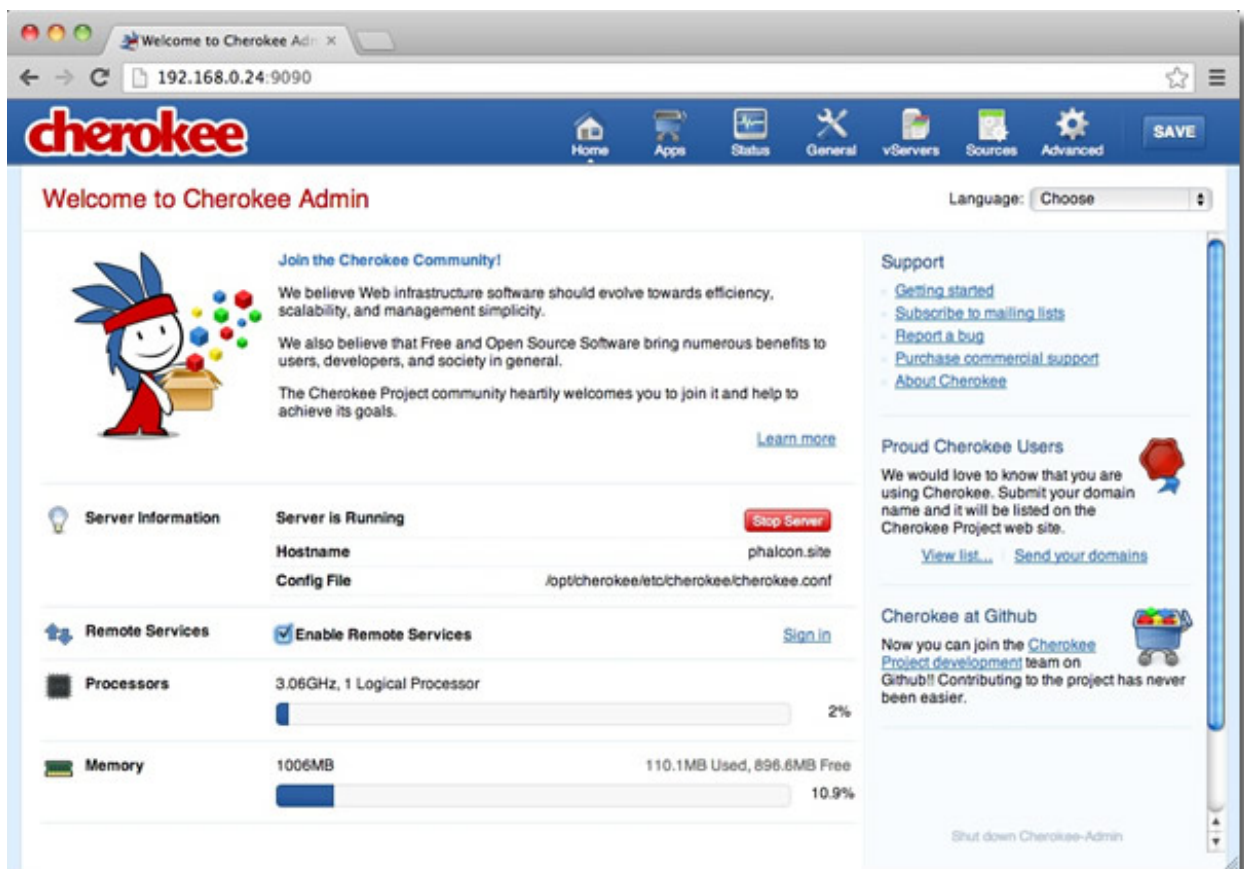Add New Virtual Server

Manual
Manual configuration

- CMS**
Content Management Systems
- Application Servers**
General Purpose Application Servers
- Platforms**
Web Development Platforms
- Languages**
Development Languages and Platforms
- Web Applications**
General Purpose Applications
- Tasks**
Common Maintenance Tasks

Nick
Name of the Virtual Server you are about to create. A domain name is alright.

Document Root
Document Root directory of the new Virtual Server.

Add **Cancel**



Virtual Server: my-phalcon.app Help




Basics **Host Match** **Behavior** **Error Handler** **Logging** **Security**


Behavior Rules

Match	Handler	Auth	Root	Secure	Enc	Cache	Exp	Timeout	Shaping	Log	Final
Default	List & Send									✓	✓

Rule Management

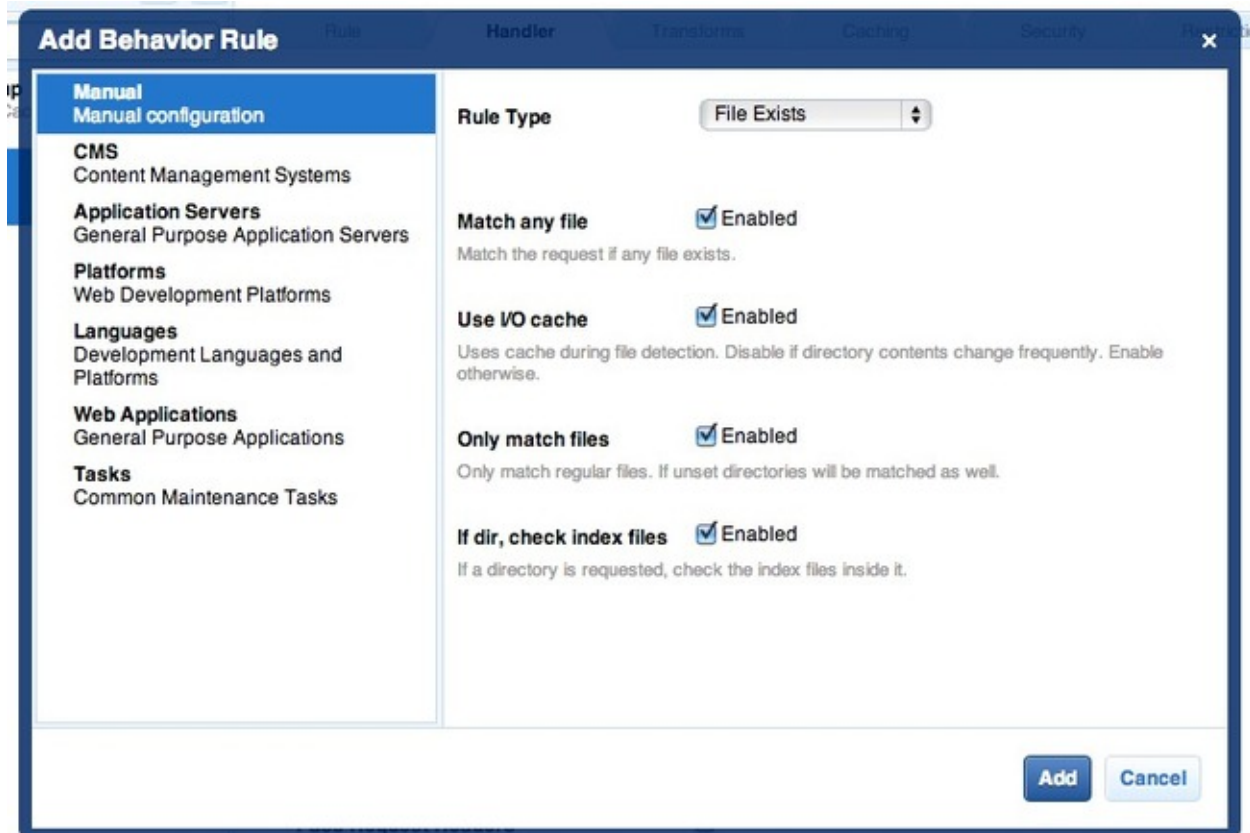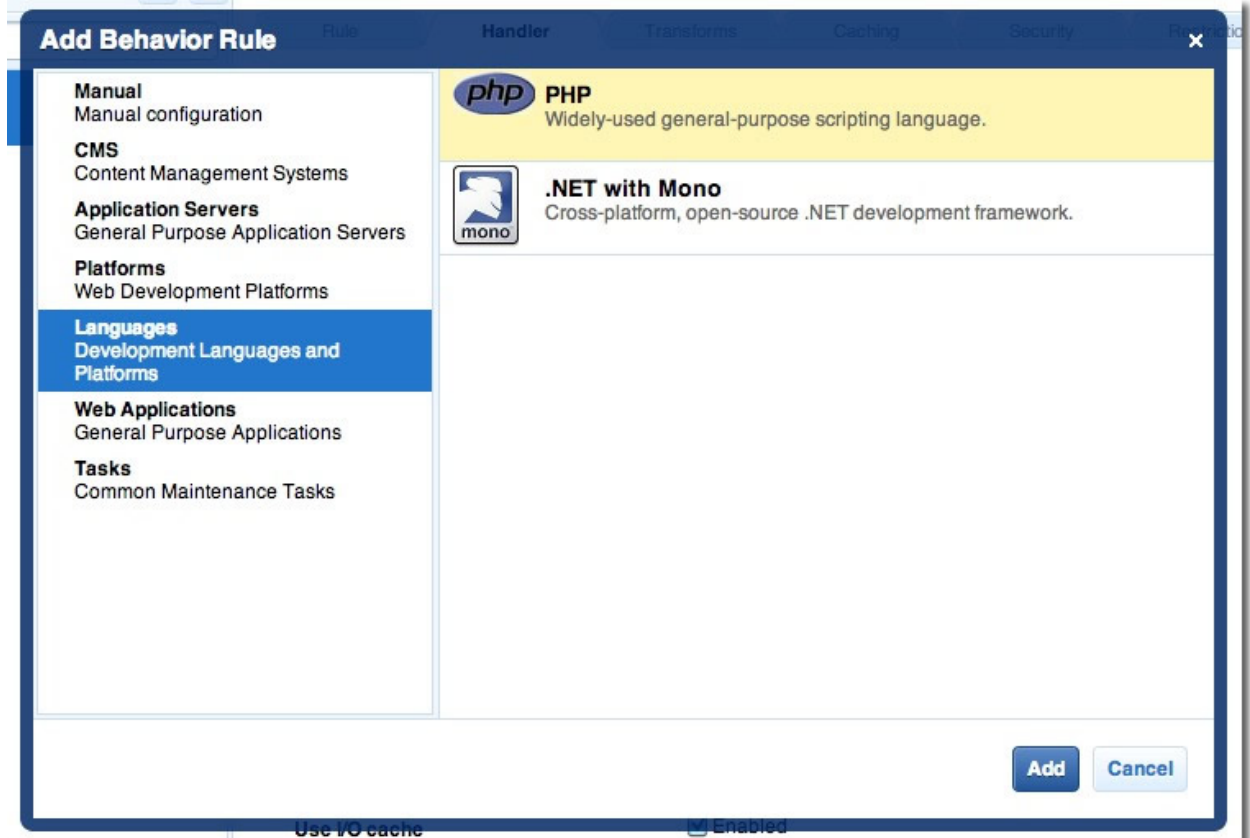

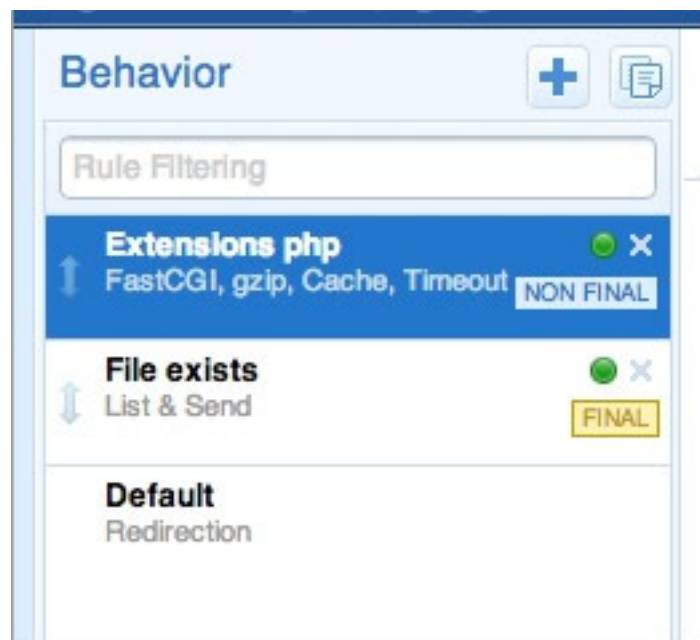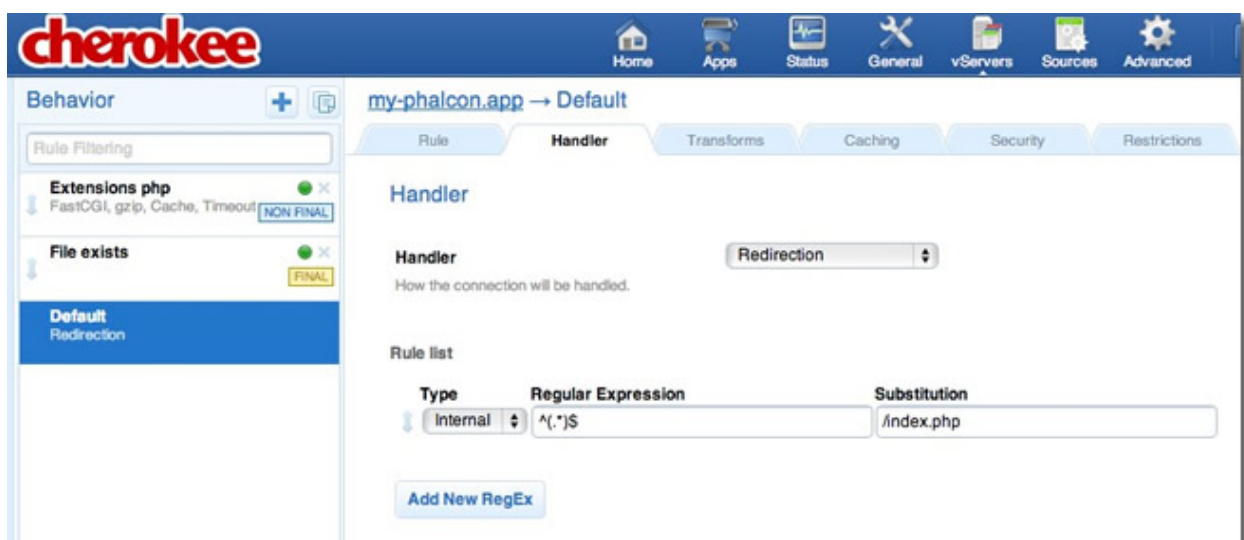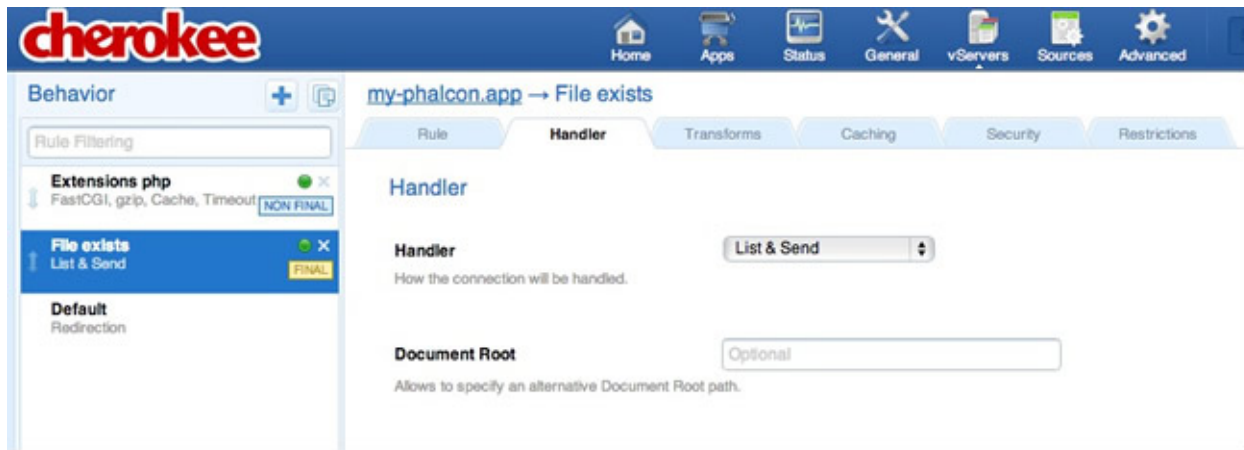

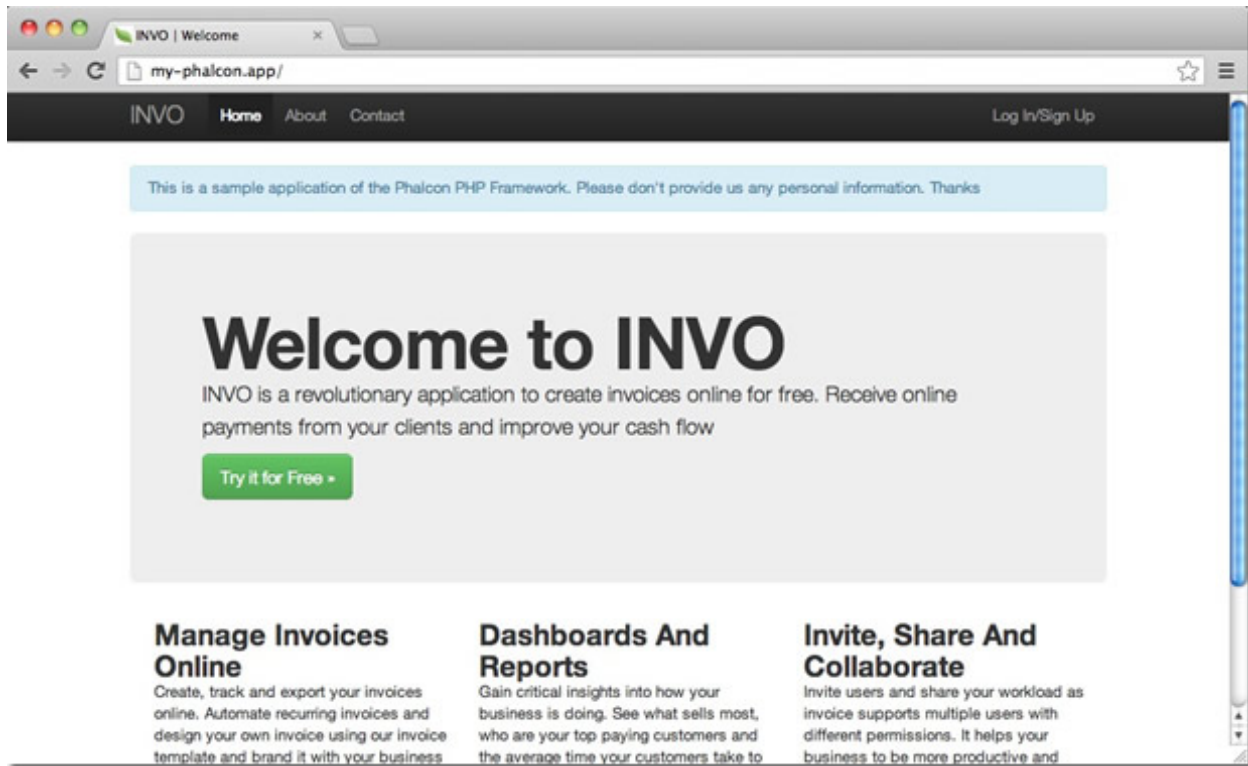

Jika anda ingin menulis ulang URI ke file index.php gunakan file router berikut (.htrouter.php):

```
<?php
if (!file_exists(__DIR__ . '/' . $_SERVER['REQUEST_URI'])) {
    $_GET['_url'] = $_SERVER['REQUEST_URI'];
}
return false;
```

dan jalankan server dari direktori proyek:

```
php -S localhost:8000 -t /public .htrouter.php
```

Lau arahkan browser anda ke <http://localhost:8000/> untuk menguji apakah semuanya bekerja.

Phalcon Developer Tools

These tools are a collection of useful scripts to generate skeleton code. Core components of your application can be generated with a simple command, allowing you to easily develop applications using Phalcon.

If you prefer to use the web version instead of the console, this [blog post](#) offers more information.

Download

You can download or clone a cross platform package containing the developer tools from [Github](#).

Installation

These are detailed instructions on how to install the developer tools on different platforms:

Phalcon Developer Tools on Windows

These steps will guide you through the process of installing Phalcon Developer Tools for Windows.

Prerequisites

The Phalcon PHP extension is required to run Phalcon Tools. If you haven't installed it yet, please see the [Installation](#) section for instructions.

Download

You can download a cross platform package containing the developer tools from the [Download](#) section. Also you can clone it from [Github](#).

On the Windows platform, you need to configure the system PATH to include Phalcon tools as well as the PHP executable. If you download the Phalcon tools as a zip archive, extract it on any path of your local drive i.e. *c:\phalcon-tools*. You will need this path in the steps below. Edit the file "phalcon.bat" by right clicking on the file and selecting "Edit":

Change the path to the one you installed the Phalcon tools (set PTOOLSPATH=C:\phalcon-tools):

Save the changes.

Adding PHP and Tools to your system PATH

Because the scripts are written in PHP, you need to install it on your machine. Depending on your PHP installation, the executable can be located in various places. Search for the file php.exe and copy the path it is located in. For instance, if using the latest WAMP stack, PHP is located in: *C:\wampbin\php\php5.3.10\php.exe*.

From the Windows start menu, right mouse click on the "Computer" icon and select "Properties":

Click the "Advanced" tab and then the button "Environment Variables":

At the bottom, look for the section "System variables" and edit the variable "Path":


Be very careful on this step! You need to append at the end of the long string the path where your php.exe was located and the path where Phalcon tools are installed. Use the ";" character to separate the different paths in the variable:



Accept the changes made by clicking "OK" and close the dialogs opened. From the start menu click on the option "Run". If you can't find this option, press "Windows Key" + "R".


Type "cmd" and press enter to open the windows command line utility:



Type the commands "php -v" and "phalcon" and you will see something like this:




Congratulations you now have Phalcon tools installed!

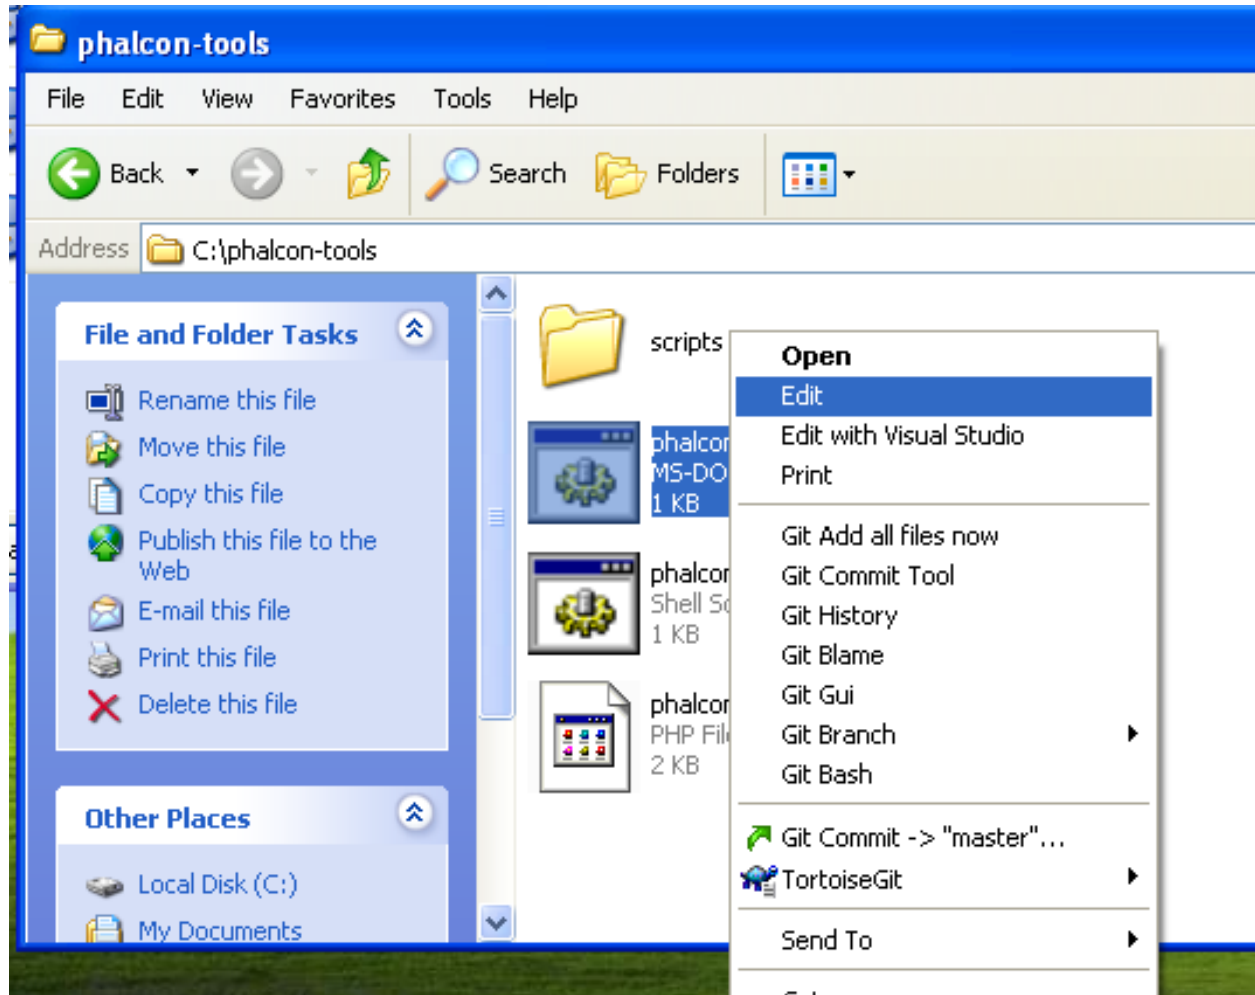

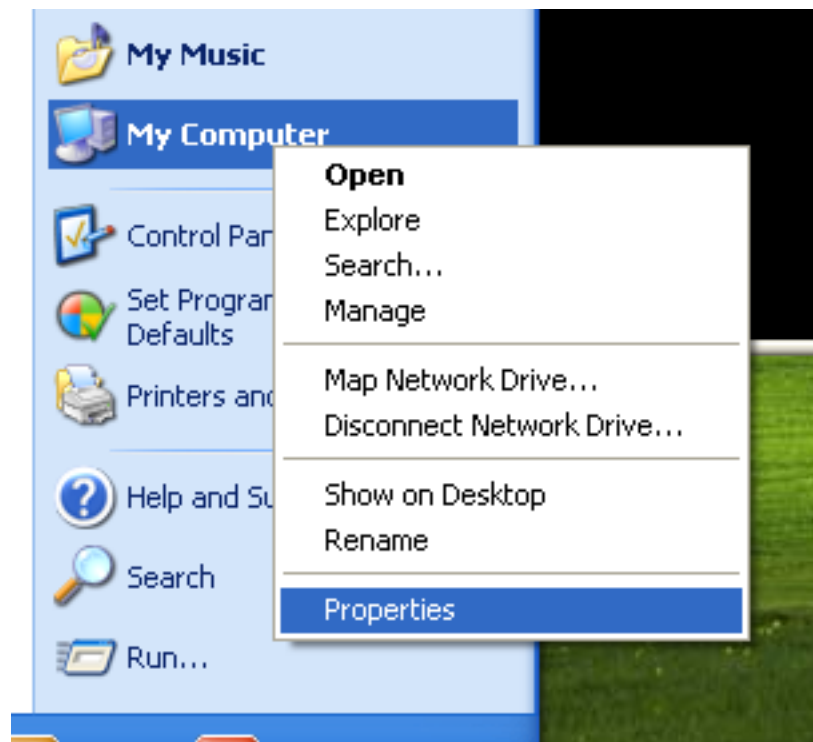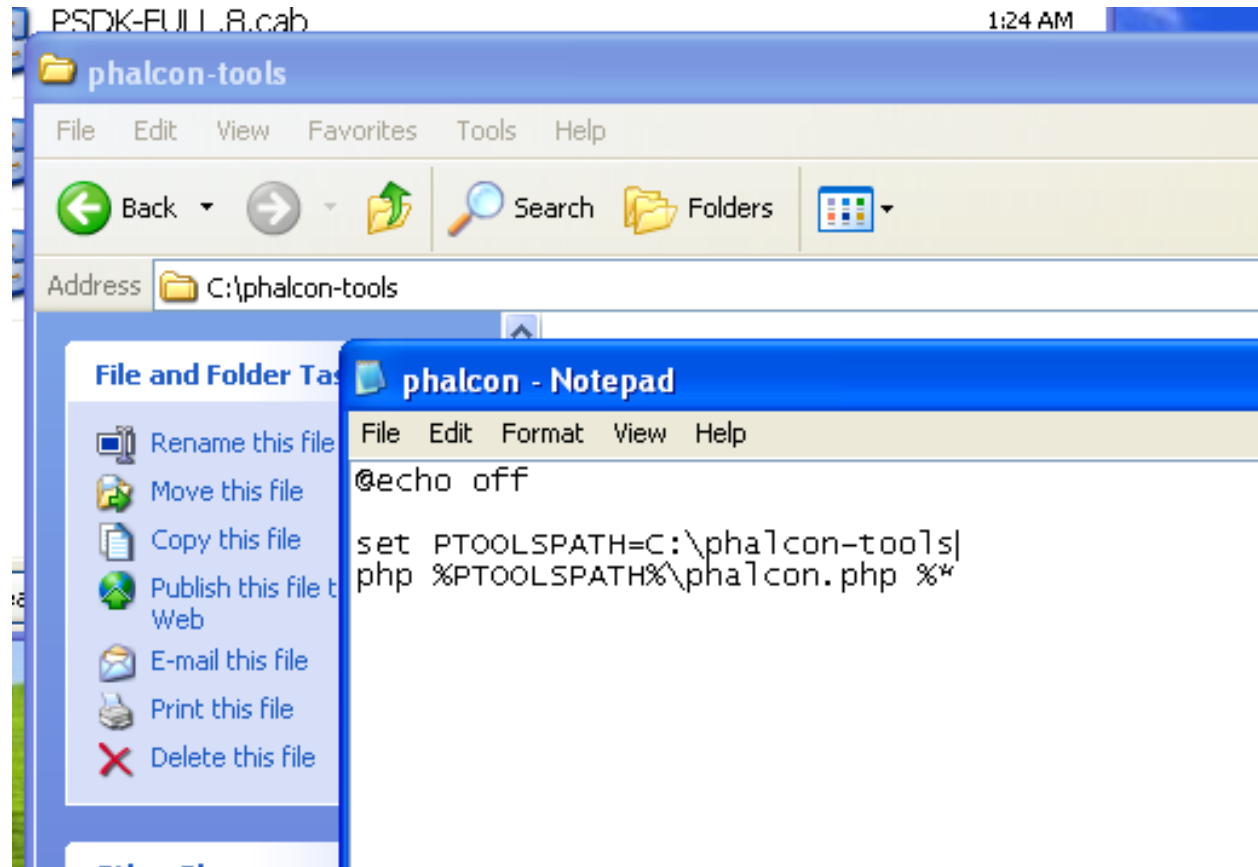

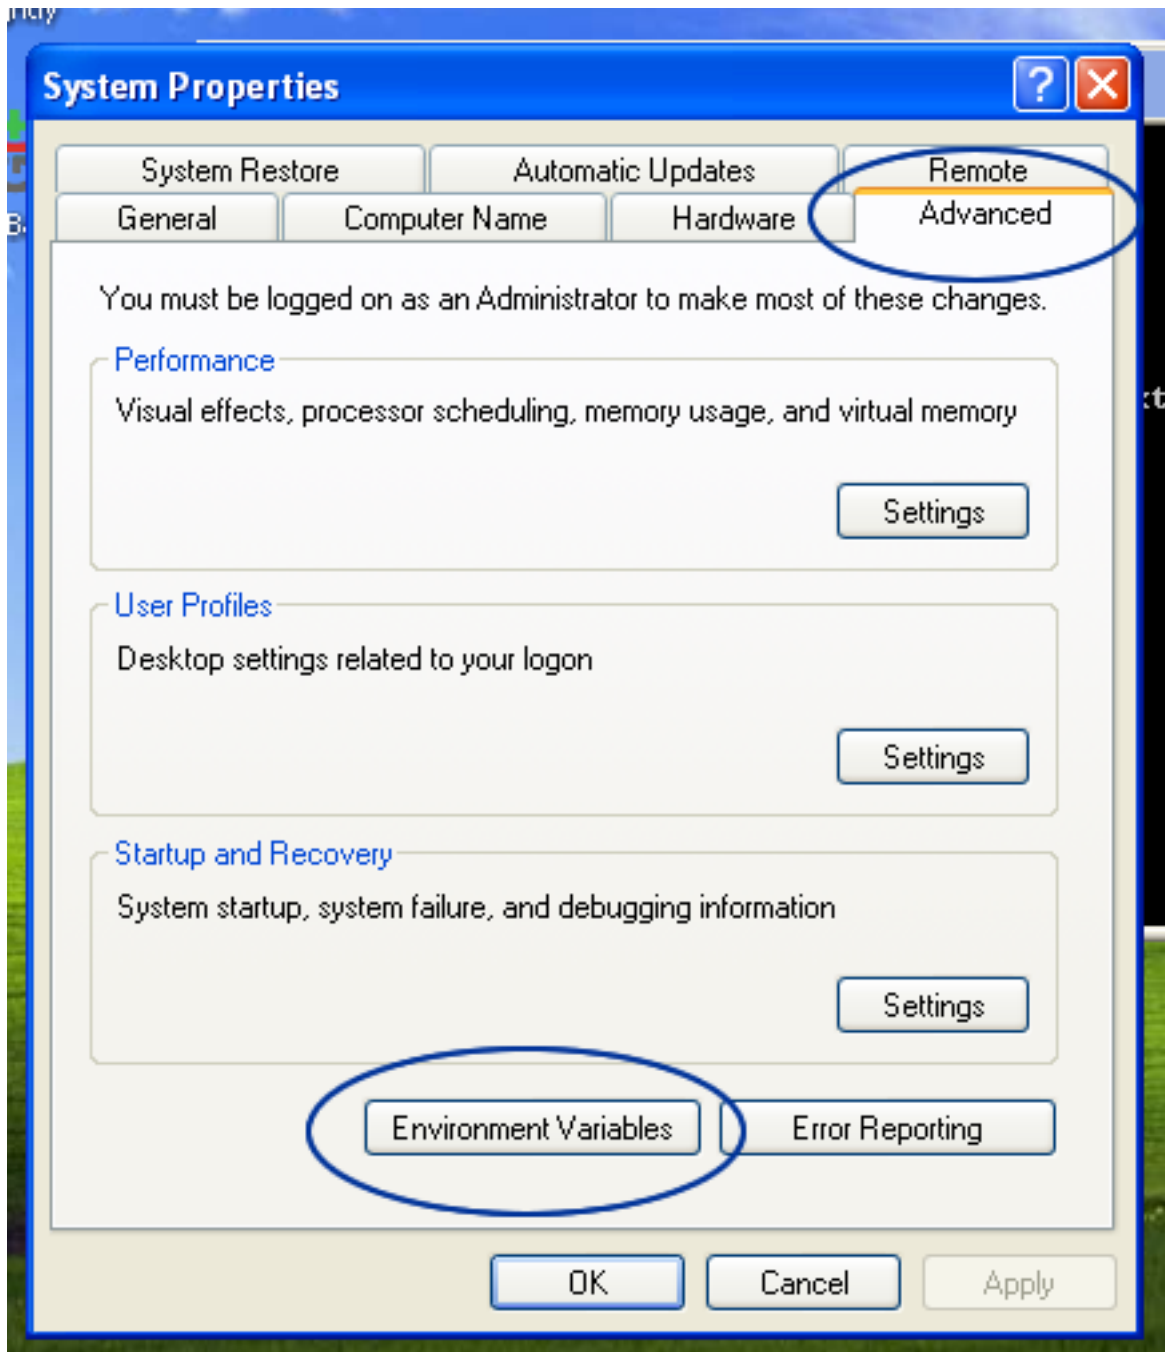

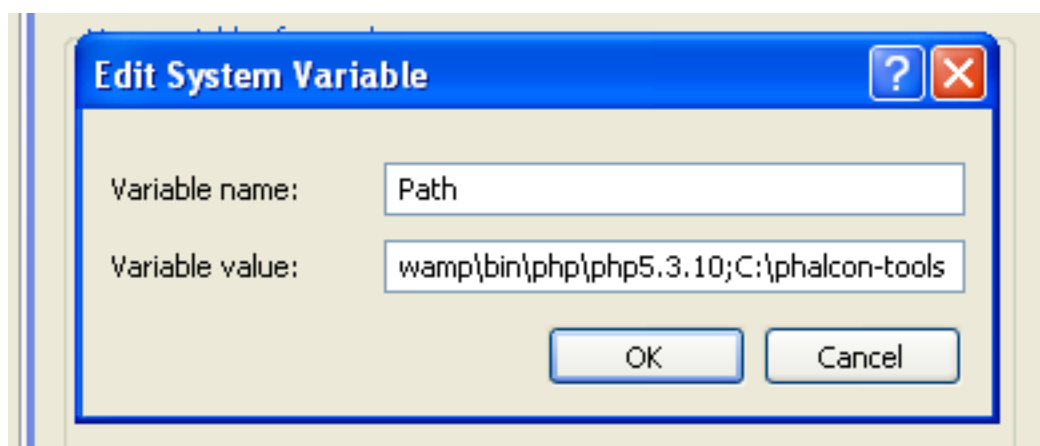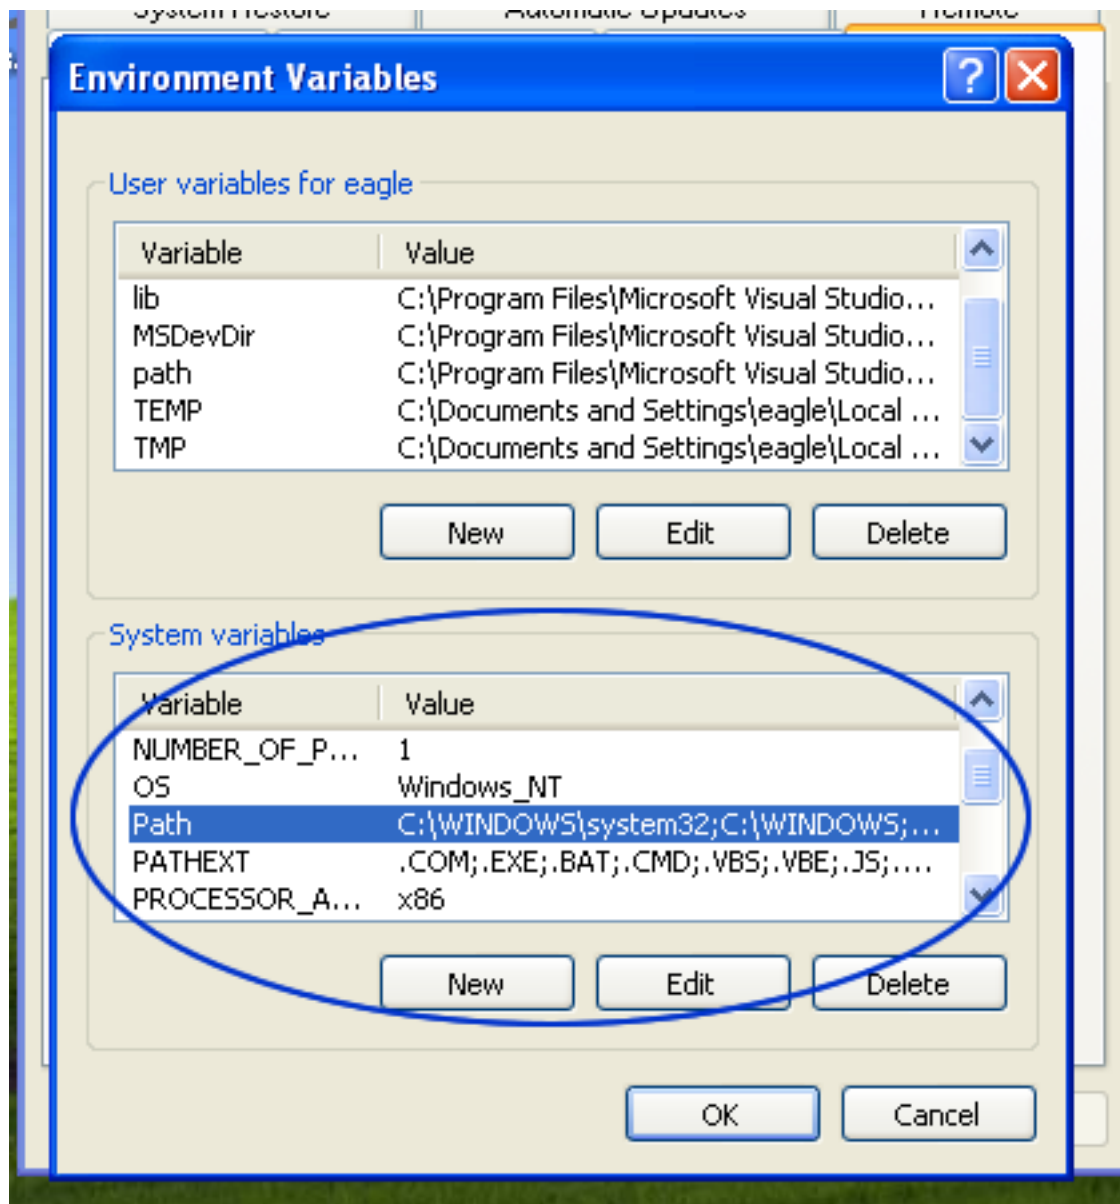

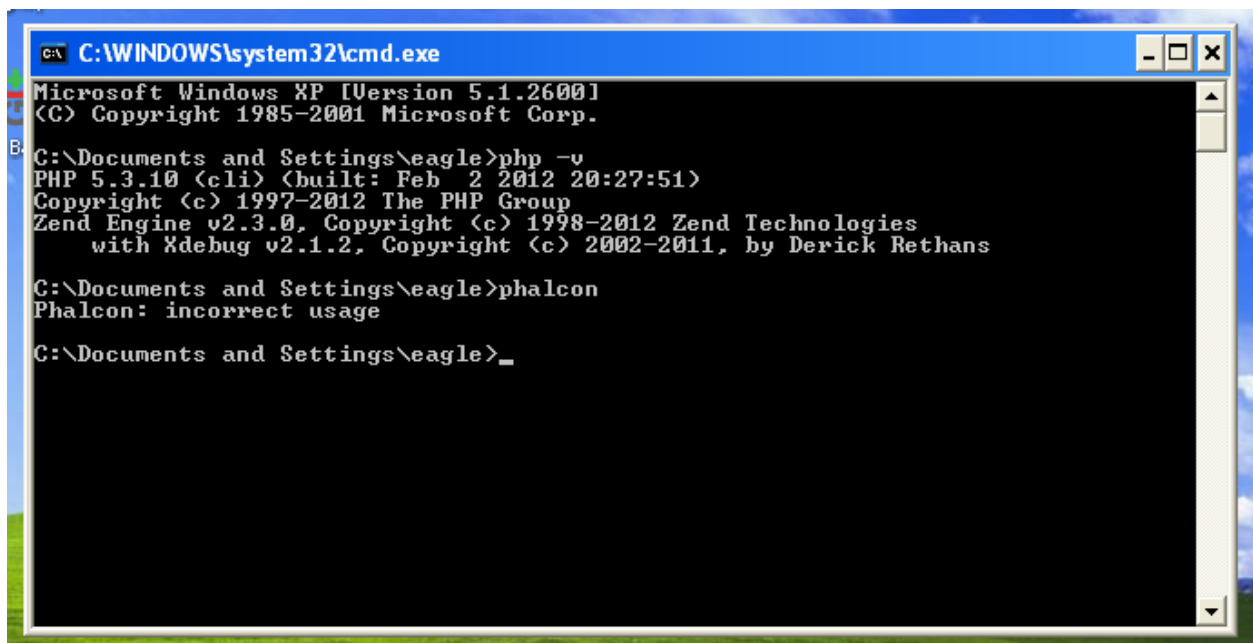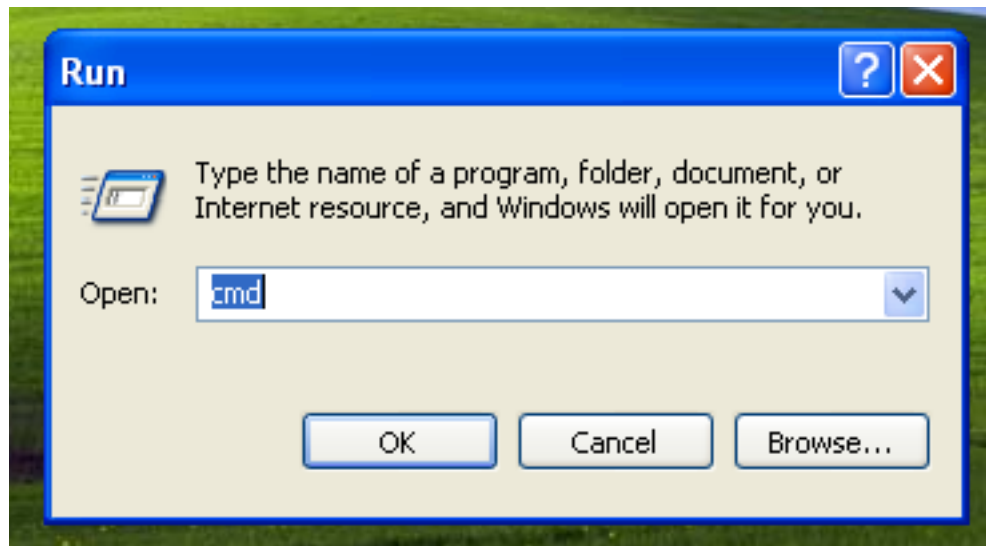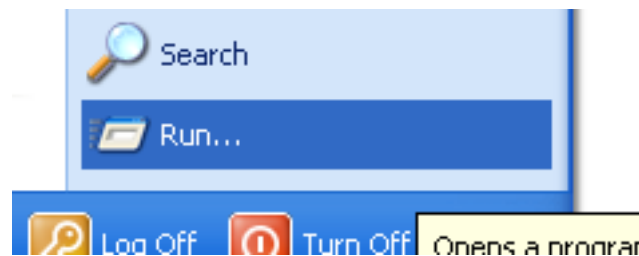

Related Guides

- [Using Developer Tools](#)
- [Installation on OS X](#)
- [Installation on Linux](#)

Phalcon Developer Tools on Mac OS X

These steps will guide you through the process of installing Phalcon Developer Tools for OS/X.


Prerequisites

The Phalcon PHP extension is required to run Phalcon Tools. If you haven't installed it yet, please see the [Installation](#) section for instructions.

Download

You can download a cross platform package containing the developer tools from the [Download](#) section. You can also clone it from [Github](#).

Open the terminal application:

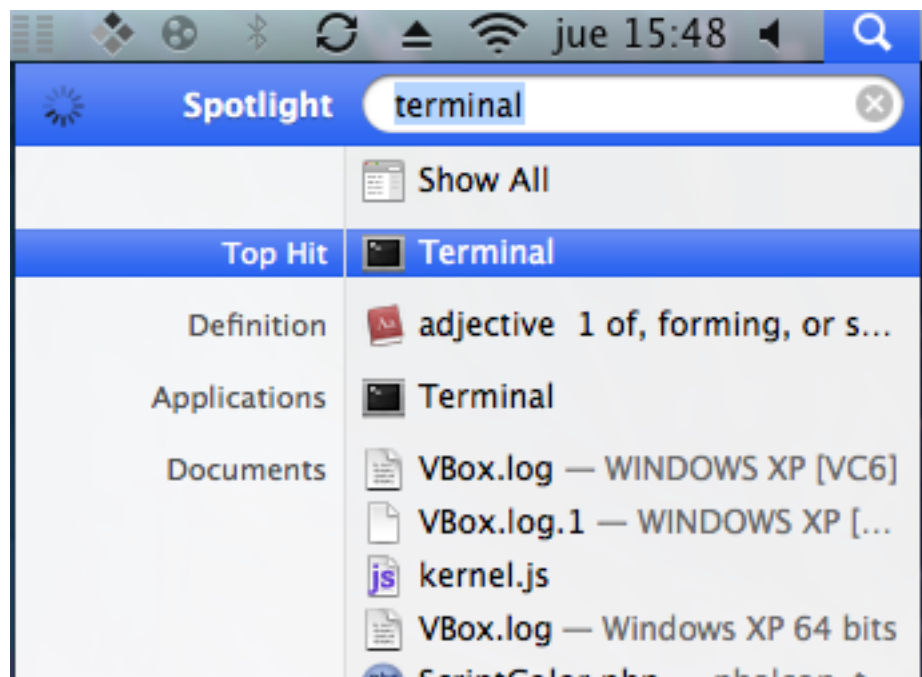

Copy & Paste the commands below in your terminal:

```
git clone git://github.com/phalcon/phalcon-devtools.git
```


Then enter the folder where the tools were cloned and execute `". /phalcon.sh"`, (don't forget the dot at beginning of the command):

```
cd phalcon-devtools/  
.  
./phalcon.sh
```

In the terminal window, type the following commands to create a symbolic link to the phalcon.php script:

```
ln -s ~/phalcon-tools/phalcon.php ~/phalcon-tools/phalcon  
chmod +x ~/phalcon-tools/phalcon
```

Type the command “phalcon” and you will see something like this:

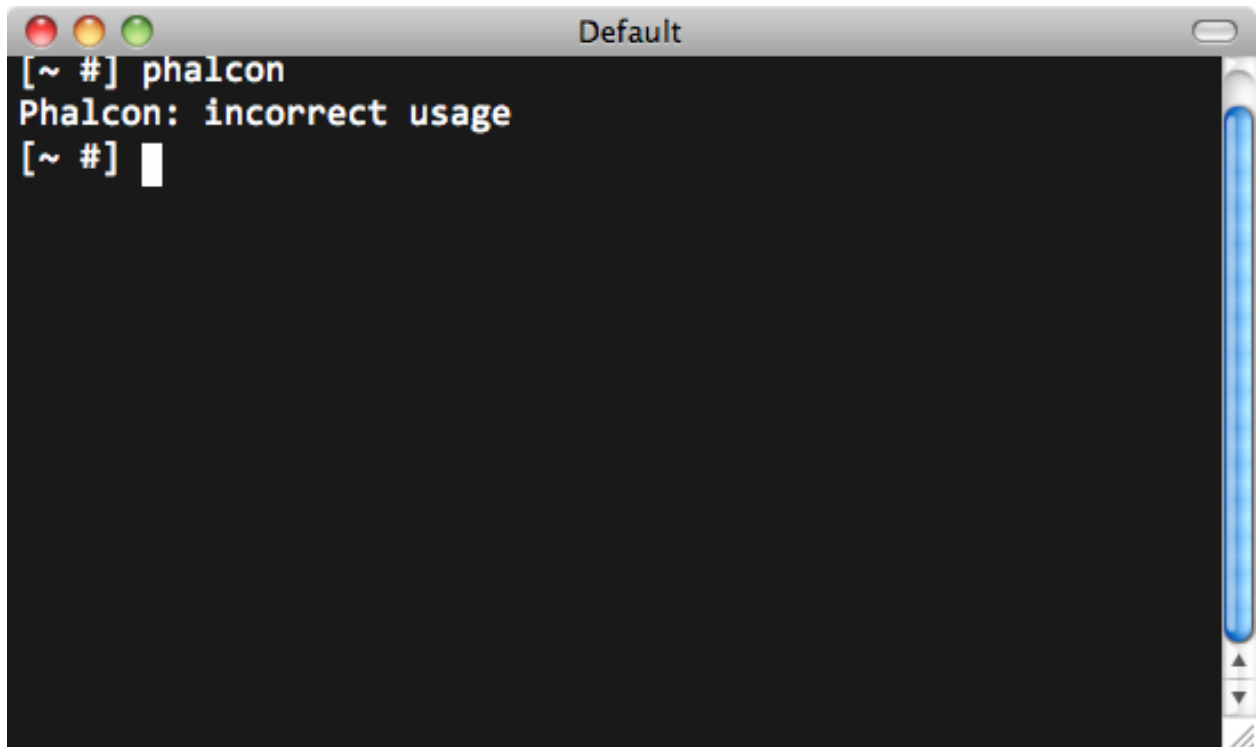

Congratulations you now have Phalcon tools installed!

Related Guides

- *Using Developer Tools*
- *Installation on Windows*
- *Installation on Linux*

Phalcon Developer Tools di Linux

Langkah berikut akan memandu anda melalui proses menginstal Phalcon Developer Tools untuk Linux.

Prasyarat


Ekstensi PHP Phalcon diperlukan untuk menjalankan Phalcon Tools. Jika belum menginstall, silakan lihat [Installation](#) untuk instruksi.

Download

Anda dapat mendownload cross platform package berisi developer tools dari bagian [Download](#). Anda dapat juga clone dari [Github](#).

Buka terminal dan ketik perintah berikut:

```
git clone git://github.com/phalcon/phalcon-devtools.git
```

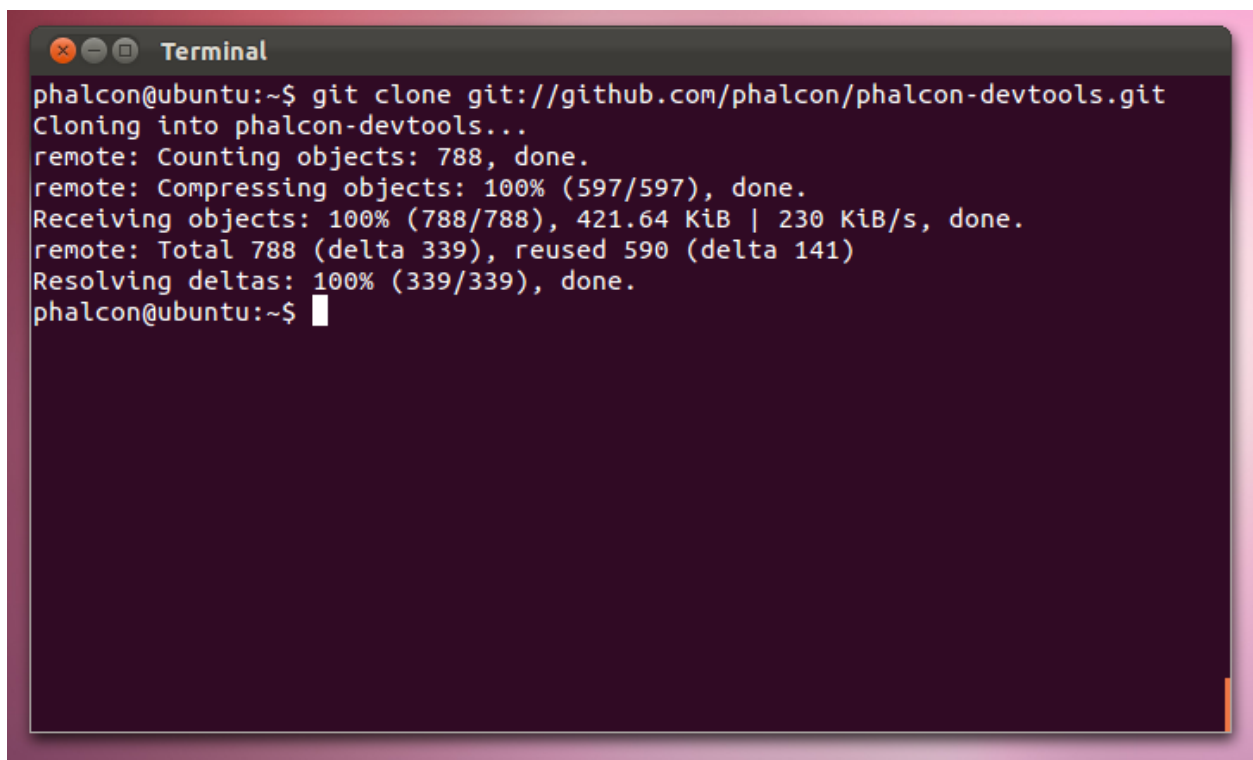


Lalu masuk ke folder di mana tools diclone dan jalankan ". ./phalcon.sh", (Jangan lupa titik di awal perintah):

```
cd phalcon-devtools/  
. ./phalcon.sh
```

Buat symbolink ke script phalcon.php:

```
ln -s ~/phalcon-devtools/phalcon.php /usr/bin/phalcon  
chmod ugo+x /usr/bin/phalcon
```

Selamat Phalcon tools anda sudah terinstall!

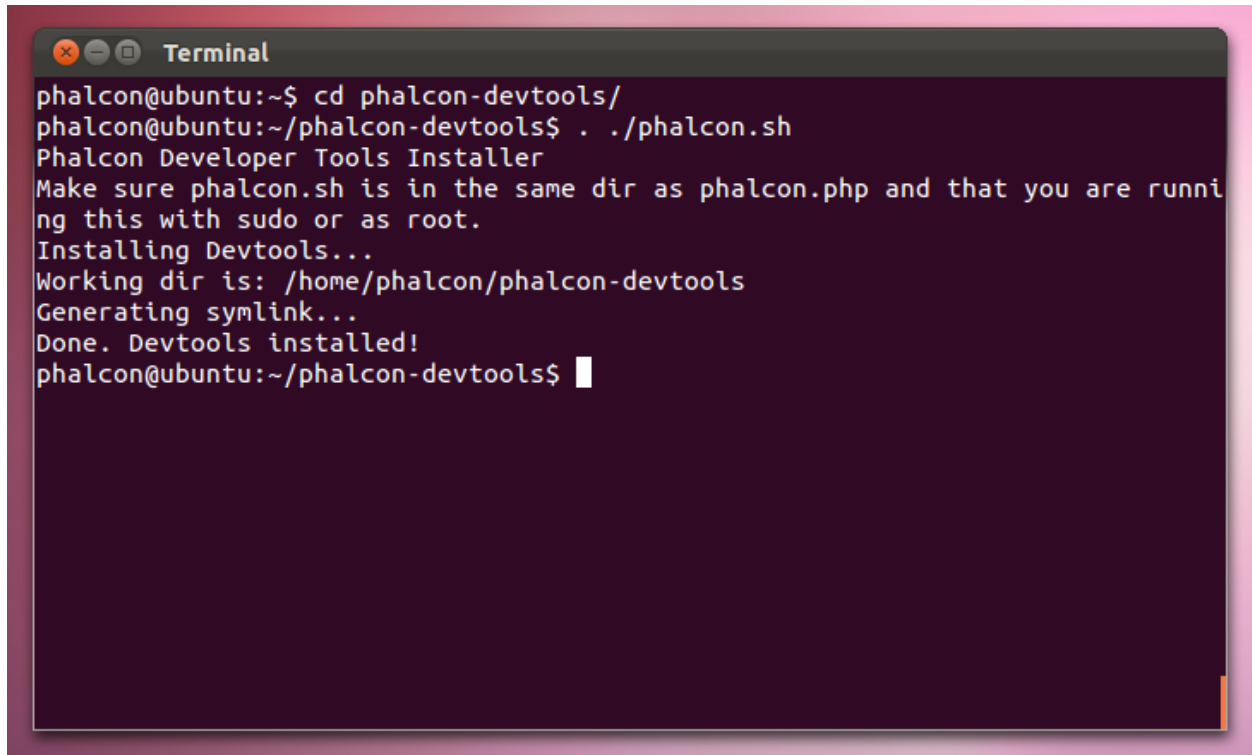A terminal window titled "Terminal" with a dark background and light text. It shows the following commands and output:

```
phalcon@ubuntu:~$ cd phalcon-devtools/  
phalcon@ubuntu:~/phalcon-devtools$ ./phalcon.sh  
Phalcon Developer Tools Installer  
Make sure phalcon.sh is in the same dir as phalcon.php and that you are running this with sudo or as root.  
Installing Devtools...  
Working dir is: /home/phalcon/phalcon-devtools  
Generating symlink...  
Done. Devtools installed!  
phalcon@ubuntu:~/phalcon-devtools$
```

Panduan Terkait

- *Menggunakan Developer Tools*
- *Instalasi pada Windows*
- *Instalasi pada Mac*

Getting Available Commands

You can get a list of available commands in Phalcon tools by typing: `phalcon commands`

```
$ phalcon commands  
  
Phalcon DevTools (3.0.0)  
  
Available commands:  
  commands      (alias of: list, enumerate)  
  controller     (alias of: create-controller)  
  module         (alias of: create-module)  
  model          (alias of: create-model)  
  all-models     (alias of: create-all-models)  
  project        (alias of: create-project)  
  scaffold       (alias of: create-scaffold)  
  migration      (alias of: create-migration)  
  webtools       (alias of: create-webtools)
```

Generating a Project Skeleton

You can use Phalcon tools to generate pre-defined project skeletons for your applications with Phalcon framework. By default the project skeleton generator will use `mod_rewrite` for Apache. Type the following command on your web server document root:

```
$ pwd

/Applications/MAMP/htdocs

$ phalcon create-project store
```

The above recommended project structure was generated:

You could add the parameter `--help` to get help on the usage of a certain script:

```
$ phalcon project --help

Phalcon DevTools (3.0.0)

Help:
  Creates a project

Usage:
  project [name] [type] [directory] [enable-webtools]

Arguments:
  help      Shows this help text

Example
  phalcon project store simple

Options:
  --name                Name of the new project
  --enable-webtools     Determines if webtools should be enabled [optional]
  --directory=s        Base path on which project will be created [optional]
  --type=s              Type of the application to be generated (cli, micro, simple, ↵
↵modules)
  --template-path=s    Specify a template path [optional]
  --use-config-ini      Use a ini file as configuration file [optional]
  --trace               Shows the trace of the framework in case of exception. ↵
↵[optional]
  --help               Shows this help
```

Accessing the project from the web server will show you:


Generating Controllers


The command “create-controller” generates controller skeleton structures. It’s important to invoke this command inside a directory that already has a Phalcon project.

```
$ phalcon create-controller --name test
```

The following code is generated by the script:

```
<?php
```

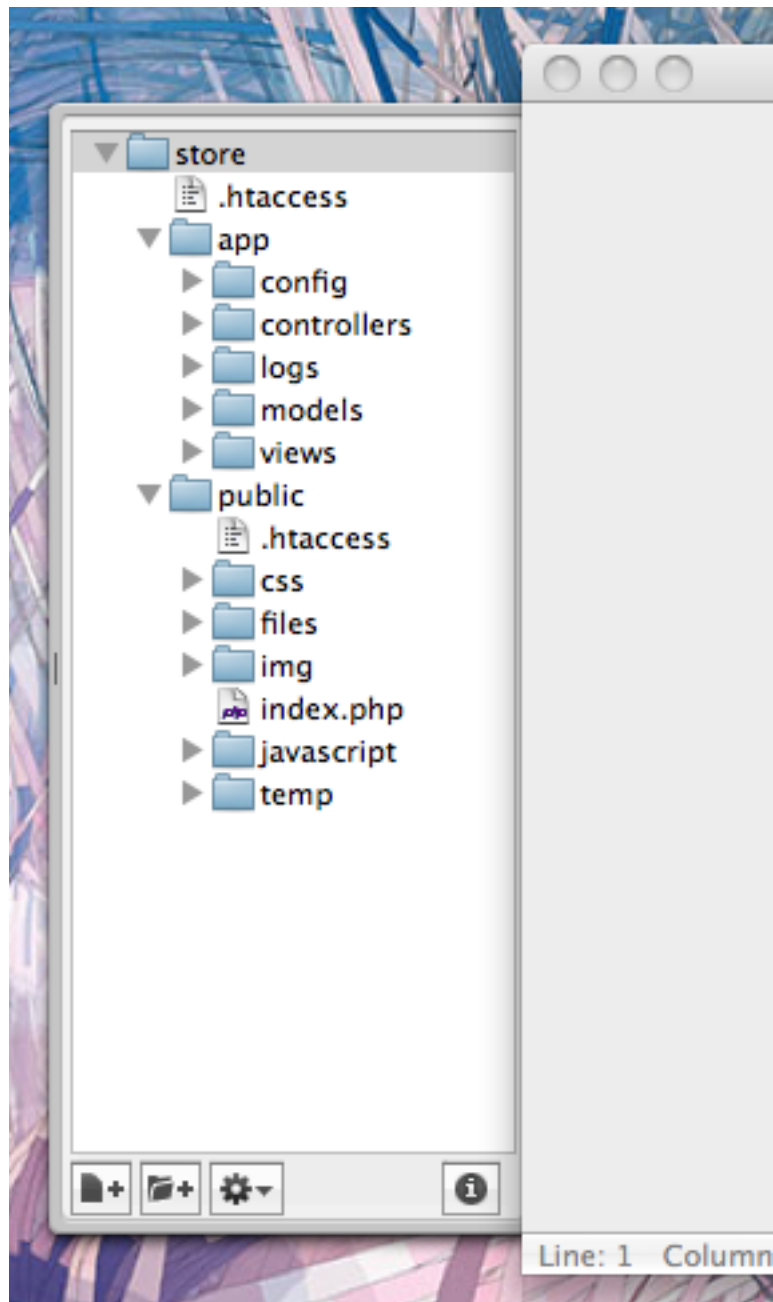
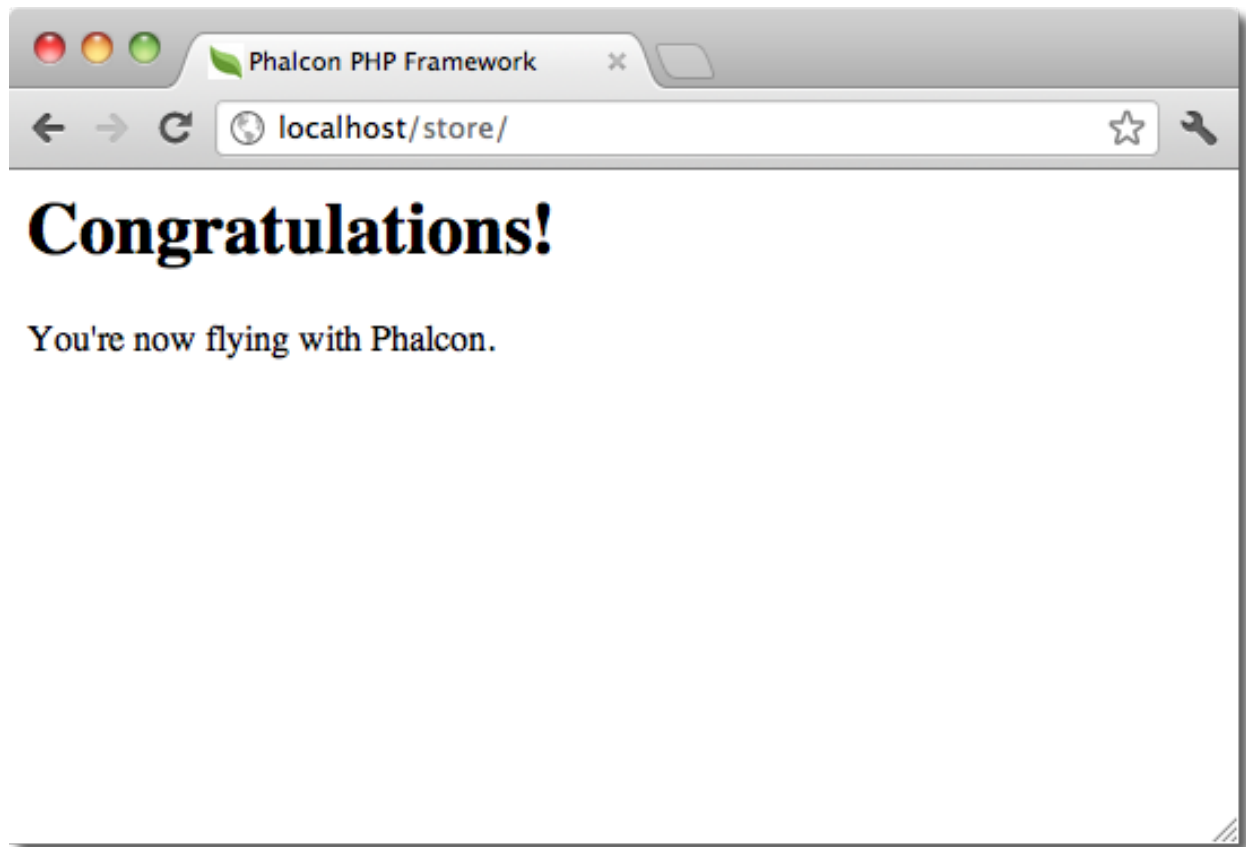
```
use Phalcon\Mvc\Controller;

class TestController extends Controller
{
    public function indexAction()
    {
    }
}
```

Preparing Database Settings

When a project is generated using developer tools. A configuration file can be found in *app/config/config.ini*. To generate models or scaffold, you will need to change the settings used to connect to your database.

Change the database section in your config.ini file:

```
[database]
adapter  = Mysql
host     = "127.0.0.1"
username = "root"
password = "secret"
dbname   = "store_db"

[phalcon]
controllersDir = "../app/controllers/"
```

```
modelsDir      = "../app/models/"
viewsDir       = "../app/views/"
baseUri        = "/store/"
```

Generating Models

There are several ways to create models. You can create all models from the default database connection or some selectively. Models can have public attributes for the field representations or setters/getters can be used.

Options:

--name=s	Table name
--schema=s	Name of the schema. [optional]
--namespace=s	Model's namespace [optional]
--get-set	Attributes will be protected and have setters/getters. [optional]
--extends=s	Model extends the class name supplied [optional]
--excludefields=l	Excludes fields defined in a comma separated list [optional]
--doc	Helps to improve code completion on IDEs [optional]
--directory=s	Base path on which project will be created [optional]
--force	Rewrite the model. [optional]
--trace	Shows the trace of the framework in case of exception. [optional]
--mapcolumn	Get some code for map columns. [optional]
--abstract	Abstract Model [optional]

The simplest way to generate a model is:

```
$ phalcon model products
```

```
$ phalcon model --name tablename
```

All table fields are declared public for direct access.

```
<?php
use Phalcon\Mvc\Model;

class Products extends Model
{
    /**
     * @var integer
     */
    public $id;

    /**
     * @var integer
     */
    public $typesId;

    /**
     * @var string
```

```
    */
    public $name;

    /**
     * @var string
     */
    public $price;

    /**
     * @var integer
     */
    public $quantity;

    /**
     * @var string
     */
    public $status;
}
```

By adding the `-get-set` you can generate the fields with protected variables and public setter/getter methods. Those methods can help in business logic implementation within the setter/getter methods.

```
<?php

use Phalcon\Mvc\Model;

class Products extends Model
{
    /**
     * @var integer
     */
    protected $id;

    /**
     * @var integer
     */
    protected $typesId;

    /**
     * @var string
     */
    protected $name;

    /**
     * @var string
     */
    protected $price;

    /**
     * @var integer
     */
    protected $quantity;

    /**
     * @var string
     */
    protected $status;
}
```

```

/**
 * Method to set the value of field id
 *
 * @param integer $id
 */
public function setId($id)
{
    $this->id = $id;
}

/**
 * Method to set the value of field typeId
 *
 * @param integer $typeId
 */
public function setTypeId($typeId)
{
    $this->typeId = $typeId;
}

// ...

/**
 * Returns the value of field status
 *
 * @return string
 */
public function getStatus()
{
    return $this->status;
}
}

```

A nice feature of the model generator is that it keeps changes made by the developer between code generations. This allows the addition or removal of fields and properties, without worrying about losing changes made to the model itself. The following screencast shows you how it works:

Scaffold a CRUD

Scaffolding is a quick way to generate some of the major pieces of an application. If you want to create the models, views, and controllers for a new resource in a single operation, scaffolding is the tool for the job.


Once the code is generated, it will have to be customized to meet your needs. Many developers avoid scaffolding entirely, opting to write all or most of their source code from scratch. The generated code can serve as a guide to better understand of how the framework works or develop prototypes. The code below shows a scaffold based on the table “products”:

```
$ phalcon scaffold --table-name products
```

The scaffold generator will build several files in your application, along with some folders. Here’s a quick overview of what will be generated:

File	Purpose
app/controllers/ProductsController.php	The Products controller
app/models/Products.php	The Products model
app/views/layout/products.phtml	Controller layout for Products
app/views/products/new.phtml	View for the action “new”
app/views/products/edit.phtml	View for the action “edit”
app/views/products/search.phtml	View for the action “search”

When browsing the recently generated controller, you will see a search form and a link to create a new Product:

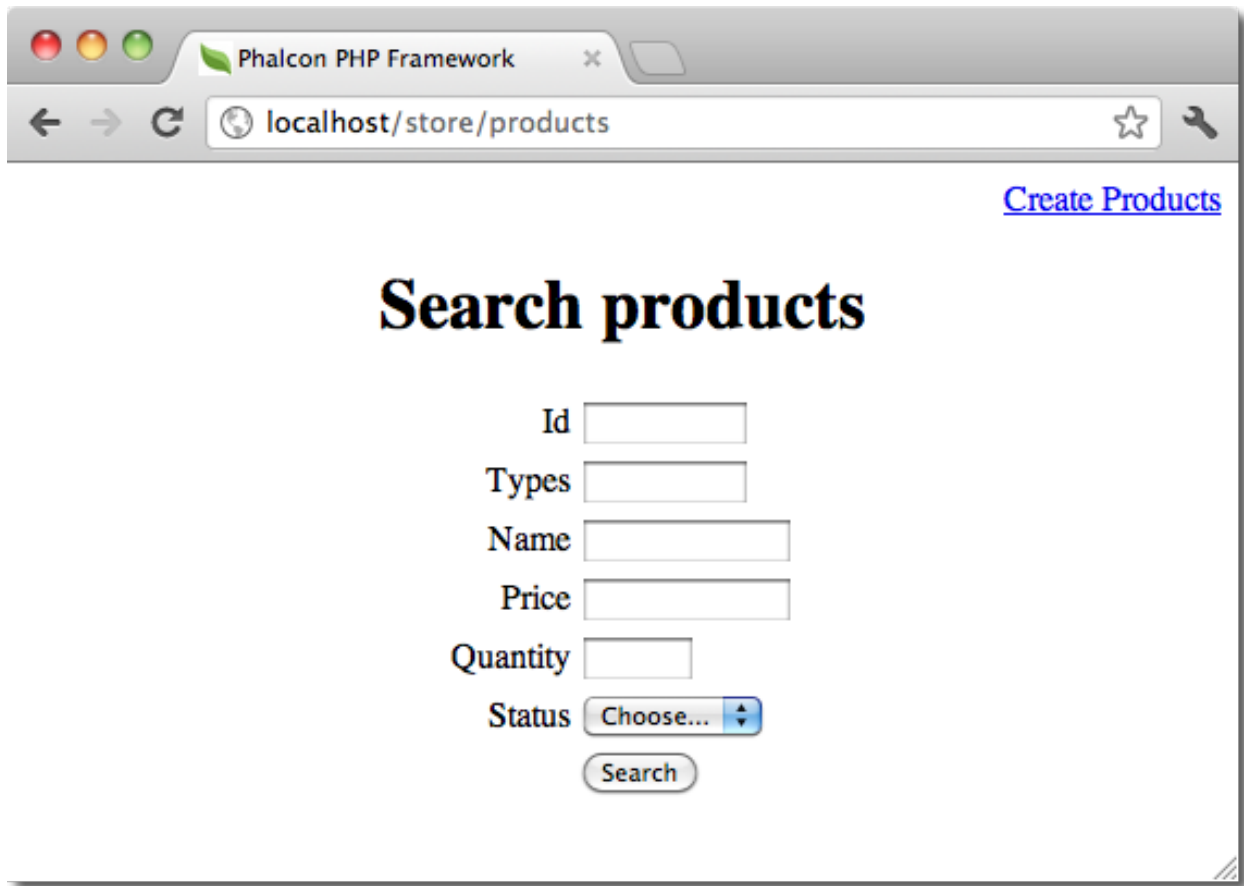


The “create page” allows you to create products applying validations on the Products model. Phalcon will automatically validate not null fields producing warnings if any of them is required.

After performing a search, a pager component is available to show paged results. Use the “Edit” or “Delete” links in front of each result to perform such actions.

Web Interface to Tools

Also, if you prefer, it’s possible to use Phalcon Developer Tools from a web interface. Check out the following screencast to figure out how it works:

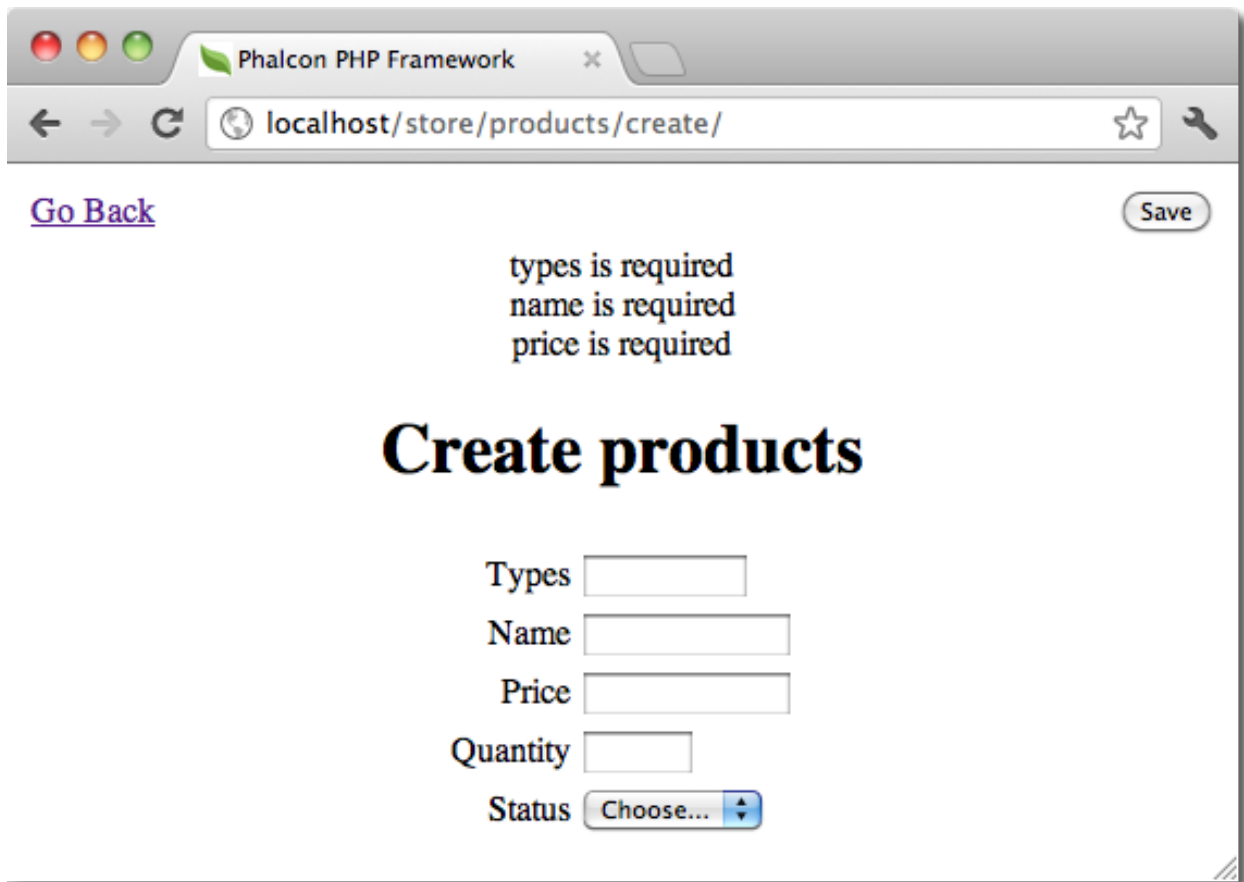

A screenshot of a web browser window titled "Phalcon PHP Framework". The address bar shows "localhost/store/products/create/". The page contains a "Go Back" link and a "Save" button. Three validation error messages are displayed: "types is required", "name is required", and "price is required". Below these errors is a large heading "Create products". The form includes input fields for "Types", "Name", "Price", and "Quantity", and a "Status" dropdown menu with "Choose..." selected.

[Go Back](#) Save

types is required
name is required
price is required

Create products


Types

Name

Price

Quantity

Status Choose...

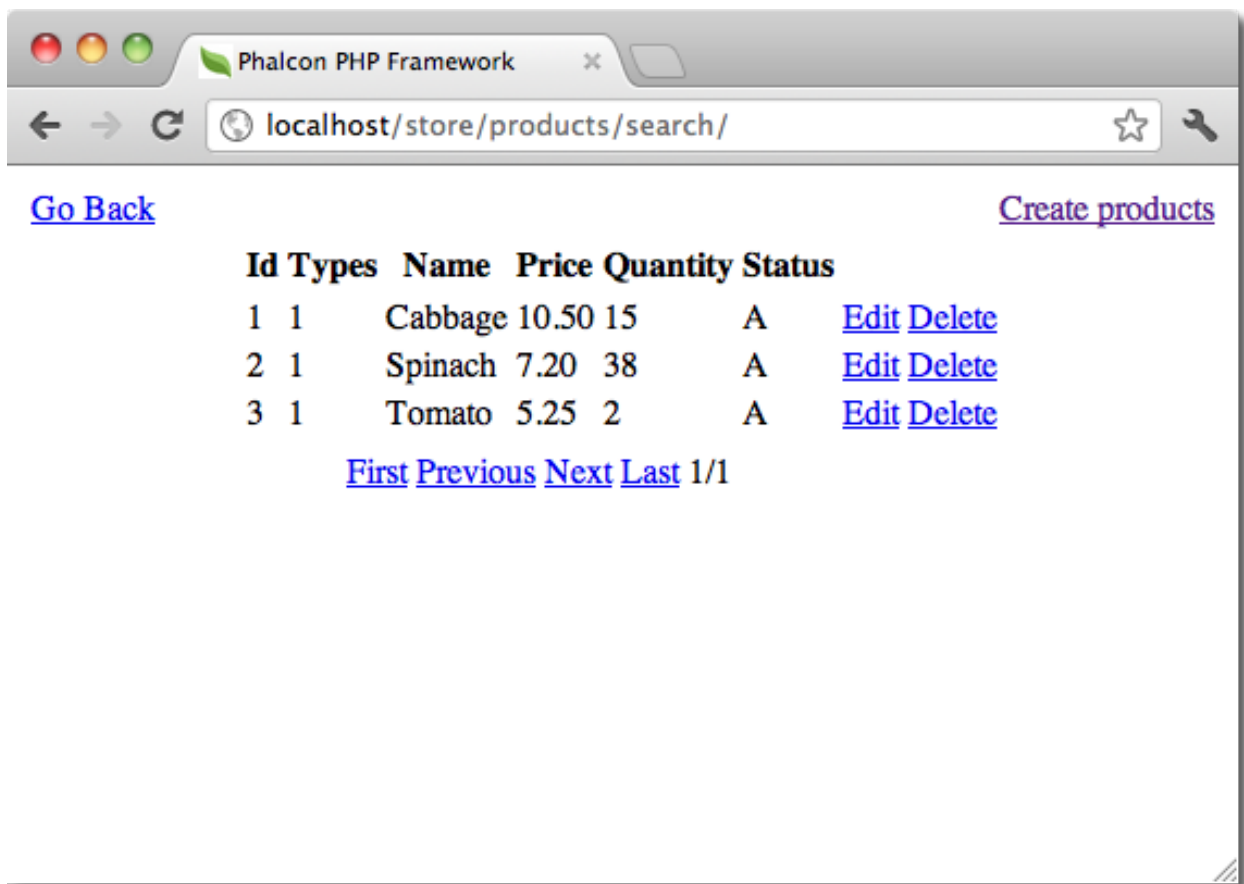

Integrating Tools with PhpStorm IDE

The screencast below shows how to integrate developer tools with the [PhpStorm IDE](#). The configuration steps could be easily adapted to other IDEs for PHP.

Conclusion

Phalcon Developer Tools provides an easy way to generate code for your application, reducing development time and potential coding errors.

Tutorials

Tutorial 1: Let's learn by example

Throughout this first tutorial, we'll walk you through the creation of an application with a simple registration form from the ground up. We will also explain the basic aspects of the framework's behavior. If you are interested in automatic code generation tools for Phalcon, you can check our [developer tools](#).

The best way to use this guide is to follow each step in turn. You can get the complete code [here](#).

File structure

Phalcon does not impose a particular file structure for application development. Due to the fact that it is loosely coupled, you can implement Phalcon powered applications with a file structure you are most comfortable using.

For the purposes of this tutorial and as a starting point, we suggest this very simple structure:

```
tutorial/  
  app/  
    controllers/  
    models/  
    views/  
  public/  
    css/  
    img/  
    js/
```

Note that you don't need any "library" directory related to Phalcon. The framework is available in memory, ready for you to use.

Before continuing, please be sure you've successfully [installed Phalcon](#) and have setup either [Nginx](#), [Apache](#) or [Cherokee](#).

Bootstrap

The first file you need to create is the bootstrap file. This file is very important; since it serves as the base of your application, giving you control of all aspects of it. In this file you can implement initialization of components as well as application behavior.

Ultimately, it is responsible for doing 3 things:

1. Setting up the autoloader.
2. Configuring the Dependency Injector.

3. Handling the application request.

Autoloaders

The first part that we find in the bootstrap is registering an autoloader. This will be used to load classes as controllers and models in the application. For example we may register one or more directories of controllers increasing the flexibility of the application. In our example we have used the component *Phalcon\Loader*.

With it, we can load classes using various strategies but for this example we have chosen to locate classes based on predefined directories:

```
<?php
use Phalcon\Loader;

// ...

$loader = new Loader();

$loader->registerDirs(
    [
        "../app/controllers/",
        "../app/models/",
    ]
);

$loader->register();
```

Dependency Management

A very important concept that must be understood when working with Phalcon is its *dependency injection container*. It may sound complex but is actually very simple and practical.

A service container is a bag where we globally store the services that our application will use to function. Each time the framework requires a component, it will ask the container using an agreed upon name for the service. Since Phalcon is a highly decoupled framework, *Phalcon\Di* acts as glue facilitating the integration of the different components achieving their work together in a transparent manner.

```
<?php
use Phalcon\Di\FactoryDefault;

// ...

// Create a DI
$di = new FactoryDefault();
```

Phalcon\Di\FactoryDefault is a variant of *Phalcon\Di*. To make things easier, it has registered most of the components that come with Phalcon. Thus we should not register them one by one. Later there will be no problem in replacing a factory service.

In the next part, we register the “view” service indicating the directory where the framework will find the views files. As the views do not correspond to classes, they cannot be charged with an autoloader.

Services can be registered in several ways, but for our tutorial we’ll use an *anonymous function*:

```

<?php

use Phalcon\Mvc\View;

// ...

// Setup the view component
$di->set(
    "view",
    function () {
        $view = new View();

        $view->setViewsDir("../app/views/");

        return $view;
    }
);

```

Next we register a base URI so that all URIs generated by Phalcon include the “tutorial” folder we setup earlier. This will become important later on in this tutorial when we use the class *Phalcon\Tag* to generate a hyperlink.

```

<?php

use Phalcon\Mvc\Url as UrlProvider;

// ...

// Setup a base URI so that all generated URIs include the "tutorial" folder
$di->set(
    "url",
    function () {
        $url = new UrlProvider();

        $url->setBaseUri("/tutorial/");

        return $url;
    }
);

```

Handling the application request

In the last part of this file, we find *Phalcon\Mvc\Application*. Its purpose is to initialize the request environment, route the incoming request, and then dispatch any discovered actions; it aggregates any responses and returns them when the process is complete.

```

<?php

use Phalcon\Mvc\Application;

// ...

$application = new Application($di);

$response = $application->handle();

$response->send();

```

Putting everything together

The tutorial/public/index.php file should look like:

```
<?php

use Phalcon\Loader;
use Phalcon\Mvc\View;
use Phalcon\Mvc\Application;
use Phalcon\Di\FactoryDefault;
use Phalcon\Mvc\Url as UrlProvider;
use Phalcon\Db\Adapter\Pdo\Mysql as DbAdapter;

// Register an autoloader
$loader = new Loader();

$loader->registerDirs(
    [
        "../app/controllers/",
        "../app/models/",
    ]
);

$loader->register();

// Create a DI
$di = new FactoryDefault();

// Setup the view component
$di->set(
    "view",
    function () {
        $view = new View();

        $view->setViewsDir("../app/views/");

        return $view;
    }
);

// Setup a base URI so that all generated URIs include the "tutorial" folder
$di->set(
    "url",
    function () {
        $url = new UrlProvider();

        $url->setBaseUri("/tutorial/");

        return $url;
    }
);
```

```

$application = new Application($di);

try {
    // Handle the request
    $response = $application->handle();

    $response->send();
} catch (\Exception $e) {
    echo "Exception: ", $e->getMessage();
}

```

As you can see, the bootstrap file is very short and we do not need to include any additional files. We have set ourselves a flexible MVC application in less than 30 lines of code.

Creating a Controller

By default Phalcon will look for a controller named “Index”. It is the starting point when no controller or action has been passed in the request. The index controller (app/controllers/IndexController.php) looks like:

```

<?php
use Phalcon\Mvc\Controller;

class IndexController extends Controller
{
    public function indexAction()
    {
        echo "<h1>Hello!</h1>";
    }
}

```

The controller classes must have the suffix “Controller” and controller actions must have the suffix “Action”. If you access the application from your browser, you should see something like this:

Congratulations, you’re flying with Phalcon!

Sending output to a view

Sending output to the screen from the controller is at times necessary but not desirable as most purists in the MVC community will attest. Everything must be passed to the view that is responsible for outputting data on screen. Phalcon will look for a view with the same name as the last executed action inside a directory named as the last executed controller. In our case (app/views/index/index.phtml):

```

<?php echo "<h1>Hello!</h1>";

```


Our controller (app/controllers/IndexController.php) now has an empty action definition:

```

<?php
use Phalcon\Mvc\Controller;

class IndexController extends Controller
{
    public function indexAction()
    {

```

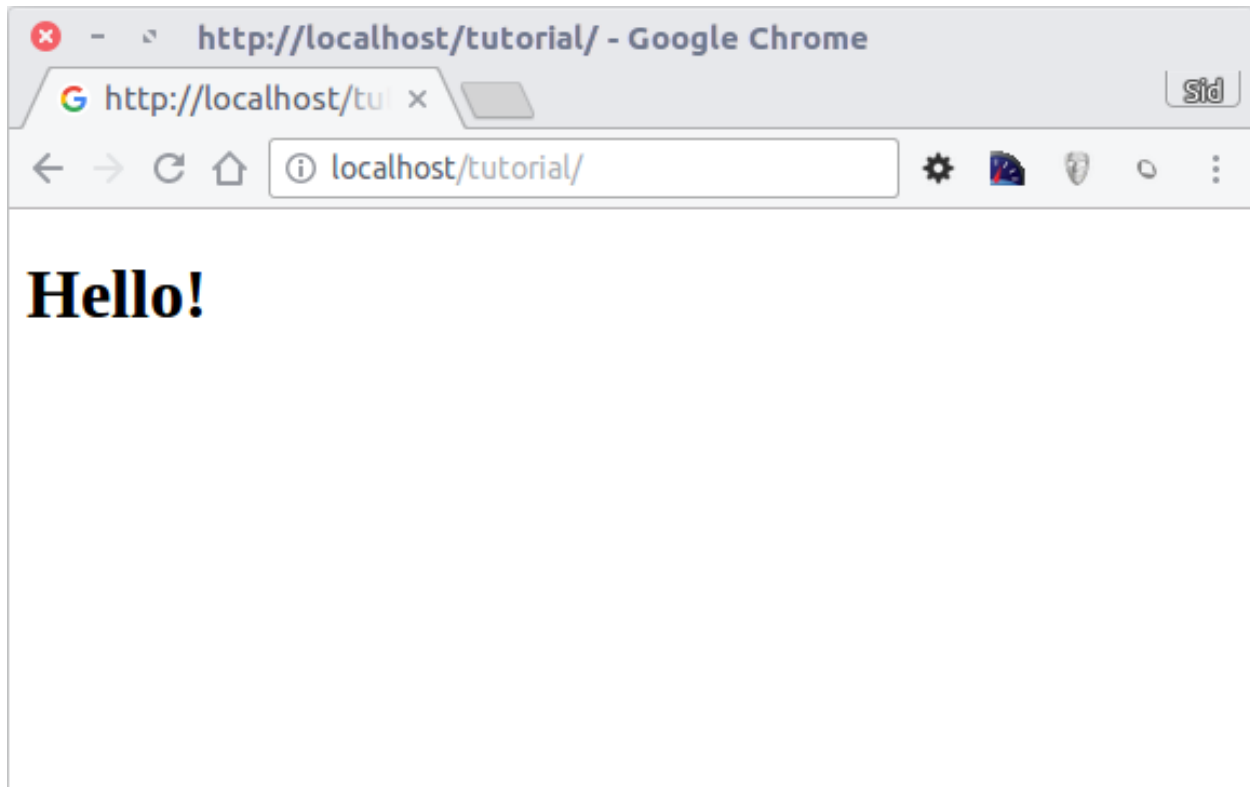

```
}  
}
```

The browser output should remain the same. The *Phalcon\Mvc\View* static component is automatically created when the action execution has ended. Learn more about *views usage here*.

Designing a sign up form

Now we will change the `index.phtml` view file, to add a link to a new controller named “signup”. The goal is to allow users to sign up within our application.

```
<?php  
  
echo "<h1>Hello!</h1>";  
  
echo PHP_EOL;  
  
echo PHP_EOL;  
  
echo $this->tag->linkTo(  
    "signup",  
    "Sign Up Here!"  
);
```


The generated HTML code displays an anchor (“a”) HTML tag linking to a new controller:

```
<h1>Hello!</h1>

<a href="/tutorial/signup">Sign Up Here!</a>
```

To generate the tag we use the class `Phalcon\Tag`. This is a utility class that allows us to build HTML tags with framework conventions in mind. As this class is also a service registered in the DI we use `$this->tag` to access it.

A more detailed article regarding HTML generation can be [found here](#).

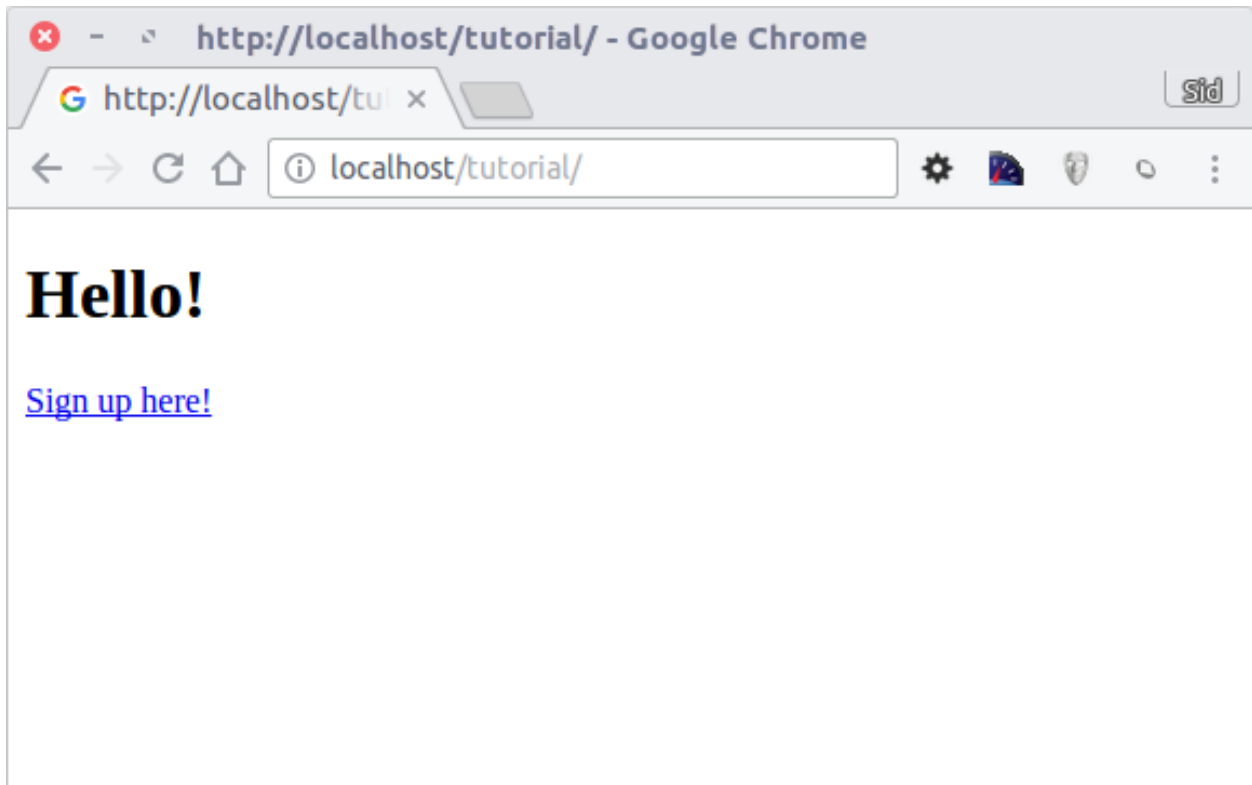

Here is the Signup controller (`app/controllers/SignupController.php`):

```
<?php

use Phalcon\Mvc\Controller;

class SignupController extends Controller
{
    public function indexAction()
    {

    }
}
```

The empty index action gives the clean pass to a view with the form definition (`app/views/signup/index.phtml`):

```
<h2>
    Sign up using this form
</h2>
```

```
<?php echo $this->tag->form("signup/register"); ?>

<p>
    <label for="name">
        Name
    </label>

    <?php echo $this->tag->textField("name"); ?>
</p>


<p>
    <label for="email">
        E-Mail
    </label>

    <?php echo $this->tag->textField("email"); ?>
</p>

<p>
    <?php echo $this->tag->submitButton("Register"); ?>
</p>

</form>
```

Viewing the form in your browser will show something like this:

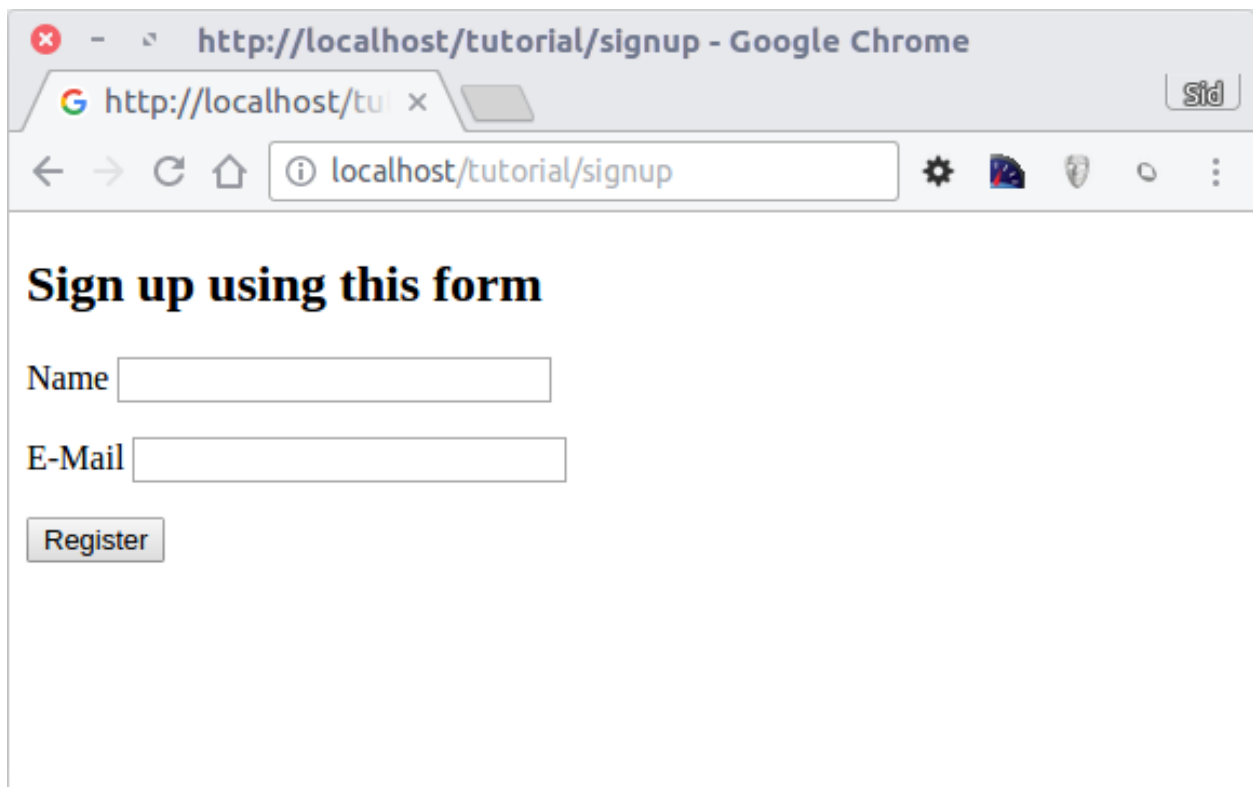A screenshot of a Google Chrome browser window. The address bar shows 'http://localhost/tutorial/signup'. The page content includes a heading 'Sign up using this form', followed by two text input fields labeled 'Name' and 'E-Mail', and a 'Register' button at the bottom.

Sign up using this form

Name

E-Mail

PhalconTag also provides useful methods to build form elements.

The `Phalcon\Tag::form()` method receives only one parameter for instance, a relative URI to a controller/action in the application.

By clicking the “Send” button, you will notice an exception thrown from the framework, indicating that we are missing the “register” action in the controller “signup”. Our `public/index.php` file throws this exception:

Exception: Action “register” was not found on handler “signup”

Implementing that method will remove the exception:

```
<?php

use Phalcon\Mvc\Controller;

class SignupController extends Controller
{
    public function indexAction()
    {

    }

    public function registerAction()
    {

    }
}
```

If you click the “Send” button again, you will see a blank page. The name and email input provided by the user should be stored in a database. According to MVC guidelines, database interactions must be done through models so as to ensure clean object-oriented code.

Creating a Model

Phalcon brings the first ORM for PHP entirely written in C-language. Instead of increasing the complexity of development, it simplifies it.

Before creating our first model, we need to create a database table outside of Phalcon to map it to. A simple table to store registered users can be defined like this:

```
CREATE TABLE `users` (
  `id`      int(10)      unsigned NOT NULL AUTO_INCREMENT,
  `name`    varchar(70)  NOT NULL,
  `email`   varchar(70)  NOT NULL,

  PRIMARY KEY (`id`)
);
```

A model should be located in the `app/models` directory (`app/models/Users.php`). The model maps to the “users” table:

```
<?php

use Phalcon\Mvc\Model;

class Users extends Model
{
    public $id;

    public $name;
```

```
    public $email;
}
```

Setting a Database Connection

In order to be able to use a database connection and subsequently access data through our models, we need to specify it in our bootstrap process. A database connection is just another service that our application has that can be used for several components:

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql as DbAdapter;

// Setup the database service
$di->set(
    "db",
    function () {
        return new DbAdapter(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"    => "test_db",
            ]
        );
    }
);
```

With the correct database parameters, our models are ready to work and interact with the rest of the application.

Storing data using models

Receiving data from the form and storing them in the table is the next step.

```
<?php

use Phalcon\Mvc\Controller;

class SignupController extends Controller
{
    public function indexAction()
    {

    }

    public function registerAction()
    {
        $user = new Users();

        // Store and check for errors
        $success = $user->save(
            $this->request->getPost(),
            [
                "name",
            ]
        );
    }
}
```

```

        "email",
    ]
);

if ($success) {
    echo "Thanks for registering!";
} else {
    echo "Sorry, the following problems were generated: ";

    $messages = $user->getMessages();

    foreach ($messages as $message) {
        echo $message->getMessage(), "<br/>";
    }


    $this->view->disable();
}
}

```

We then instantiate the Users class, which corresponds to a User record. The class public properties map to the fields of the record in the users table. Setting the relevant values in the new record and calling `save()` will store the data in the database for that record. The `save()` method returns a boolean value which indicates whether the storing of the data was successful or not.

The ORM automatically escapes the input preventing SQL injections so we only need to pass the request to the `save()` method.

Additional validation happens automatically on fields that are defined as not null (required). If we don't enter any of the required fields in the sign up form our screen will look like this:

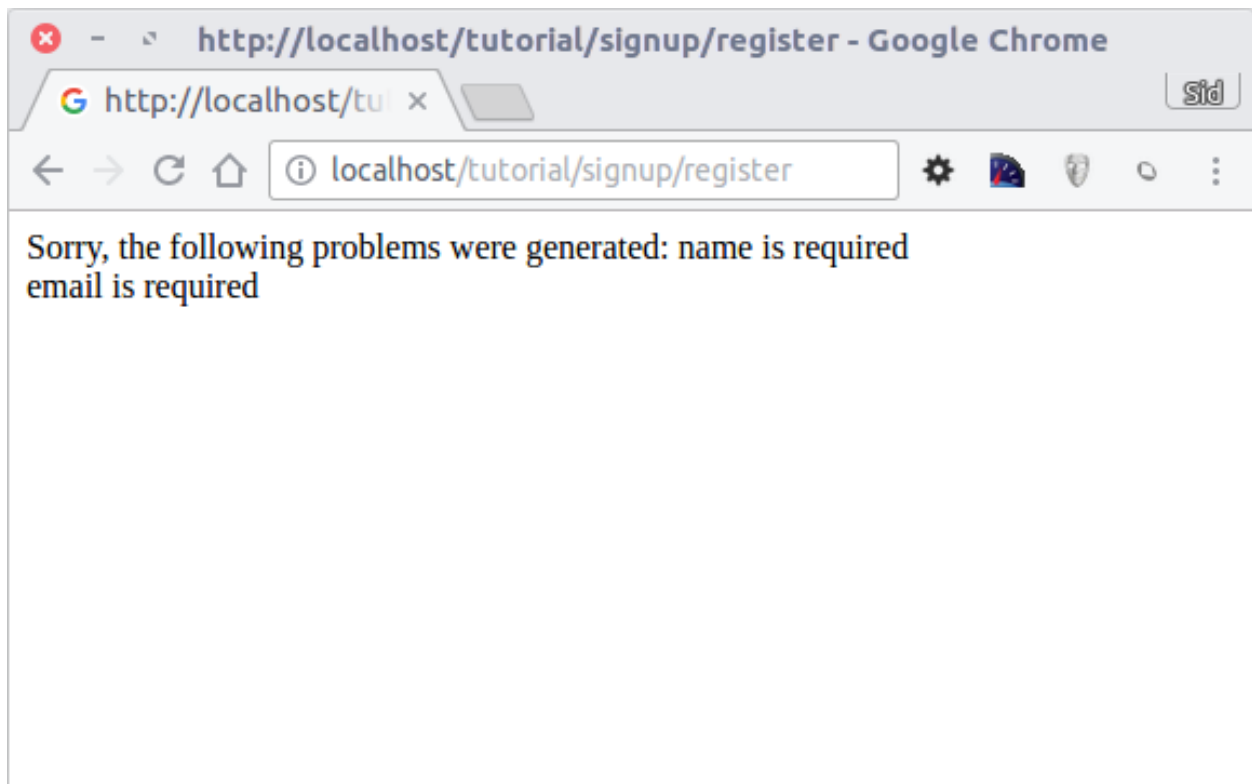

Conclusion

This is a very simple tutorial and as you can see, it's easy to start building an application using Phalcon. The fact that Phalcon is an extension on your web server has not interfered with the ease of development or features available. We invite you to continue reading the manual so that you can discover additional features offered by Phalcon!

Tutorial 2: Introducing INVO

In this second tutorial, we'll explain a more complete application in order to gain a deeper understanding of developing with Phalcon. INVO is one of the sample applications we have created. INVO is a small website that allows users to generate invoices and do other tasks such as manage customers and products. You can clone its code from [Github](#).

INVO was made with the client-side framework [Bootstrap](#). Although the application does not generate actual invoices, it still serves as an example showing how the framework works.

Project Structure

Once you clone the project in your document root you'll see the following structure:

```
invo/
  app/
    config/
    controllers/
    forms/
    library/
    logs/
    models/
    plugins/
    views/
  cache/
  volt/
  docs/
  public/
    css/
    fonts/
    js/
  schemas/
```

As you know, Phalcon does not impose a particular file structure for application development. This project has a simple MVC structure and a public document root.


Once you open the application in your browser <http://localhost/invo> you'll see something like this:

The application is divided into two parts: a frontend and a backend. The frontend is a public area where visitors can receive information about INVO and request contact information. The backend is an administrative area where registered users can manage their products and customers.

Routing

INVO uses the standard route that is built-in with the [Router](#) component. These routes match the following pattern: `/:controller/:action/:params`. This means that the first part of a URI is the controller, the second the controller action and the rest are the parameters.

The following route `/session/register` executes the controller `SessionController` and its action `registerAction`.

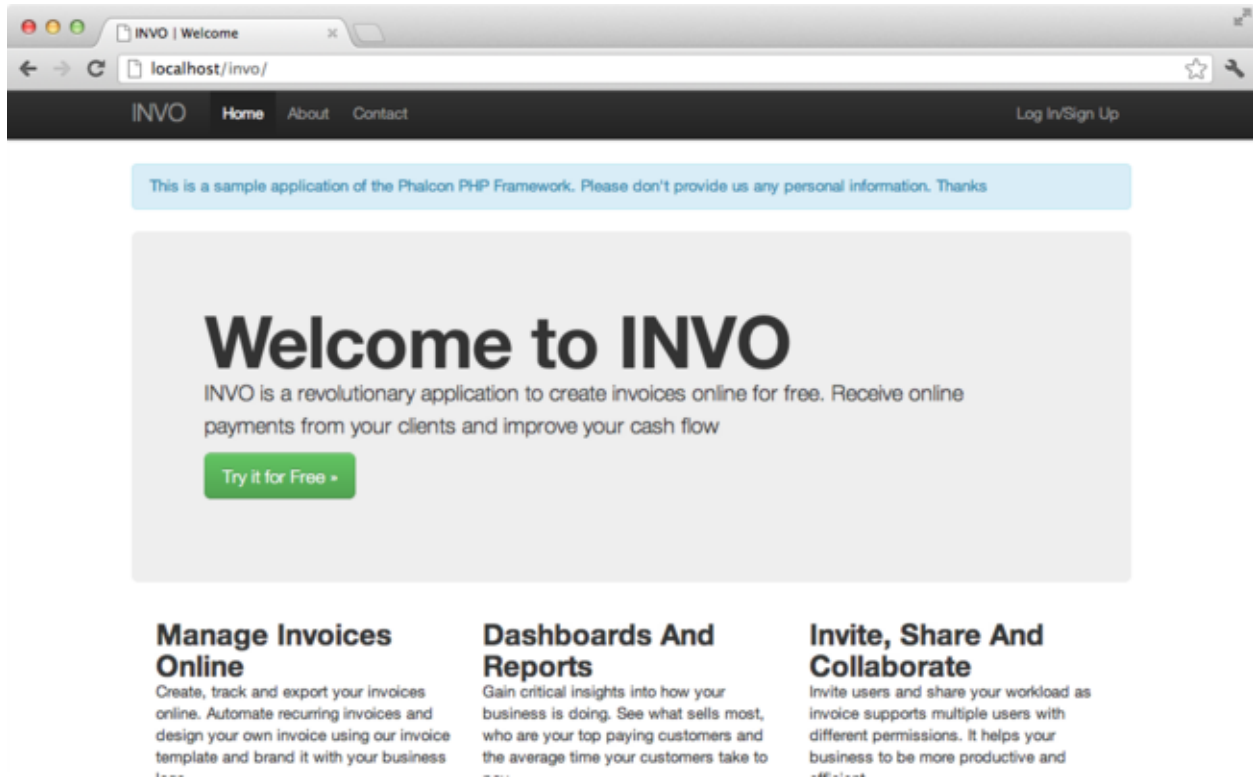

Configuration

INVO has a configuration file that sets general parameters in the application. This file is located at `app/config/config.ini` and is loaded in the very first lines of the application bootstrap (`public/index.php`):

```
<?php

use Phalcon\Config\Adapter\Ini as ConfigIni;

// ...

// Read the configuration
$config = new ConfigIni(
    APP_PATH . "app/config/config.ini"
);
```

`Phalcon\Config` allows us to manipulate the file in an object-oriented way. In this example, we're using an ini file for configuration but Phalcon has *adapters* for other file types as well. The configuration file contains the following settings:

```
[database]
host      = localhost
username  = root
password  = secret
name      = invo

[application]
controllersDir = app/controllers/
modelsDir      = app/models/
viewsDir       = app/views/
```

```
pluginsDir      = app/plugins/
formsDir        = app/forms/
libraryDir      = app/library/
baseUri         = /invo/
```

Phalcon doesn't have any pre-defined settings convention. Sections help us to organize the options as appropriate. In this file there are two sections to be used later: "application" and "database".

Autoloaders

The second part that appears in the bootstrap file (public/index.php) is the autoloader:

```
<?php

/**
 * Auto-loader configuration
 */
require APP_PATH . "app/config/loader.php";
```

The autoloader registers a set of directories in which the application will look for the classes that it will eventually need.

```
<?php

$loader = new Phalcon\Loader();

// We're registering a set of directories taken from the configuration file
$loader->registerDirs(
    [
        APP_PATH . $config->application->controllersDir,
        APP_PATH . $config->application->pluginsDir,
        APP_PATH . $config->application->libraryDir,
        APP_PATH . $config->application->modelsDir,
        APP_PATH . $config->application->formsDir,
    ]
);

$loader->register();
```

Note that the above code has registered the directories that were defined in the configuration file. The only directory that is not registered is the viewsDir because it contains HTML + PHP files but no classes. Also, note that we use a constant called APP_PATH. This constant is defined in the bootstrap (public/index.php) to allow us to have a reference to the root of our project:

```
<?php

// ...

define(
    "APP_PATH",
    realpath("../") . "/"
);
```

Registering services

Another file that is required in the bootstrap is (app/config/services.php). This file allows us to organize the services that INVO uses.

```
<?php

/**
 * Load application services
 */
require APP_PATH . "app/config/services.php";
```

Service registration is achieved as in the previous tutorial, making use of closures to lazily load the required components:

```
<?php

use Phalcon\Mvc\Url as UrlProvider;

// ...

/**
 * The URL component is used to generate all kind of URLs in the application
 */
$di->set(
    "url",
    function () use ($config) {
        $url = new UrlProvider();

        $url->setBaseUri(
            $config->application->baseUri
        );

        return $url;
    }
);
```

We will discuss this file in depth later.

Handling the Request

If we skip to the end of the file (public/index.php), the request is finally handled by *Phalcon\Mvc\Application* which initializes and executes all that is necessary to make the application run:

```
<?php

use Phalcon\Mvc\Application;

// ...

$application = new Application($di);

$response = $application->handle();

$response->send();
```

Dependency Injection

In the first line of the code block above, the Application class constructor is receiving the variable `$di` as an argument. What is the purpose of that variable? Phalcon is a highly decoupled framework so we need a component that acts as glue to make everything work together. That component is *Phalcon\Di*. It's a service container that also performs dependency injection and service location, instantiating all components as they are needed by the application.

There are many ways of registering services in the container. In INVO, most services have been registered using anonymous functions/closures. Thanks to this, the objects are instantiated in a lazy way, reducing the resources needed by the application.

For instance, in the following excerpt the session service is registered. The anonymous function will only be called when the application requires access to the session data:

```
<?php

use Phalcon\Session\Adapter\Files as Session;

// ...

// Start the session the first time a component requests the session service
$di->set(
    "session",
    function () {
        $session = new Session();

        $session->start();

        return $session;
    }
);
```

Here, we have the freedom to change the adapter, perform additional initialization and much more. Note that the service was registered using the name “session”. This is a convention that will allow the framework to identify the active service in the services container.

A request can use many services and registering each service individually can be a cumbersome task. For that reason, the framework provides a variant of *Phalcon\Di* called *Phalcon\Di\FactoryDefault* whose task is to register all services providing a full-stack framework.

```
<?php

use Phalcon\Di\FactoryDefault;

// ...

// The FactoryDefault Dependency Injector automatically registers the
// right services providing a full-stack framework
$di = new FactoryDefault();
```

It registers the majority of services with components provided by the framework as standard. If we need to override the definition of some service we could just set it again as we did above with “session” or “url”. This is the reason for the existence of the variable `$di`.

In next chapter, we will see how authentication and authorization is implemented in INVO.

Tutorial 3: Securing INVO

In this chapter, we continue explaining how INVO is structured, we'll talk about the implementation of authentication, authorization using events and plugins and an access control list (ACL) managed by Phalcon.

Log into the Application

A “log in” facility will allow us to work on backend controllers. The separation between backend controllers and frontend ones is only logical. All controllers are located in the same directory (app/controllers/).

To enter the system, users must have a valid username and password. Users are stored in the table “users” in the database “invo”.

Before we can start a session, we need to configure the connection to the database in the application. A service called “db” is set up in the service container with the connection information. As with the autoloader, we are again taking parameters from the configuration file in order to configure a service:

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql as DbAdapter;

// ...

// Database connection is created based on parameters defined in the configuration_
↪file
$di->set(
    "db",
    function () use ($config) {
        return new DbAdapter(
            [
                "host"      => $config->database->host,
                "username" => $config->database->username,
                "password" => $config->database->password,
                "dbname"   => $config->database->name,
            ]
        );
    }
);
```

Here, we return an instance of the MySQL connection adapter. If needed, you could do extra actions such as adding a logger, a profiler or change the adapter, setting it up as you want.

The following simple form (app/views/session/index.volt) requests the login information. We've removed some HTML code to make the example more concise:

```
{{ form("session/start") }}
<fieldset>
    <div>
        <label for="email">
            Username/Email
        </label>

        <div>
            {{ text_field("email") }}
        </div>
    </div>

    <div>
```

```
<label for="password">
    Password
</label>

<div>
    {{ password_field("password") }}
</div>
</div>

<div>
    {{ submit_button("Login") }}
</div>
</fieldset>
{{ endForm() }}
```

Instead of using raw PHP as the previous tutorial, we started to use *Volt*. This is a built-in template engine inspired in *Jinja* providing a simpler and friendly syntax to create templates. It will not take too long before you become familiar with Volt.

The `SessionController::startAction` function (`app/controllers/SessionController.php`) has the task of validating the data entered in the form including checking for a valid user in the database:

```
<?php

class SessionController extends ControllerBase
{
    // ...

    private function _registerSession($user)
    {
        $this->session->set(
            "auth",
            [
                "id" => $user->id,
                "name" => $user->name,
            ]
        );
    }

    /**
     * This action authenticate and logs a user into the application
     */
    public function startAction()
    {
        if ($this->request->isPost()) {
            // Get the data from the user
            $email    = $this->request->getPost("email");
            $password = $this->request->getPost("password");

            // Find the user in the database
            $user = Users::findFirst(
                [
                    "(email = :email: OR username = :email:) AND password = _
↪:password: AND active = 'Y'",
                    "bind" => [
                        "email" => $email,
```

```

        "password" => sha1($password),
    ]
];

);

if ($user !== false) {
    $this->_registerSession($user);

    $this->flash->success(
        "Welcome " . $user->name
    );

    // Forward to the 'invoices' controller if the user is valid
    return $this->dispatcher->forward(
        [
            "controller" => "invoices",
            "action"      => "index",
        ]
    );
}

$this->flash->error(
    "Wrong email/password"
);
}

// Forward to the login form again
return $this->dispatcher->forward(
    [
        "controller" => "session",
        "action"      => "index",
    ]
);
}
}

```

For the sake of simplicity, we have used “`sha1`” to store the password hashes in the database, however, this algorithm is not recommended in real applications, use “`bcrypt`” instead.

Note that multiple public attributes are accessed in the controller like: `$this->flash`, `$this->request` or `$this->session`. These are services defined in the services container from earlier (`app/config/services.php`). When they’re accessed the first time, they are injected as part of the controller.

These services are “shared”, which means that we are always accessing the same instance regardless of the place where we invoke them.

For instance, here we invoke the “session” service and then we store the user identity in the variable “auth”:

```

<?php

$this->session->set(
    "auth",
    [
        "id"    => $user->id,
        "name"  => $user->name,
    ]
);

```

Another important aspect of this section is how the user is validated as a valid one, first we validate whether the request

has been made using method POST:

```
<?php

if ($this->request->isPost()) {
```

Then, we receive the parameters from the form:

```
<?php

$email    = $this->request->getPost("email");
$password = $this->request->getPost("password");
```

Now, we have to check if there is one user with the same username or email and password:

```
<?php

$user = Users::findFirst(
    [
        "(email = :email: OR username = :email:) AND password = :password: AND active_
        ↳= 'Y'",
        "bind" => [
            "email"    => $email,
            "password" => sha1($password),
        ]
    ]
);
```

Note, the use of ‘bound parameters’, placeholders :email: and :password: are placed where values should be, then the values are ‘bound’ using the parameter ‘bind’. This safely replaces the values for those columns without having the risk of a SQL injection.

If the user is valid we register it in session and forwards him/her to the dashboard:

```
<?php

if ($user !== false) {
    $this->_registerSession($user);

    $this->flash->success(
        "Welcome " . $user->name
    );

    return $this->dispatcher->forward(
        [
            "controller" => "invoices",
            "action"      => "index",
        ]
    );
}
```

If the user does not exist we forward the user back again to action where the form is displayed:


```
<?php

return $this->dispatcher->forward(
    [
        "controller" => "session",
        "action"      => "index",
    ]
);
```

```
]
);
```

Securing the Backend

The backend is a private area where only registered users have access. Therefore, it is necessary to check that only registered users have access to these controllers. If you aren't logged into the application and you try to access, for example, the products controller (which is private) you will see a screen like this:

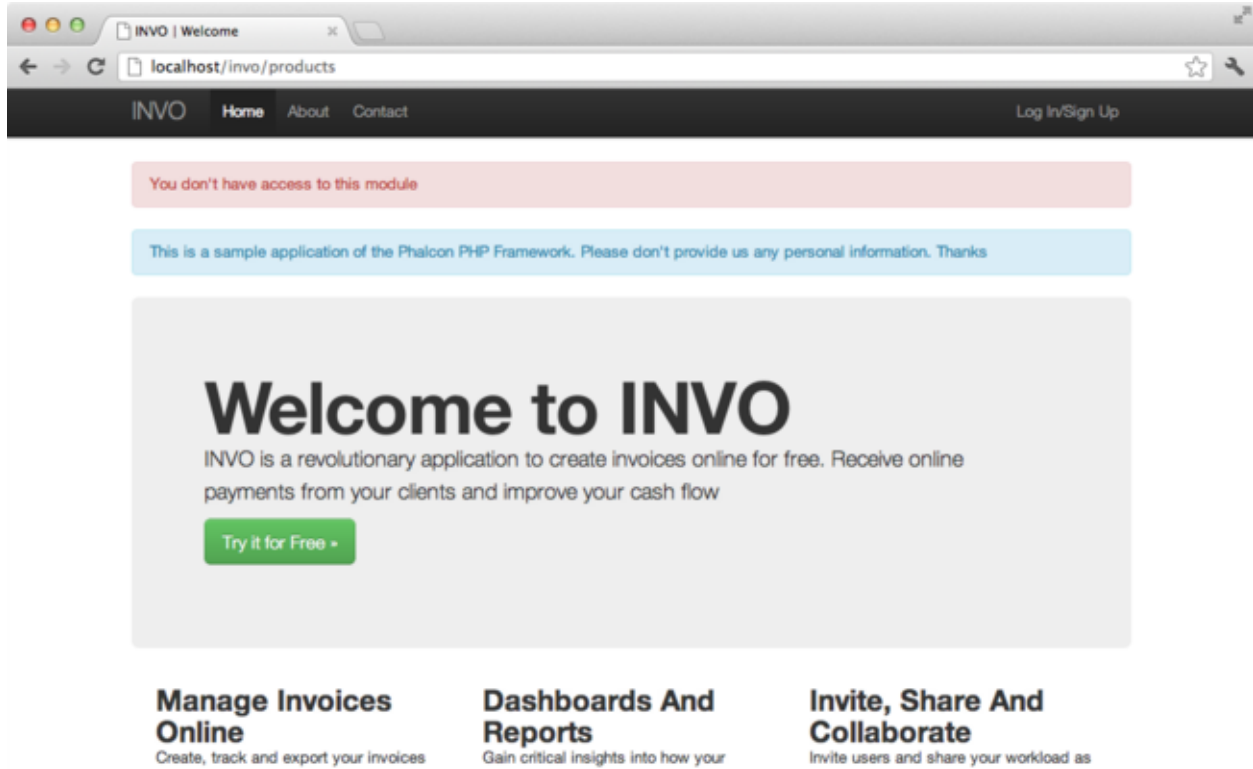

Every time someone attempts to access any controller/action, the application verifies that the current role (in session) has access to it, otherwise it displays a message like the above and forwards the flow to the home page.

Now let's find out how the application accomplishes this. The first thing to know is that there is a component called *Dispatcher*. It is informed about the route found by the *Routing* component. Then, it is responsible for loading the appropriate controller and execute the corresponding action method.

Normally, the framework creates the Dispatcher automatically. In our case, we want to perform a verification before executing the required action, checking if the user has access to it or not. To achieve this, we have replaced the component by creating a function in the bootstrap:

```
<?php
use Phalcon\Mvc\Dispatcher;

// ...

/**
 * MVC dispatcher
```

```
*/
$di->set(
    "dispatcher",
    function () {
        // ...

        $dispatcher = new Dispatcher();

        return $dispatcher;
    }
);
```

We now have total control over the Dispatcher used in the application. Many components in the framework trigger events that allow us to modify their internal flow of operation. As the Dependency Injector component acts as glue for components, a new component called *EventsManager* allows us to intercept the events produced by a component, routing the events to listeners.

Events Management

An *EventsManager* allows us to attach listeners to a particular type of event. The type that interests us now is “dispatch”. The following code filters all events produced by the Dispatcher:

```
<?php

use Phalcon\Mvc\Dispatcher;
use Phalcon\Events\Manager as EventsManager;

$di->set(
    "dispatcher",
    function () {
        // Create an events manager
        $eventsManager = new EventsManager();

        // Listen for events produced in the dispatcher using the Security plugin
        $eventsManager->attach(
            "dispatch:beforeExecuteRoute",
            new SecurityPlugin()
        );

        // Handle exceptions and not-found exceptions using NotFoundPlugin
        $eventsManager->attach(
            "dispatch:beforeException",
            new NotFoundPlugin()
        );

        $dispatcher = new Dispatcher();

        // Assign the events manager to the dispatcher
        $dispatcher->setEventsManager($eventsManager);

        return $dispatcher;
    }
);
```

When an event called “beforeExecuteRoute” is triggered the following plugin will be notified:

```
<?php

/**
 * Check if the user is allowed to access certain action using the SecurityPlugin
 */
$eventsManager->attach(
    "dispatch:beforeExecuteRoute",
    new SecurityPlugin()
);
```

When a “beforeException” is triggered then other plugin is notified:

```
<?php

/**
 * Handle exceptions and not-found exceptions using NotFoundPlugin
 */
$eventsManager->attach(
    "dispatch:beforeException",
    new NotFoundPlugin()
);
```

SecurityPlugin is a class located at (app/plugins/SecurityPlugin.php). This class implements the method “beforeExecuteRoute”. This is the same name as one of the events produced in the Dispatcher:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Mvc\User\Plugin;
use Phalcon\Mvc\Dispatcher;

class SecurityPlugin extends Plugin
{
    // ...

    public function beforeExecuteRoute(Event $event, Dispatcher $dispatcher)
    {
        // ...
    }
}
```

The hook events always receive a first parameter that contains contextual information of the event produced (\$event) and a second one that is the object that produced the event itself (\$dispatcher). It is not mandatory that plugins extend the class *Phalcon\Mvc\User\Plugin*, but by doing this they gain easier access to the services available in the application.

Now, we’re verifying the role in the current session, checking if the user has access using the ACL list. If the user does not have access we redirect to the home screen as explained before:

```
<?php

use Phalcon\Acl;
use Phalcon\Events\Event;
use Phalcon\Mvc\User\Plugin;
use Phalcon\Mvc\Dispatcher;

class SecurityPlugin extends Plugin
{
```

```
// ...

public function beforeExecuteRoute(Event $event, Dispatcher $dispatcher)
{
    // Check whether the "auth" variable exists in session to define the active_
    ↪role
    $auth = $this->session->get("auth");

    if (!$auth) {
        $role = "Guests";
    } else {
        $role = "Users";
    }

    // Take the active controller/action from the dispatcher
    $controller = $dispatcher->getControllerName();
    $action      = $dispatcher->getActionName();

    // Obtain the ACL list
    $acl = $this->getAcl();

    // Check if the Role have access to the controller (resource)
    $allowed = $acl->isAllowed($role, $controller, $action);

    if (!$allowed) {
        // If he doesn't have access forward him to the index controller
        $this->flash->error(
            "You don't have access to this module"
        );

        $dispatcher->forward(
            [
                "controller" => "index",
                "action"      => "index",
            ]
        );

        // Returning "false" we tell to the dispatcher to stop the current_
    ↪operation
        return false;
    }
}
```

Providing an ACL list

In the above example we have obtained the ACL using the method `$this->getAcl()`. This method is also implemented in the Plugin. Now we are going to explain step-by-step how we built the access control list (ACL):

```
<?php

use Phalcon\Acl;
use Phalcon\Acl\Role;
use Phalcon\Acl\Adapter\Memory as AclList;

// Create the ACL
```



```

$acl = new AclList();

// The default action is DENY access
$acl->setDefaultAction(
    Acl::DENY
);

// Register two roles, Users is registered users
// and guests are users without a defined identity
$roles = [
    "users" => new Role("Users"),
    "guests" => new Role("Guests"),
];

foreach ($roles as $role) {
    $acl->addRole($role);
}

```

Now, we define the resources for each area respectively. Controller names are resources and their actions are accesses for the resources:

```

<?php

use Phalcon\Acl\Resource;

// ...

// Private area resources (backend)
$privateResources = [
    "companies" => ["index", "search", "new", "edit", "save", "create", "delete"],
    "products"  => ["index", "search", "new", "edit", "save", "create", "delete"],
    "producttypes" => ["index", "search", "new", "edit", "save", "create", "delete"],
    "invoices"  => ["index", "profile"],
];

foreach ($privateResources as $resourceName => $actions) {
    $acl->addResource(
        new Resource($resourceName),
        $actions
    );
}

// Public area resources (frontend)
$publicResources = [
    "index" => ["index"],
    "about" => ["index"],
    "register" => ["index"],
    "errors" => ["show404", "show500"],
    "session" => ["index", "register", "start", "end"],
    "contact" => ["index", "send"],
];

foreach ($publicResources as $resourceName => $actions) {
    $acl->addResource(
        new Resource($resourceName),
        $actions
    );
}

```

```
    );  
}
```

The ACL now have knowledge of the existing controllers and their related actions. Role “Users” has access to all the resources of both frontend and backend. The role “Guests” only has access to the public area:

```
<?php  
  
// Grant access to public areas to both users and guests  
foreach ($roles as $role) {  
    foreach ($publicResources as $resource => $actions) {  
        $acl->allow(  
            $role->getName(),  
            $resource,  
            "*" );  
    }  
}  
  
// Grant access to private area only to role Users  
foreach ($privateResources as $resource => $actions) {  
    foreach ($actions as $action) {  
        $acl->allow(  
            "Users",  
            $resource,  
            $action );  
    }  
}
```

Hooray!, the ACL is now complete. In next chapter, we will see how a CRUD is implemented in Phalcon and how you can customize it.

Tutorial 4: Working with the CRUD

Backends usually provide forms to allow users to manipulate data. Continuing the explanation of INVO, we now address the creation of CRUDs, a very common task that Phalcon will facilitate you using forms, validations, paginators and more.

Most options that manipulate data in INVO (companies, products and types of products) were developed using a basic and common **CRUD** (Create, Read, Update and Delete). Each CRUD contains the following files:

```
invo/  
  app/  
    controllers/  
      ProductsController.php  
    models/  
      Products.php  
    forms/  
      ProductsForm.php  
    views/  
      products/  
        edit.volt  
        index.volt  
        new.volt  
        search.volt
```

Each controller has the following actions:

```
<?php

class ProductsController extends ControllerBase
{
    /**
     * The start action, it shows the "search" view
     */
    public function indexAction()
    {
        // ...
    }

    /**
     * Execute the "search" based on the criteria sent from the "index"
     * Returning a paginator for the results
     */
    public function searchAction()
    {
        // ...
    }

    /**
     * Shows the view to create a "new" product
     */
    public function newAction()
    {
        // ...
    }

    /**
     * Shows the view to "edit" an existing product
     */
    public function editAction()
    {
        // ...
    }

    /**
     * Creates a product based on the data entered in the "new" action
     */
    public function createAction()
    {
        // ...
    }

    /**
     * Updates a product based on the data entered in the "edit" action
     */
    public function saveAction()
    {
        // ...
    }

    /**
     * Deletes an existing product
     */
    public function deleteAction($id)
```

```
{  
    // ...  
}  
}
```

The Search Form

Every CRUD starts with a search form. This form shows each field that the table has (products), allowing the user to create a search criteria for any field. The “products” table has a relationship with the table “products_types”. In this case, we previously queried the records in this table in order to facilitate the search by that field:

```
<?php  
  
/**  
 * The start action, it shows the "search" view  
 */  
public function indexAction()  
{  
    $this->persistent->searchParams = null;  
  
    $this->view->form = new ProductsForm();  
}
```

An instance of the ProductsForm form (app/forms/ProductsForm.php) is passed to the view. This form defines the fields that are visible to the user:

```
<?php  
  
use Phalcon\Forms\Form;  
use Phalcon\Forms\Element\Text;  
use Phalcon\Forms\Element\Hidden;  
use Phalcon\Forms\Element\Select;  
use Phalcon\Validation\Validator\Email;  
use Phalcon\Validation\Validator\PresenceOf;  
use Phalcon\Validation\Validator\Numericality;  
  
class ProductsForm extends Form  
{  
    /**  
     * Initialize the products form  
     */  
    public function initialize($entity = null, $options = [])  
    {  
        if (!isset($options["edit"])) {  
            $element = new Text("id");  
  
            $element->setLabel("Id");  
  
            $this->add(  
                $element  
            );  
        } else {  
            $this->add(  
                new Hidden("id")  
            );  
        }  
    }  
}
```

```
$name = new Text("name");

$name->setLabel("Name");

$name->setFilters(
    [
        "striptags",
        "string",
    ]
);

$name->addValidators(
    [
        new PresenceOf(
            [
                "message" => "Name is required",
            ]
        )
    ]
);

$this->add($name);
```

```
$type = new Select(
    "profilesId",
    ProductTypes::find(),
    [
        "using" => [
            "id",
            "name",
        ],
        "useEmpty" => true,
        "emptyText" => "...",
        "emptyValue" => "",
    ]
);

$this->add($type);
```

```
$price = new Text("price");

$price->setLabel("Price");

$price->setFilters(
    [
        "float",
    ]
);

$price->addValidators(
    [
```

```
        new PresenceOf(
            [
                "message" => "Price is required",
            ]
        ),
        new Numericality(
            [
                "message" => "Price is required",
            ]
        ),
    ]
);

$this->add($price);
}
```

The form is declared using an object-oriented scheme based on the elements provided by the *forms* component. Every element follows almost the same structure:

```
<?php

// Create the element
$name = new Text("name");

// Set its label
$name->setLabel("Name");

// Before validating the element apply these filters
$name->setFilters(
    [
        "striptags",
        "string",
    ]
);

// Apply this validators
$name->addValidators(
    [
        new PresenceOf(
            [
                "message" => "Name is required",
            ]
        )
    ]
);

// Add the element to the form
$this->add($name);
```

Other elements are also used in this form:

```
<?php

// Add a hidden input to the form
$this->add(
    new Hidden("id")
);
```

```
// ...

$productTypes = ProductTypes::find();

// Add a HTML Select (list) to the form
// and fill it with data from "product_types"
$type = new Select(
    "profilesId",
    $productTypes,
    [
        "using" => [
            "id",
            "name",
        ],
        "useEmpty" => true,
        "emptyText" => "...",
        "emptyValue" => "",
    ]
);
```

Note that `ProductTypes::find()` contains the data necessary to fill the `SELECT` tag using `Phalcon\Tag::select()`. Once the form is passed to the view, it can be rendered and presented to the user:

```
{{ form("products/search") }}

<h2>
    Search products
</h2>

<fieldset>

    {% for element in form %}
        <div class="control-group">
            {{ element.label(["class": "control-label"]) }}

            <div class="controls">
                {{ element }}
            </div>
        </div>
    {% endfor %}

    <div class="control-group">
        {{ submit_button("Search", "class": "btn btn-primary") }}
    </div>

</fieldset>

{{ endForm() }}
```

This produces the following HTML:

```
<form action="/invo/products/search" method="post">

    <h2>
```

```
        Search products
    </h2>

    <fieldset>

        <div class="control-group">
            <label for="id" class="control-label">Id</label>

            <div class="controls">
                <input type="text" id="id" name="id" />
            </div>
        </div>

        <div class="control-group">
            <label for="name" class="control-label">Name</label>

            <div class="controls">
                <input type="text" id="name" name="name" />
            </div>
        </div>

        <div class="control-group">
            <label for="profilesId" class="control-label">profilesId</label>

            <div class="controls">
                <select id="profilesId" name="profilesId">
                    <option value="">...</option>
                    <option value="1">Vegetables</option>
                    <option value="2">Fruits</option>
                </select>
            </div>
        </div>

        <div class="control-group">
            <label for="price" class="control-label">Price</label>

            <div class="controls">
                <input type="text" id="price" name="price" />
            </div>
        </div>

        <div class="control-group">
            <input type="submit" value="Search" class="btn btn-primary" />
        </div>

    </fieldset>

</form>
```

When the form is submitted, the “search” action is executed in the controller performing the search based on the data entered by the user.

Performing a Search

The “search” action has two behaviors. When accessed via POST, it performs a search based on the data sent from the form but when accessed via GET it moves the current page in the paginator. To differentiate HTTP methods, we check it using the *Request* component:

```
<?php

/**
 * Execute the "search" based on the criteria sent from the "index"
 * Returning a paginator for the results
 */
public function searchAction()
{
    if ($this->request->isPost()) {
        // Create the query conditions
    } else {
        // Paginate using the existing conditions
    }

    // ...
}
```

With the help of *Phalcon\Mvc\Model\Criteria*, we can create the search conditions intelligently based on the data types and values sent from the form:

```
<?php

$query = Criteria::fromInput(
    $this->di,
    "Products",
    $this->request->getPost()
);
```

This method verifies which values are different from “” (empty string) and null and takes them into account to create the search criteria:

- If the field data type is text or similar (char, varchar, text, etc.) It uses an SQL “like” operator to filter the results.
- If the data type is not text or similar, it’ll use the operator “=”.

Additionally, “Criteria” ignores all the \$_POST variables that do not match any field in the table. Values are automatically escaped using “bound parameters”.

Now, we store the produced parameters in the controller’s session bag:

```
<?php

$this->persistent->searchParams = $query->getParams();
```

A session bag, is a special attribute in a controller that persists between requests using the session service. When accessed, this attribute injects a *Phalcon\Session\Bag* instance that is independent in each controller.

Then, based on the built params we perform the query:

```
<?php

$products = Products::find($parameters);

if (count($products) === 0) {
```

```
$this->flash->notice(
    "The search did not found any products"
);

return $this->dispatcher->forward(
    [
        "controller" => "products",
        "action"      => "index",
    ]
);
}
```

If the search doesn't return any product, we forward the user to the index action again. Let's pretend the search returned results, then we create a paginator to navigate easily through them:

```
<?php

use Phalcon\Paginator\Adapter\Model as Paginator;

// ...

$paginator = new Paginator(
    [
        "data" => $products,    // Data to paginate
        "limit" => 5,           // Rows per page
        "page" => $numberPage,  // Active page
    ]
);

// Get active page in the paginator
$page = $paginator->getPaginate();
```

Finally we pass the returned page to view:

```
<?php

$this->view->page = $page;
```

In the view (app/views/products/search.volt), we traverse the results corresponding to the current page, showing every row in the current page to the user:

```
{% for product in page.items %}
    {% if loop.first %}
        <table>
            <thead>
                <tr>
                    <th>Id</th>
                    <th>Product Type</th>
                    <th>Name</th>
                    <th>Price</th>
                    <th>Active</th>
                </tr>
            </thead>
            <tbody>
    {% endif %}

    <tr>
        <td>
```

```

        {{ product.id }}
    </td>

    <td>
        {{ product.getProductTypes().name }}
    </td>

    <td>
        {{ product.name }}
    </td>

    <td>
        {{ "%.2f"|format(product.price) }}
    </td>

    <td>
        {{ product.getActiveDetail() }}
    </td>

    <td width="7%">
        {{ link_to("products/edit/" ~ product.id, "Edit") }}
    </td>

    <td width="7%">
        {{ link_to("products/delete/" ~ product.id, "Delete") }}
    </td>
</tr>

{% if loop.last %}
    </tbody>
    <tbody>
        <tr>
            <td colspan="7">
                <div>
                    {{ link_to("products/search", "First") }}
                    {{ link_to("products/search?page=" ~ page.before,
↪ "Previous") }}

                    {{ link_to("products/search?page=" ~ page.next, "Next") }}
                    {{ link_to("products/search?page=" ~ page.last, "Last") }}
                    <span class="help-inline">{{ page.current }} of {{ page.
↪ total_pages }}</span>
                </div>
            </td>
        </tr>
    </tbody>
</table>
{% endif %}
{% else %}
    No products are recorded
{% endfor %}

```

There are many things in the above example that worth detailing. First of all, active items in the current page are traversed using a Volt's 'for'. Volt provides a simpler syntax for a PHP 'foreach'.

```
{% for product in page.items %}
```

Which in PHP is the same as:

```
<?php foreach ($page->items as $product) { ?>
```

The whole ‘for’ block provides the following:

```
{% for product in page.items %}
    {% if loop.first %}
        Executed before the first product in the loop
    {% endif %}

    Executed for every product of page.items

    {% if loop.last %}
        Executed after the last product is loop
    {% endif %}
{% else %}
    Executed if page.items does not have any products
{% endfor %}
```

Now you can go back to the view and find out what every block is doing. Every field in “product” is printed accordingly:

```
<tr>
    <td>
        {{ product.id }}
    </td>

    <td>
        {{ product.productTypes.name }}
    </td>

    <td>
        {{ product.name }}
    </td>

    <td>
        {{ "%.2f"|format(product.price) }}
    </td>

    <td>
        {{ product.getActiveDetail() }}
    </td>

    <td width="7%">
        {{ link_to("products/edit/" ~ product.id, "Edit") }}
    </td>

    <td width="7%">
        {{ link_to("products/delete/" ~ product.id, "Delete") }}
    </td>
</tr>
```

As we seen before using `product.id` is the same as in PHP as doing: `$product->id`, we made the same with `product.name` and so on. Other fields are rendered differently, for instance, let’s focus in `product.productTypes.name`. To understand this part, we have to check the Products model (`app/models/Products.php`):

```
<?php
use Phalcon\Mvc\Model;
```

```

/**
 * Products
 */
class Products extends Model
{
    // ...

    /**
     * Products initializer
     */
    public function initialize()
    {
        $this->belongsTo(
            "product_types_id",
            "ProductTypes",
            "id",
            [
                "reusable" => true,
            ]
        );
    }

    // ...
}

```

A model can have a method called `initialize()`, this method is called once per request and it serves the ORM to initialize a model. In this case, “Products” is initialized by defining that this model has a one-to-many relationship to another model called “ProductTypes”.

```

<?php
$this->belongsTo(
    "product_types_id",
    "ProductTypes",
    "id",
    [
        "reusable" => true,
    ]
);

```

Which means, the local attribute “product_types_id” in “Products” has an one-to-many relation to the “ProductTypes” model in its attribute “id”. By defining this relationship we can access the name of the product type by using:

```
<td>{{ product.productTypes.name }}</td>
```

The field “price” is printed by its formatted using a Volt filter:

```
<td>{{ "%.2f"|format(product.price) }}</td>
```

In plain PHP, this would be:

```
<?php echo sprintf("%.2f", $product->price) ?>
```

Printing whether the product is active or not uses a helper implemented in the model:

```
<td>{{ product.getActiveDetail() }}</td>
```

This method is defined in the model.

Creating and Updating Records

Now let's see how the CRUD creates and updates records. From the “new” and “edit” views, the data entered by the user is sent to the “create” and “save” actions that perform actions of “creating” and “updating” products, respectively.

In the creation case, we recover the data submitted and assign them to a new “Products” instance:

```
<?php

/**
 * Creates a product based on the data entered in the "new" action
 */
public function createAction()
{
    if (!$this->request->isPost()) {
        return $this->dispatcher->forward([
            "controller" => "products",
            "action"      => "index",
        ]);
    }

    $form = new ProductsForm();

    $product = new Products();

    $product->id           = $this->request->getPost("id", "int");
    $product->product_types_id = $this->request->getPost("product_types_id", "int");
    $product->name          = $this->request->getPost("name", "striptags");
    $product->price          = $this->request->getPost("price", "double");
    $product->active         = $this->request->getPost("active");

    // ...
}
```

Remember the filters we defined in the Products form? Data is filtered before being assigned to the object `$product`. This filtering is optional; the ORM also escapes the input data and performs additional casting according to the column types:

```
<?php

// ...

$name = new Text("name");

$name->setLabel("Name");

// Filters for name
$name->setFilters([
    "striptags",
    "string",
]);
```

```

    ]
);

// Validators for name
$name->addValidators(
    [
        new PresenceOf(
            [
                "message" => "Name is required",
            ]
        )
    ]
);

$this->add($name);

```

When saving, we'll know whether the data conforms to the business rules and validations implemented in the form ProductsForm form (app/forms/ProductsForm.php):

```

<?php
// ...

$form = new ProductsForm();

$product = new Products();

// Validate the input
$data = $this->request->getPost();

if (!$form->isValid($data, $product)) {
    $messages = $form->getMessages();

    foreach ($messages as $message) {
        $this->flash->error($message);
    }

    return $this->dispatcher->forward(
        [
            "controller" => "products",
            "action"      => "new",
        ]
    );
}

```

Finally, if the form does not return any validation message we can save the product instance:

```

<?php
// ...

if ($product->save() === false) {
    $messages = $product->getMessages();

    foreach ($messages as $message) {
        $this->flash->error($message);
    }
}

```

```
        return $this->dispatcher->forward(
            [
                "controller" => "products",
                "action"      => "new",
            ]
        );
    }

    $form->clear();

    $this->flash->success(
        "Product was created successfully"
    );

    return $this->dispatcher->forward(
        [
            "controller" => "products",
            "action"      => "index",
        ]
    );
}
```

Now, in the case of updating a product, we must first present the user with the data that is currently in the edited record:

```
<?php

/**
 * Edits a product based on its id
 */
public function editAction($id)
{
    if (!$this->request->isPost()) {
        $product = Products::findFirstById($id);

        if (!$product) {
            $this->flash->error(
                "Product was not found"
            );

            return $this->dispatcher->forward(
                [
                    "controller" => "products",
                    "action"      => "index",
                ]
            );
        }

        $this->view->form = new ProductsForm(
            $product,
            [
                "edit" => true,
            ]
        );
    }
}
```

The data found is bound to the form by passing the model as first parameter. Thanks to this, the user can change any value and then sent it back to the database through to the “save” action:


```

<?php

/**
 * Updates a product based on the data entered in the "edit" action
 */
public function saveAction()
{
    if (!$this->request->isPost()) {
        return $this->dispatcher->forward(
            [
                "controller" => "products",
                "action"      => "index",
            ]
        );
    }

    $id = $this->request->getPost("id", "int");

    $product = Products::findFirstById($id);

    if (!$product) {
        $this->flash->error(
            "Product does not exist"
        );

        return $this->dispatcher->forward(
            [
                "controller" => "products",
                "action"      => "index",
            ]
        );
    }

    $form = new ProductsForm();

    $data = $this->request->getPost();

    if (!$form->isValid($data, $product)) {
        $messages = $form->getMessages();

        foreach ($messages as $message) {
            $this->flash->error($message);
        }

        return $this->dispatcher->forward(
            [
                "controller" => "products",
                "action"      => "new",
            ]
        );
    }

    if ($product->save() === false) {
        $messages = $product->getMessages();

        foreach ($messages as $message) {
            $this->flash->error($message);
        }
    }
}

```

```
        return $this->dispatcher->forward(
            [
                "controller" => "products",
                "action"      => "new",
            ]
        );
    }

    $form->clear();

    $this->flash->success(
        "Product was updated successfully"
    );

    return $this->dispatcher->forward(
        [
            "controller" => "products",
            "action"      => "index",
        ]
    );
}
```

We have seen how Phalcon lets you create forms and bind data from a database in a structured way. In next chapter, we will see how to add custom HTML elements like a menu.

Tutorial 5: Customizing INVO

To finish the detailed explanation of INVO we are going to explain how to customize INVO adding UI elements and changing the title according to the controller executed.

User Components

All the UI elements and visual style of the application has been achieved mostly through [Bootstrap](#). Some elements, such as the navigation bar changes according to the state of the application. For example, in the upper right corner, the link “Log in / Sign Up” changes to “Log out” if a user is logged into the application.

This part of the application is implemented in the component “Elements” (`app/library/Elements.php`).

```
<?php

use Phalcon\Mvc\User\Component;

class Elements extends Component
{
    public function getMenu()
    {
        // ...
    }

    public function getTabs()
    {
        // ...
    }
}
```

This class extends the *Phalcon\Mvc\User\Component*. It is not imposed to extend a component with this class, but it helps to get access more quickly to the application services. Now, we are going to register our first user component in the services container:

```
<?php

// Register a user component
$di->set (
    "elements",
    function () {
        return new Elements();
    }
);
```

As controllers, plugins or components within a view, this component also has access to the services registered in the container and by just accessing an attribute with the same name as a previously registered service:

```
<div class="navbar navbar-fixed-top">
    <div class="navbar-inner">
        <div class="container">
            <a class="btn btn-navbar" data-toggle="collapse" data-target=".nav-
→collapse">
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
            </a>

            <a class="brand" href="#">INVO</a>

            {{ elements.getMenu() }}
        </div>
    </div>
</div>

<div class="container">
    {{ content() }}

    <hr>

    <footer>
        <p>&copy; Company 2015</p>
    </footer>
</div>
```

The important part is:

```
{{ elements.getMenu() }}
```

Changing the Title Dynamically

When you browse between one option and another will see that the title changes dynamically indicating where we are currently working. This is achieved in each controller initializer:

```
<?php

class ProductsController extends ControllerBase
{
```

```
public function initialize()
{
    // Set the document title
    $this->tag->setTitle(
        "Manage your product types"
    );

    parent::initialize();
}

// ...
}
```

Note, that the method `parent::initialize()` is also called, it adds more data to the title:

```
<?php
use Phalcon\Mvc\Controller;

class ControllerBase extends Controller
{
    protected function initialize()
    {
        // Prepend the application name to the title
        $this->tag->prependTitle(
            "INVO | "
        );
    }

    // ...
}
```

Finally, the title is printed in the main view (`app/views/index.volt`):

```
<!DOCTYPE html>
<html>
    <head>
        <?php echo $this->tag->getTitle(); ?>
    </head>

    <!-- ... -->
</html>
```

Tutorial 6: Vökuró

Vökuró is another sample application you can use to learn more about Phalcon. Vökuró is a small website that shows how to implement a security features and management of users and permissions. You can clone its code from [Github](#).

Project Structure

Once you clone the project in your document root you'll see the following structure:


```
vokuro/
  app/
    config/
```

```

controllers/
forms/
library/
models/
views/
cache/
public/
  css/
  img/
schemas/

```

This project follows a quite similar structure to INVO. Once you open the application in your browser <http://localhost/vokuro> you'll see something like this:

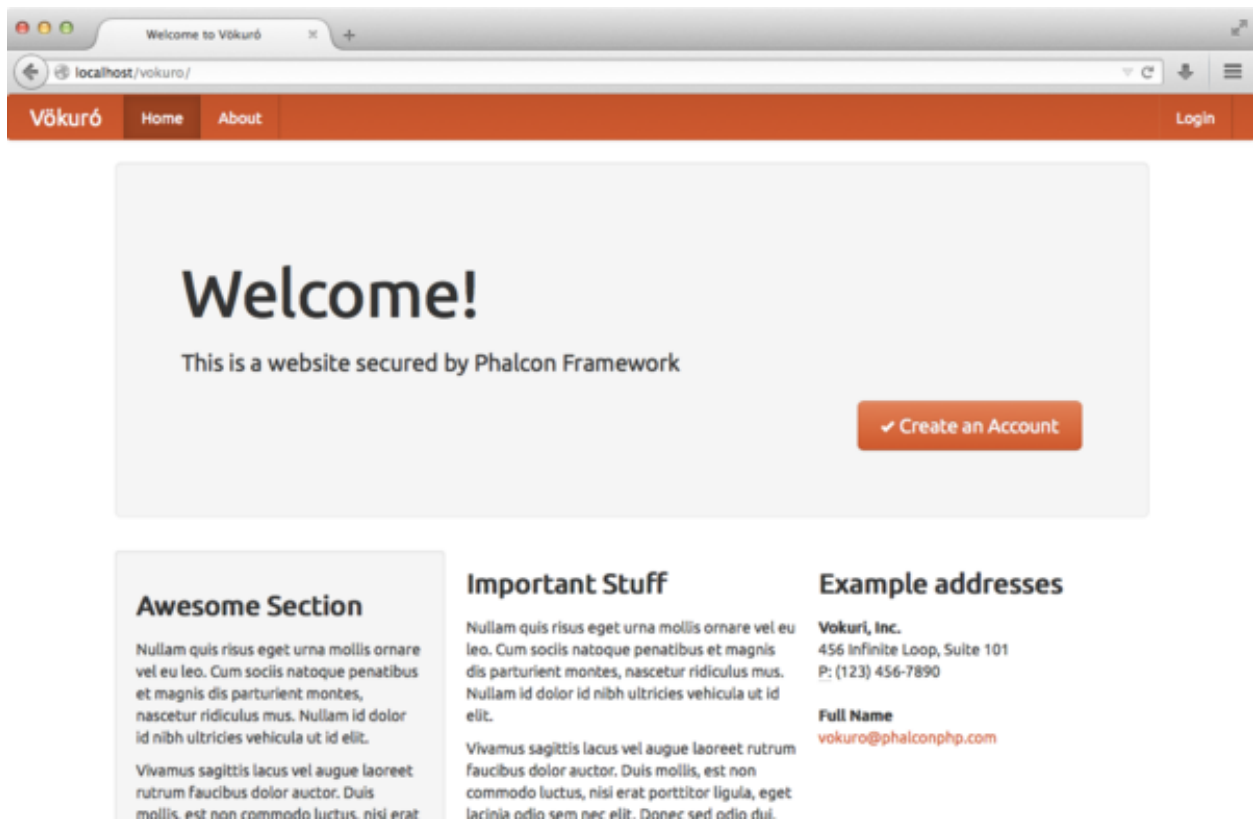

The application is divided into two parts, a frontend, where visitors can sign up the service and a backend where administrative users can manage registered users. Both frontend and backend are combined in a single module.

Load Classes and Dependencies

This project uses *Phalcon\Loader* to load controllers, models, forms, etc. within the project and *composer* to load the project's dependencies. So, the first thing you have to do before execute Vökuró is install its dependencies via *composer*. Assuming you have it correctly installed, type the following command in the console:

```

cd vokuro
composer install

```

Vökuró sends emails to confirm the sign up of registered users using Swift, the *composer.json* looks like:

```
{
    "require" : {
        "php" : ">=5.5.0",
        "ext-phalcon" : ">=3.0.0",
        "swiftmailer/swiftmailer" : "^5.4",
        "amazonwebservices/aws-sdk-for-php" : "~1.0"
    }
}
```

Now, there is a file called `app/config/loader.php` where all the auto-loading stuff is set up. At the end of this file you can see that the composer autoloader is included enabling the application to autoload any of the classes in the downloaded dependencies:

```
<?php

// ...

// Use composer autoloader to load vendor classes
require_once BASE_PATH . "/vendor/autoload.php";
```

Moreover, Vökuró, unlike the INVO, utilizes namespaces for controllers and models which is the recommended practice to structure a project. This way the autoloader looks slightly different than the one we saw before (`app/config/loader.php`):

```
<?php

use Phalcon\Loader;

$loader = new Loader();

$loader->registerNamespaces(
    [
        "Vokuro\\Models"      => $config->application->modelsDir,
        "Vokuro\\Controllers" => $config->application->controllersDir,
        "Vokuro\\Forms"       => $config->application->formsDir,
        "Vokuro"              => $config->application->libraryDir,
    ]
);

$loader->register();

// ...
```

Instead of using `registerDirectories()`, we use `registerNamespaces()`. Every namespace points to a directory defined in the configuration file (`app/config/config.php`). For instance the namespace `Vokuro\Controllers` points to `app/controllers` so all the classes required by the application within this namespace requires it in its definition:

```
<?php

namespace Vokuro\Controllers;

class AboutController extends ControllerBase
{
    // ...
}
```

Sign Up

First, let's check how users are registered in Vökuró. When a user clicks the “Create an Account” button, the controller SessionController is invoked and the action “signup” is executed:

```
<?php

namespace Vokuro\Controllers;

use Vokuro\Forms\SignUpForm;

class RegisterController extends ControllerBase
{
    public function signupAction()
    {
        $form = new SignUpForm();

        // ...

        $this->view->form = $form;
    }
}
```

This action simply pass a form instance of SignUpForm to the view, which itself is rendered to allow the user enter the login details:

```
{{ form("class": "form-search") }}
```

```
<h2>
    Sign Up
</h2>

<p>{{ form.label("name") }}</p>
<p>
    {{ form.render("name") }}
    {{ form.messages("name") }}
</p>

<p>{{ form.label("email") }}</p>
<p>
    {{ form.render("email") }}
    {{ form.messages("email") }}
</p>

<p>{{ form.label("password") }}</p>
<p>
    {{ form.render("password") }}
    {{ form.messages("password") }}
</p>

<p>{{ form.label("confirmPassword") }}</p>
<p>
    {{ form.render("confirmPassword") }}
    {{ form.messages("confirmPassword") }}
</p>

<p>
    {{ form.render("terms") }} {{ form.label("terms") }}
```

```
        {{ form.messages("terms") }}
    </p>

    <p>{{ form.render("Sign Up") }}</p>

    {{ form.render("csrf", ["value": security.getToken()]) }}
    {{ form.messages("csrf") }}

    <hr>

    {{ endForm() }}
```

Tutorial 7: Creating a Simple REST API

In this tutorial, we will explain how to create a simple application that provides a [RESTful](#) API using the different HTTP methods:

- GET to retrieve and search data
- POST to add data
- PUT to update data
- DELETE to delete data

Defining the API

The API consists of the following methods:

Method	URL	Action
GET	/api/robots	Retrieves all robots
GET	/api/robots/search/Astro	Searches for robots with 'Astro' in their name
GET	/api/robots/2	Retrieves robots based on primary key
POST	/api/robots	Adds a new robot
PUT	/api/robots/2	Updates robots based on primary key
DELETE	/api/robots/2	Deletes robots based on primary key

Creating the Application

As the application is so simple, we will not implement any full MVC environment to develop it. In this case, we will use a *micro application* to meet our goal.

The following file structure is more than enough:

```
my-rest-api/
  models/
    Robots.php
  index.php
  .htaccess
```

First, we need an .htaccess file that contains all the rules to rewrite the URIs to the index.php file, that is our application:

```
<IfModule mod_rewrite.c>
  RewriteEngine On
  RewriteCond %{REQUEST_FILENAME} !-f
```



```
RewriteRule ^((?s).*)$ index.php?_url=/$1 [QSA,L]
</IfModule>
```

Then, in the index.php file we create the following:

```
<?php

use Phalcon\Mvc\Micro;

$app = new Micro();

// Define the routes here

$app->handle();
```

Now we will create the routes as we defined above:

```
<?php

use Phalcon\Mvc\Micro;

$app = new Micro();

// Retrieves all robots
$app->get(
    "/api/robots",
    function () {

    }
);

// Searches for robots with $name in their name
$app->get(
    "/api/robots/search/{name}",
    function ($name) {

    }
);

// Retrieves robots based on primary key
$app->get(
    "/api/robots/{id:[0-9]+}",
    function ($id) {

    }
);

// Adds a new robot
$app->post(
    "/api/robots",
    function () {

    }
);

// Updates robots based on primary key
$app->put(
    "/api/robots/{id:[0-9]+}",
```

```
function () {  
  
}  
);  
  
// Deletes robots based on primary key  
$app->delete(  
    "/api/robots/{id:[0-9]+}",  
    function () {  
  
    }  
);  
  
$app->handle();
```

Each route is defined with a method with the same name as the HTTP method, as first parameter we pass a route pattern, followed by a handler. In this case, the handler is an anonymous function. The following route: `'/api/robots/{id:[0-9]+}'`, by example, explicitly sets that the “id” parameter must have a numeric format.

When a defined route matches the requested URI then the application executes the corresponding handler.

Creating a Model

Our API provides information about ‘robots’, these data are stored in a database. The following model allows us to access that table in an object-oriented way. We have implemented some business rules using built-in validators and simple validations. Doing this will give us the peace of mind that saved data meet the requirements of our application:

```
<?php  
  
namespace Store\Toys;  
  
use Phalcon\Mvc\Model;  
use Phalcon\Mvc\Model\Message;  
use Phalcon\Mvc\Model\Validator\Uniqueness;  
use Phalcon\Mvc\Model\Validator\InclusionIn;  
  
class Robots extends Model  
{  
    public function validation()  
    {  
        // Type must be: droid, mechanical or virtual  
        $this->validate(  
            new InclusionIn(  
                [  
                    "field" => "type",  
                    "domain" => [  
                        "droid",  
                        "mechanical",  
                        "virtual",  
                    ],  
                )  
            )  
        );  
    }  
  
    // Robot name must be unique  
    $this->validate(  
        new Uniqueness(  

```

```

        [
            "field"    => "name",
            "message" => "The robot name must be unique",
        ]
    )
);

// Year cannot be less than zero
if ($this->year < 0) {
    $this->appendMessage(
        new Message("The year cannot be less than zero")
    );
}

// Check if any messages have been produced
if ($this->validationHasFailed() === true) {
    return false;
}
}
}

```

Now, we must set up a connection to be used by this model and load it within our app:

```

<?php

use Phalcon\Loader;
use Phalcon\Mvc\Micro;
use Phalcon\Di\FactoryDefault;
use Phalcon\Db\Adapter\Pdo\Mysql as PdoMysql;

// Use Loader() to autoload our model
$loader = new Loader();

$loader->registerNamespaces(
    [
        "Store\\Toys" => __DIR__ . "/models/",
    ]
);

$loader->register();

$di = new FactoryDefault();

// Set up the database service
$di->set(
    "db",
    function () {
        return new PdoMysql(
            [
                "host"      => "localhost",
                "username" => "asimov",
                "password" => "zeroth",
                "dbname"    => "robotics",
            ]
        );
    }
);

```

```
// Create and bind the DI to the application
$app = new Micro($di);
```

Retrieving Data

The first “handler” that we will implement is which by method GET returns all available robots. Let’s use PHQL to perform this simple query returning the results as JSON:

```
<?php

// Retrieves all robots
$app->get(
    "/api/robots",
    function () use ($app) {
        $phql = "SELECT * FROM Store\\Toys\\Robots ORDER BY name";

        $robots = $app->modelsManager->executeQuery($phql);

        $data = [];

        foreach ($robots as $robot) {
            $data[] = [
                "id" => $robot->id,
                "name" => $robot->name,
            ];
        }

        echo json_encode($data);
    }
);
```

PHQL, allow us to write queries using a high-level, object-oriented SQL dialect that internally translates to the right SQL statements depending on the database system we are using. The clause “use” in the anonymous function allows us to pass some variables from the global to local scope easily.

The searching by name handler would look like:

```
<?php

// Searches for robots with $name in their name
$app->get(
    "/api/robots/search/{name}",
    function ($name) use ($app) {
        $phql = "SELECT * FROM Store\\Toys\\Robots WHERE name LIKE :name: ORDER BY_
↵name";

        $robots = $app->modelsManager->executeQuery(
            $phql,
            [
                "name" => "%" . $name . "%"
            ]
        );

        $data = [];

        foreach ($robots as $robot) {
            $data[] = [
```

```

        "id"    => $robot->id,
        "name" => $robot->name,
    ];
}

echo json_encode($data);
}
);

```

Searching by the field “id” it’s quite similar, in this case, we’re also notifying if the robot was found or not:

```

<?php

use Phalcon\Http\Response;

// Retrieves robots based on primary key
$app->get(
    "/api/robots/{id:[0-9]+}",
    function ($id) use ($app) {
        $phql = "SELECT * FROM Store\\Toys\\Robots WHERE id = :id:";

        $robot = $app->modelsManager->executeQuery(
            $phql,
            [
                "id" => $id,
            ]
        )->getFirst();

        // Create a response
        $response = new Response();

        if ($robot === false) {
            $response->setJsonContent(
                [
                    "status" => "NOT-FOUND"
                ]
            );
        } else {
            $response->setJsonContent(
                [
                    "status" => "FOUND",
                    "data"    => [
                        "id"    => $robot->id,
                        "name" => $robot->name
                    ]
                ]
            );
        }

        return $response;
    }
);

```

Inserting Data

Taking the data as a JSON string inserted in the body of the request, we also use PHQL for insertion:

```
<?php

use Phalcon\Http\Response;

// Adds a new robot
$app->post(
    "/api/robots",
    function () use ($app) {
        $robot = $app->request->getJsonRawBody();

        $phql = "INSERT INTO Store\\Toys\\Robots (name, type, year) VALUES (:name:, ↵
↵:type:, :year:)";

        $status = $app->modelsManager->executeQuery(
            $phql,
            [
                "name" => $robot->name,
                "type" => $robot->type,
                "year" => $robot->year,
            ]
        );

        // Create a response
        $response = new Response();

        // Check if the insertion was successful
        if ($status->success() === true) {
            // Change the HTTP status
            $response->setStatusCode(201, "Created");

            $robot->id = $status->getModel()->id;

            $response->setJsonContent(
                [
                    "status" => "OK",
                    "data" => $robot,
                ]
            );
        } else {
            // Change the HTTP status
            $response->setStatusCode(409, "Conflict");

            // Send errors to the client
            $errors = [];

            foreach ($status->getMessages() as $message) {
                $errors[] = $message->getMessage();
            }

            $response->setJsonContent(
                [
                    "status" => "ERROR",
                    "messages" => $errors,
                ]
            );
        }
    }
);
```

```

        );
    }

    return $response;
}
);

```

Updating Data

The data update is similar to insertion. The “id” passed as parameter indicates what robot must be updated:

```

<?php

use Phalcon\Http\Response;

// Updates robots based on primary key
$app->put(
    "/api/robots/{id:[0-9]+}",
    function ($id) use ($app) {
        $robot = $app->request->getJsonRawBody();

        $sql = "UPDATE Store\\Toys\\Robots SET name = :name:, type = :type:, year = :year: WHERE id = :id:";

        $status = $app->modelsManager->executeQuery(
            $sql,
            [
                "id" => $id,
                "name" => $robot->name,
                "type" => $robot->type,
                "year" => $robot->year,
            ]
        );

        // Create a response
        $response = new Response();

        // Check if the insertion was successful
        if ($status->success() === true) {
            $response->setJsonContent(
                [
                    "status" => "OK"
                ]
            );
        } else {
            // Change the HTTP status
            $response->setStatusCode(409, "Conflict");

            $errors = [];

            foreach ($status->getMessages() as $message) {
                $errors[] = $message->getMessage();
            }

            $response->setJsonContent(
                [
                    "status" => "ERROR",

```

```
        "messages" => $errors,
    ]
    );
}

return $response;
}
);
```

Deleting Data

The data delete is similar to update. The “id” passed as parameter indicates what robot must be deleted:

```
<?php

use Phalcon\Http\Response;

// Deletes robots based on primary key
$app->delete(
    "/api/robots/{id:[0-9]+}",
    function ($id) use ($app) {
        $phql = "DELETE FROM Store\\Toys\\Robots WHERE id = :id:";

        $status = $app->modelsManager->executeQuery(
            $phql,
            [
                "id" => $id,
            ]
        );

        // Create a response
        $response = new Response();

        if ($status->success() === true) {
            $response->setJsonContent(
                [
                    "status" => "OK"
                ]
            );
        } else {
            // Change the HTTP status
            $response->setStatusCode(409, "Conflict");

            $errors = [];

            foreach ($status->getMessages() as $message) {
                $errors[] = $message->getMessage();
            }

            $response->setJsonContent(
                [
                    "status" => "ERROR",
                    "messages" => $errors,
                ]
            );
        }
    }
);
```



```

        return $response;
    }
);

```

Testing our Application

Using `curl` we'll test every route in our application verifying its proper operation.

Obtain all the robots:

```

curl -i -X GET http://localhost/my-rest-api/api/robots

HTTP/1.1 200 OK
Date: Tue, 21 Jul 2015 07:05:13 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 117
Content-Type: text/html; charset=UTF-8

[{"id": "1", "name": "Robotina"}, {"id": "2", "name": "Astro Boy"}, {"id": "3", "name": "Terminator"}]

```

Search a robot by its name:

```

curl -i -X GET http://localhost/my-rest-api/api/robots/search/Astro

HTTP/1.1 200 OK
Date: Tue, 21 Jul 2015 07:09:23 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 31
Content-Type: text/html; charset=UTF-8

[{"id": "2", "name": "Astro Boy"}]

```

Obtain a robot by its id:

```

curl -i -X GET http://localhost/my-rest-api/api/robots/3

HTTP/1.1 200 OK
Date: Tue, 21 Jul 2015 07:12:18 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 56
Content-Type: text/html; charset=UTF-8

{"status": "FOUND", "data": {"id": "3", "name": "Terminator"}}

```

Insert a new robot:

```

curl -i -X POST -d '{"name": "C-3PO", "type": "droid", "year": 1977}'
http://localhost/my-rest-api/api/robots

HTTP/1.1 201 Created
Date: Tue, 21 Jul 2015 07:15:09 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 75
Content-Type: text/html; charset=UTF-8

{"status": "OK", "data": {"name": "C-3PO", "type": "droid", "year": 1977, "id": "4"}}

```

Try to insert a new robot with the name of an existing robot:

```
curl -i -X POST -d '{"name":"C-3PO","type":"droid","year":1977}'
http://localhost/my-rest-api/api/robots

HTTP/1.1 409 Conflict
Date: Tue, 21 Jul 2015 07:18:28 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 63
Content-Type: text/html; charset=UTF-8

{"status":"ERROR","messages":["The robot name must be unique"]}
```

Or update a robot with an unknown type:

```
curl -i -X PUT -d '{"name":"ASIMO","type":"humanoid","year":2000}'
http://localhost/my-rest-api/api/robots/4

HTTP/1.1 409 Conflict
Date: Tue, 21 Jul 2015 08:48:01 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 104
Content-Type: text/html; charset=UTF-8

{"status":"ERROR","messages":["Value of field 'type' must be part of
list: droid, mechanical, virtual"]}
```

Finally, delete a robot:

```
curl -i -X DELETE http://localhost/my-rest-api/api/robots/4

HTTP/1.1 200 OK
Date: Tue, 21 Jul 2015 08:49:29 GMT
Server: Apache/2.2.22 (Unix) DAV/2
Content-Length: 15
Content-Type: text/html; charset=UTF-8

{"status":"OK"}
```

Conclusion

As we have seen, develop a RESTful API with Phalcon is easy. Later in the documentation we'll explain in detail how to use micro applications and the *PHQL* language.

List of examples

Following examples are full applications you can use to learn more about Phalcon and use them as base for your own websites/applications:

Components

Injeksi Ketergantungan/Lokasi Service

Before reading this section, it is wise to read *the section which explains why Phalcon uses service location and dependency injection*.

Phalcon\Di adalah komponen yang mengimplementasi Dependency Injection dan Location of services dan merupakan kontainer service.

Karena Phalcon memiliki ketergantungan minimal (highly decoupled), *Phalcon\Di* penting untuk mengintegrasikan beragam komponen framework. Developer dapat juga menggunakan komponen ini untuk menginjeksi ketergantungan dan mengelola instance global kelas-kelas berbeda yang digunakan aplikasi.

Pada dasarnya, komponen ini mengimplementasi pola *Inversion of Control*. Dengan menerapkannya, objek-objek tidak menerima ketergantungannya menggunakan setter atau konstruktor, namun meminta service dependency injector. Ini menurunkan kompleksitas keseluruhan karena hanya ada satu cara untuk mendapatkan ketergantungan yang dibutuhkan dalam sebuah komponen.

Tambahan lagi, pola ini menaikkan testabilitas dalam kode, sehingga menjadikannya tidak rawan kesalahan.

Mendaftarkan service dalam Kontainer

Framework sendiri atau developer dapat mendaftarkan service. Ketika sebuah komponen A membutuhkan komponen B (atau instance kelas itu) untuk bekerja, ia dapat meminta komponen B dari kontainer, daripada menciptakan instance komponen B baru.

Cara kerja ini memberi kita banyak keuntungan:

- Kita dapat mudah mengganti sebuah komponen dengan milik kita sendiri atau pihak ketiga.
- Kita memiliki kendali penuh atas inisialisasi objek, memungkinkan kita mengatur objek ini sebelum memberikan ke komponen.
- Kita dapat instance global komponen dengan cara yang terstruktur dan menyatu.

Service dapat didaftarkan dengan beberapa jenis definisi:

Registrasi Sederhana

Seperti terlihat sebelumnya, ada beberapa cara untuk mendaftarkan service. Ini kita sebut sederhana:

String

Jenis mengharapkan nama kelas valid, mengembalikan sebuah objek dari kelas yang ditentukan, jika kelas tidak dimuat ia akan diciptakan menggunakan auto-loader. Jenis definisi ini tidak mengizinkan untuk menentukan argumen untuk konstruktor kelas atau parameter:

```
<?php

// mengembalikan new Phalcon\Http\Request();
$di->set (
    "request",
    "Phalcon\\Http\\Request"
);
```

Objek

Jenis ini mengharapkan sebuah objek. Karena fakta bahwa objek tidak perlu di resolve karena ia sudah objek, bisa dibayangkan ini tidak benar-benar dependency injection, namun ia berguna jika anda ingin memaksa ketergantungan yang diberikan selalu objek atau nilai yang sama:

```
<?php

use Phalcon\Http\Request;

// mengembalikan new Phalcon\Http\Request();
$di->set(
    "request",
    new Request()
);
```

Closure/Fungsi Anonymous

Metode ini menawarkan kebebasan lebih besar dengan membangun ketergantungan sesuai keinginan, namun, ia sulit mengubah beberapa parameter secara eksternal tanpa mengubah definisi ketergantungan:

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql as PdoMysql;

$di->set(
    "db",
    function () {
        return new PdoMysql(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"   => "blog",
            ]
        );
    }
);
```

Beberapa keterbatasan dapat diatasi dengan melewati variabel tambahan ke lingkungan closure:

```
<?php

use Phalcon\Config;
use Phalcon\Db\Adapter\Pdo\Mysql as PdoMysql;

$config = new Config(
    [
        "host"      => "127.0.0.1",
        "username" => "user",
        "password" => "pass",
        "dbname"   => "my_database",
    ]
);

// Menggunakan variabel $config dalam scope saat ini
```

```

$di->set(
    "db",
    function () use ($config) {
        return new PdoMysql(
            [
                "host"      => $config->host,
                "username" => $config->username,
                "password" => $config->password,
                "dbname"   => $config->name,
            ]
        );
    }
);

```

You can also access other DI services using the `get ()` method:

```

<?php

use Phalcon\Config;
use Phalcon\Db\Adapter\Pdo\Mysql as PdoMysql;

$di->set(
    "config",
    function () {
        return new Config(
            [
                "host"      => "127.0.0.1",
                "username" => "user",
                "password" => "pass",
                "dbname"   => "my_database",
            ]
        );
    }
);

// Using the 'config' service from the DI
$di->set(
    "db",
    function () {
        $config = $this->get("config");

        return new PdoMysql(
            [
                "host"      => $config->host,
                "username" => $config->username,
                "password" => $config->password,
                "dbname"   => $config->name,
            ]
        );
    }
);

```

Registrasi Kompleks

Jika diperlukan untuk mengubah definisi service tanpa perlu menciptakan/resolve service, maka, kita butuh menentukan service menggunakan sintaks array. Menentukan service menggunakan definisi array dapat terlihat lebih ramai:

```
<?php

use Phalcon\Logger\Adapter\File as LoggerFile;

// Daftarkan service 'logger' dengan nama kelas dan parameter
$di->set(
    "logger",
    [
        "className" => "Phalcon\\Logger\\Adapter\\File",
        "arguments" => [
            [
                "type" => "parameter",
                "value" => "../apps/logs/error.log",
            ]
        ]
    ]
);

// Menggunakan fungsi anonim
$di->set(
    "logger",
    function () {
        return new LoggerFile("../apps/logs/error.log");
    }
);
```

Kedua registrasi service diatas menghasilkan hasil sama. Namun definisi array, memungkinkan pengubahan parameter service bila diperlukan:

```
<?php

// Ubah nama kelas service
$di->getService("logger")->setClassName("MyCustomLogger");

// Ubah parameter pertama tanpa menciptakan logger
$di->getService("logger")->setParameter(
    0,
    [
        "type" => "parameter",
        "value" => "../apps/logs/error.log",
    ]
);
```

Tambahan lagi menggunakan sintaks array anda dapat menggunakan tiga jenis dependency injection:

Injeksi Konstruktor

Injeksi jenis ini melewati ketergantungan/argumen ke konstruktor kelas. Anggap kita memiliki komponen berikut:

```
<?php

namespace SomeApp;

use Phalcon\Http\Response;

class SomeComponent
```

```

{
    /**
     * @var Response
     */
    protected $_response;

    protected $_someFlag;

    public function __construct(Response $response, $someFlag)
    {
        $this->_response = $response;
        $this->_someFlag = $someFlag;
    }
}

```

Service ini dapat didaftarkan dengan cara berikut:

```

<?php

$di->set (
    "response",
    [
        "className" => "Phalcon\\Http\\Response"
    ]
);

$di->set (
    "someComponent",
    [
        "className" => "SomeApp\\SomeComponent",
        "arguments" => [
            [
                "type" => "service",
                "name" => "response",
            ],
            [
                "type" => "parameter",
                "value" => true,
            ],
        ],
    ]
);

```

Service “response” (*Phalcon\\Http\\Response*) di resolve lalu dilewatkan ke argumen pertama konstruktor, sedangkan yang kedua adalah nilai boolean (true) yang dilewatkan apa adanya.

Injeksi Setter

Kelas mungkin punya setter untuk menyisipkan ketergantungan tidak wajib, kelas kita sebelumnya dapat diubah untuk menerima ketergantungan dengan setter:

```

<?php

namespace SomeApp;

```

```
use Phalcon\Http\Response;

class SomeComponent
{
    /**
     * @var Response
     */
    protected $_response;

    protected $_someFlag;

    public function setResponse(Response $response)
    {
        $this->_response = $response;
    }

    public function setFlag($someFlag)
    {
        $this->_someFlag = $someFlag;
    }
}
```

Service dengan injeksi setter dapat didaftarkan seperti berikut:

```
<?php

$di->set(
    "response",
    [
        "className" => "Phalcon\\Http\\Response",
    ]
);

$di->set(
    "someComponent",
    [
        "className" => "SomeApp\\SomeComponent",
        "calls" => [
            [
                "method" => "setResponse",
                "arguments" => [
                    [
                        "type" => "service",
                        "name" => "response",
                    ]
                ]
            ],
            [
                "method" => "setFlag",
                "arguments" => [
                    [
                        "type" => "parameter",
                        "value" => true,
                    ]
                ]
            ]
        ]
    ]
);
```



```

        ]
    ]
);

```

Injeksi Properti

Strategi kurang umum adalah menyisipkan ketergantungan atau parameter langsung melalui atribut publik kelas:

```

<?php

namespace SomeApp;

use Phalcon\Http\Response;

class SomeComponent
{
    /**
     * @var Response
     */
    public $response;

    public $someFlag;
}

```

Service dengan injeksi properti dapat didaftarkan sebagai berikut:

```

<?php

$di->set (
    "response",
    [
        "className" => "Phalcon\\Http\\Response",
    ]
);

$di->set (
    "someComponent",
    [
        "className" => "SomeApp\\SomeComponent",
        "properties" => [
            [
                "name" => "response",
                "value" => [
                    "type" => "service",
                    "name" => "response",
                ],
            ],
            [
                "name" => "someFlag",
                "value" => [
                    "type" => "parameter",
                    "value" => true,
                ],
            ],
        ]
    ]
);

```

```
    ]  
);
```

Jenis parameter yang didukung termasuk berikut ini:

Jenis	Keterangan	Contoh
parameter	Mewakili nilai asli yang dilewatkan sebagai parameter	<code>["type" => "parameter", "value" => 1234]</code>
service	Mewakili service lain dalam kontainer service	<code>["type" => "service", "name" => "request"]</code>
instance	Mewakili objek yang harus diciptakan dinamis	<code>["type" => "instance", "className" => "DateTime", "arguments" => ["now"]]</code>

Resolve service yang definisinya kompleks mungkin lebih lambat dibandingkan yang sederhana seperti yang sudah terlihat sebelumnya. Namun, ia menyediakan pendekatan yang lebih kokoh untuk mendefinisi dan menginjeksi service.

Mencampur jenis definisi berbeda diizinkan, semua orang dapat memutuskan cara apa yang paling cocok mendaftarkan service tergantung kebutuhan aplikasi.

Array Syntax

Sintaks array juga diizinkan untuk mendaftarkan service:

```
<?php  
  
use Phalcon\Di;  
use Phalcon\Http\Request;  
  
// Buat Dependency Injector Container  
$di = new Di();  
  
// Menggunakan nama kelas  
$di["request"] = "Phalcon\\Http\\Request";  
  
// Menggunakan fungsi anonymous function, instance akan dimuat secara lazy load  
$di["request"] = function () {  
    return new Request();  
};  
  
// Mendaftarkan instance langsung  
$di["request"] = new Request();  
  
// Menggunakan definisi array  
$di["request"] = [  
    "className" => "Phalcon\\Http\\Request",  
];
```

Dicontoh diatas, ketika framework butuh mengakses data request, ia akan meminta service yang diidentifikasi sebagai 'request' dalam kontainer. Kontainer kemudian mengembalikan instance service yang diminta. Developer mungkin suatu saat mengganti sebuah komponen ketika mereka butuh.

Tiap metode (ditunjukkan di contoh diatas) yang digunakan untuk mengatur/mendaftarkan service punya kelebihan dan kekurangan. Tergantung developer dan kebutuhan tertentu yang mengarahkan mana yang digunakan.

Mengatur service dengan string mudah, namun kurang fleksibilitas. Mengatur service dengan array menawarkan lebih banyak fleksibilitas, namun menjadikan kode lebih rumit. Fungsi lambda adalah keseimbangan bagus diantara keduanya, namun dapat menyebabkan lebih banyak maintenance dari yang diharapkan.

Phalcon\Di menawarkan lazy loading untuk semua service yang disimpan. Kecuali developer memilih menciptakan objek langsung dan menyimpannya dalam kontainer, tiap objek yang disimpan didalamnya (melalui array, string dan lain-lain) akan di muat secara lazy load yakni hanya akan diciptakan ketika diminta.

Resolving Services

Mendapatkan service dari kontainer hanya masalah memanggil metode “get”. Instance baru service akan dikembalikan:

```
<?php $request = $di->get("request");
```

Atau menggunakan metode magic:

```
<?php
$request = $di->getRequest();
```

Atau menggunakan sintaks akses array:

```
<?php
$request = $di["request"];
```

Argumen dapat dilewatkan ke konstruktor dengan menambahkan parameter array ke metode “get”:

```
<?php
// new MyComponent("some-parameter", "other")
$component = $di->get(
    "MyComponent",
    [
        "some-parameter",
        "other",
    ]
);
```

Event

Phalcon\Di mampu mengirim event ke *EventsManager* jika ada. Event dipicu menggunakan tipe “di”. Beberapa event ketika mengembalikan nilai boolean false dapat menghentikan operasi aktif. Event berikut didukung:

Nama Event	Dipicu	Bisa stop operasi?	Dipicu di
beforeServiceResolve	Dipicu sebelum resolve service. Listener menerima nama service dan parameter yang dilewatkan.	Tidak	Listeners
afterServiceResolve	Dipicu setelah resolve service. Listener menerima nama service, instance dan parameter yang dilewatkan.	Tidak	Listeners

Service Berbagi

Service dapat didaftarkan sebagai “shared” services yang berarti bahwa mereka selalu bertindak sebagai [singletons](#). Service diresolve untuk pertama kali, instance sama dikembalikan tiap kali konsumen meminta service dari container:

```
<?php

use Phalcon\Session\Adapter\Files as SessionFiles;

// daftarkan service session sebagai "always shared"
$di->setShared(
    "session",
    function () {
        $session = new SessionFiles();

        $session->start();

        return $session;
    }
);

// Temukan service untuk pertama kali
$session = $di->get("session");

// Mengembalikan objek yang sudah diciptakan pertama kali
$session = $di->getSession();
```

Cara lain mendaftarkan shared service adalah melewati “true” sebagai parameter ketiga “set”:

```
<?php

// Daftarkan service session sebagai "always shared"
$di->set(
    "session",
    function () {
        // ...
    },
    true
);
```

Ketika sebuah service tidak didaftarkan sebagai service berbagi dan anda ingin memastikan instance yang sama diakses tiap kali service diambil dari DI, anda dapat menggunakan metode ‘getShared’:

```
<?php

$request = $di->getShared("request");
```

Memaniplulasi masing-masing Service

Setelah service didaftarkan dalam kontainer service, anda dapat mengambilnya untuk dimanipulasi secara terpisah:

```
<?php

use Phalcon\Http\Request;

// Daftarkan service "request"
$di->set("request", "Phalcon\\Http\\Request");
```

```
// Ambil service
$requestService = $di->getService("request");

// Ubah definisi
$requestService->setDefinition(
    function () {
        return new Request();
    }
);

// Ubah menjadi berbagi
$requestService->setShared(true);

// Resolve service (mengembalikan instance Phalcon\Http\Request)
$request = $requestService->resolve();
```

Menciptakan kelas melalui Service Container

Ketika anda meminta service ke kontainer service, jika ia tidak dapat menemukan service dengan nama sama ia akan mencoba memuat kelas dengan nama sama. Dengan perilaku ini kita dapat mengganti sembarang kelas dengan lainnya cuma dengan mendaftarkan service dengan nama itu:

```
<?php

// Daftarkan kontroler sebagai service
$di->set(
    "IndexController",
    function () {
        $component = new Component();

        return $component;
    },
    true
);

// Daftarkan kontroler sebagai service
$di->set(
    "MyOtherComponent",
    function () {
        // Kembalikan komponen lain
        $component = new AnotherComponent();

        return $component;
    }
);

// Buat instance melalui service container
$myComponent = $di->get("MyOtherComponent");
```

Anda dapat memanfaatkan ini, dengan selalu menciptakan kelas anda melalui service container (bahkan jika mereka tidak didaftarkan sebagai service). DI akan fallback ke autoloader yang valid yang akhirnya memuat kelas tersebut. Dengan melakukan ini, anda dapat mengganti sembarang kelas dimasa datang dengan mengimplementasi definisinya.

Menginjeksi DI secara otomatis

Jika sebuah kelas atau komponen memerlukan DI sendiri untuk menemukan service, DI dapat diinjeksi otomatis kedalam instance yang diciptakan, untuk melakukan ini, anda butuh mengimplementasi *Phalcon\DI\InjectionAwareInterface* dalam kelas anda:

```
<?php

use Phalcon\DiInterface;
use Phalcon\Di\InjectionAwareInterface;

class MyClass implements InjectionAwareInterface
{
    /**
     * @var DiInterface
     */
    protected $_di;

    public function setDi(DiInterface $di)
    {
        $this->_di = $di;
    }

    public function getDi()
    {
        return $this->_di;
    }
}
```

lalu setelah service diresolve, \$di akan dilewatkan ke setDi() otomatis:

```
<?php

// Daftarkan service
$di->set("myClass", "MyClass");

// Resolve service (Catatan: $myClass->setDi($di) dipanggil otomatis)
$myClass = $di->get("myClass");
```

Mengelola service dalam file

Anda dapat mengelola lebih baik aplikasi anda dengan memindahkan pendaftaran service ke file terpisah daripada melakukan semua dalam bootstrap aplikasi:

```
<?php

$di->set(
    "router",
    function () {
        return include "../app/config/routes.php";
    }
);
```

Lalu dalam file ("../app/config/routes.php") kembalikan objek yang diresolve:

```
<?php

$router = new MyRouter();

$router->post("/login");

return $router;
```

Mengakses DI cara statik

Jika diperlukan anda dapat mengakses DI yang diciptakan terakhir dalam fungsi statik dengan cara berikut:

```
<?php

use Phalcon\Di;

class SomeComponent
{
    public static function someMethod()
    {
        // Ambil service session
        $session = Di::getDefault()->getSession();
    }
}
```

Factory Default DI

Meski katakter Phalcon yang terpisah (decoupled) menawarkan kita kebebasan dan fleksibilitas bagus, mungkin kita cuma ingin menggunakannya sebagai framework full-stack. Untuk mencapai ini, framework menyediakan varian *Phalcon\Di* yang disebut *Phalcon\Di\FactoryDefault*. Kelas ini otomatis mendaftarkan service yang cocok yang digabung dengan framework untuk menjadikannya framework lengkap (full-stack).

```
<?php

use Phalcon\Di\FactoryDefault;

$di = new FactoryDefault();
```

Konvensi Nama Service

Meski anda dapat mendaftarkan service dengan nama yang anda mau, Phalcon punya beberapa konvensi penamaan yang memungkinkan ia mendapatkan service bawaan dengan benar ketika anda membutuhkannya.

Nama Service	Keterangan	Default	Shared
dispatcher	Controllers Dispatching Service	<i>Phalcon\Mvc\Dispatcher</i>	Ya
router	Routing Service	<i>Phalcon\Mvc\Router</i>	Ya
url	URL Generator Service	<i>Phalcon\Mvc\Url</i>	Ya
request	HTTP Request Environment Service	<i>Phalcon\Http\Request</i>	Ya
response	HTTP Response Environment Service	<i>Phalcon\Http\Response</i>	Ya
cookies	HTTP Cookies Management Service	<i>Phalcon\Http\Response\Cookies</i>	Ya
filter	Input Filtering Service	<i>Phalcon\Filter</i>	Ya
flash	Flash Messaging Service	<i>Phalcon\Flash\Direct</i>	Ya
flashSession	Flash Session Messaging Service	<i>Phalcon\Flash\Session</i>	Ya
session	Session Service	<i>Phalcon\Session\Adapter\Files</i>	Ya
eventsManager	Events Management Service	<i>Phalcon\Events\Manager</i>	Ya
db	Low-Level Database Connection Service	<i>Phalcon\Db</i>	Ya
security	Security helpers	<i>Phalcon\Security</i>	Ya
crypt	Encrypt/Decrypt data	<i>Phalcon\Crypt</i>	Ya
tag	HTML generation helpers	<i>Phalcon\Tag</i>	Ya
escaper	Contextual Escaping	<i>Phalcon\Escaper</i>	Ya
annotations	Annotations Parser	<i>Phalcon\Annotations\Adapter\Memory</i>	Ya
modelsManager	Models Management Service	<i>Phalcon\Mvc\Model\Manager</i>	Ya
modelsMetadata	Models Meta-Data Service	<i>Phalcon\Mvc\Model\MetaData\Memory</i>	Ya
transactionManager	Models Transaction Manager Service	<i>Phalcon\Mvc\Model\Transaction\Manager</i>	Ya
modelsCache	Cache backend for models cache	None	Tidak
viewsCache	Cache backend for views fragments	None	Tidak

Mengimplementasi DI anda sendiri

Interface *Phalcon\DiInterface* harus diimplementasi untuk menciptakan DI anda sendiri menggantikan yang sudah disediakan oleh Phalcon atau melengkapi yang sudah ada.

The MVC Architecture

Phalcon offers the object-oriented classes, necessary to implement the Model, View, Controller architecture (often referred to as **MVC**) in your application. This design pattern is widely used by other web frameworks and desktop applications.

MVC benefits include:

- Isolation of business logic from the user interface and the database layer
- Making it clear where different types of code belong for easier maintenance

If you decide to use MVC, every request to your application resources will be managed by the MVC architecture. Phalcon classes are written in C language, offering a high performance approach of this pattern in a PHP based application.

Models

A model represents the information (data) of the application and the rules to manipulate that data. Models are primarily used for managing the rules of interaction with a corresponding database table. In most cases, each table in your

database will correspond to one model in your application. The bulk of your application's business logic will be concentrated in the models. [Learn more](#)

Views

Views represent the user interface of your application. Views are often HTML files with embedded PHP code that perform tasks related solely to the presentation of the data. Views handle the job of providing data to the web browser or other tool that is used to make requests from your application. [Learn more](#)

Controllers

The controllers provide the “flow” between models and views. Controllers are responsible for processing the incoming requests from the web browser, interrogating the models for data, and passing that data on to the views for presentation. [Learn more](#)

Menggunakan Kontroler

Aksi adalah metode pada sebuah kontroler yang menangani request. Defaultnya semua metode publik pada sebuah kontroler dipetakan ke aksi dan dapat diakses menggunakan sebuah URL. Aksi bertanggung jawab menerjemahkan request dan menciptakan respon. Respon biasanya dalam bentuk view yang dirender, namun ada juga cara lain untuk menciptakan respon.

Contoh, ketika anda mengakses sebuah URL seperti berikut: <http://localhost/blog/posts/show/2015/the-post-title> Phalcon secara bawaan akan memecah tiap bagian seperti berikut:

Phalcon Directory	blog
Controller	posts
Action	show
Parameter	2015
Parameter	the-post-title

Di kasus ini, PostsController akan menangani request ini. Tidak ada lokasi khusus untuk meletakkan kontroler dalam aplikasi, ia dapat dimuat menggunakan [autoloaders](#), sehingga anda bebas mengorganisasi kontroler sesuai kebutuhan.

Kontroler harus memiliki akhiran “Controller” sementara aksi menggunakan akhiran “Action”. Contoh sebuah kontroler adalah sebagai berikut:

```
<?php
use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction($year, $postTitle)
    {

    }
}
```

Parameter URI tambahan didefinisi sebagai parameter aksi, sehingga mereka dapat diakses dengan mudah menggunakan variabel lokal. Sebuah kontroler bisa jadi diturunkan dari *Phalcon\Mvc\Controller*. Dengan melakukan ini, kontroler dapat memiliki akses mudah ke layanan aplikasi.

Parameter tanpa nilai default ditangani seperlunya. Pengaturan nilai opsional untuk parameter dilakukan seperti biasa dalam PHP:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction($year = 2015, $postTitle = "some default title")
    {

    }
}
```

Parameter disalin dengan urutan sama ketika dilewatkan dalam sebuah route. Anda dapat memperoleh sembarang parameter dari namanya dengan cara berikut:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction()
    {
        $year      = $this->dispatcher->getParam("year");
        $postTitle = $this->dispatcher->getParam("postTitle");
    }
}
```

Dispatch Loop

Dispatch loop akan dijalankan dalam Dispatcher sampai tidak ada aksi tersisa untuk dijalankan. Di contoh sebelumnya hanya satu aksi yang dijalankan. Kita akan melihat bagaimana `forward()` dapat menyediakan alir operasi yang lebih kompleks dalam dispatch loop, dengan mengarahkan eksekusi ke kontroler/aksi berbeda.

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
```

```

public function indexAction()
{

}

public function showAction($year, $postTitle)
{
    $this->flash->error(
        "You don't have permission to access this area"
    );

    // Arahkan alir ke aksi lain
    $this->dispatcher->forward(
        [
            "controller" => "users",
            "action"      => "signin",
        ]
    );
}
}

```

Jika pengguna tidak memiliki izin untuk mengakses aksi tertentu maka mereka akan diarahkan ke kontroler Users dan aksi bernama signin.

```

<?php

use Phalcon\Mvc\Controller;

class UsersController extends Controller
{
    public function indexAction()
    {

    }

    public function signinAction()
    {

    }
}

```

Tidak ada batasan jumlah “forward” yang dapat anda miliki dalam aplikasi, selama mereka tidak menyebabkan referensi sirkular, di mana titik ini aplikasi akan dihentikan. Jika tidak ada aksi lain yang harus dikirim oleh dispatch loop, dispatcher otomatis memanggil lapisan view dalam MVC yang dikelola oleh *Phalcon\Mvc\View*.

Inisialisasi Kontroler

Phalcon\Mvc\Controller menawarkan metode `initialize()`, yang dijalankan pertama kali, sebelum semua aksi dieksekusi pada sebuah kontroler. Penggunaan metode `__construct()` tidak disarankan.

```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{

```

```
public $settings;

public function initialize()
{
    $this->settings = [
        "mySetting" => "value",
    ];
}

public function saveAction()
{
    if ($this->settings["mySetting"] === "value") {
        // ...
    }
}
```

Metode `initialize()` hanya dipanggil jika event `'beforeExecuteRoute'` dieksekusi dengan sukses. Ini mencegah kode aplikasi dalam `initializer` tidak dapat dieksekusi tanpa otorisasi.

Jika anda ingin menjalankan kode inisialisasi tepat setelah menciptakan objek kontroler anda dapat mengimplementasi metode `onConstruct()`:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function onConstruct()
    {
        // ...
    }
}
```

Ketahui bahwa metode `onConstruct()` dijalankan bahkan bila aksi yang harus dijalankan tidak ada dalam kontroler atau user tidak punya akses ke sana (berdasarkan kontrol akses kustom yang disediakan oleh developer).

Menginjeksi Services

Jika sebuah kontroler diturunkan dari *Phalcon\Mvc\Controller* maka mudah untuk mengakses service container dalam aplikasi. Contoh, jika kita mendaftarkan sebuah service seperti ini:

```
<?php

use Phalcon\Di;

$di = new Di();

$di->set(
    "storage",
    function () {
        return new Storage(
            "/some/directory"
        );
    },
);
```

```

    true
);

```

Anda dapat mengakses service tersebut dengan beberapa cara:

```

<?php

use Phalcon\Mvc\Controller;

class FilesController extends Controller
{
    public function saveAction()
    {
        // Menginjeksi service dengan mengakses property bernama sama
        $this->storage->save("/some/file");

        // Mengakses service dari DI
        $this->di->get("storage")->save("/some/file");

        // Cara lain mengakses service dengan magic getter
        $this->di->getStorage()->save("/some/file");

        // Cara lain mengakses service dengan magic getter
        $this->getDi()->getStorage()->save("/some/file");

        // Menggunakan sintaks array
        $this->di["storage"]->save("/some/file");
    }
}

```

Jika anda menggunakan Phalcon sebagai sebuah full-stack framework, anda dapat membaca service *bawaan* yang disediakan dalam framework.

Request dan Response

Diasumsikan framework menyediakan sejumlah service yang telah terdaftar. Kita menjelaskan bagaimana berinteraksi dengan lingkungan HTTP. Service “request” mengandung instance *Phalcon\Http\Request* dan “response” berisi *Phalcon\Http\Response* mewakili apa yang akan dikirim kembali ke klien.

```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        // Uji apakah request dibuat dengan POST
        if ($this->request->isPost()) {
            // Akses data POST
            $customerName = $this->request->getPost("name");
            $customerBorn = $this->request->getPost("born");
        }
    }
}

```

```
}  
}  
}
```

Objek response biasanya tidak digunakan secara langsung, ia dibuat sebelum eksekusi aksi, kadang kala - seperti dalam event `afterDispatch` - cukup berguna bila response dapat diakses langsung:

```
<?php  
  
use Phalcon\Mvc\Controller;  
  
class PostsController extends Controller  
{  
    public function indexAction()  
    {  
  
    }  
  
    public function notFoundAction()  
    {  
        // Kirim response header HTTP 404  
        $this->response->setStatusCode(404, "Not Found");  
    }  
}
```

Pelajari lebih lanjut tentang lingkungan HTTP di artikel [request](#) dan [response](#).

Data Session

Session membantu kita mengelola data persisten antar request. Anda dapat mengakses `Phalcon\Session\Bag` dari sembarang kontroler untuk membungkus data yang harus dibuat persisten.

```
<?php  
  
use Phalcon\Mvc\Controller;  
  
class UserController extends Controller  
{  
    public function indexAction()  
    {  
        $this->persistent->name = "Michael";  
    }  
  
    public function welcomeAction()  
    {  
        echo "Welcome, ", $this->persistent->name;  
    }  
}
```

Menggunakan Service sebagai Kontroler

Service dapat bertindak sebagai kontroler, kelas kontroler selalu diminta dari service container. Dengan demikian, tiap kelas lain yang terdaftar dengan nama sama dapat dengan mudah mengganti sebuah kontroler:

```

<?php

// Daftarkan kontroler sebagai service
$di->set (
    "IndexController",
    function () {
        $component = new Component ();

        return $component;
    }
);

// Daftarkan kontroler dengan namespace sebagai service
$di->set (
    "Backend\\Controllers\\IndexController",
    function () {
        $component = new Component ();

        return $component;
    }
);

```

Event dalam Kontroler

Kontroler otomatis bertindak sebagai listener untuk *dispatcher* event, mengimplementasi metode dengan nama tersebut memungkinkan anda untuk mengimplementasi hook point sebelum/sesudah aksi dieksekusi:

```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function beforeExecuteRoute($dispatcher)
    {
        // This is executed before every found action
        if ($dispatcher->getActionName() === "save") {
            $this->flash->error(
                "You don't have permission to save posts"
            );

            $this->dispatcher->forward(
                [
                    "controller" => "home",
                    "action"      => "index",
                ]
            );

            return false;
        }
    }

    public function afterExecuteRoute($dispatcher)
    {
        // Dieksekusi tiap kali setelah aksi yang ditemukan
    }
}

```

```
}
```

Working with Models

A model represents the information (data) of the application and the rules to manipulate that data. Models are primarily used for managing the rules of interaction with a corresponding database table. In most cases, each table in your database will correspond to one model in your application. The bulk of your application's business logic will be concentrated in the models.

Phalcon\Mvc\Model is the base for all models in a Phalcon application. It provides database independence, basic CRUD functionality, advanced finding capabilities, and the ability to relate models to one another, among other services. *Phalcon\Mvc\Model* avoids the need of having to use SQL statements because it translates methods dynamically to the respective database engine operations.

Models are intended to work with the database on a high layer of abstraction. If you need to work with databases at a lower level check out the *Phalcon\Db* component documentation.

Creating Models

A model is a class that extends from *Phalcon\Mvc\Model*. Its class name should be in camel case notation:

```
<?php
namespace Store\Toys;

use Phalcon\Mvc\Model;

class RobotParts extends Model
{
}
```

If you're using PHP 5.4/5.5 it is recommended you declare each column that makes part of the model in order to save memory and reduce the memory allocation.

By default, the model "Store\Toys\RobotParts" will refer to the table "robot_parts". If you want to manually specify another name for the mapping table, you can use the `setSource()` method:

```
<?php
namespace Store\Toys;

use Phalcon\Mvc\Model;

class RobotParts extends Model
{
    public function initialize()
    {
        $this->setSource("toys_robot_parts");
    }
}
```

The model RobotParts now maps to "toys_robot_parts" table. The `initialize()` method aids in setting up the model with a custom behavior i.e. a different table.

The `initialize()` method is only called once during the request, it's intended to perform initializations that apply for all instances of the model created within the application. If you want to perform initialization tasks for every instance created you can use the `onConstruct()` method:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class RobotParts extends Model
{
    public function onConstruct()
    {
        // ...
    }
}
```

Public properties vs. Setters/Getters

Models can be implemented with properties of public scope, meaning that each property can be read/updated from any part of the code that has instantiated that model class without any restrictions:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public $price;
}
```

By using getters and setters you can control which properties are visible publicly perform various transformations to the data (which would be impossible otherwise) and also add validation rules to the data stored in the object:

```
<?php

namespace Store\Toys;

use InvalidArgumentException;
use Phalcon\Mvc\Model;

class Robots extends Model
{
    protected $id;

    protected $name;

    protected $price;
}
```

```
public function getId()
{
    return $this->id;
}

public function setName($name)
{
    // The name is too short?
    if (strlen($name) < 10) {
        throw new InvalidArgumentException(
            "The name is too short"
        );
    }

    $this->name = $name;
}

public function getName()
{
    return $this->name;
}

public function setPrice($price)
{
    // Negative prices aren't allowed
    if ($price < 0) {
        throw new InvalidArgumentException(
            "Price can't be negative"
        );
    }

    $this->price = $price;
}

public function getPrice()
{
    // Convert the value to double before be used
    return (double) $this->price;
}
}
```

Public properties provide less complexity in development. However getters/setters can heavily increase the testability, extensibility and maintainability of applications. Developers can decide which strategy is more appropriate for the application they are creating. The ORM is compatible with both schemes of defining properties.

Underscores in property names can be problematic when using getters and setters.

If you use underscores in your property names, you must still use camel case in your getter/setter declarations for use with magic methods. (e.g. `$model->getProperty_name` instead of `$model->getProperty_name`, `$model->findByPropertyName` instead of `$model->findByProperty_name`, etc.). As much of the system expects camel case, and underscores are commonly removed, it is recommended to name your properties in the manner shown throughout the documentation. You can use a column map (as described above) to ensure proper mapping of your properties to their database counterparts.

Understanding Records To Objects

Every instance of a model represents a row in the table. You can easily access record data by reading object properties. For example, for a table “robots” with the records:

```
mysql> select * from robots;
+----+-----+-----+-----+
| id | name      | type      | year |
+----+-----+-----+-----+
| 1  | Robotina  | mechanical | 1972 |
| 2  | Astro Boy | mechanical | 1952 |
| 3  | Terminator| cyborg     | 2029 |
+----+-----+-----+-----+
3 rows in set (0.00 sec)
```

You could find a certain record by its primary key and then print its name:

```
<?php

use Store\Toys\Robots;

// Find record with id = 3
$robot = Robots::findFirst(3);

// Prints "Terminator"
echo $robot->name;
```

Once the record is in memory, you can make modifications to its data and then save changes:

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(3);

$robot->name = "RoboCop";

$robot->save();
```

As you can see, there is no need to use raw SQL statements. *Phalcon\Mvc\Model* provides high database abstraction for web applications.

Finding Records

Phalcon\Mvc\Model also offers several methods for querying records. The following examples will show you how to query one or more records from a model:

```
<?php

use Store\Toys\Robots;

// How many robots are there?
$robots = Robots::find();
echo "There are ", count($robots), "\n";

// How many mechanical robots are there?
$robots = Robots::find("type = 'mechanical'");
```

```
echo "There are ", count($robots), "\n";

// Get and print virtual robots ordered by name
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
    ]
);
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}

// Get first 100 virtual robots ordered by name
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
        "limit" => 100,
    ]
);
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

If you want find record by external data (such as user input) or variable data you must use *Binding Parameters*.

You could also use the `findFirst()` method to get only the first record matching the given criteria:

```
<?php

use Store\Toys\Robots;

// What's the first robot in robots table?
$robot = Robots::findFirst();
echo "The robot name is ", $robot->name, "\n";

// What's the first mechanical robot in robots table?
$robot = Robots::findFirst("type = 'mechanical'");
echo "The first mechanical robot name is ", $robot->name, "\n";

// Get first virtual robot ordered by name
$robot = Robots::findFirst(
    [
        "type = 'virtual'",
        "order" => "name",
    ]
);
echo "The first virtual robot name is ", $robot->name, "\n";
```

Both `find()` and `findFirst()` methods accept an associative array specifying the search criteria:

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(
```

```

[
    "type" => "virtual",
    "order" => "name DESC",
    "limit" => 30,
]
);

$robots = Robots::find(
[
    "conditions" => "type = ?1",
    "bind" => [
        1 => "virtual",
    ]
]
);

```

The available query options are:

Parameter	Description	Example
conditions	Search conditions for the find operation. Is used to extract only those records that fulfill a specified criterion. By default <i>Phalcon\Mvc\Model</i> assumes the first parameter are the conditions.	"conditions" => "name LIKE 'steve%'"
columns	Return specific columns instead of the full columns in the model. When using this option an incomplete object is returned	"columns" => "id, name"
bind	Bind is used together with options, by replacing placeholders and escaping values thus increasing security	"bind" => ["status" => "A", "type" => "some-time"]
bindTypes	When binding parameters, you can use this parameter to define additional casting to the bound parameters increasing even more the security	"bindTypes" => [Column::BIND_PARAM_STR, Column::BIND_PARAM_INT]
order	Is used to sort the resultset. Use one or more fields separated by commas.	"order" => "name DESC, status"
limit	Limit the results of the query to results to certain range	"limit" => 10
offset	Offset the results of the query by a certain amount	"offset" => 5
group	Allows to collect data across multiple records and group the results by one or more columns	"group" => "name, status"
for_update	With this option, <i>Phalcon\Mvc\Model</i> reads the latest available data, setting exclusive locks on each row it reads	"for_update" => true
shared_lock	With this option, <i>Phalcon\Mvc\Model</i> reads the latest available data, setting shared locks on each row it reads	"shared_lock" => true
cache	Cache the resultset, reducing the continuous access to the relational system	"cache" => ["lifetime" => 3600, "key" => "my-find-key"]
hydration	Sets the hydration strategy to represent each returned record in the result	"hydration" => Resultset::HYDRATE_OBJECTS

If you prefer, there is also available a way to create queries in an object-oriented way, instead of using an array of parameters:

```
<?php

use Store\Toys\Robots;

$robots = Robots::query()
    ->where("type = :type:")
    ->andWhere("year < 2000")
    ->bind(["type" => "mechanical"])
    ->order("name")
    ->execute();
```

The static method `query()` returns a *Phalcon\Mvc\Model\Criteria* object that is friendly with IDE autocompleters.

All the queries are internally handled as *PHQL* queries. PHQL is a high-level, object-oriented and SQL-like language. This language provide you more features to perform queries like joining other models, define groupings, add aggregations etc.

Lastly, there is the `findFirstBy<property-name>()` method. This method expands on the `findFirst()` method mentioned earlier. It allows you to quickly perform a retrieval from a table by using the property name in the method itself and passing it a parameter that contains the data you want to search for in that column. An example is in order, so taking our Robots model mentioned earlier:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public $price;
}
```

We have three properties to work with here: `$id`, `$name` and `$price`. So, let's say you want to retrieve the first record in the table with the name 'Terminator'. This could be written like:

```
<?php

use Store\Toys\Robots;

$name = "Terminator";

$robot = Robots::findFirstByName($name);

if ($robot) {
    echo "The first robot with the name " . $name . " cost " . $robot->price . ".";
} else {
    echo "There were no robots found in our table with the name " . $name . ".";
}
```

Notice that we used 'Name' in the method call and passed the variable `$name` to it, which contains the name we are looking for in our table. Notice also that when we find a match with our query, all the other properties are available to us as well.

Model Resultsets

While `findFirst()` returns directly an instance of the called class (when there is data to be returned), the `find()` method returns a *Phalcon\Mvc\Model\Resultset\Simple*. This is an object that encapsulates all the functionality a resultset has like traversing, seeking specific records, counting, etc.

These objects are more powerful than standard arrays. One of the greatest features of the *Phalcon\Mvc\Model\Resultset* is that at any time there is only one record in memory. This greatly helps in memory management especially when working with large amounts of data.

```
<?php

use Store\Toys\Robots;

// Get all robots
$robots = Robots::find();

// Traversing with a foreach
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}

// Traversing with a while
$robots->rewind();

while ($robots->valid()) {
    $robot = $robots->current();

    echo $robot->name, "\n";

    $robots->next();
}

// Count the resultset
echo count($robots);

// Alternative way to count the resultset
echo $robots->count();

// Move the internal cursor to the third robot
$robots->seek(2);

$robot = $robots->current();

// Access a robot by its position in the resultset
$robot = $robots[5];

// Check if there is a record in certain position
if (isset($robots[3])) {
    $robot = $robots[3];
}

// Get the first record in the resultset
$robot = $robots->getFirst();

// Get the last record
$robot = $robots->getLast();
```

Phalcon's resultsets emulate scrollable cursors, you can get any row just by accessing its position, or seeking the internal pointer to a specific position. Note that some database systems don't support scrollable cursors, this forces to re-execute the query in order to rewind the cursor to the beginning and obtain the record at the requested position. Similarly, if a resultset is traversed several times, the query must be executed the same number of times.

As storing large query results in memory could consume many resources, resultsets are obtained from the database in chunks of 32 rows - reducing the need to re-execute the request in several cases.

Note that resultsets can be serialized and stored in a cache backend. *Phalcon\Cache* can help with that task. However, serializing data causes *Phalcon\Mvc\Model* to retrieve all the data from the database in an array, thus consuming more memory while this process takes place.

```
<?php

// Query all records from model parts
$parts = Parts::find();

// Store the resultset into a file
file_put_contents(
    "cache.txt",
    serialize($parts)
);

// Get parts from file
$parts = unserialize(
    file_get_contents("cache.txt")
);

// Traverse the parts
foreach ($parts as $part) {
    echo $part->id;
}
```

Filtering Resultsets

The most efficient way to filter data is setting some search criteria, databases will use indexes set on tables to return data faster. Phalcon additionally allows you to filter the data using PHP using any resource that is not available in the database:

```
<?php

$customers = Customers::find();

$customers = $customers->filter(
    function ($customer) {
        // Return only customers with a valid e-mail
        if (filter_var($customer->email, FILTER_VALIDATE_EMAIL)) {
            return $customer;
        }
    }
);
```


Binding Parameters

Bound parameters are also supported in *Phalcon\Mvc\Model*. You are encouraged to use this methodology so as to eliminate the possibility of your code being subject to SQL injection attacks. Both string and integer placeholders are supported. Binding parameters can simply be achieved as follows:

```
<?php

use Store\Toys\Robots;

// Query robots binding parameters with string placeholders
// Parameters whose keys are the same as placeholders
$robots = Robots::find(
    [
        "name = :name: AND type = :type:",
        "bind" => [
            "name" => "Robotina",
            "type" => "maid",
        ],
    ],
);

// Query robots binding parameters with integer placeholders
$robots = Robots::find(
    [
        "name = ?1 AND type = ?2",
        "bind" => [
            1 => "Robotina",
            2 => "maid",
        ],
    ],
);

// Query robots binding parameters with both string and integer placeholders
// Parameters whose keys are the same as placeholders
$robots = Robots::find(
    [
        "name = :name: AND type = ?1",
        "bind" => [
            "name" => "Robotina",
            1      => "maid",
        ],
    ],
);
```

When using numeric placeholders, you will need to define them as integers i.e. 1 or 2. In this case “1” or “2” are considered strings and not numbers, so the placeholder could not be successfully replaced.

Strings are automatically escaped using **PDO**. This function takes into account the connection charset, so its recommended to define the correct charset in the connection parameters or in the database configuration, as a wrong charset will produce undesired effects when storing or retrieving data.

Additionally you can set the parameter “bindTypes”, this allows defining how the parameters should be bound according to its data type:

```
<?php

use Phalcon\Db\Column;
```

```
use Store\Toys\Robots;

// Bind parameters
$parameters = [
    "name" => "Robotina",
    "year" => 2008,
];

// Casting Types
$types = [
    "name" => Column::BIND_PARAM_STR,
    "year" => Column::BIND_PARAM_INT,
];

// Query robots binding parameters with string placeholders
$robots = Robots::find(
    [
        "name = :name: AND year = :year:",
        "bind"      => $parameters,
        "bindTypes" => $types,
    ]
);
```

Since the default bind-type is `Phalcon\Db\Column::BIND_PARAM_STR`, there is no need to specify the “bindTypes” parameter if all of the columns are of that type.

If you bind arrays in bound parameters, keep in mind, that keys must be numbered from zero:

```
<?php

use Store\Toys\Robots;

$array = ["a", "b", "c"]; // $array: [[0] => "a", [1] => "b", [2] => "c"]

unset($array[1]); // $array: [[0] => "a", [2] => "c"]

// Now we have to renumber the keys
$array = array_values($array); // $array: [[0] => "a", [1] => "c"]

$robots = Robots::find(
    [
        'letter IN ({letter:array})',
        'bind' => [
            'letter' => $array
        ]
    ]
);
```

Bound parameters are available for all query methods such as `find()` and `findFirst()` but also the calculation methods like `count()`, `sum()`, `average()` etc.

If you’re using “finders”, bound parameters are automatically used for you:

```
<?php

use Store\Toys\Robots;

// Explicit query using bound parameters
```

```

$robots = Robots::find(
    [
        "name = ?0",
        "bind" => [
            "Ultron",
        ],
    ]
);

// Implicit query using bound parameters
$robots = Robots::findByName("Ultron");

```

Initializing/Preparing fetched records

May be the case that after obtaining a record from the database is necessary to initialise the data before being used by the rest of the application. You can implement the `afterFetch()` method in a model, this event will be executed just after create the instance and assign the data to it:

```

<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public $status;

    public function beforeSave()
    {
        // Convert the array into a string
        $this->status = join(",", $this->status);
    }

    public function afterFetch()
    {
        // Convert the string to an array
        $this->status = explode(",", $this->status);
    }

    public function afterSave()
    {
        // Convert the string to an array
        $this->status = explode(",", $this->status);
    }
}

```

If you use getters/setters instead of/or together with public properties, you can initialize the field once it is accessed:

```

<?php

namespace Store\Toys;

```

```
use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public $status;

    public function getStatus()
    {
        return explode(", ", $this->status);
    }
}
```

Generating Calculations

Calculations (or aggregations) are helpers for commonly used functions of database systems such as COUNT, SUM, MAX, MIN or AVG. *Phalcon\Mvc\Model* allows to use these functions directly from the exposed methods.

Count examples:

```
<?php

// How many employees are?
$rowcount = Employees::count();

// How many different areas are assigned to employees?
$rowcount = Employees::count(
    [
        "distinct" => "area",
    ]
);

// How many employees are in the Testing area?
$rowcount = Employees::count(
    "area = 'Testing'"
);

// Count employees grouping results by their area
$group = Employees::count(
    [
        "group" => "area",
    ]
);
foreach ($group as $row) {
    echo "There are ", $row->rowcount, " in ", $row->area;
}

// Count employees grouping by their area and ordering the result by count
$group = Employees::count(
    [
        "group" => "area",
        "order" => "rowcount",
    ]
)
```

```
);

// Avoid SQL injections using bound parameters
$group = Employees::count(
    [
        "type > ?0",
        "bind" => [
            $type
        ],
    ]
);
```

Sum examples:

```
<?php

// How much are the salaries of all employees?
$total = Employees::sum(
    [
        "column" => "salary",
    ]
);

// How much are the salaries of all employees in the Sales area?
$total = Employees::sum(
    [
        "column"      => "salary",
        "conditions" => "area = 'Sales'",
    ]
);

// Generate a grouping of the salaries of each area
$group = Employees::sum(
    [
        "column" => "salary",
        "group"  => "area",
    ]
);
foreach ($group as $row) {
    echo "The sum of salaries of the ", $row->area, " is ", $row->sumatory;
}

// Generate a grouping of the salaries of each area ordering
// salaries from higher to lower
$group = Employees::sum(
    [
        "column" => "salary",
        "group"  => "area",
        "order"  => "sumatory DESC",
    ]
);

// Avoid SQL injections using bound parameters
$group = Employees::sum(
    [
        "conditions" => "area > ?0",
        "bind"       => [
            $area
        ],
    ]
);
```

```
        ],  
    ]  
);
```

Average examples:

```
<?php  
  
// What is the average salary for all employees?  
$average = Employees::average(  
    [  
        "column" => "salary",  
    ]  
);  
  
// What is the average salary for the Sales's area employees?  
$average = Employees::average(  
    [  
        "column"      => "salary",  
        "conditions" => "area = 'Sales'",  
    ]  
);  
  
// Avoid SQL injections using bound parameters  
$average = Employees::average(  
    [  
        "column"      => "age",  
        "conditions" => "area > ?0",  
        "bind"        => [  
            $area  
        ],  
    ],  
);
```

Max/Min examples:

```
<?php  
  
// What is the oldest age of all employees?  
$age = Employees::maximum(  
    [  
        "column" => "age",  
    ]  
);  
  
// What is the oldest of employees from the Sales area?  
$age = Employees::maximum(  
    [  
        "column"      => "age",  
        "conditions" => "area = 'Sales'",  
    ]  
);  
  
// What is the lowest salary of all employees?  
$salary = Employees::minimum(  
    [  
        "column" => "salary",  
    ]  
);
```

```
);
```

Creating/Updating Records

The `Phalcon\Mvc\Model::save()` method allows you to create/update records according to whether they already exist in the table associated with a model. The save method is called internally by the create and update methods of *Phalcon\Mvc\Model*. For this to work as expected it is necessary to have properly defined a primary key in the entity to determine whether a record should be updated or created.

Also the method executes associated validators, virtual foreign keys and events that are defined in the model:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

if ($robot->save() === false) {
    echo "Umh, We can't store robots right now: \n";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo $message, "\n";
    }
} else {
    echo "Great, a new robot was saved successfully!";
}
```

An array could be passed to “save” to avoid assign every column manually. *Phalcon\Mvc\Model* will check if there are setters implemented for the columns passed in the array giving priority to them instead of assign directly the values of the attributes:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->save(
    [
        "type" => "mechanical",
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);
```

Values assigned directly or via the array of attributes are escaped/sanitized according to the related attribute data type. So you can pass an insecure array without worrying about possible SQL injections:

```
<?php
```

```
use Store\Toys\Robots;

$robot = new Robots();

$robot->save($_POST);
```

Without precautions mass assignment could allow attackers to set any database column's value. Only use this feature if you want to permit a user to insert/update every column in the model, even if those fields are not in the submitted form.

You can set an additional parameter in 'save' to set a whitelist of fields that only must taken into account when doing the mass assignment:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->save(
    $_POST,
    [
        "name",
        "type",
    ]
);
```

Create/Update with Confidence

When an application has a lot of competition, we could be expecting create a record but it is actually updated. This could happen if we use `Phalcon\Mvc\Model::save()` to persist the records in the database. If we want to be absolutely sure that a record is created or updated, we can change the `save()` call with `create()` or `update()`:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

// This record only must be created
if ($robot->create() === false) {
    echo "Umh, We can't store robots right now: \n";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo $message, "\n";
    }
} else {
    echo "Great, a new robot was created successfully!";
}
```


These methods “create” and “update” also accept an array of values as parameter.

Deleting Records

The `Phalcon\Mvc\Model::delete()` method allows to delete a record. You can use it as follows:

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(11);

if ($robot !== false) {
    if ($robot->delete() === false) {
        echo "Sorry, we can't delete the robot right now: \n";

        $messages = $robot->getMessages();

        foreach ($messages as $message) {
            echo $message, "\n";
        }
    } else {
        echo "The robot was deleted successfully!";
    }
}
```

You can also delete many records by traversing a resultset with a foreach:

```
<?php

use Store\Toys\Robots;

$robots = Robots::find(
    "type = 'mechanical'"
);

foreach ($robots as $robot) {
    if ($robot->delete() === false) {
        echo "Sorry, we can't delete the robot right now: \n";

        $messages = $robot->getMessages();

        foreach ($messages as $message) {
            echo $message, "\n";
        }
    } else {
        echo "The robot was deleted successfully!";
    }
}
```

The following events are available to define custom business rules that can be executed when a delete operation is performed:

Operation	Name	Can stop operation?	Explanation
Deleting	beforeDelete	YES	Runs before the delete operation is made
Deleting	afterDelete	NO	Runs after the delete operation was made

With the above events can also define business rules in the models:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function beforeDelete()
    {
        if ($this->status === "A") {
            echo "The robot is active, it can't be deleted";

            return false;
        }

        return true;
    }
}
```

Model Relationships

Relationships between Models

There are four types of relationships: one-on-one, one-to-many, many-to-one and many-to-many. The relationship may be unidirectional or bidirectional, and each can be simple (a one to one model) or more complex (a combination of models). The model manager manages foreign key constraints for these relationships, the definition of these helps referential integrity as well as easy and fast access of related records to a model. Through the implementation of relations, it is easy to access data in related models from each record in a uniform way.

Unidirectional relationships

Unidirectional relations are those that are generated in relation to one another but not vice versa.

Bidirectional relations

The bidirectional relations build relationships in both models and each model defines the inverse relationship of the other.

Defining relationships

In Phalcon, relationships must be defined in the `initialize()` method of a model. The methods `belongsTo()`, `hasOne()`, `hasMany()` and `hasManyToMany()` define the relationship between one or more fields from the current model to fields in another model. Each of these methods requires 3 parameters: local fields, referenced model, referenced fields.

Method	Description
<code>hasMany</code>	Defines a 1-n relationship
<code>hasOne</code>	Defines a 1-1 relationship
<code>belongsTo</code>	Defines a n-1 relationship
<code>hasManyToMany</code>	Defines a n-n relationship

The following schema shows 3 tables whose relations will serve us as an example regarding relationships:

```
CREATE TABLE `robots` (
  `id` int(10) unsigned NOT NULL AUTO_INCREMENT,
  `name` varchar(70) NOT NULL,
  `type` varchar(32) NOT NULL,
  `year` int(11) NOT NULL,
  PRIMARY KEY (`id`)
);

CREATE TABLE `robots_parts` (
  `id` int(10) unsigned NOT NULL AUTO_INCREMENT,
  `robots_id` int(10) NOT NULL,
  `parts_id` int(10) NOT NULL,
  `created_at` DATE NOT NULL,
  PRIMARY KEY (`id`),
  KEY `robots_id` (`robots_id`),
  KEY `parts_id` (`parts_id`)
);

CREATE TABLE `parts` (
  `id` int(10) unsigned NOT NULL AUTO_INCREMENT,
  `name` varchar(70) NOT NULL,
  PRIMARY KEY (`id`)
);
```

- The model “Robots” has many “RobotsParts”.
- The model “Parts” has many “RobotsParts”.
- The model “RobotsParts” belongs to both “Robots” and “Parts” models as a many-to-one relation.
- The model “Robots” has a relation many-to-many to “Parts” through “RobotsParts”.

Check the EER diagram to understand better the relations:

The models with their relations could be implemented as follows:

```
<?php


namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public function initialize()
    {
        $this->hasMany(
            "id",
            "RobotsParts",
            "robots_id"
        );
    }
}
```

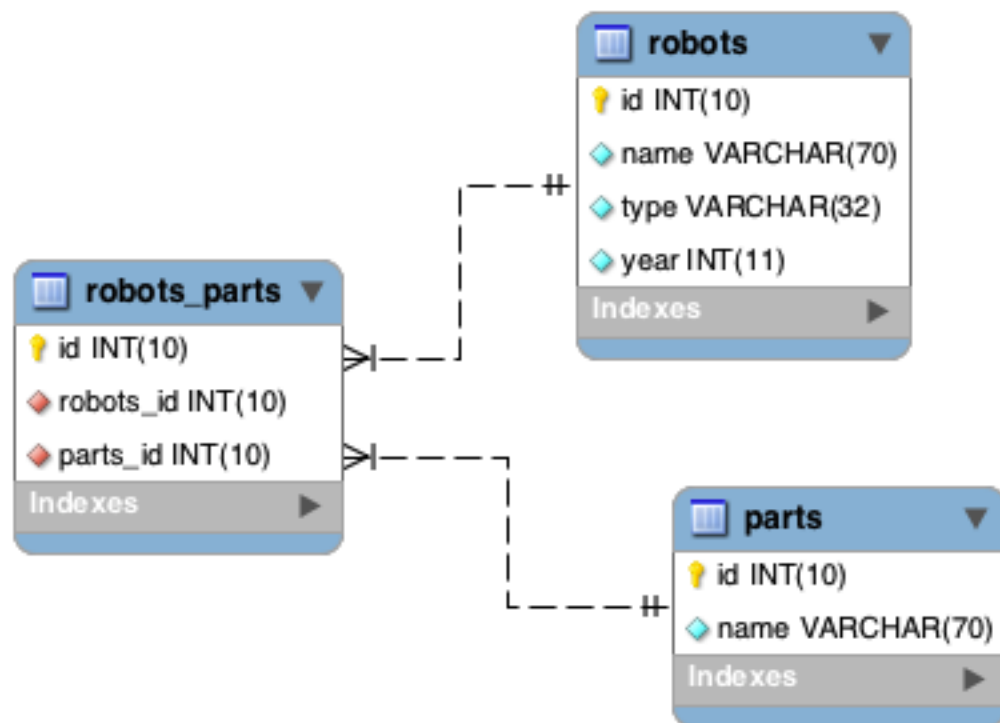

```

<?php

use Phalcon\Mvc\Model;

class Parts extends Model
{
    public $id;

    public $name;

    public function initialize()
    {
        $this->hasMany(
            "id",
            "RobotsParts",
            "parts_id"
        );
    }
}

```

```

<?php

use Phalcon\Mvc\Model;

class RobotsParts extends Model
{
    public $id;

    public $robots_id;

    public $parts_id;

    public function initialize()
    {
        $this->belongsTo(
            "robots_id",
            "Store\\Toys\\Robots",
            "id"
        );

        $this->belongsTo(
            "parts_id",
            "Parts",
            "id"
        );
    }
}

```

The first parameter indicates the field of the local model used in the relationship; the second indicates the name of the referenced model and the third the field name in the referenced model. You could also use arrays to define multiple fields in the relationship.

Many to many relationships require 3 models and define the attributes involved in the relationship:

```

<?php

namespace Store\Toys;

```

```
use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public function initialize()
    {
        $this->hasManyToMany(
            "id",
            "RobotsParts",
            "robots_id", "parts_id",
            "Parts",
            "id"
        );
    }
}
```

Taking advantage of relationships

When explicitly defining the relationships between models, it is easy to find related records for a particular record.

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(2);

foreach ($robot->robotsParts as $robotPart) {
    echo $robotPart->parts->name, "\n";
}
```

Phalcon uses the magic methods `__set`/`__get`/`__call` to store or retrieve related data using relationships.

By accessing an attribute with the same name as the relationship will retrieve all its related record(s).

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst();

// All the related records in RobotsParts
$robotsParts = $robot->robotsParts;
```

Also, you can use a magic getter:

```
<?php

use Store\Toys\Robots;

$robot = Robots::findFirst();

// All the related records in RobotsParts
```

```

$robotsParts = $robot->getRobotsParts();

// Passing parameters
$robotsParts = $robot->getRobotsParts(
    [
        "limit" => 5,
    ]
);

```

If the called method has a “get” prefix *Phalcon\Mvc\Model* will return a `findFirst()/find()` result. The following example compares retrieving related results with using magic methods and without:

```

<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(2);

// Robots model has a 1-n (hasMany)
// relationship to RobotsParts then
$robotsParts = $robot->robotsParts;

// Only parts that match conditions
$robotsParts = $robot->getRobotsParts(
    [
        "created_at = :date:",
        "bind" => [
            "date" => "2015-03-15"
        ]
    ]
);

$robotPart = RobotsParts::findFirst(1);

// RobotsParts model has a n-1 (belongsTo)
// relationship to RobotsParts then
$robot = $robotPart->robots;

```

Getting related records manually:

```

<?php

use Store\Toys\Robots;

$robot = Robots::findFirst(2);

// Robots model has a 1-n (hasMany)
// relationship to RobotsParts, then
$robotsParts = RobotsParts::find(
    [
        "robots_id = :id:",
        "bind" => [
            "id" => $robot->id,
        ]
    ]
);

// Only parts that match conditions

```

```

$robotsParts = RobotsParts::find(
    [
        "robots_id = :id: AND created_at = :date:",
        "bind" => [
            "id" => $robot->id,
            "date" => "2015-03-15",
        ]
    ]
);

$robotPart = RobotsParts::findFirst(1);

// RobotsParts model has a n-1 (belongsTo)
// relationship to RobotsParts then
$robot = Robots::findFirst(
    [
        "id = :id:",
        "bind" => [
            "id" => $robotPart->robots_id,
        ]
    ]
);

```

The prefix “get” is used to `find()`/`findFirst()` related records. Depending on the type of relation it will use `find()` or `findFirst()`:

Type	Description	Implicit Method
Belongs-To	Returns a model instance of the related record directly	<code>findFirst</code>
Has-One	Returns a model instance of the related record directly	<code>findFirst</code>
Has-Many	Returns a collection of model instances of the referenced model	<code>find</code>
Has-Many-to-Many	Returns a collection of model instances of the referenced model, it implicitly does ‘inner joins’ with the involved models	(complex query)

You can also use the “count” prefix to return an integer denoting the count of the related records:

```

<?php
use Store\Toys\Robots;

$robot = Robots::findFirst(2);

echo "The robot has ", $robot->countRobotsParts(), " parts\n";

```

Aliasing Relationships

To explain better how aliases work, let’s check the following example:

The “robots_similar” table has the function to define what robots are similar to others:

```


mysql> desc robots_similar;
+-----+-----+-----+-----+-----+-----+
| Field          | Type          | Null | Key | Default | Extra          |
+-----+-----+-----+-----+-----+-----+
| id             | int(10) unsigned | NO   | PRI | NULL    | auto_increment |
| robots_id      | int(10) unsigned | NO   | MUL | NULL    |                |
| similar_robots_id | int(10) unsigned | NO   |     | NULL    |                |

```



```
+-----+-----+-----+-----+-----+-----+
3 rows in set (0.00 sec)
```

Both “robots_id” and “similar_robots_id” have a relation to the model Robots:

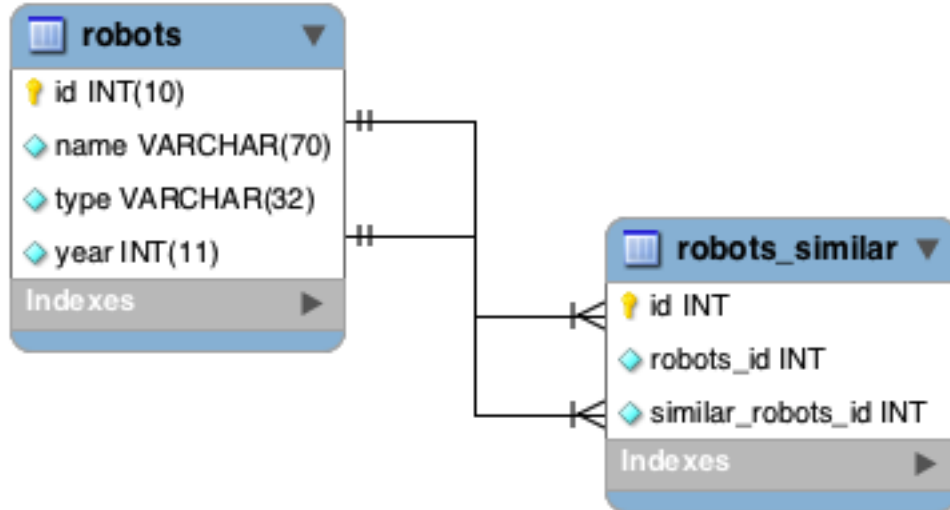

A model that maps this table and its relationships is the following:

```
<?php
class RobotsSimilar extends Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->belongsTo(
            "robots_id",
            "Store\\Toys\\Robots",
            "id"
        );

        $this->belongsTo(
            "similar_robots_id",
            "Store\\Toys\\Robots",
            "id"
        );
    }
}
```

Since both relations point to the same model (Robots), obtain the records related to the relationship could not be clear:

```
<?php
$robotsSimilar = RobotsSimilar::findFirst();

// Returns the related record based on the column (robots_id)
// Also as is a belongsTo it's only returning one record
// but the name 'getRobots' seems to imply that return more than one
$robot = $robotsSimilar->getRobots();
```

```
// but, how to get the related record based on the column (similar_robots_id)  
// if both relationships have the same name?
```

The aliases allow us to rename both relationships to solve these problems:

```
<?php  
  
use Phalcon\Mvc\Model;  
  
class RobotsSimilar extends Model  
{  
    public function initialize()  
    {  
        $this->belongsTo(  
            "robots_id",  
            "Store\\Toys\\Robots",  
            "id",  
            [  
                "alias" => "Robot",  
            ]  
        );  
  
        $this->belongsTo(  
            "similar_robots_id",  
            "Store\\Toys\\Robots",  
            "id",  
            [  
                "alias" => "SimilarRobot",  
            ]  
        );  
    }  
}
```

With the aliasing we can get the related records easily:

```
<?php  
  
$robotsSimilar = RobotsSimilar::findFirst();  
  
// Returns the related record based on the column (robots_id)  
$robot = $robotsSimilar->getRobot();  
$robot = $robotsSimilar->robot;  
  
// Returns the related record based on the column (similar_robots_id)  
$similarRobot = $robotsSimilar->getSimilarRobot();  
$similarRobot = $robotsSimilar->similarRobot;
```

Magic Getters vs. Explicit methods

Most IDEs and editors with auto-completion capabilities can not infer the correct types when using magic getters, instead of use the magic getters you can optionally define those methods explicitly with the corresponding docblocks helping the IDE to produce a better auto-completion:

```
<?php
```

```

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $id;

    public $name;

    public function initialize()
    {
        $this->hasMany(
            "id",
            "RobotsParts",
            "robots_id"
        );

        /**
         * Return the related "robots parts"
         *
         * @return \RobotsParts[]
         */
        public function getRobotsParts($parameters = null)
        {
            return $this->getRelated("RobotsParts", $parameters);
        }
    }
}

```

Virtual Foreign Keys

By default, relationships do not act like database foreign keys, that is, if you try to insert/update a value without having a valid value in the referenced model, Phalcon will not produce a validation message. You can modify this behavior by adding a fourth parameter when defining a relationship.

The RobotsPart model can be changed to demonstrate this feature:

```

<?php

use Phalcon\Mvc\Model;

class RobotsParts extends Model
{
    public $id;

    public $robots_id;

    public $parts_id;

    public function initialize()
    {
        $this->belongsTo(
            "robots_id",
            "Store\\Toys\\Robots",
            "id",
            [

```

```
        "foreignKey" => true
    ]
);

$this->belongsTo(
    "parts_id",
    "Parts",
    "id",
    [
        "foreignKey" => [
            "message" => "The part_id does not exist on the Parts model"
        ]
    ]
);
}
```

If you alter a `belongsTo()` relationship to act as foreign key, it will validate that the values inserted/updated on those fields have a valid value on the referenced model. Similarly, if a `hasMany()`/`hasOne()` is altered it will validate that the records cannot be deleted if that record is used on a referenced model.

```
<?php

use Phalcon\Mvc\Model;

class Parts extends Model
{
    public function initialize()
    {
        $this->hasMany(
            "id",
            "RobotsParts",
            "parts_id",
            [
                "foreignKey" => [
                    "message" => "The part cannot be deleted because other robots are_
↪using it",
                ]
            ]
        );
    }
}
```

A virtual foreign key can be set up to allow null values as follows:

```
<?php

use Phalcon\Mvc\Model;

class RobotsParts extends Model
{
    public $id;

    public $robots_id;

    public $parts_id;

    public function initialize()
```

```

{
    $this->belongsTo(
        "parts_id",
        "Parts",
        "id",
        [
            "foreignKey" => [
                "allowNulls" => true,
                "message"    => "The part_id does not exist on the Parts model",
            ]
        ]
    );
}

```

Cascade/Restrict actions

Relationships that act as virtual foreign keys by default restrict the creation/update/deletion of records to maintain the integrity of data:

```

<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Relation;

class Robots extends Model
{
    public $id;

    public $name;

    public function initialize()
    {
        $this->hasMany(
            "id",
            "Parts",
            "robots_id",
            [
                "foreignKey" => [
                    "action" => Relation::ACTION_CASCADE,
                ]
            ]
        );
    }
}

```

The above code set up to delete all the referenced records (parts) if the master record (robot) is deleted.

Storing Related Records

Magic properties can be used to store a record and its related properties:

```
<?php

// Create an artist
$artist = new Artists();

$artist->name      = "Shinichi Osawa";
$artist->country   = "Japan";

// Create an album
$album = new Albums();

$album->name       = "The One";
$album->artist     = $artist; // Assign the artist
$album->year       = 2008;

// Save both records
$album->save();
```

Saving a record and its related records in a has-many relation:

```
<?php

// Get an existing artist
$artist = Artists::findFirst(
    "name = 'Shinichi Osawa'"
);

// Create an album
$album = new Albums();

$album->name      = "The One";
$album->artist     = $artist;

$songs = [];

// Create a first song
$songs[0]        = new Songs();
$songs[0]->name   = "Star Guitar";
$songs[0]->duration = "5:54";

// Create a second song
$songs[1]        = new Songs();
$songs[1]->name   = "Last Days";
$songs[1]->duration = "4:29";

// Assign the songs array
$album->songs = $songs;

// Save the album + its songs
$album->save();
```

Saving the album and the artist at the same time implicitly makes use of a transaction so if anything goes wrong with saving the related records, the parent will not be saved either. Messages are passed back to the user for information regarding any errors.

Note: Adding related entities by overloading the following methods is not possible:

- `Phalcon\Mvc\Model::beforeSave()`

- `Phalcon\Mvc\Model::beforeCreate()`
- `Phalcon\Mvc\Model::beforeUpdate()`

You need to overload `Phalcon\Mvc\Model::save()` for this to work from within a model.

Operations over Resultsets

If a resultset is composed of complete objects, the resultset is in the ability to perform operations on the records obtained in a simple manner:

Updating related records

Instead of doing this:

```
<?php

$parts = $robots->getParts();

foreach ($parts as $part) {
    $part->stock      = 100;
    $part->updated_at = time();

    if ($part->update() === false) {
        $messages = $part->getMessages();

        foreach ($messages as $message) {
            echo $message;
        }

        break;
    }
}
```

you can do this:

```
<?php

$robots->getParts()->update(
    [
        "stock"      => 100,
        "updated_at" => time(),
    ]
);
```

‘update’ also accepts an anonymous function to filter what records must be updated:

```
<?php

$data = [
    "stock"      => 100,
    "updated_at" => time(),
];

// Update all the parts except those whose type is basic
$robots->getParts()->update(
    $data,
```

```
function ($part) {  
    if ($part->type === Part::TYPE_BASIC) {  
        return false;  
    }  
  
    return true;  
}  
);
```

Deleting related records

Instead of doing this:

```
<?php  
  
$parts = $robots->getParts();  
  
foreach ($parts as $part) {  
    if ($part->delete() === false) {  
        $messages = $part->getMessages();  
  
        foreach ($messages as $message) {  
            echo $message;  
        }  
  
        break;  
    }  
}
```

you can do this:

```
<?php  
  
$robots->getParts()->delete();
```

`delete()` also accepts an anonymous function to filter what records must be deleted:

```
<?php  
  
// Delete only whose stock is greater or equal than zero  
$robots->getParts()->delete(  
    function ($part) {  
        if ($part->stock < 0) {  
            return false;  
        }  
  
        return true;  
    }  
);
```

Model Events

Events and Events Manager

Models allow you to implement events that will be thrown while performing an insert/update/delete which can be used to define business rules. The following are the events supported by *Phalcon\Mvc\Model* and their order of execution:

Operation	Name	Can stop operation?	Explanation
Inserting/Updating	beforeValidation	YES	Is executed before the fields are validated for not nulls/empty strings or foreign keys
Inserting	beforeValidationOnCreate	YES	Is executed before the fields are validated for not nulls/empty strings or foreign keys when an insertion operation is being made
Updating	beforeValidationOnUpdate	YES	Is executed before the fields are validated for not nulls/empty strings or foreign keys when an updating operation is being made
Inserting/Updating	onValidationFails	YES (already stopped)	Is executed after an integrity validator fails
Inserting	afterValidationOnCreate	YES	Is executed after the fields are validated for not nulls/empty strings or foreign keys when an insertion operation is being made
Updating	afterValidationOnUpdate	YES	Is executed after the fields are validated for not nulls/empty strings or foreign keys when an updating operation is being made
Inserting/Updating	afterValidation	YES	Is executed after the fields are validated for not nulls/empty strings or foreign keys
Inserting/Updating	beforeSave	YES	Runs before the required operation over the database system
Updating	beforeUpdate	YES	Runs before the required operation over the database system only when an updating operation is being made
Inserting	beforeCreate	YES	Runs before the required operation over the database system only when an inserting operation is being made
Updating	afterUpdate	NO	Runs after the required operation over the database system only when an updating operation is being made
Inserting	afterCreate	NO	Runs after the required operation over the database system only when an inserting operation is being made
Inserting/Updating	afterSave	NO	Runs after the required operation over the database system

Implementing Events in the Model's class

The easier way to make a model react to events is to implement a method with the same name of the event in the model's class:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function beforeValidationOnCreate()
    {
        echo "This is executed before creating a Robot!";
    }
}
```

Events can be used to assign values before performing an operation, for example:

```
<?php

use Phalcon\Mvc\Model;

class Products extends Model
{
    public function beforeCreate()
    {
        // Set the creation date
        $this->created_at = date("Y-m-d H:i:s");
    }

    public function beforeUpdate()
    {
        // Set the modification date
        $this->modified_in = date("Y-m-d H:i:s");
    }
}
```

Using a custom Events Manager

Additionally, this component is integrated with *Phalcon\Events\Manager*, this means we can create listeners that run when an event is triggered.

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

class Robots extends Model
{
    public function initialize()
    {
        $eventsManager = new EventsManager();

        // Attach an anonymous function as a listener for "model" events
        $eventsManager->attach(
            "model:beforeSave",
            function (Event $event, $robot) {
                if ($robot->name === "Scooby Doo") {
                    echo "Scooby Doo isn't a robot!";

                    return false;
                }

                return true;
            }
        );

        // Attach the events manager to the event
        $this->setEventsManager($eventsManager);
    }
}
```

```
}

```

In the example given above, the Events Manager only acts as a bridge between an object and a listener (the anonymous function). Events will be fired to the listener when 'robots' are saved:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->name = "Scooby Doo";
$robot->year = 1969;

$robot->save();

```

If we want all objects created in our application use the same EventsManager, then we need to assign it to the Models Manager:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

// Registering the modelsManager service
$di->setShared(
    "modelsManager",
    function () {
        $eventsManager = new EventsManager();

        // Attach an anonymous function as a listener for "model" events
        $eventsManager->attach(
            "model:beforeSave",
            function (Event $event, $model) {
                // Catch events produced by the Robots model
                if (get_class($model) === "Store\\Toys\\Robots") {
                    if ($model->name === "Scooby Doo") {
                        echo "Scooby Doo isn't a robot!";

                        return false;
                    }
                }

                return true;
            }
        );

        // Setting a default EventsManager
        $modelsManager = new ModelsManager();

        $modelsManager->setEventsManager($eventsManager);

        return $modelsManager;
    }
);

```

If a listener returns false that will stop the operation that is executing currently.

Logging Low-Level SQL Statements

When using high-level abstraction components such as *Phalcon\Mvc\Model* to access a database, it is difficult to understand which statements are finally sent to the database system. *Phalcon\Mvc\Model* is supported internally by *Phalcon\Db*. *Phalcon\Logger* interacts with *Phalcon\Db*, providing logging capabilities on the database abstraction layer, thus allowing us to log SQL statements as they happen.

```
<?php

use Phalcon\Logger;
use Phalcon\Events\Manager;
use Phalcon\Logger\Adapter\File as FileLogger;
use Phalcon\Db\Adapter\Pdo\Mysql as Connection;

$di->set(
    "db",
    function () {
        $eventsManager = new EventsManager();

        $logger = new FileLogger("app/logs/debug.log");

        // Listen all the database events
        $eventsManager->attach(
            "db:beforeQuery",
            function ($event, $connection) use ($logger) {
                $logger->log(
                    $connection->getSQLStatement(),
                    Logger::INFO
                );
            }
        );

        $connection = new Connection(
            [
                "host"      => "localhost",
                "username"  => "root",
                "password"  => "secret",
                "dbname"    => "invo",
            ]
        );

        // Assign the eventsManager to the db adapter instance
        $connection->setEventsManager($eventsManager);

        return $connection;
    }
);
```

As models access the default database connection, all SQL statements that are sent to the database system will be logged in the file:

```
<?php

use Store\Toys\Robots;

$robot = new Robots();

$robot->name      = "Robby the Robot";
```

```
$robot->created_at = "1956-07-21";

if ($robot->save() === false) {
    echo "Cannot save robot";
}
```

As above, the file `app/logs/db.log` will contain something like this:

```
[Mon, 30 Apr 12 13:47:18 -0500][DEBUG][Resource Id #77] INSERT INTO robots
(name, created_at) VALUES ('Robby the Robot', '1956-07-21')
```

Profiling SQL Statements

Thanks to *Phalcon\Db*, the underlying component of *Phalcon\Mvc\Model*, it's possible to profile the SQL statements generated by the ORM in order to analyze the performance of database operations. With this you can diagnose performance problems and to discover bottlenecks.

```
<?php

use Phalcon\Db\Profiler as ProfilerDb;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Db\Adapter\Pdo\Mysql as MysqlPdo;

$di->set(
    "profiler",
    function () {
        return new ProfilerDb();
    },
    true
);

$di->set(
    "db",
    function () use ($di) {
        $eventsManager = new EventsManager();

        // Get a shared instance of the DbProfiler
        $profiler = $di->getProfiler();

        // Listen all the database events
        $eventsManager->attach(
            "db",
            function ($event, $connection) use ($profiler) {
                if ($event->getType() === "beforeQuery") {
                    $profiler->startProfile(
                        $connection->getSQLStatement()
                    );
                }

                if ($event->getType() === "afterQuery") {
                    $profiler->stopProfile();
                }
            }
        );

        $connection = new MysqlPdo(
```

```
        [
            "host"      => "localhost",
            "username"  => "root",
            "password"  => "secret",
            "dbname"    => "invo",
        ]
    );

    // Assign the eventsManager to the db adapter instance
    $connection->setEventsManager($eventsManager);

    return $connection;
}
);
```

Profiling some queries:

```
<?php
use Store\Toys\Robots;

// Send some SQL statements to the database
Robots::find();

Robots::find(
    [
        "order" => "name",
    ]
);

Robots::find(
    [
        "limit" => 30,
    ]
);

// Get the generated profiles from the profiler
$profiles = $di->get("profiler")->getProfiles();

foreach ($profiles as $profile) {
    echo "SQL Statement: ", $profile->getSQLStatement(), "\n";
    echo "Start Time: ", $profile->getInitialTime(), "\n";
    echo "Final Time: ", $profile->getFinalTime(), "\n";
    echo "Total Elapsed Time: ", $profile->getTotalElapsedSeconds(), "\n";
}
```

Each generated profile contains the duration in milliseconds that each instruction takes to complete as well as the generated SQL statement.

Model Behaviors

Behaviors are shared conducts that several models may adopt in order to re-use code, the ORM provides an API to implement behaviors in your models. Also, you can use the events and callbacks as seen before as an alternative to implement Behaviors with more freedom.

A behavior must be added in the model initializer, a model can have zero or more behaviors:

```

<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Behavior\Timestampable;

class Users extends Model
{
    public $id;

    public $name;

    public $created_at;

    public function initialize()
    {
        $this->addBehavior(
            new Timestampable(
                [
                    "beforeCreate" => [
                        "field" => "created_at",
                        "format" => "Y-m-d",
                    ]
                ]
            )
        );
    }
}

```

The following built-in behaviors are provided by the framework:

Name	Description
Timestampable	Allows to automatically update a model's attribute saving the datetime when a record is created or updated
SoftDelete	Instead of permanently delete a record it marks the record as deleted changing the value of a flag column

Timestampable

This behavior receives an array of options, the first level key must be an event name indicating when the column must be assigned:

```

<?php

use Phalcon\Mvc\Model\Behavior\Timestampable;

public function initialize()
{
    $this->addBehavior(
        new Timestampable(
            [
                "beforeCreate" => [
                    "field" => "created_at",
                    "format" => "Y-m-d",
                ]
            ]
        )
    )
}

```

```
    );  
}
```

Each event can have its own options, ‘field’ is the name of the column that must be updated, if ‘format’ is a string it will be used as format of the PHP’s function `date`, format can also be an anonymous function providing you the free to generate any kind timestamp:

```
<?php  
  
use DateTime;  
use DateTimeZone;  
use Phalcon\Mvc\Model\Behavior\Timestampable;  
  
public function initialize()  
{  
    $this->addBehavior(  
        new Timestampable(  
            [  
                "beforeCreate" => [  
                    "field" => "created_at",  
                    "format" => function () {  
                        $datetime = new DateTime(  
                            new DateTimeZone("Europe/Stockholm")  
                        );  
  
                        return $datetime->format("Y-m-d H:i:sP");  
                    }  
                ]  
            ]  
        )  
    );  
}
```

If the option ‘format’ is omitted a timestamp using the PHP’s function `time`, will be used.

SoftDelete

This behavior can be used in the following way:

```
<?php  
  
use Phalcon\Mvc\Model;  
use Phalcon\Mvc\Model\Behavior\SoftDelete;  
  
class Users extends Model  
{  
    const DELETED = "D";  
  
    const NOT_DELETED = "N";  
  
    public $id;  
  
    public $name;  
  
    public $status;
```



```

public function initialize()
{
    $this->addBehavior(
        new SoftDelete(
            [
                "field" => "status",
                "value" => Users::DELETED,
            ]
        )
    );
}

```

This behavior accepts two options: ‘field’ and ‘value’, ‘field’ determines what field must be updated and ‘value’ the value to be deleted. Let’s pretend the table ‘users’ has the following data:

```

mysql> select * from users;
+----+-----+-----+
| id | name  | status |
+----+-----+-----+
|  1 | Lana  | N      |
|  2 | Brandon | N      |
+----+-----+-----+
2 rows in set (0.00 sec)

```

If we delete any of the two records the status will be updated instead of delete the record:

```

<?php
Users::findFirst(2)->delete();

```

The operation will result in the following data in the table:

```

mysql> select * from users;
+----+-----+-----+
| id | name  | status |
+----+-----+-----+
|  1 | Lana  | N      |
|  2 | Brandon | D      |
+----+-----+-----+
2 rows in set (0.01 sec)

```

Note that you need to specify the deleted condition in your queries to effectively ignore them as deleted records, this behavior doesn’t support that.

Creating your own behaviors

The ORM provides an API to create your own behaviors. A behavior must be a class implementing the *Phalcon\Mvc\Model\BehaviorInterface*. Also, *Phalcon\Mvc\Model\Behavior* provides most of the methods needed to ease the implementation of behaviors.

The following behavior is an example, it implements the Blameable behavior which helps identify the user that is performed operations over a model:

```
<?php

use Phalcon\Mvc\Model\Behavior;
use Phalcon\Mvc\Model\BehaviorInterface;

class Blameable extends Behavior implements BehaviorInterface
{
    public function notify($eventType, $model)
    {
        switch ($eventType) {

            case "afterCreate":
            case "afterDelete":
            case "afterUpdate":

                $userName = // ... get the current user from session

                // Store in a log the username, event type and primary key
                file_put_contents(
                    "logs/blamable-log.txt",
                    $userName . " " . $eventType . " " . $model->id
                );

                break;

            default:
                /* ignore the rest of events */
        }
    }
}
```

The former is a very simple behavior, but it illustrates how to create a behavior, now let's add this behavior to a model:

```
<?php

use Phalcon\Mvc\Model;

class Profiles extends Model
{
    public function initialize()
    {
        $this->addBehavior(
            new Blameable()
        );
    }
}
```

A behavior is also capable of intercepting missing methods on your models:

```
<?php

use Phalcon\Tag;
use Phalcon\Mvc\Model\Behavior;
use Phalcon\Mvc\Model\BehaviorInterface;

class Sluggable extends Behavior implements BehaviorInterface
{
    public function missingMethod($model, $method, $arguments = [])
```

```

{
    // If the method is 'getSlug' convert the title
    if ($method === "getSlug") {
        return Tag::friendlyTitle($model->title);
    }
}
}

```

Call that method on a model that implements Sluggable returns a SEO friendly title:

```

<?php

$title = $post->getSlug();

```

Using Traits as behaviors

Starting from PHP 5.4 you can use [Traits](#) to re-use code in your classes, this is another way to implement custom behaviors. The following trait implements a simple version of the Timestampable behavior:

```

<?php

trait MyTimestampable
{
    public function beforeCreate()
    {
        $this->created_at = date("r");
    }

    public function beforeUpdate()
    {
        $this->updated_at = date("r");
    }
}

```

Then you can use it in your model as follows:

```

<?php

use Phalcon\Mvc\Model;

class Products extends Model
{
    use MyTimestampable;
}

```

Models Metadata

To speed up development *Phalcon\Mvc\Model* helps you to query fields and constraints from tables related to models. To achieve this, *Phalcon\Mvc\Model\Metadata* is available to manage and cache table metadata.

Sometimes it is necessary to get those attributes when working with models. You can get a metadata instance as follows:

```

<?php

```

```

$robot = new Robots();

// Get Phalcon\Mvc\Model\Metadata instance
$metadata = $robot->getModelsMetadata();

// Get robots fields names
$attributes = $metadata->getAttributes($robot);
print_r($attributes);

// Get robots fields data types
$dataTypes = $metadata->getDataTypes($robot);
print_r($dataTypes);

```

Caching Metadata

Once the application is in a production stage, it is not necessary to query the metadata of the table from the database system each time you use the table. This could be done caching the metadata using any of the following adapters:

Adapter	Description	API
Memory	This adapter is the default. The metadata is cached only during the request. When the request is completed, the metadata are released as part of the normal memory of the request. This adapter is perfect when the application is in development so as to refresh the metadata in each request containing the new and/or modified fields.	<i>Phalcon\Mvc\Model\Metadata\Memory</i>
Session	This adapter stores metadata in the <code>\$_SESSION</code> superglobal. This adapter is recommended only when the application is actually using a small number of models. The metadata are refreshed every time a new session starts. This also requires the use of <code>session_start()</code> to start the session before using any models.	<i>Phalcon\Mvc\Model\Metadata\Session</i>
Apc	This adapter uses the Alternative PHP Cache (APC) to store the table metadata. You can specify the lifetime of the metadata with options. This is the most recommended way to store metadata when the application is in production stage.	<i>Phalcon\Mvc\Model\Metadata\Apc</i>
XCache	This adapter uses XCache to store the table metadata. You can specify the lifetime of the metadata with options. This is the most recommended way to store metadata when the application is in production stage.	<i>Phalcon\Mvc\Model\Metadata\Xcache</i>
Files	This adapter uses plain files to store metadata. By using this adapter the disk-reading is increased but the database access is reduced.	<i>Phalcon\Mvc\Model\Metadata\Files</i>

As other ORM's dependencies, the metadata manager is requested from the services container:

```

<?php

use Phalcon\Mvc\Model\Metadata\Apc as ApcMetadata;

$di["modelsMetadata"] = function () {
    // Create a metadata manager with APC
    $metadata = new ApcMetadata(
        [
            "lifetime" => 86400,
            "prefix"   => "my-prefix",
        ]
    );

    return $metadata;
};

```

Metadata Strategies

As mentioned above the default strategy to obtain the model's metadata is database introspection. In this strategy, the information schema is used to know the fields in a table, its primary key, nullable fields, data types, etc.

You can change the default metadata introspection in the following way:

```
<?php

use Phalcon\Mvc\Model\MetaData\Apc as ApcMetaData;

$di["modelsMetadata"] = function () {
    // Instantiate a metadata adapter
    $metadata = new ApcMetaData(
        [
            "lifetime" => 86400,
            "prefix"   => "my-prefix",
        ]
    );

    // Set a custom metadata introspection strategy
    $metadata->setStrategy(
        new MyIntrospectionStrategy()
    );

    return $metadata;
};
```

Database Introspection Strategy

This strategy doesn't require any customization and is implicitly used by all the metadata adapters.

Annotations Strategy

This strategy makes use of *annotations* to describe the columns in a model:

```
<?php

use Phalcon\Mvc\Model;

class Robots extends Model
{
    /**
     * @Primary
     * @Identity
     * @Column(type="integer", nullable=false)
     */
    public $id;

    /**
     * @Column(type="string", length=70, nullable=false)
     */
    public $name;

    /**
```

```
* @Column(type="string", length=32, nullable=false)
*/
public $type;

/**
 * @Column(type="integer", nullable=false)
 */
public $year;
}
```

Annotations must be placed in properties that are mapped to columns in the mapped source. Properties without the @Column annotation are handled as simple class attributes.

The following annotations are supported:

Name	Description
Primary	Mark the field as part of the table's primary key
Identity	The field is an auto_increment/serial column
Column	This marks an attribute as a mapped column

The annotation @Column supports the following parameters:

Name	Description
type	The column's type (string, integer, decimal, boolean)
length	The column's length if any
nullable	Set whether the column accepts null values or not

The annotations strategy could be set up this way:

```
<?php

use Phalcon\Mvc\Model\MetaData\Apc as ApcMetaData;
use Phalcon\Mvc\Model\MetaData\Strategy\Annotations as StrategyAnnotations;

$di["modelsMetadata"] = function () {
    // Instantiate a metadata adapter
    $metadata = new ApcMetaData(
        [
            "lifetime" => 86400,
            "prefix"   => "my-prefix",
        ]
    );

    // Set a custom metadata database introspection
    $metadata->setStrategy(
        new StrategyAnnotations()
    );

    return $metadata;
};
```

Manual Metadata

Phalcon can obtain the metadata for each model automatically without the developer must set them manually using any of the introspection strategies presented above.

The developer also has the option of define the metadata manually. This strategy overrides any strategy set in the metadata manager. New columns added/modified/removed to/from the mapped table must be added/modified/removed

also for everything to work properly.

The following example shows how to define the metadata manually:

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Db\Column;
use Phalcon\Mvc\Model\MetaData;

class Robots extends Model
{
    public function metaData()
    {
        return array(
            // Every column in the mapped table
            MetaData::MODELS_ATTRIBUTES => [
                "id",
                "name",
                "type",
                "year",
            ],

            // Every column part of the primary key
            MetaData::MODELS_PRIMARY_KEY => [
                "id",
            ],

            // Every column that isn't part of the primary key
            MetaData::MODELS_NON_PRIMARY_KEY => [
                "name",
                "type",
                "year",
            ],

            // Every column that doesn't allows null values
            MetaData::MODELS_NOT_NULL => [
                "id",
                "name",
                "type",
            ],

            // Every column and their data types
            MetaData::MODELS_DATA_TYPES => [
                "id" => Column::TYPE_INTEGER,
                "name" => Column::TYPE_VARCHAR,
                "type" => Column::TYPE_VARCHAR,
                "year" => Column::TYPE_INTEGER,
            ],

            // The columns that have numeric data types
            MetaData::MODELS_DATA_TYPES_NUMERIC => [
                "id" => true,
                "year" => true,
            ],

            // The identity column, use boolean false if the model doesn't have
            // an identity column
            MetaData::MODELS_IDENTITY_COLUMN => "id",
        );
    }
}
```

```
// How every column must be bound/casted
MetaData::MODELS_DATA_TYPES_BIND => [
    "id"    => Column::BIND_PARAM_INT,
    "name"  => Column::BIND_PARAM_STR,
    "type"  => Column::BIND_PARAM_STR,
    "year"  => Column::BIND_PARAM_INT,
],

// Fields that must be ignored from INSERT SQL statements
MetaData::MODELS_AUTOMATIC_DEFAULT_INSERT => [
    "year" => true,
],

// Fields that must be ignored from UPDATE SQL statements
MetaData::MODELS_AUTOMATIC_DEFAULT_UPDATE => [
    "year" => true,
],

// Default values for columns
MetaData::MODELS_DEFAULT_VALUES => [
    "year" => "2015",
],

// Fields that allow empty strings
MetaData::MODELS_EMPTY_STRING_VALUES => [
    "name" => true,
],

);
}
```

Model Transactions

When a process performs multiple database operations, it might be important that each step is completed successfully so that data integrity can be maintained. Transactions offer the ability to ensure that all database operations have been executed successfully before the data is committed to the database.

Transactions in Phalcon allow you to commit all operations if they were executed successfully or rollback all operations if something went wrong.

Manual Transactions

If an application only uses one connection and the transactions aren't very complex, a transaction can be created by just moving the current connection into transaction mode and then commit or rollback the operation whether it is successful or not:

```
<?php
use Phalcon\Mvc\Controller;

class RobotsController extends Controller
{
    public function saveAction()
    {
```



```

        // Start a transaction
        $this->db->begin();

        $robot = new Robots();

        $robot->name          = "WALL·E";
        $robot->created_at    = date("Y-m-d");

        // The model failed to save, so rollback the transaction
        if ($robot->save() === false) {
            $this->db->rollback();
            return;
        }

        $robotPart = new RobotParts();

        $robotPart->robots_id = $robot->id;
        $robotPart->type      = "head";

        // The model failed to save, so rollback the transaction
        if ($robotPart->save() === false) {
            $this->db->rollback();

            return;
        }

        // Commit the transaction
        $this->db->commit();
    }
}

```

Implicit Transactions

Existing relationships can be used to store records and their related instances, this kind of operation implicitly creates a transaction to ensure that data is correctly stored:

```

<?php

$robotPart = new RobotParts();

$robotPart->type = "head";

$robot = new Robots();

$robot->name          = "WALL·E";
$robot->created_at    = date("Y-m-d");
$robot->robotPart     = $robotPart;

// Creates an implicit transaction to store both records
$robot->save();

```

Isolated Transactions

Isolated transactions are executed in a new connection ensuring that all the generated SQL, virtual foreign key checks and business rules are isolated from the main connection. This kind of transaction requires a transaction manager that globally manages each transaction created ensuring that they are correctly rolled back/committed before ending the request:

```
<?php

use Phalcon\Mvc\Model\Transaction\Failed as TxFailed;
use Phalcon\Mvc\Model\Transaction\Manager as TxManager;

try {
    // Create a transaction manager
    $manager = new TxManager();

    // Request a transaction
    $transaction = $manager->get();

    $robot = new Robots();

    $robot->setTransaction($transaction);

    $robot->name          = "WALL·E";
    $robot->created_at    = date("Y-m-d");

    if ($robot->save() === false) {
        $transaction->rollback(
            "Cannot save robot"
        );
    }

    $robotPart = new RobotParts();

    $robotPart->setTransaction($transaction);

    $robotPart->robots_id = $robot->id;
    $robotPart->type       = "head";

    if ($robotPart->save() === false) {
        $transaction->rollback(
            "Cannot save robot part"
        );
    }

    // Everything's gone fine, let's commit the transaction
    $transaction->commit();
} catch (TxFailed $e) {
    echo "Failed, reason: ", $e->getMessage();
}
```

Transactions can be used to delete many records in a consistent way:

```
<?php

use Phalcon\Mvc\Model\Transaction\Failed as TxFailed;
use Phalcon\Mvc\Model\Transaction\Manager as TxManager;
```

```

try {
    // Create a transaction manager
    $manager = new TxManager();

    // Request a transaction
    $transaction = $manager->get();

    // Get the robots to be deleted
    $robots = Robots::find(
        "type = 'mechanical'"
    );

    foreach ($robots as $robot) {
        $robot->setTransaction($transaction);

        // Something's gone wrong, we should rollback the transaction
        if ($robot->delete() === false) {
            $messages = $robot->getMessages();

            foreach ($messages as $message) {
                $transaction->rollback(
                    $message->getMessage()
                );
            }
        }
    }

    // Everything's gone fine, let's commit the transaction
    $transaction->commit();

    echo "Robots were deleted successfully!";
} catch (TxFailed $e) {
    echo "Failed, reason: ", $e->getMessage();
}

```

Transactions are reused no matter where the transaction object is retrieved. A new transaction is generated only when a `commit()` or `rollback()` is performed. You can use the service container to create the global transaction manager for the entire application:

```

<?php

use Phalcon\Mvc\Model\Transaction\Manager as TransactionManager

$di->setShared(
    "transactions",
    function () {
        return new TransactionManager();
    }
);

```

Then access it from a controller or view:

```

<?php

use Phalcon\Mvc\Controller;

class ProductsController extends Controller
{

```

```
public function saveAction()
{
    // Obtain the TransactionsManager from the services container
    $manager = $this->di->getTransactions();

    // Or
    $manager = $this->transactions;

    // Request a transaction
    $transaction = $manager->get();

    // ...
}
```

While a transaction is active, the transaction manager will always return the same transaction across the application.

Validating Models

Validating Data Integrity

Phalcon\Mvc\Model provides several events to validate data and implement business rules. The special “validation” event allows us to call built-in validators over the record. Phalcon exposes a few built-in validators that can be used at this stage of validation.

The following example shows how to use it:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
use Phalcon\Validation;
use Phalcon\Validation\Validator\Uniqueness;
use Phalcon\Validation\Validator\InclusionIn;

class Robots extends Model
{
    public function validation()
    {
        $validator = new Validation();

        $validator->add(
            "type",
            new InclusionIn(
                [
                    "domain" => [
                        "Mechanical",
                        "Virtual",
                    ]
                ]
            )
        );

        $validator->add(
            "name",
```

```

        new Uniqueness (
            [
                "message" => "The robot name must be unique",
            ]
        )
    );

    return $this->validate($validator);
}
}

```

The above example performs a validation using the built-in validator “InclusionIn”. It checks the value of the field “type” in a domain list. If the value is not included in the method then the validator will fail and return false.

For more information on validators, see the [Validation documentation](#).

The idea of creating validators is make them reusable between several models. A validator can also be as simple as:

```

<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Message;

class Robots extends Model
{
    public function validation()
    {
        if ($this->type === "Old") {
            $message = new Message(
                "Sorry, old robots are not allowed anymore",
                "type",
                "MyType"
            );

            $this->appendMessage($message);

            return false;
        }

        return true;
    }
}

```

Validation Messages

Phalcon\Mvc\Model has a messaging subsystem that provides a flexible way to output or store the validation messages generated during the insert/update processes.

Each message is an instance of *Phalcon\Mvc\Model\Message* and the set of messages generated can be retrieved with the `getMessages()` method. Each message provides extended information like the field name that generated the message or the message type:

```

<?php

if ($robot->save() === false) {

```

```
$messages = $robot->getMessages();

foreach ($messages as $message) {
    echo "Message: ", $message->getMessage();
    echo "Field: ", $message->getField();
    echo "Type: ", $message->getType();
}
}
```

Phalcon\Mvc\Model can generate the following types of validation messages:

Type	Description
PresenceOf	Generated when a field with a non-null attribute on the database is trying to insert/update a null value
ConstraintViolation	Generated when a field part of a virtual foreign key is trying to insert/update a value that doesn't exist in the referenced model
InvalidValue	Generated when a validator failed because of an invalid value
InvalidCreateAttempt	Produced when a record is attempted to be created but it already exists
InvalidUpdateAttempt	Produced when a record is attempted to be updated but it doesn't exist

The `getMessages()` method can be overridden in a model to replace/translate the default messages generated automatically by the ORM:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function getMessages()
    {
        $messages = [];

        foreach (parent::getMessages() as $message) {
            switch ($message->getType()) {
                case "InvalidCreateAttempt":
                    $messages[] = "The record cannot be created because it already_
↪exists";
                    break;

                case "InvalidUpdateAttempt":
                    $messages[] = "The record cannot be updated because it doesn't_
↪exist";
                    break;

                case "PresenceOf":
                    $messages[] = "The field " . $message->getField() . " is mandatory
↪";
                    break;
            }
        }

        return $messages;
    }
}
```

```
}

```

Validation Failed Events

Another type of events are available when the data validation process finds any inconsistency:

Operation	Name	Explanation
Insert or Update	notSaved	Triggered when the INSERT or UPDATE operation fails for any reason
Insert, Delete or Update	onValidation-Fails	Triggered when any data manipulation operation fails

Working with Models (Advanced)

Hydration Modes

As mentioned previously, resultsets are collections of complete objects, this means that every returned result is an object representing a row in the database. These objects can be modified and saved again to persistence:

```
<?php
use Store\Toys\Robots;

$robots = Robots::find();

// Manipulating a resultset of complete objects
foreach ($robots as $robot) {
    $robot->year = 2000;

    $robot->save();
}
```

Sometimes records are obtained only to be presented to a user in read-only mode, in these cases it may be useful to change the way in which records are represented to facilitate their handling. The strategy used to represent objects returned in a resultset is called 'hydration mode':

```
<?php
use Phalcon\Mvc\Model\Resultset;
use Store\Toys\Robots;

$robots = Robots::find();

// Return every robot as an array
$robots->setHydrateMode(
    Resultset::HYDRATE_ARRAYS
);

foreach ($robots as $robot) {
    echo $robot["year"], PHP_EOL;
}

// Return every robot as a stdClass
$robots->setHydrateMode(
```

```
        Resultset::HYDRATE_OBJECTS
    );

    foreach ($robots as $robot) {
        echo $robot->year, PHP_EOL;
    }

    // Return every robot as a Robots instance
    $robots->setHydrateMode(
        Resultset::HYDRATE_RECORDS
    );

    foreach ($robots as $robot) {
        echo $robot->year, PHP_EOL;
    }
}
```

Hydration mode can also be passed as a parameter of ‘find’:

```
<?php

use Phalcon\Mvc\Model\Resultset;
use Store\Toys\Robots;

$robots = Robots::find(
    [
        "hydration" => Resultset::HYDRATE_ARRAYS,
    ]
);

foreach ($robots as $robot) {
    echo $robot["year"], PHP_EOL;
}
```

Auto-generated identity columns

Some models may have identity columns. These columns usually are the primary key of the mapped table. *Phalcon\Mvc\Model* can recognize the identity column omitting it in the generated SQL INSERT, so the database system can generate an auto-generated value for it. Always after creating a record, the identity field will be registered with the value generated in the database system for it:

```
<?php

$robot->save();

echo "The generated id is: ", $robot->id;
```

Phalcon\Mvc\Model is able to recognize the identity column. Depending on the database system, those columns may be serial columns like in PostgreSQL or auto_increment columns in the case of MySQL.

PostgreSQL uses sequences to generate auto-numeric values, by default, Phalcon tries to obtain the generated value from the sequence “table_field_seq”, for example: robots_id_seq, if that sequence has a different name, the `getSequenceName()` method needs to be implemented:

```
<?php

namespace Store\Toys;
```



```

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function getSequenceName()
    {
        return "robots_sequence_name";
    }
}

```

Skipping Columns

To tell *Phalcon\Mvc\Model* that always omits some fields in the creation and/or update of records in order to delegate the database system the assignment of the values by a trigger or a default:

```

<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        // Skips fields/columns on both INSERT/UPDATE operations
        $this->skipAttributes(
            [
                "year",
                "price",
            ]
        );

        // Skips only when inserting
        $this->skipAttributesOnCreate(
            [
                "created_at",
            ]
        );

        // Skips only when updating
        $this->skipAttributesOnUpdate(
            [
                "modified_in",
            ]
        );
    }
}

```

This will ignore globally these fields on each INSERT/UPDATE operation on the whole application. If you want to ignore different attributes on different INSERT/UPDATE operations, you can specify the second parameter (boolean) - true for replacement. Forcing a default value can be done in the following way:

```

<?php

```

```
use Store\Toys\Robots;

use Phalcon\Db\RawValue;

$robot = new Robots();

$robot->name      = "Bender";
$robot->year      = 1999;
$robot->created_at = new RawValue("default");

$robot->create();
```

A callback also can be used to create a conditional assignment of automatic default values:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
use Phalcon\Db\RawValue;

class Robots extends Model
{
    public function beforeCreate()
    {
        if ($this->price > 10000) {
            $this->type = new RawValue("default");
        }
    }
}
```

Never use a *Phalcon\Db\RawValue* to assign external data (such as user input) or variable data. The value of these fields is ignored when binding parameters to the query. So it could be used to attack the application injecting SQL.

Dynamic Update

SQL UPDATE statements are by default created with every column defined in the model (full all-field SQL update). You can change specific models to make dynamic updates, in this case, just the fields that had changed are used to create the final SQL statement.

In some cases this could improve the performance by reducing the traffic between the application and the database server, this specially helps when the table has blob/text fields:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->useDynamicUpdate(true);
    }
}
```

```
}

```

Independent Column Mapping

The ORM supports an independent column map, which allows the developer to use different column names in the model to the ones in the table. Phalcon will recognize the new column names and will rename them accordingly to match the respective columns in the database. This is a great feature when one needs to rename fields in the database without having to worry about all the queries in the code. A change in the column map in the model will take care of the rest. For example:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public $code;

    public $theName;

    public $theType;

    public $theYear;

    public function columnMap()
    {
        // Keys are the real names in the table and
        // the values their names in the application
        return [
            "id"      => "code",
            "the_name" => "theName",
            "the_type" => "theType",
            "the_year" => "theYear",
        ];
    }
}
```

Then you can use the new names naturally in your code:

```
<?php

use Store\Toys\Robots;

// Find a robot by its name
$robot = Robots::findFirst(
    "theName = 'Voltron'"
);

echo $robot->theName, "\n";

// Get robots ordered by type
$robot = Robots::find(
    [
        "order" => "theType DESC",
    ]
);
```

```
]
);

foreach ($robots as $robot) {
    echo "Code: ", $robot->code, "\n";
}

// Create a robot
$robot = new Robots();

$robot->code      = "10101";
$robot->theName   = "Bender";
$robot->theType   = "Industrial";
$robot->theYear   = 2999;

$robot->save();
```

Take into consideration the following the next when renaming your columns:

- References to attributes in relationships/validators must use the new names
- Refer the real column names will result in an exception by the ORM

The independent column map allow you to:

- Write applications using your own conventions
- Eliminate vendor prefixes/suffixes in your code
- Change column names without change your application code

Record Snapshots

Specific models could be set to maintain a record snapshot when they're queried. You can use this feature to implement auditing or just to know what fields are changed according to the data queried from the persistence:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->keepSnapshots(true);
    }
}
```

When activating this feature the application consumes a bit more of memory to keep track of the original values obtained from the persistence. In models that have this feature activated you can check what fields changed:

```
<?php

use Store\Toys\Robots;

// Get a record from the database
$robot = Robots::findFirst();
```

```
// Change a column
$robot->name = "Other name";

var_dump($robot->getChangedFields()); // ["name"]

var_dump($robot->hasChanged("name")); // true

var_dump($robot->hasChanged("type")); // false
```

Pointing to a different schema

If a model is mapped to a table that is in a different schemas/databases than the default. You can use the `setSchema()` method to define that:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->setSchema("toys");
    }
}
```

Setting multiple databases

In Phalcon, all models can belong to the same database connection or have an individual one. Actually, when *Phalcon\Mvc\Model* needs to connect to the database it requests the “db” service in the application’s services container. You can overwrite this service setting it in the `initialize()` method:

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql as MysqlPdo;
use Phalcon\Db\Adapter\Pdo\PostgreSQL as PostgreSQLPdo;

// This service returns a MySQL database
$di->set(
    "dbMysql",
    function () {
        return new MysqlPdo(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"   => "invo",
            ]
        );
    }
);
```

```
// This service returns a PostgreSQL database
$di->set (
    "dbPostgres",
    function () {
        return new PostgreSQLPdo (
            [
                "host"      => "localhost",
                "username"  => "postgres",
                "password"  => "",
                "dbname"    => "invo",
            ]
        );
    }
);
```

Then, in the `initialize()` method, we define the connection service for the model:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->setConnectionService("dbPostgres");
    }
}
```

But Phalcon offers you more flexibility, you can define the connection that must be used to ‘read’ and for ‘write’. This is specially useful to balance the load to your databases implementing a master-slave architecture:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->setReadConnectionService("dbSlave");

        $this->setWriteConnectionService("dbMaster");
    }
}
```

The ORM also provides Horizontal Sharding facilities, by allowing you to implement a ‘shard’ selection according to the current query conditions:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;
```

```

class Robots extends Model
{
    /**
     * Dynamically selects a shard
     *
     * @param array $intermediate
     * @param array $bindParams
     * @param array $bindTypes
     */
    public function selectReadConnection($intermediate, $bindParams, $bindTypes)
    {
        // Check if there is a 'where' clause in the select
        if (isset($intermediate["where"])) {
            $conditions = $intermediate["where"];

            // Choose the possible shard according to the conditions
            if ($conditions["left"]["name"] === "id") {
                $id = $conditions["right"]["value"];

                if ($id > 0 && $id < 10000) {
                    return $this->getDI()->get("dbShard1");
                }

                if ($id > 10000) {
                    return $this->getDI()->get("dbShard2");
                }
            }

            // Use a default shard
            return $this->getDI()->get("dbShard0");
        }
    }
}

```

The `selectReadConnection()` method is called to choose the right connection, this method intercepts any new query executed:

```

<?php

use Store\Toys\Robots;

$robot = Robots::findFirst('id = 101');

```

Injecting services into Models

You may be required to access the application services within a model, the following example explains how to do that:

```

<?php

namespace Store\Toys;

use Phalcon\Mvc\Model;

class Robots extends Model
{

```

```
public function notSaved()
{
    // Obtain the flash service from the DI container
    $flash = $this->getDI()->getFlash();

    $messages = $this->getMessages();

    // Show validation messages
    foreach ($messages as $message) {
        $flash->error($message);
    }
}
```

The “notSaved” event is triggered every time that a “create” or “update” action fails. So we’re flashing the validation messages obtaining the “flash” service from the DI container. By doing this, we don’t have to print messages after each save.

Disabling/Enabling Features

In the ORM we have implemented a mechanism that allow you to enable/disable specific features or options globally on the fly. According to how you use the ORM you can disable that you aren’t using. These options can also be temporarily disabled if required:

```
<?php

use Phalcon\Mvc\Model;

Model::setup(
[
    "events"           => false,
    "columnRenaming" => false,
]
);
```

The available options are:

Option	Description	De- fault
events	Enables/Disables callbacks, hooks and event notifications from all the models	true
columnRenaming	Enables/Disables the column renaming	true
notNullValida- tions	The ORM automatically validate the not null columns present in the mapped table	true
virtualFor- eignKeys	Enables/Disables the virtual foreign keys	true
phqlLiterals	Enables/Disables literals in the PHQL parser	true
lateStateBinding	Enables/Disables late state binding of the <code>Mvc\Model::cloneResultMap()</code> method	false

Stand-Alone component

Using *Phalcon\Mvc\Model* in a stand-alone mode can be demonstrated below:


```

<?php

use Phalcon\Di;
use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Manager as ModelsManager;
use Phalcon\Db\Adapter\Pdo\Sqlite as Connection;
use Phalcon\Mvc\Model\Metadata\Memory as MetaData;

$di = new Di();

// Setup a connection
$di->set(
    "db",
    new Connection(
        [
            "dbname" => "sample.db",
        ]
    )
);

// Set a models manager
$di->set(
    "modelsManager",
    new ModelsManager()
);

// Use the memory meta-data adapter or other
$di->set(
    "modelsMetadata",
    new MetaData()
);

// Create a model
class Robots extends Model
{
}

// Use the model
echo Robots::count();

```

Phalcon Query Language (PHQL)

Phalcon Query Language, PhalconQL or simply PHQL is a high-level, object-oriented SQL dialect that allows to write queries using a standardized SQL-like language. PHQL is implemented as a parser (written in C) that translates syntax in that of the target RDBMS.

To achieve the highest performance possible, Phalcon provides a parser that uses the same technology as [SQLite](#). This technology provides a small in-memory parser with a very low memory footprint that is also thread-safe.

The parser first checks the syntax of the pass PHQL statement, then builds an intermediate representation of the statement and finally it converts it to the respective SQL dialect of the target RDBMS.

In PHQL, we've implemented a set of features to make your access to databases more secure:

- Bound parameters are part of the PHQL language helping you to secure your code
- PHQL only allows one SQL statement to be executed per call preventing injections

- PHQL ignores all SQL comments which are often used in SQL injections
- PHQL only allows data manipulation statements, avoiding altering or dropping tables/databases by mistake or externally without authorization
- PHQL implements a high-level abstraction allowing you to handle tables as models and fields as class attributes

Usage Example

To better explain how PHQL works consider the following example. We have two models “Cars” and “Brands”:

```
<?php
use Phalcon\Mvc\Model;

class Cars extends Model
{
    public $id;

    public $name;

    public $brand_id;

    public $price;

    public $year;

    public $style;

    /**
     * This model is mapped to the table sample_cars
     */
    public function getSource()
    {
        return "sample_cars";
    }

    /**
     * A car only has a Brand, but a Brand have many Cars
     */
    public function initialize()
    {
        $this->belongsTo("brand_id", "Brands", "id");
    }
}
```

And every Car has a Brand, so a Brand has many Cars:

```
<?php
use Phalcon\Mvc\Model;

class Brands extends Model
{
    public $id;

    public $name;
```

```

/**
 * The model Brands is mapped to the "sample_brands" table
 */
public function getSource()
{
    return "sample_brands";
}

/**
 * A Brand can have many Cars
 */
public function initialize()
{
    $this->hasMany("id", "Cars", "brand_id");
}
}

```

Creating PHQL Queries

PHQL queries can be created just by instantiating the class *Phalcon\Mvc\Model\Query*:

```

<?php
use Phalcon\Mvc\Model\Query;

// Instantiate the Query
$query = new Query(
    "SELECT * FROM Cars",
    $this->getDI()
);

// Execute the query returning a result if any
$cars = $query->execute();

```

From a controller or a view, it's easy to create/execute them using an injected *models manager*:

```

<?php

// Executing a simple query
$query = $this->modelsManager->createQuery("SELECT * FROM Cars");
$cars = $query->execute();

// With bound parameters
$query = $this->modelsManager->createQuery("SELECT * FROM Cars WHERE name = :name:");
$cars = $query->execute(
    [
        "name" => "Audi",
    ]
);

```

Or simply execute it:

```

<?php

// Executing a simple query
$cars = $this->modelsManager->executeQuery(

```

```
"SELECT * FROM Cars"
);

// Executing with bound parameters
$cars = $this->modelsManager->executeQuery(
    "SELECT * FROM Cars WHERE name = :name:",
    [
        "name" => "Audi",
    ]
);
```

Selecting Records

As the familiar SQL, PHQL allows querying of records using the SELECT statement we know, except that instead of specifying tables, we use the models classes:

```
<?php

$query = $manager->createQuery(
    "SELECT * FROM Cars ORDER BY Cars.name"
);

$query = $manager->createQuery(
    "SELECT Cars.name FROM Cars ORDER BY Cars.name"
);
```

Classes in namespaces are also allowed:

```
<?php

$phql = "SELECT * FROM Formula\Cars ORDER BY Formula\Cars.name";
$query = $manager->createQuery($phql);

$phql = "SELECT Formula\Cars.name FROM Formula\Cars ORDER BY Formula\Cars.name";
$query = $manager->createQuery($phql);

$phql = "SELECT c.name FROM Formula\Cars c ORDER BY c.name";
$query = $manager->createQuery($phql);
```

Most of the SQL standard is supported by PHQL, even nonstandard directives such as LIMIT:

```
<?php

$phql = "SELECT c.name FROM Cars AS c WHERE c.brand_id = 21 ORDER BY c.name LIMIT 100
→";

$query = $manager->createQuery($phql);
```

Result Types

Depending on the type of columns we query, the result type will vary. If you retrieve a single whole object, then the object returned is a *Phalcon\Mvc\Model\Resultset\Simple*. This kind of resultset is a set of complete model objects:

```
<?php

$phql = "SELECT c.* FROM Cars AS c ORDER BY c.name";

$cars = $manager->executeQuery($phql);

foreach ($cars as $car) {
    echo "Name: ", $car->name, "\n";
}
```

This is exactly the same as:

```
<?php

$cars = Cars::find(
    [
        "order" => "name"
    ]
);

foreach ($cars as $car) {
    echo "Name: ", $car->name, "\n";
}
```

Complete objects can be modified and re-saved in the database because they represent a complete record of the associated table. There are other types of queries that do not return complete objects, for example:

```
<?php

$phql = "SELECT c.id, c.name FROM Cars AS c ORDER BY c.name";

$cars = $manager->executeQuery($phql);

foreach ($cars as $car) {
    echo "Name: ", $car->name, "\n";
}
```

We are only requesting some fields in the table, therefore those cannot be considered an entire object, so the returned object is still a resultset of type *Phalcon\Mvc\Model\ResultSetSimple*. However, each element is a standard object that only contain the two columns that were requested.

These values that don't represent complete objects are what we call scalars. PHQL allows you to query all types of scalars: fields, functions, literals, expressions, etc.:

```
<?php

$phql = "SELECT CONCAT(c.id, ' ', c.name) AS id_name FROM Cars AS c ORDER BY c.name";

$cars = $manager->executeQuery($phql);

foreach ($cars as $car) {
    echo $car->id_name, "\n";
}
```

As we can query complete objects or scalars, we can also query both at once:

```
<?php
```

```
$phql = "SELECT c.price*0.16 AS taxes, c.* FROM Cars AS c ORDER BY c.name";

$result = $manager->executeQuery($phql);
```

The result in this case is an object *Phalcon\Mvc\Model\Resultset\Complex*. This allows access to both complete objects and scalars at once:

```
<?php

foreach ($result as $row) {
    echo "Name: ", $row->cars->name, "\n";
    echo "Price: ", $row->cars->price, "\n";
    echo "Taxes: ", $row->taxes, "\n";
}
```

Scalars are mapped as properties of each “row”, while complete objects are mapped as properties with the name of its related model.

Joins

It’s easy to request records from multiple models using PHQL. Most kinds of Joins are supported. As we defined relationships in the models, PHQL adds these conditions automatically:

```
<?php

$phql = "SELECT Cars.name AS car_name, Brands.name AS brand_name FROM Cars JOIN Brands
↪";

$rows = $manager->executeQuery($phql);

foreach ($rows as $row) {
    echo $row->car_name, "\n";
    echo $row->brand_name, "\n";
}
```

By default, an INNER JOIN is assumed. You can specify the type of JOIN in the query:

```
<?php

$phql = "SELECT Cars.*, Brands.* FROM Cars INNER JOIN Brands";
$rows = $manager->executeQuery($phql);

$phql = "SELECT Cars.*, Brands.* FROM Cars LEFT JOIN Brands";
$rows = $manager->executeQuery($phql);

$phql = "SELECT Cars.*, Brands.* FROM Cars LEFT OUTER JOIN Brands";
$rows = $manager->executeQuery($phql);

$phql = "SELECT Cars.*, Brands.* FROM Cars CROSS JOIN Brands";
$rows = $manager->executeQuery($phql);
```

It is also possible to manually set the conditions of the JOIN:

```
<?php

$phql = "SELECT Cars.*, Brands.* FROM Cars INNER JOIN Brands ON Brands.id = Cars.
↪brands id";
```

```
$rows = $manager->executeQuery($phql);
```

Also, the joins can be created using multiple tables in the FROM clause:

```
<?php

$phql = "SELECT Cars.*, Brands.* FROM Cars, Brands WHERE Brands.id = Cars.brands_id";

$rows = $manager->executeQuery($phql);

foreach ($rows as $row) {
    echo "Car: ", $row->cars->name, "\n";
    echo "Brand: ", $row->brands->name, "\n";
}
```

If an alias is used to rename the models in the query, those will be used to name the attributes in the every row of the result:

```
<?php

$phql = "SELECT c.*, b.* FROM Cars c, Brands b WHERE b.id = c.brands_id";

$rows = $manager->executeQuery($phql);

foreach ($rows as $row) {
    echo "Car: ", $row->c->name, "\n";
    echo "Brand: ", $row->b->name, "\n";
}
```

When the joined model has a many-to-many relation to the ‘from’ model, the intermediate model is implicitly added to the generated query:

```
<?php

$phql = "SELECT Artists.name, Songs.name FROM Artists " .
        "JOIN Songs WHERE Artists.genre = 'Trip-Hop'";

$result = $this->modelsManager->executeQuery($phql);
```

This code executes the following SQL in MySQL:

```
SELECT `artists`.`name`, `songs`.`name` FROM `artists`
INNER JOIN `albums` ON `albums`.`artists_id` = `artists`.`id`
INNER JOIN `songs` ON `albums`.`songs_id` = `songs`.`id`
WHERE `artists`.`genre` = 'Trip-Hop'
```

Aggregations

The following examples show how to use aggregations in PHQL:

```
<?php

// How much are the prices of all the cars?
$phql = "SELECT SUM(price) AS summatory FROM Cars";
$row = $manager->executeQuery($phql)->getFirst();
```

```
echo $row['summatory'];

// How many cars are by each brand?
$phql = "SELECT Cars.brand_id, COUNT(*) FROM Cars GROUP BY Cars.brand_id";
$rows = $manager->executeQuery($phql);
foreach ($rows as $row) {
    echo $row->brand_id, ' ', $row["1"], "\n";
}

// How many cars are by each brand?
$phql = "SELECT Brands.name, COUNT(*) FROM Cars JOIN Brands GROUP BY 1";
$rows = $manager->executeQuery($phql);
foreach ($rows as $row) {
    echo $row->name, ' ', $row["1"], "\n";
}

$phql = "SELECT MAX(price) AS maximum, MIN(price) AS minimum FROM Cars";
$rows = $manager->executeQuery($phql);
foreach ($rows as $row) {
    echo $row["maximum"], ' ', $row["minimum"], "\n";
}

// Count distinct used brands
$phql = "SELECT COUNT(DISTINCT brand_id) AS brandId FROM Cars";
$rows = $manager->executeQuery($phql);
foreach ($rows as $row) {
    echo $row->brandId, "\n";
}
```

Conditions

Conditions allow us to filter the set of records we want to query. The WHERE clause allows to do that:

```
<?php

// Simple conditions
$phql = "SELECT * FROM Cars WHERE Cars.name = 'Lamborghini Espada'";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.price > 10000";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE TRIM(Cars.name) = 'Audi R8'";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.name LIKE 'Ferrari%'";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.name NOT LIKE 'Ferrari%'";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.price IS NULL";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.id IN (120, 121, 122)";
$cars = $manager->executeQuery($phql);
```



```
$phql = "SELECT * FROM Cars WHERE Cars.id NOT IN (430, 431)";
$cars = $manager->executeQuery($phql);

$phql = "SELECT * FROM Cars WHERE Cars.id BETWEEN 1 AND 100";
$cars = $manager->executeQuery($phql);
```

Also, as part of PHQL, prepared parameters automatically escape the input data, introducing more security:

```
<?php

$phql = "SELECT * FROM Cars WHERE Cars.name = :name:";
$cars = $manager->executeQuery(
    $phql,
    [
        "name" => "Lamborghini Espada"
    ]
);

$phql = "SELECT * FROM Cars WHERE Cars.name = ?0";
$cars = $manager->executeQuery(
    $phql,
    [
        0 => "Lamborghini Espada"
    ]
);
```

Inserting Data

With PHQL it's possible to insert data using the familiar INSERT statement:

```
<?php

// Inserting without columns
$phql = "INSERT INTO Cars VALUES (NULL, 'Lamborghini Espada', "
    . "7, 10000.00, 1969, 'Grand Tourer')";
$manager->executeQuery($phql);

// Specifying columns to insert
$phql = "INSERT INTO Cars (name, brand_id, year, style) "
    . "VALUES ('Lamborghini Espada', 7, 1969, 'Grand Tourer')";
$manager->executeQuery($phql);

// Inserting using placeholders
$phql = "INSERT INTO Cars (name, brand_id, year, style) "
    . "VALUES (:name:, :brand_id:, :year:, :style)";
$manager->executeQuery(
    $phql,
    [
        "name"      => "Lamborghini Espada",
        "brand_id"  => 7,
        "year"      => 1969,
        "style"     => "Grand Tourer",
    ]
);
```

Phalcon doesn't only transform the PHQL statements into SQL. All events and business rules defined in the model are executed as if we created individual objects manually. Let's add a business rule on the model cars. A car cannot cost less than \$ 10,000:

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Message;

class Cars extends Model
{
    public function beforeCreate()
    {
        if ($this->price < 10000) {
            $this->appendMessage(
                new Message("A car cannot cost less than $ 10,000")
            );

            return false;
        }
    }
}
```

If we made the following INSERT in the models Cars, the operation will not be successful because the price does not meet the business rule that we implemented. By checking the status of the insertion we can print any validation messages generated internally:

```
<?php

$phql = "INSERT INTO Cars VALUES (NULL, 'Nissan Versa', 7, 9999.00, 2015, 'Sedan')";

$result = $manager->executeQuery($phql);

if ($result->success() === false) {
    foreach ($result->getMessages() as $message) {
        echo $message->getMessage();
    }
}
```

Updating Data

Updating rows is very similar than inserting rows. As you may know, the instruction to update records is UPDATE. When a record is updated the events related to the update operation will be executed for each row.

```
<?php

// Updating a single column
$phql = "UPDATE Cars SET price = 15000.00 WHERE id = 101";
$manager->executeQuery($phql);

// Updating multiples columns
$phql = "UPDATE Cars SET price = 15000.00, type = 'Sedan' WHERE id = 101";
$manager->executeQuery($phql);

// Updating multiples rows
$phql = "UPDATE Cars SET price = 7000.00, type = 'Sedan' WHERE brands_id > 5";
$manager->executeQuery($phql);
```

```
// Using placeholders
$phql = "UPDATE Cars SET price = ?0, type = ?1 WHERE brands_id > ?2";
$manager->executeQuery(
    $phql,
    [
        0 => 7000.00,
        1 => 'Sedan',
        2 => 5,
    ]
);
```

An UPDATE statement performs the update in two phases:

- First, if the UPDATE has a WHERE clause it retrieves all the objects that match these criteria,
- Second, based on the queried objects it updates/changes the requested attributes storing them to the relational database

This way of operation allows that events, virtual foreign keys and validations take part of the updating process. In summary, the following code:

```
<?php

$phql = "UPDATE Cars SET price = 15000.00 WHERE id > 101";

$result = $manager->executeQuery($phql);

if ($result->success() === false) {
    $messages = $result->getMessages();

    foreach ($messages as $message) {
        echo $message->getMessage();
    }
}
```

is somewhat equivalent to:

```
<?php

$messages = null;

$process = function () use (&$messages) {
    $cars = Cars::find("id > 101");

    foreach ($cars as $car) {
        $car->price = 15000;

        if ($car->save() === false) {
            $messages = $car->getMessages();

            return false;
        }
    }

    return true;
};

$success = $process();
```

Deleting Data

When a record is deleted the events related to the delete operation will be executed for each row:

```
<?php

// Deleting a single row
$sql = "DELETE FROM Cars WHERE id = 101";
$manager->executeQuery($sql);

// Deleting multiple rows
$sql = "DELETE FROM Cars WHERE id > 100";
$manager->executeQuery($sql);

// Using placeholders
$sql = "DELETE FROM Cars WHERE id BETWEEN :initial: AND :final:";
$manager->executeQuery(
    $sql,
    [
        "initial" => 1,
        "final"   => 100,
    ]
);
```

DELETE operations are also executed in two phases like UPDATES. To check if the deletion produces any validation messages you should check the status code returned:

```
<?php

// Deleting multiple rows
$sql = "DELETE FROM Cars WHERE id > 100";

$result = $manager->executeQuery($sql);

if ($result->success() === false) {
    $messages = $result->getMessages();

    foreach ($messages as $message) {
        echo $message->getMessage();
    }
}
```

Creating queries using the Query Builder

A builder is available to create PHQL queries without the need to write PHQL statements, also providing IDE facilities:

```
<?php

// Getting a whole set
$robots = $this->modelsManager->createBuilder()
    ->from("Robots")
    ->join("RobotsParts")
    ->orderBy("Robots.name")
    ->getQuery()
    ->execute();

// Getting the first row
```

```
$robots = $this->modelsManager->createBuilder()
    ->from("Robots")
    ->join("RobotsParts")
    ->orderBy("Robots.name")
    ->getQuery()
    ->getSingleResult();
```

That is the same as:

```
<?php

$phql = "SELECT Robots.* FROM Robots JOIN RobotsParts p ORDER BY Robots.name LIMIT 20
↪";

$result = $manager->executeQuery($phql);
```

More examples of the builder:

```
<?php

// 'SELECT Robots.* FROM Robots';
$builder->from("Robots");

// 'SELECT Robots.*, RobotsParts.* FROM Robots, RobotsParts';
$builder->from(
    [
        "Robots",
        "RobotsParts",
    ]
);

// 'SELECT * FROM Robots';
$phql = $builder->columns("*")
    ->from("Robots");

// 'SELECT id FROM Robots';
$builder->columns("id")
    ->from("Robots");

// 'SELECT id, name FROM Robots';
$builder->columns(["id", "name"])
    ->from("Robots");

// 'SELECT Robots.* FROM Robots WHERE Robots.name = "Voltron"';
$builder->from("Robots")
    ->where("Robots.name = 'Voltron'");

// 'SELECT Robots.* FROM Robots WHERE Robots.id = 100';
$builder->from("Robots")
    ->where(100);

// 'SELECT Robots.* FROM Robots WHERE Robots.type = "virtual" AND Robots.id > 50';
$builder->from("Robots")
    ->where("type = 'virtual'")
    ->andWhere("id > 50");

// 'SELECT Robots.* FROM Robots WHERE Robots.type = "virtual" OR Robots.id > 50';
$builder->from("Robots")
```

```
->where("type = 'virtual'")
->orWhere("id > 50");

// 'SELECT Robots.* FROM Robots GROUP BY Robots.name';
$builder->from("Robots")
->groupBy("Robots.name");

// 'SELECT Robots.* FROM Robots GROUP BY Robots.name, Robots.id';
$builder->from("Robots")
->groupBy(["Robots.name", "Robots.id"]);

// 'SELECT Robots.name, SUM(Robots.price) FROM Robots GROUP BY Robots.name';
$builder->columns(["Robots.name", "SUM(Robots.price)"])
->from("Robots")
->groupBy("Robots.name");

// 'SELECT Robots.name, SUM(Robots.price) FROM Robots GROUP BY Robots.name HAVING_
↳SUM(Robots.price) > 1000';
$builder->columns(["Robots.name", "SUM(Robots.price)"])
->from("Robots")
->groupBy("Robots.name")
->having("SUM(Robots.price) > 1000");

// 'SELECT Robots.* FROM Robots JOIN RobotsParts';
$builder->from("Robots")
->join("RobotsParts");

// 'SELECT Robots.* FROM Robots JOIN RobotsParts AS p';
$builder->from("Robots")
->join("RobotsParts", null, "p");

// 'SELECT Robots.* FROM Robots JOIN RobotsParts ON Robots.id = RobotsParts.robots_id_
↳AS p';
$builder->from("Robots")
->join("RobotsParts", "Robots.id = RobotsParts.robots_id", "p");

// 'SELECT Robots.* FROM Robots
// JOIN RobotsParts ON Robots.id = RobotsParts.robots_id AS p
// JOIN Parts ON Parts.id = RobotsParts.parts_id AS t';
$builder->from("Robots")
->join("RobotsParts", "Robots.id = RobotsParts.robots_id", "p")
->join("Parts", "Parts.id = RobotsParts.parts_id", "t");

// 'SELECT r.* FROM Robots AS r';
$builder->addFrom("Robots", "r");

// 'SELECT Robots.*, p.* FROM Robots, Parts AS p';
$builder->from("Robots")
->addFrom("Parts", "p");

// 'SELECT r.*, p.* FROM Robots AS r, Parts AS p';
$builder->from(["r" => "Robots"])
->addFrom("Parts", "p");

// 'SELECT r.*, p.* FROM Robots AS r, Parts AS p';
$builder->from(["r" => "Robots", "p" => "Parts"]);

// 'SELECT Robots.* FROM Robots LIMIT 10';
```

```

$builder->from("Robots")
    ->limit(10);

// 'SELECT Robots.* FROM Robots LIMIT 10 OFFSET 5';
$builder->from("Robots")
    ->limit(10, 5);

// 'SELECT Robots.* FROM Robots WHERE id BETWEEN 1 AND 100';
$builder->from("Robots")
    ->betweenWhere("id", 1, 100);

// 'SELECT Robots.* FROM Robots WHERE id IN (1, 2, 3)';
$builder->from("Robots")
    ->inWhere("id", [1, 2, 3]);

// 'SELECT Robots.* FROM Robots WHERE id NOT IN (1, 2, 3)';
$builder->from("Robots")
    ->notInWhere("id", [1, 2, 3]);

// 'SELECT Robots.* FROM Robots WHERE name LIKE '%Art%';
$builder->from("Robots")
    ->where("name LIKE :name:", ["name" => "%" . $name . "%"]);

// 'SELECT r.* FROM Store\Robots WHERE r.name LIKE '%Art%';
$builder->from(['r' => 'Store\Robots'])
    ->where("r.name LIKE :name:", ["name" => "%" . $name . "%"]);

```

Bound Parameters

Bound parameters in the query builder can be set as the query is constructed or past all at once when executing:

```

<?php

// Passing parameters in the query construction
$robots = $this->modelsManager->createBuilder()
    ->from("Robots")
    ->where("name = :name:", ["name" => $name])
    ->andWhere("type = :type:", ["type" => $type])
    ->getQuery()
    ->execute();

// Passing parameters in query execution
$robots = $this->modelsManager->createBuilder()
    ->from("Robots")
    ->where("name = :name:")
    ->andWhere("type = :type:")
    ->getQuery()
    ->execute(["name" => $name, "type" => $type]);

```

Disallow literals in PHQL

Literals can be disabled in PHQL, this means that directly using strings, numbers and boolean values in PHQL strings will be disallowed. If PHQL statements are created embedding external data on them, this could open the application to potential SQL injections:

```
<?php

$login = 'voltron';

$phql = "SELECT * FROM Models\Users WHERE login = '$login'";

$result = $manager->executeQuery($phql);
```

If \$login is changed to ' OR '' = ', the produced PHQL is:

```
SELECT * FROM Models\Users WHERE login = '' OR '' = ''
```

Which is always true no matter what the login stored in the database is.

If literals are disallowed strings can be used as part of a PHQL statement, thus an exception will be thrown forcing the developer to use bound parameters. The same query can be written in a secure way like this:

```
<?php

$phql = "SELECT Robots.* FROM Robots WHERE Robots.name = :name:";

$result = $manager->executeQuery(
    $phql,
    [
        "name" => $name,
    ]
);
```

You can disallow literals in the following way:

```
<?php

use Phalcon\Mvc\Model;

Model::setup(
    [
        "phqlLiterals" => false
    ]
);
```

Bound parameters can be used even if literals are allowed or not. Disallowing them is just another security decision a developer could take in web applications.

Escaping Reserved Words

PHQL has a few reserved words, if you want to use any of them as attributes or models names, you need to escape those words using the cross-database escaping delimiters '[' and ']':

```
<?php

$phql = "SELECT * FROM [Update]";
$result = $manager->executeQuery($phql);

$phql = "SELECT id, [Like] FROM Posts";
$result = $manager->executeQuery($phql);
```


The delimiters are dynamically translated to valid delimiters depending on the database system where the application is currently running on.

PHQL Lifecycle

Being a high-level language, PHQL gives developers the ability to personalize and customize different aspects in order to suit their needs. The following is the life cycle of each PHQL statement executed:

- The PHQL is parsed and converted into an Intermediate Representation (IR) which is independent of the SQL implemented by database system
- The IR is converted to valid SQL according to the database system associated to the model
- PHQL statements are parsed once and cached in memory. Further executions of the same statement result in a slightly faster execution

Using Raw SQL

A database system could offer specific SQL extensions that aren't supported by PHQL, in this case, a raw SQL can be appropriate:

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Resultset\Simple as Resultset;

class Robots extends Model
{
    public static function findByCreateInterval()
    {
        // A raw SQL statement
        $sql = "SELECT * FROM robots WHERE id > 0";

        // Base model
        $robot = new Robots();

        // Execute the query
        return new Resultset(
            null,
            $robot,
            $robot->getReadConnection()->query($sql)
        );
    }
}
```

If Raw SQL queries are common in your application a generic method could be added to your model:

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Resultset\Simple as Resultset;

class Robots extends Model
{
    public static function findByRawSql($conditions, $params = null)
    {
        // A raw SQL statement
```

```
        $sql = "SELECT * FROM robots WHERE $conditions";

        // Base model
        $robot = new Robots();

        // Execute the query
        return new Resultset(
            null,
            $robot,
            $robot->getReadConnection()->query($sql, $params)
        );
    }
}
```

The above `findByRawSql` could be used as follows:

```
<?php
$robots = Robots::findByRawSql(
    "id > ?",
    [
        10
    ]
);
```

Troubleshooting

Some things to keep in mind when using PHQL:

- Classes are case-sensitive, if a class is not defined with the same name as it was created this could lead to an unexpected behavior in operating systems with case-sensitive file systems such as Linux.
- Correct charset must be defined in the connection to bind parameters with success.
- Aliased classes aren't replaced by full namespaced classes since this only occurs in PHP code and not inside strings.
- If column renaming is enabled avoid using column aliases with the same name as columns to be renamed, this may confuse the query resolver.

Caching in the ORM

Every application is different, we could have models whose data change frequently and others that rarely change. Accessing database systems is often one of the most common bottlenecks in terms of performance. This is due to the complex connection/communication processes that PHP must do in each request to obtain data from the database. Therefore, if we want to achieve good performance we need to add some layers of caching where the application requires it.

This chapter explains the possible points where it is possible to implement caching to improve performance. The framework gives you the tools to implement the cache where you demand of it according to the architecture of your application.

Caching Resultsets

A well established technique to avoid continuously accessing to the database is to cache resultsets that don't change frequently using a system with faster access (usually memory).

When *Phalcon\Mvc\Model* requires a service to cache resultsets, it will request it to the Dependency Injector Container with the convention name "modelsCache".

As Phalcon provides a component to *cache* any kind of data, we'll explain how to integrate it with Models. First, you must register it as a service in the services container:

```
<?php

use Phalcon\Cache\Frontend\Data as FrontendData;
use Phalcon\Cache\Backend\Memcache as BackendMemcache;

// Set the models cache service
$di->set(
    "modelsCache",
    function () {
        // Cache data for one day by default
        $frontCache = new FrontendData(
            [
                "lifetime" => 86400,
            ]
        );

        // Memcached connection settings
        $cache = new BackendMemcache(
            $frontCache,
            [
                "host" => "localhost",
                "port" => "11211",
            ]
        );

        return $cache;
    }
);
```

You have complete control in creating and customizing the cache before being used by registering the service as an anonymous function. Once the cache setup is properly defined you could cache resultsets as follows:

```
<?php

// Get products without caching
$products = Products::find();

// Just cache the resultset. The cache will expire in 1 hour (3600 seconds)
$products = Products::find(
    [
        "cache" => [
            "key" => "my-cache",
        ],
    ]
);

// Cache the resultset for only for 5 minutes
$products = Products::find(
```

```
[
    "cache" => [
        "key"      => "my-cache",
        "lifetime" => 300,
    ],
]
);

// Use the 'cache' service from the DI instead of 'modelsCache'
$product = Products::find(
    [
        "cache" => [
            "key"      => "my-cache",
            "service" => "cache",
        ],
    ]
);
```

Caching could be also applied to resultsets generated using relationships:

```
<?php

// Query some post
$post = Post::findFirst();

// Get comments related to a post, also cache it
$comments = $post->getComments(
    [
        "cache" => [
            "key" => "my-key",
        ],
    ]
);

// Get comments related to a post, setting lifetime
$comments = $post->getComments(
    [
        "cache" => [
            "key"      => "my-key",
            "lifetime" => 3600,
        ],
    ]
);
```

When a cached resultset needs to be invalidated, you can simply delete it from the cache using the previously specified key.

Note that not all resultsets should be cached. Results that change very frequently should not be cached since they are invalidated very quickly and caching in that case impacts performance. Additionally, large datasets that do not change frequently could be cached, but that is a decision that the developer has to make based on the available caching mechanism and whether the performance impact to simply retrieve that data in the first place is acceptable.

Forcing Cache

Earlier we saw how *Phalcon\Mvc\Model* integrates with the caching component provided by the framework. To make a record/resultset cacheable we pass the key 'cache' in the array of parameters:

```
<?php

// Cache the resultset for only for 5 minutes
$products = Products::find(
    [
        "cache" => [
            "key"      => "my-cache",
            "lifetime" => 300,
        ],
    ]
);
```

This gives us the freedom to cache specific queries, however if we want to cache globally every query performed over the model, we can override the `find()` / `:code:`findFirst()` method to force every query to be cached:

```
<?php

use Phalcon\Mvc\Model;

class Robots extends Model
{
    /**
     * Implement a method that returns a string key based
     * on the query parameters
     */
    protected static function _createKey($parameters)
    {
        $uniqueKey = [];

        foreach ($parameters as $key => $value) {
            if (is_scalar($value)) {
                $uniqueKey[] = $key . ":" . $value;
            } elseif (is_array($value)) {
                $uniqueKey[] = $key . ":" . self::_createKey($value) . " ";
            }
        }

        return join(" ", $uniqueKey);
    }

    public static function find($parameters = null)
    {
        // Convert the parameters to an array
        if (!is_array($parameters)) {
            $parameters = [$parameters];
        }

        // Check if a cache key wasn't passed
        // and create the cache parameters
        if (!isset($parameters["cache"])) {
            $parameters["cache"] = [
                "key"      => self::_createKey($parameters),
                "lifetime" => 300,
            ];
        }

        return parent::find($parameters);
    }
}
```

```
public static function findFirst($parameters = null)
{
    // ...
}
```

Accessing the database is several times slower than calculating a cache key. You're free to implement any key generation strategy you find to better for your needs. Note that a good key avoids collisions as much as possible - meaning that different keys should return unrelated records.

This gives you full control on how the cache should be implemented for each model. If this strategy is common to several models you can create a base class for all of them:

```
<?php
use Phalcon\Mvc\Model;

class CacheableModel extends Model
{
    protected static function _createKey($parameters)
    {
        // ... Create a cache key based on the parameters
    }

    public static function find($parameters = null)
    {
        // ... Custom caching strategy
    }

    public static function findFirst($parameters = null)
    {
        // ... Custom caching strategy
    }
}
```

Then use this class as base class for each 'Cacheable' model:

```
<?php
class Robots extends CacheableModel
{
}
```

Caching PHQL Queries

Regardless of the syntax we used to create them, all queries in the ORM are handled internally using PHQL. This language gives you much more freedom to create all kinds of queries. Of course these queries can be cached:

```
<?php

$phql = "SELECT * FROM Cars WHERE name = :name:";
$query = $this->modelsManager->createQuery($phql);
```

```

$query->cache(
    [
        "key"      => "cars-by-name",
        "lifetime" => 300,
    ]
);

$cars = $query->execute(
    [
        "name" => "Audi",
    ]
);

```

Reusable Related Records

Some models may have relationships with other models. This allows us to easily check the records that relate to instances in memory:

```

<?php

// Get some invoice
$invoice = Invoices::findFirst();

// Get the customer related to the invoice
$customer = $invoice->customer;

// Print his/her name
echo $customer->name, "\n";

```

This example is very simple, a customer is queried and can be used as required, for example, to show its name. This also applies if we retrieve a set of invoices to show customers that correspond to these invoices:

```

<?php

// Get a set of invoices
// SELECT * FROM invoices;
$invoices = Invoices::find();

foreach ($invoices as $invoice) {
    // Get the customer related to the invoice
    // SELECT * FROM customers WHERE id = ?;
    $customer = $invoice->customer;

    // Print his/her name
    echo $customer->name, "\n";
}

```

A customer may have one or more bills so, in this example, the same customer record may be unnecessarily queried several times. To avoid this, we could mark the relationship as reusable; by doing so, we tell the ORM to automatically reuse the records from memory instead of re-querying them again and again:

```

<?php

use Phalcon\Mvc\Model;

class Invoices extends Model

```

```
{  
    public function initialize()  
    {  
        $this->belongsTo(  
            "customers_id",  
            "Customer",  
            "id",  
            [  
                "reusable" => true,  
            ]  
        );  
    }  
}
```

Note that this type of cache works in memory only, this means that cached data are released when the request is terminated.

Caching Related Records

When a related record is queried, the ORM internally builds the appropriate condition and gets the required records using `find()`/`findFirst()` in the target model according to the following table:

Type	Description	Implicit Method
Belongs-To	Returns a model instance of the related record directly	<code>findFirst()</code>
Has-One	Returns a model instance of the related record directly	<code>findFirst()</code>
Has-Many	Returns a collection of model instances of the referenced model	<code>find()</code>

This means that when you get a related record you could intercept how the data is obtained by implementing the corresponding method:

```
<?php  
  
// Get some invoice  
$invoice = Invoices::findFirst();  
  
// Get the customer related to the invoice  
$customer = $invoice->customer; // Invoices::findFirst("...");  
  
// Same as above  
$customer = $invoice->getCustomer(); // Invoices::findFirst("...");
```

Accordingly, we could replace the `findFirst()` method in the Invoices model and implement the cache we consider most appropriate:

```
<?php  
  
use Phalcon\Mvc\Model;  
  
class Invoices extends Model  
{  
    public static function findFirst($parameters = null)  
    {  
        // ... Custom caching strategy  
    }  
}
```


Caching Related Records Recursively

In this scenario, we assume that every time we query a result we also retrieve their associated records. If we store the records found together with their related entities perhaps we could reduce a bit the overhead required to obtain all entities:

```
<?php

use Phalcon\Mvc\Model;

class Invoices extends Model
{
    protected static function _createKey($parameters)
    {
        // ... Create a cache key based on the parameters
    }

    protected static function _getCache($key)
    {
        // Returns data from a cache
    }

    protected static function _setCache($key, $results)
    {
        // Stores data in the cache
    }

    public static function find($parameters = null)
    {
        // Create a unique key
        $key = self::_createKey($parameters);

        // Check if there are data in the cache
        $results = self::_getCache($key);

        // Valid data is an object
        if (is_object($results)) {
            return $results;
        }

        $results = [];

        $invoices = parent::find($parameters);

        foreach ($invoices as $invoice) {
            // Query the related customer
            $customer = $invoice->customer;

            // Assign it to the record
            $invoice->customer = $customer;

            $results[] = $invoice;
        }

        // Store the invoices in the cache + their customers
        self::_setCache($key, $results);

        return $results;
    }
}
```

```
}

public function initialize()
{
    // Add relations and initialize other stuff
}

}
```

Getting the invoices from the cache already obtains the customer data in just one hit, reducing the overall overhead of the operation. Note that this process can also be performed with PHQL following an alternative solution:

```
<?php

use Phalcon\Mvc\Model;

class Invoices extends Model
{
    public function initialize()
    {
        // Add relations and initialize other stuff
    }

    protected static function _createKey($conditions, $params)
    {
        // ... Create a cache key based on the parameters
    }

    public function getInvoicesCustomers($conditions, $params = null)
    {
        $phql = "SELECT Invoices.*, Customers.* FROM Invoices JOIN Customers WHERE " .
        ↪ $conditions;

        $query = $this->getModelsManager()->executeQuery($phql);

        $query->cache(
            [
                "key"      => self::_createKey($conditions, $params),
                "lifetime" => 300,
            ]
        );

        return $query->execute($params);
    }
}
```

Caching based on Conditions

In this scenario, the cache is implemented differently depending on the conditions received. We might decide that the cache backend should be determined by the primary key:

Type	Cache Backend
1 - 10000	mongo1
10000 - 20000	mongo2
> 20000	mongo3

The easiest way is adding a static method to the model that chooses the right cache to be used:

```

<?php

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public static function queryCache($initial, $final)
    {
        if ($initial >= 1 && $final < 10000) {
            $service = "mongo1";
        } elseif ($initial >= 10000 && $final <= 20000) {
            $service = "mongo2";
        } elseif ($initial > 20000) {
            $service = "mongo3";
        }

        return self::find(
            [
                "id >= " . $initial . " AND id <= " . $final,
                "cache" => [
                    "service" => $service,
                ],
            ]
        );
    }
}

```

This approach solves the problem, however, if we want to add other parameters such orders or conditions we would have to create a more complicated method. Additionally, this method does not work if the data is obtained using related records or a `find()/findFirst()`:

```

<?php

$robots = Robots::find("id < 1000");
$robots = Robots::find("id > 100 AND type = 'A'");
$robots = Robots::find("(id > 100 AND type = 'A') AND id < 2000");

$robots = Robots::find(
    [
        "(id > ?0 AND type = 'A') AND id < ?1",
        "bind" => [100, 2000],
        "order" => "type",
    ]
);

```

To achieve this we need to intercept the intermediate representation (IR) generated by the PHQL parser and thus customize the cache everything possible:

The first is create a custom builder, so we can generate a totally customized query:

```

<?php

use Phalcon\Mvc\Model\Query\Builder as QueryBuilder;

class CustomQueryBuilder extends QueryBuilder
{
    public function getQuery()
    {

```

```
$query = new CustomQuery($this->getPhql());

$query->setDI($this->getDI());

return $query;
}
}
```

Instead of directly returning a *Phalcon\Mvc\Model\Query*, our custom builder returns a CustomQuery instance, this class looks like:

```
<?php

use Phalcon\Mvc\Model\Query as ModelQuery;

class CustomQuery extends ModelQuery
{
    /**
     * The execute method is overridden
     */
    public function execute($params = null, $types = null)
    {
        // Parse the intermediate representation for the SELECT
        $ir = $this->parse();

        // Check if the query has conditions
        if (isset($ir["where"])) {
            // The fields in the conditions can have any order
            // We need to recursively check the conditions tree
            // to find the info we're looking for
            $visitor = new CustomNodeVisitor();

            // Recursively visits the nodes
            $visitor->visit($ir["where"]);

            $initial = $visitor->getInitial();
            $final   = $visitor->getFinal();

            // Select the cache according to the range
            // ...

            // Check if the cache has data
            // ...
        }

        // Execute the query
        $result = $this->_executeSelect($ir, $params, $types);

        // Cache the result
        // ...

        return $result;
    }
}
```

Implementing a helper (CustomNodeVisitor) that recursively checks the conditions looking for fields that tell us the possible range to be used in the cache:

```
<?php

class CustomNodeVisitor
{
    protected $_initial = 0;

    protected $_final = 25000;

    public function visit($node)
    {
        switch ($node["type"]) {
            case "binary-op":
                $left = $this->visit($node["left"]);
                $right = $this->visit($node["right"]);

                if (!$left || !$right) {
                    return false;
                }

                if ($left === "id") {
                    if ($node["op"] === ">") {
                        $this->_initial = $right;
                    }

                    if ($node["op"] === "=") {
                        $this->_initial = $right;
                    }

                    if ($node["op"] === ">=") {
                        $this->_initial = $right;
                    }

                    if ($node["op"] === "<") {
                        $this->_final = $right;
                    }

                    if ($node["op"] === "<=") {
                        $this->_final = $right;
                    }
                }

                break;

            case "qualified":
                if ($node["name"] === "id") {
                    return "id";
                }

                break;

            case "literal":
                return $node["value"];

            default:
                return false;
        }
    }
}
```

```
public function getInitial()
{
    return $this->_initial;
}

public function getFinal()
{
    return $this->_final;
}
}
```

Finally, we can replace the find method in the Robots model to use the custom classes we've created:

```
<?php
use Phalcon\Mvc\Model;

class Robots extends Model
{
    public static function find($parameters = null)
    {
        if (!is_array($parameters)) {
            $parameters = [$parameters];
        }

        $builder = new CustomQueryBuilder($parameters);

        $builder->from(get_called_class());

        $query = $builder->getQuery();

        if (isset($parameters["bind"])) {
            return $query->execute($parameters["bind"]);
        } else {
            return $query->execute();
        }
    }
}
```

Caching of PHQL planning

As well as most moderns database systems PHQL internally caches the execution plan, if the same statement is executed several times PHQL reuses the previously generated plan improving performance, for a developer to take better advantage of this is highly recommended build all your SQL statements passing variable parameters as bound parameters:

```
<?php

for ($i = 1; $i <= 10; $i++) {
    $phql = "SELECT * FROM Store\Robots WHERE id = " . $i;

    $robots = $this->modelsManager->executeQuery($phql);

    // ...
}
```

In the above example, ten plans were generated increasing the memory usage and processing in the application. Rewriting the code to take advantage of bound parameters reduces the processing by both ORM and database system:

```
<?php

$phql = "SELECT * FROM Store\Robots WHERE id = ?0";

for ($i = 1; $i <= 10; $i++) {
    $robots = $this->modelsManager->executeQuery(
        $phql,
        [
            $i,
        ]
    );

    // ...
}
```

Performance can be also improved reusing the PHQL query:

```
<?php

$phql = "SELECT * FROM Store\Robots WHERE id = ?0";

$query = $this->modelsManager->createQuery($phql);

for ($i = 1; $i <= 10; $i++) {
    $robots = $query->execute(
        $phql,
        [
            $i,
        ]
    );

    // ...
}
```

Execution plans for queries involving [prepared statements](#) are also cached by most database systems reducing the overall execution time, also protecting your application against [SQL Injections](#).

ODM (Object-Document Mapper)

In addition to its ability to [map tables](#) in relational databases, Phalcon can map documents from NoSQL databases. The ODM offers a CRUD functionality, events, validations among other services.

Due to the absence of SQL queries and planners, NoSQL databases can see real improvements in performance using the Phalcon approach. Additionally, there are no SQL building reducing the possibility of SQL injections.

The following NoSQL databases are supported:

Name	Description
MongoDB	MongoDB is a scalable, high-performance, open source NoSQL database.

Creating Models

A model is a class that extends from [Phalcon\Mvc\Collection](#). It must be placed in the models directory. A model file must contain a single class; its class name should be in camel case notation:

```
<?php

use Phalcon\Mvc\Collection;

class Robots extends Collection
{
}

```

If you're using PHP 5.4/5.5 is recommended declare each column that makes part of the model in order to save memory and reduce the memory allocation.

By default model "Robots" will refer to the collection "robots". If you want to manually specify another name for the mapping collection, you can use the `setSource()` method:

```
<?php

use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function initialize()
    {
        $this->setSource("the_robots");
    }
}

```

Understanding Documents To Objects

Every instance of a model represents a document in the collection. You can easily access collection data by reading object properties. For example, for a collection "robots" with the documents:

```
$ mongo test
MongoDB shell version: 1.8.2
connecting to: test
> db.robots.find()
{ "_id" : ObjectId("508735512d42b8c3d15ec4e1"), "name" : "Astro Boy", "year" : 1952,
  "type" : "mechanical" }
{ "_id" : ObjectId("5087358f2d42b8c3d15ec4e2"), "name" : "Bender", "year" : 1999,
  "type" : "mechanical" }
{ "_id" : ObjectId("508735d32d42b8c3d15ec4e3"), "name" : "Wall-E", "year" : 2008 }
>

```

Models in Namespaces

Namespaces can be used to avoid class name collision. In this case it is necessary to indicate the name of the related collection using the `setSource()` method:

```
<?php

namespace Store\Toys;

use Phalcon\Mvc\Collection;

class Robots extends Collection

```



```
{
    public function initialize()
    {
        $this->setSource("robots");
    }
}
```

You could find a certain document by its ID and then print its name:

```
<?php

// Find record with _id = "5087358f2d42b8c3d15ec4e2"
$robot = Robots::findById("5087358f2d42b8c3d15ec4e2");

// Prints "Bender"
echo $robot->name;
```

Once the record is in memory, you can make modifications to its data and then save changes:

```
<?php

$robot = Robots::findFirst(
    [
        [
            "name" => "Astro Boy",
        ]
    ]
);

$robot->name = "Voltron";
$robot->save();
```

Setting a Connection

Connections are retrieved from the services container. By default, Phalcon tries to find the connection in a service called “mongo”:

```
<?php

// Simple database connection to localhost
$di->set(
    "mongo",
    function () {
        $mongo = new MongoClient();

        return $mongo->selectDB("store");
    },
    true
);

// Connecting to a domain socket, falling back to localhost connection
$di->set(
    "mongo",
    function () {
        $mongo = new MongoClient(
```

```
        "mongodb:///tmp/mongodb-27017.sock,localhost:27017"
    );

    return $mongo->selectDB("store");
},
true
);
```

Finding Documents

As *Phalcon\Mvc\Collection* relies on the Mongo PHP extension you have the same facilities to query documents and convert them transparently to model instances:

```
<?php

// How many robots are there?
$robots = Robots::find();
echo "There are ", count($robots), "\n";

// How many mechanical robots are there?
$robots = Robots::find(
    [
        [
            "type" => "mechanical",
        ]
    ]
);
echo "There are ", count($robots), "\n";

// Get and print mechanical robots ordered by name upward
$robots = Robots::find(
    [
        [
            "type" => "mechanical",
        ],
        "sort" => [
            "name" => 1,
        ],
    ],
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}

// Get first 100 mechanical robots ordered by name
$robots = Robots::find(
    [
        [
            "type" => "mechanical",
        ],
        "sort" => [
            "name" => 1,
        ],
        "limit" => 100,
    ]
);
```

```
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

You could also use the `findFirst()` method to get only the first record matching the given criteria:

```
<?php

// What's the first robot in robots collection?
$robot = Robots::findFirst();
echo "The robot name is ", $robot->name, "\n";

// What's the first mechanical robot in robots collection?
$robot = Robots::findFirst(
    [
        [
            "type" => "mechanical",
        ]
    ]
);
echo "The first mechanical robot name is ", $robot->name, "\n";
```

Both `find()` and `findFirst()` methods accept an associative array specifying the search criteria:

```
<?php

// First robot where type = "mechanical" and year = "1999"
$robot = Robots::findFirst(
    [
        "conditions" => [
            "type" => "mechanical",
            "year" => "1999",
        ],
    ]
);

// All virtual robots ordered by name downward
$robots = Robots::find(
    [
        "conditions" => [
            "type" => "virtual",
        ],
        "sort" => [
            "name" => -1,
        ],
    ]
);
```

The available query options are:

Parameter	Description	Example
conditions	Search conditions for the find operation. Is used to extract only those records that fulfill a specified criterion. By default Phalcon_model assumes the first parameter are the conditions.	"conditions" => array('\$gt' => 1990)
fields	Returns specific columns instead of the full fields in the collection. When using this option an incomplete object is returned	"fields" => array('name' => true)
sort	It's used to sort the resultset. Use one or more fields as each element in the array, 1 means ordering upwards, -1 downward	"sort" => array("name" => -1, "status" => 1)
limit	Limit the results of the query to results to certain range	"limit" => 10
skip	Skips a number of results	"skip" => 50

If you have experience with SQL databases, you may want to check the [SQL to Mongo Mapping Chart](#).

Aggregations

A model can return calculations using [aggregation framework](#) provided by Mongo. The aggregated values are calculate without having to use MapReduce. With this option is easy perform tasks such as totaling or averaging field values:

```
<?php
$data = Article::aggregate(
    [
        [
            "\$project" => [
                "category" => 1,
            ],
        ],
        [
            "\$group" => [
                "_id" => [
                    "category" => "\$category"
                ],
                "id" => [
                    "\$max" => "\$_id",
                ],
            ],
        ],
    ],
);
```

Creating Updating/Records

The `Phalcon\Mvc\Collection::save()` method allows you to create/update documents according to whether they already exist in the collection associated with a model. The `save()` method is called internally by the create and update methods of [Phalcon\Mvc\Collection](#).

Also the method executes associated validators and events that are defined in the model:

```
<?php
$robot = new Robots();
```

```

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

if ($robot->save() === false) {
    echo "Umh, We can't store robots right now: \n";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo $message, "\n";
    }
} else {
    echo "Great, a new robot was saved successfully!";
}

```

The “_id” property is automatically updated with the [MongoId](#) object created by the driver:

```

<?php

$robot->save();

echo "The generated id is: ", $robot->getId();

```

Validation Messages

Phalcon\Mvc\Collection has a messaging subsystem that provides a flexible way to output or store the validation messages generated during the insert/update processes.

Each message consists of an instance of the class *Phalcon\Mvc\Model\Message*. The set of messages generated can be retrieved with the method `getMessages()`. Each message provides extended information like the field name that generated the message or the message type:

```

<?php

if ($robot->save() === false) {
    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo "Message: ", $message->getMessage();
        echo "Field: ", $message->getField();
        echo "Type: ", $message->getType();
    }
}

```

Validation Events and Events Manager

Models allow you to implement events that will be thrown when performing an insert or update. They help define business rules for a certain model. The following are the events supported by *Phalcon\Mvc\Collection* and their order of execution:

Operation	Name	Can stop operation?	Explanation
Inserting/Updating	beforeValidation	YES	Is executed before the validation process and the final insert/update to the database
Inserting	beforeValidationOnCreate	YES	Is executed before the validation process only when an insertion operation is being made
Updating	beforeValidationOnUpdate	YES	Is executed before the fields are validated for not nulls or foreign keys when an updating operation is being made
Inserting/Updating	onValidationFail	YES (already stopped)	Is executed before the validation process only when an insertion operation is being made
Inserting	afterValidationOnCreate	YES	Is executed after the validation process when an insertion operation is being made
Updating	afterValidationOnUpdate	YES	Is executed after the validation process when an updating operation is being made
Inserting/Updating	afterValidation	YES	Is executed after the validation process
Inserting/Updating	beforeSave	YES	Runs before the required operation over the database system
Updating	beforeUpdate	YES	Runs before the required operation over the database system only when an updating operation is being made
Inserting	beforeCreate	YES	Runs before the required operation over the database system only when an inserting operation is being made
Updating	afterUpdate	NO	Runs after the required operation over the database system only when an updating operation is being made
Inserting	afterCreate	NO	Runs after the required operation over the database system only when an inserting operation is being made
Inserting/Updating	afterSave	NO	Runs after the required operation over the database system

To make a model to react to an event, we must to implement a method with the same name of the event:

```
<?php
use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function beforeValidationOnCreate()
    {
        echo "This is executed before creating a Robot!";
    }
}
```

Events can be useful to assign values before performing an operation, for example:

```
<?php
use Phalcon\Mvc\Collection;

class Products extends Collection
{
    public function beforeCreate()
    {
        // Set the creation date
        $this->created_at = date("Y-m-d H:i:s");
    }
}
```

```

    }

    public function beforeUpdate()
    {
        // Set the modification date
        $this->modified_in = date("Y-m-d H:i:s");
    }
}

```

Additionally, this component is integrated with *Phalcon\Events\Manager*, this means we can create listeners that run when an event is triggered.

```

<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

$eventsManager = new EventsManager();

// Attach an anonymous function as a listener for "model" events
$eventsManager->attach(
    "collection:beforeSave",
    function (Event $event, $robot) {
        if ($robot->name === "Scooby Doo") {
            echo "Scooby Doo isn't a robot!";

            return false;
        }

        return true;
    }
);

$robot = new Robots();

$robot->setEventsManager($eventsManager);

$robot->name = "Scooby Doo";
$robot->year = 1969;

$robot->save();

```

In the example given above the EventsManager only acted as a bridge between an object and a listener (the anonymous function). If we want all objects created in our application use the same EventsManager, then we need to assign this to the Models Manager:

```

<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Mvc\Collection\Manager as CollectionManager;

// Registering the collectionManager service
$di->set(
    "collectionManager",
    function () {
        $eventsManager = new EventsManager();
    }
);

```

```
// Attach an anonymous function as a listener for "model" events
$eventsManager->attach(
    "collection:beforeSave",
    function (Event $event, $model) {
        if (get_class($model) === "Robots") {
            if ($model->name === "Scooby Doo") {
                echo "Scooby Doo isn't a robot!";

                return false;
            }
        }

        return true;
    }
);

// Setting a default EventsManager
$modelManager = new CollectionManager();

$modelManager->setEventsManager($eventsManager);

return $modelManager;
},
true
);
```

Implementing a Business Rule

When an insert, update or delete is executed, the model verifies if there are any methods with the names of the events listed in the table above.

We recommend that validation methods are declared protected to prevent that business logic implementation from being exposed publicly.

The following example implements an event that validates the year cannot be smaller than 0 on update or insert:

```
<?php

use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function beforeSave()
    {
        if ($this->year < 0) {
            echo "Year cannot be smaller than zero!";

            return false;
        }
    }
}
```

Some events return false as an indication to stop the current operation. If an event doesn't return anything, *Phalcon\Mvc\Collection* will assume a true value.

Validating Data Integrity

Phalcon\Mvc\Collection provides several events to validate data and implement business rules. The special “validation” event allows us to call built-in validators over the record. Phalcon exposes a few built-in validators that can be used at this stage of validation.

The following example shows how to use it:

```
<?php

use Phalcon\Mvc\Collection;
use Phalcon\Validation;
use Phalcon\Validation\Validator\InclusionIn;
use Phalcon\Validation\Validator\Numericality;

class Robots extends Collection
{
    public function validation()
    {
        $validation = new Validation();

        $validation->add(
            "type",
            new InclusionIn(
                [
                    "message" => "Type must be: mechanical or virtual",
                    "domain" => [
                        "Mechanical",
                        "Virtual",
                    ],
                ]
            )
        );

        $validation->add(
            "price",
            new Numericality(
                [
                    "message" => "Price must be numeric"
                ]
            )
        );

        return $this->validate($validation);
    }
}
```

The example given above performs a validation using the built-in validator “InclusionIn”. It checks the value of the field “type” in a domain list. If the value is not included in the method, then the validator will fail and return false.

For more information on validators, see the [Validation documentation](#).

Deleting Records

The `Phalcon\Mvc\Collection::delete()` method allows you to delete a document. You can use it as follows:

```
<?php

$robot = Robots::findFirst();

if ($robot !== false) {
    if ($robot->delete() === false) {
        echo "Sorry, we can't delete the robot right now: \n";

        $messages = $robot->getMessages();

        foreach ($messages as $message) {
            echo $message, "\n";
        }
    } else {
        echo "The robot was deleted successfully!";
    }
}
```

You can also delete many documents by traversing a resultset with a foreach loop:

```
<?php

$robots = Robots::find(
    [
        [
            "type" => "mechanical",
        ]
    ]
);

foreach ($robots as $robot) {
    if ($robot->delete() === false) {
        echo "Sorry, we can't delete the robot right now: \n";

        $messages = $robot->getMessages();

        foreach ($messages as $message) {
            echo $message, "\n";
        }
    } else {
        echo "The robot was deleted successfully!";
    }
}
```

The following events are available to define custom business rules that can be executed when a delete operation is performed:

Operation	Name	Can stop operation?	Explanation
Deleting	beforeDelete	YES	Runs before the delete operation is made
Deleting	afterDelete	NO	Runs after the delete operation was made

Validation Failed Events

Another type of events is available when the data validation process finds any inconsistency:

Operation	Name	Explanation
Insert or Update	notSave	Triggered when the insert/update operation fails for any reason
Insert, Delete or Update	onValidationFails	Triggered when any data manipulation operation fails

Implicit Ids vs. User Primary Keys

By default *Phalcon\Mvc\Collection* assumes that the `_id` attribute is automatically generated using *MongoIds*. If a model uses custom primary keys this behavior can be overridden:

```
<?php
use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function initialize()
    {
        $this->useImplicitObjectIds(false);
    }
}
```

Setting multiple databases

In Phalcon, all models can belong to the same database connection or have an individual one. Actually, when *Phalcon\Mvc\Collection* needs to connect to the database it requests the “mongo” service in the application’s services container. You can overwrite this service setting it in the initialize method:

```
<?php

// This service returns a mongo database at 192.168.1.100
$di->set(
    "mongo1",
    function () {
        $mongo = new MongoClient(
            "mongodb://scott:nekhen@192.168.1.100"
        );

        return $mongo->selectDB("management");
    },
    true
);

// This service returns a mongo database at localhost
$di->set(
    "mongo2",
    function () {
        $mongo = new MongoClient(
            "mongodb://localhost"
        );

        return $mongo->selectDB("invoicing");
    },
    true
);
```

```
        true
    );
```

Then, in the `initialize()` method, we define the connection service for the model:

```
<?php
use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function initialize()
    {
        $this->setConnectionService("mongol");
    }
}
```

Injecting services into Models

You may be required to access the application services within a model, the following example explains how to do that:

```
<?php
use Phalcon\Mvc\Collection;

class Robots extends Collection
{
    public function notSave()
    {
        // Obtain the flash service from the DI container
        $flash = $this->getDI()->getShared("flash");

        $messages = $this->getMessages();

        // Show validation messages
        foreach ($messages as $message) {
            $flash->error(
                (string) $message
            );
        }
    }
}
```

The “notSave” event is triggered whenever a “creating” or “updating” action fails. We’re flashing the validation messages obtaining the “flash” service from the DI container. By doing this, we don’t have to print messages after each saving.

Using Views

Views represent the user interface of your application. Views are often HTML files with embedded PHP code that perform tasks related solely to the presentation of the data. Views handle the job of providing data to the web browser or other tool that is used to make requests from your application.

Phalcon\Mvc\View and *Phalcon\Mvc\View\Simple* are responsible for the managing the view layer of your MVC application.

Integrating Views with Controllers

Phalcon automatically passes the execution to the view component as soon as a particular controller has completed its cycle. The view component will look in the views folder for a folder named as the same name of the last controller executed and then for a file named as the last action executed. For instance, if a request is made to the URL `http://127.0.0.1/blog/posts/show/301`, Phalcon will parse the URL as follows:

Server Address	127.0.0.1
Phalcon Directory	blog
Controller	posts
Action	show
Parameter	301

The dispatcher will look for a “PostsController” and its action “showAction”. A simple controller file for this example:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction($postId)
    {
        // Pass the $postId parameter to the view
        $this->view->postId = $postId;
    }
}
```

The `setVar()` method allows us to create view variables on demand so that they can be used in the view template. The example above demonstrates how to pass the `$postId` parameter to the respective view template.

Hierarchical Rendering

Phalcon\Mvc\View supports a hierarchy of files and is the default component for view rendering in Phalcon. This hierarchy allows for common layout points (commonly used views), as well as controller named folders defining respective view templates.

This component uses by default PHP itself as the template engine, therefore views should have the `.phtml` extension. If the views directory is `app/views` then view component will find automatically for these 3 view files.

Name	File	Description
Action View	<code>app/views/posts/show.phtml</code>	This is the view related to the action. It only will be shown when the “show” action was executed.
Controller Layout	<code>app/views/layouts/posts.phtml</code>	This is the view related to the controller. It only will be shown for every action executed within the controller “posts”. All the code implemented in the layout will be reused for all the actions in this controller.
Main Layout	<code>app/views/index.phtml</code>	This is main action it will be shown for every controller or action executed within the application.

You are not required to implement all of the files mentioned above. *Phalcon\Mvc\View* will simply move to the next view level in the hierarchy of files. If all three view files are implemented, they will be processed as follows:

```
<!-- app/views/posts/show.phtml -->

<h3>This is show view!</h3>

<p>I have received the parameter <?php echo $postId; ?></p>
```

```
<!-- app/views/layouts/posts.phtml -->

<h2>This is the "posts" controller layout!</h2>

<?php echo $this->getContent(); ?>
```

```
<!-- app/views/index.phtml -->
<html>
  <head>
    <title>Example</title>
  </head>
  <body>

    <h1>This is main layout!</h1>

    <?php echo $this->getContent(); ?>

  </body>
</html>
```

Note the lines where the method `$this->getContent()` was called. This method instructs *Phalcon\Mvc\View* on where to inject the contents of the previous view executed in the hierarchy. For the example above, the output will be:

The generated HTML by the request will be:

```
<!-- app/views/index.phtml -->
<html>
  <head>
    <title>Example</title>
  </head>
  <body>

    <h1>This is main layout!</h1>

    <!-- app/views/layouts/posts.phtml -->

    <h2>This is the "posts" controller layout!</h2>

    <!-- app/views/posts/show.phtml -->

    <h3>This is show view!</h3>

    <p>I have received the parameter 101</p>

  </body>
</html>
```



Using Templates

Templates are views that can be used to share common view code. They act as controller layouts, so you need to place them in the layouts directory.

Templates can be rendered before the layout (using `$this->view->setTemplateBefore()`) or they can be rendered after the layout (using `this->view->setTemplateAfter()`). In the following example the template (layouts/common.phtml) is rendered after the main layout (layouts/posts.phtml):

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function initialize()
    {
        $this->view->setTemplateAfter("common");
    }

    public function lastAction()
    {
        $this->flash->notice(
            "These are the latest posts"
        );
    }
}
```

```
<!-- app/views/index.phtml -->
<!DOCTYPE html>
<html>
    <head>
        <title>Blog's title</title>
    </head>
    <body>
        <?php echo $this->getContent(); ?>
    </body>
</html>
```

```
<!-- app/views/layouts/common.phtml -->

<ul class="menu">
    <li><a href="/">Home</a></li>
    <li><a href="/articles">Articles</a></li>
    <li><a href="/contact">Contact us</a></li>
</ul>

<div class="content"><?php echo $this->getContent(); ?></div>
```

```
<!-- app/views/layouts/posts.phtml -->

<h1>Blog Title</h1>

<?php echo $this->getContent(); ?>
```

```
<!-- app/views/posts/last.phtml -->

<article>
    <h2>This is a title</h2>
    <p>This is the post content</p>
</article>

<article>
    <h2>This is another title</h2>
    <p>This is another post content</p>
</article>
```

The final output will be the following:

```
<!-- app/views/index.phtml -->
<!DOCTYPE html>
<html>
    <head>
        <title>Blog's title</title>
    </head>
    <body>

        <!-- app/views/layouts/common.phtml -->

        <ul class="menu">
            <li><a href="/">Home</a></li>
            <li><a href="/articles">Articles</a></li>
            <li><a href="/contact">Contact us</a></li>
        </ul>
```



```

<div class="content">

    <!-- app/views/layouts/posts.phtml -->

    <h1>Blog Title</h1>

    <!-- app/views/posts/last.phtml -->

    <article>
        <h2>This is a title</h2>
        <p>This is the post content</p>
    </article>

    <article>
        <h2>This is another title</h2>
        <p>This is another post content</p>
    </article>

</div>

</body>
</html>

```

If we had used `$this->view->setTemplateBefore("common")`, this would be the final output:

```

<!-- app/views/index.phtml -->
<!DOCTYPE html>
<html>
    <head>
        <title>Blog's title</title>
    </head>
    <body>

        <!-- app/views/layouts/posts.phtml -->

        <h1>Blog Title</h1>

        <!-- app/views/layouts/common.phtml -->

        <ul class="menu">
            <li><a href="/">Home</a></li>
            <li><a href="/articles">Articles</a></li>
            <li><a href="/contact">Contact us</a></li>
        </ul>

        <div class="content">

            <!-- app/views/posts/last.phtml -->

            <article>
                <h2>This is a title</h2>
                <p>This is the post content</p>
            </article>

            <article>
                <h2>This is another title</h2>
                <p>This is another post content</p>
            </article>


```

```
        </div>

    </body>
</html>
```

Control Rendering Levels

As seen above, *Phalcon\Mvc\View* supports a view hierarchy. You might need to control the level of rendering produced by the view component. The method `Phalcon\Mvc\View::setRenderLevel()` offers this functionality.

This method can be invoked from the controller or from a superior view layer to interfere with the rendering process.

```
<?php

use Phalcon\Mvc\View;
use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function findAction()
    {
        // This is an Ajax response so it doesn't generate any kind of view
        $this->view->setRenderLevel(
            View::LEVEL_NO_RENDER
        );

        // ...
    }

    public function showAction($postId)
    {
        // Shows only the view related to the action
        $this->view->setRenderLevel(
            View::LEVEL_ACTION_VIEW
        );
    }
}
```

The available render levels are:

Class Constant	Description	Order
LEVEL_NO_RENDER	Indicates to avoid generating any kind of presentation.	
LEVEL_ACTION_VIEW	Generates the presentation to the view associated to the action.	1
LEVEL_BEFORE_TEMPLATE	Generates presentation templates prior to the controller layout.	2
LEVEL_LAYOUT	Generates the presentation to the controller layout.	3
LEVEL_AFTER_TEMPLATE	Generates the presentation to the templates after the controller layout.	4
LEVEL_MAIN_LAYOUT	Generates the presentation to the main layout. File views/index.phtml	5

Disabling render levels

You can permanently or temporarily disable render levels. A level could be permanently disabled if it isn't used at all in the whole application:

```
<?php

use Phalcon\Mvc\View;

$di->set(
    "view",
    function () {
        $view = new View();

        // Disable several levels
        $view->disableLevel(
            [
                View::LEVEL_LAYOUT => true,
                View::LEVEL_MAIN_LAYOUT => true,
            ]
        );

        return $view;
    },
    true
);
```

Or disable temporarily in some part of the application:

```
<?php

use Phalcon\Mvc\View;
use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function findAction()
    {
        $this->view->disableLevel(
            View::LEVEL_MAIN_LAYOUT
        );
    }
}
```

```
        );  
    }  
}
```

Picking Views

As mentioned above, when *Phalcon\Mvc\View* is managed by *Phalcon\Mvc\Application* the view rendered is the one related with the last controller and action executed. You could override this by using the *Phalcon\Mvc\View::pick()* method:

```
<?php  
  
use Phalcon\Mvc\Controller;  
  
class ProductsController extends Controller  
{  
    public function listAction()  
    {  
        // Pick "views-dir/products/search" as view to render  
        $this->view->pick("products/search");  
  
        // Pick "views-dir/books/list" as view to render  
        $this->view->pick(  
            [  
                "books",  
            ],  
        );  
  
        // Pick "views-dir/products/search" as view to render  
        $this->view->pick(  
            [  
                1 => "search",  
            ],  
        );  
    }  
}
```

Disabling the view

If your controller doesn't produce any output in the view (or not even have one) you may disable the view component avoiding unnecessary processing:

```
<?php  
  
use Phalcon\Mvc\Controller;  
  
class UsersController extends Controller  
{  
    public function closeSessionAction()  
    {  
        // Close session  
        // ...  
  
        // Disable the view to avoid rendering  
    }  
}
```

```

        $this->view->disable();
    }
}

```

Alternatively, you can return `false` to produce the same effect:

```

<?php
use Phalcon\Mvc\Controller;

class UsersController extends Controller
{
    public function closeSessionAction()
    {
        // ...

        // Disable the view to avoid rendering
        return false;
    }
}

```

You can return a ‘response’ object to avoid disable the view manually:

```

<?php
use Phalcon\Mvc\Controller;

class UsersController extends Controller
{
    public function closeSessionAction()
    {
        // Close session
        // ...

        // A HTTP Redirect
        return $this->response->redirect("index/index");
    }
}

```

Simple Rendering

Phalcon\Mvc\View\Simple is an alternative component to *Phalcon\Mvc\View*. It keeps most of the philosophy of *Phalcon\Mvc\View* but lacks of a hierarchy of files which is, in fact, the main feature of its counterpart.

This component allows the developer to have control of when a view is rendered and its location. In addition, this component can leverage of view inheritance available in template engines such as *Volt* and others.

The default component must be replaced in the service container:

```

<?php
use Phalcon\Mvc\View\Simple as SimpleView;

$di->set(
    "view",
    function () {
        $view = new SimpleView();
    }
);

```

```
        $view->setViewsDir("../app/views/");

        return $view;
    },
    true
);
```

Automatic rendering must be disabled in *Phalcon\Mvc\Application* (if needed):

```
<?php

use Exception;
use Phalcon\Mvc\Application;

try {
    $application = new Application($di);

    $application->useImplicitView(false);

    $response = $application->handle();

    $response->send();
} catch (Exception $e) {
    echo $e->getMessage();
}
```

To render a view it's necessary to call the render method explicitly indicating the relative path to the view you want to display:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends \Controller
{
    public function indexAction()
    {
        // Render 'views-dir/index.phtml'
        echo $this->view->render("index");

        // Render 'views-dir/posts/show.phtml'
        echo $this->view->render("posts/show");

        // Render 'views-dir/index.phtml' passing variables
        echo $this->view->render(
            "index",
            [
                "posts" => Posts::find(),
            ]
        );

        // Render 'views-dir/posts/show.phtml' passing variables
        echo $this->view->render(
            "posts/show",
            [
                "posts" => Posts::find(),
            ]
        );
    }
}
```

```

    );
}
}

```

This is different to *Phalcon\Mvc\View* who's `render()` method uses controllers and actions as parameters:

```

<?php

$params = [
    "posts" => Posts::find(),
];

// Phalcon\Mvc\View
$view = new \Phalcon\Mvc\View();
echo $view->render("posts", "show", $params);

// Phalcon\Mvc\View\Simple
$simpleView = new \Phalcon\Mvc\View\Simple();
echo $simpleView->render("posts/show", $params);

```

Using Partial

Partial templates are another way of breaking the rendering process into simpler more manageable chunks that can be reused by different parts of the application. With a partial, you can move the code for rendering a particular piece of a response to its own file.

One way to use partials is to treat them as the equivalent of subroutines: as a way to move details out of a view so that your code can be more easily understood. For example, you might have a view that looks like this:

```

<div class="top"><?php $this->partial("shared/ad_banner"); ?></div>

<div class="content">
    <h1>Robots</h1>

    <p>Check out our specials for robots:</p>
    ...
</div>

<div class="footer"><?php $this->partial("shared/footer"); ?></div>

```

The `partial()` method does accept a second parameter as an array of variables/parameters that only will exists in the scope of the partial:

```

<?php $this->partial("shared/ad_banner", ["id" => $site->id, "size" => "big"]); ?>

```

Transfer values from the controller to views

Phalcon\Mvc\View is available in each controller using the view variable (`$this->view`). You can use that object to set variables directly to the view from a controller action by using the `setVar()` method.

```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller

```

```
{  
    public function indexAction()  
    {  
    }  
  
    public function showAction()  
    {  
        $user = Users::findFirst();  
        $posts = $user->getPosts();  
  
        // Pass all the username and the posts to the views  
        $this->view->setVar("username", $user->username);  
        $this->view->setVar("posts", $posts);  
  
        // Using the magic setter  
        $this->view->username = $user->username;  
        $this->view->posts = $posts;  
  
        // Passing more than one variable at the same time  
        $this->view->setVars(  
            [  
                "username" => $user->username,  
                "posts" => $posts,  
            ]  
        );  
    }  
}
```

A variable with the name of the first parameter of `setVar()` will be created in the view, ready to be used. The variable can be of any type, from a simple string, integer etc. variable to a more complex structure such as array, collection etc.

```
<h1>  
    {{ username }}'s Posts  
</h1>  
  
<div class="post">  
<?php  
    foreach ($posts as $post) {  
        echo "<h2>", $post->title, "</h2>";  
    }  
  
?>  
</div>
```

Caching View Fragments

Sometimes when you develop dynamic websites and some areas of them are not updated very often, the output is exactly the same between requests. *Phalcon\Mvc\View* offers caching a part or the whole rendered output to increase performance.

Phalcon\Mvc\View integrates with *Phalcon\Cache* to provide an easier way to cache output fragments. You could manually set the cache handler or set a global handler:


```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function showAction()
    {
        // Cache the view using the default settings
        $this->view->cache(true);
    }

    public function showArticleAction()
    {
        // Cache this view for 1 hour
        $this->view->cache(
            [
                "lifetime" => 3600,
            ]
        );
    }

    public function resumeAction()
    {
        // Cache this view for 1 day with the key "resume-cache"
        $this->view->cache(
            [
                "lifetime" => 86400,
                "key"       => "resume-cache",
            ]
        );
    }

    public function downloadAction()
    {
        // Passing a custom service
        $this->view->cache(
            [
                "service" => "myCache",
                "lifetime" => 86400,
                "key"      => "resume-cache",
            ]
        );
    }
}

```

When we do not define a key to the cache, the component automatically creates one using an MD5 hash of the name of the controller and view currently being rendered in the format of “controller/view”. It is a good practice to define a key for each action so you can easily identify the cache associated with each view.

When the View component needs to cache something it will request a cache service from the services container. The service name convention for this service is “viewCache”:

```

<?php

use Phalcon\Cache\Frontend\Output as OutputFrontend;
use Phalcon\Cache\Backend\Memcache as MemcacheBackend;

```

```
// Set the views cache service
$di->set(
    "viewCache",
    function () {
        // Cache data for one day by default
        $frontCache = new OutputFrontend(
            [
                "lifetime" => 86400,
            ]
        );

        // Memcached connection settings
        $cache = new MemcacheBackend(
            $frontCache,
            [
                "host" => "localhost",
                "port" => "11211",
            ]
        );

        return $cache;
    }
);
```

The frontend must always be *Phalcon\Cache\Frontend\Output* and the service ‘viewCache’ must be registered as always open (not shared) in the services container (DI).

When using views, caching can be used to prevent controllers from needing to generate view data on each request.

To achieve this we must identify uniquely each cache with a key. First we verify that the cache does not exist or has expired to make the calculations/queries to display data in the view:

```
<?php

use Phalcon\Mvc\Controller;

class DownloadController extends Controller
{
    public function indexAction()
    {
        // Check whether the cache with key "downloads" exists or has expired
        if ($this->view->getCache()->exists("downloads")) {
            // Query the latest downloads
            $latest = Downloads::find(
                [
                    "order" => "created_at DESC",
                ]
            );

            $this->view->latest = $latest;
        }

        // Enable the cache with the same key "downloads"
        $this->view->cache(
            [
                "key" => "downloads",
            ]
        );
    }
};
```

```
}
}
```

The [PHP alternative site](#) is an example of implementing the caching of fragments.

Template Engines

Template Engines help designers to create views without the use of a complicated syntax. Phalcon includes a powerful and fast templating engine called *Volt*.

Additionally, *Phalcon\Mvc\View* allows you to use other template engines instead of plain PHP or Volt.

Using a different template engine, usually requires complex text parsing using external PHP libraries in order to generate the final output for the user. This usually increases the number of resources that your application will use.

If an external template engine is used, *Phalcon\Mvc\View* provides exactly the same view hierarchy and it's still possible to access the API inside these templates with a little more effort.

This component uses adapters, these help Phalcon to speak with those external template engines in a unified way, let's see how to do that integration.

Creating your own Template Engine Adapter

There are many template engines, which you might want to integrate or create one of your own. The first step to start using an external template engine is create an adapter for it.

A template engine adapter is a class that acts as bridge between *Phalcon\Mvc\View* and the template engine itself. Usually it only needs two methods implemented: `__construct()` and `render()`. The first one receives the *Phalcon\Mvc\View* instance that creates the engine adapter and the DI container used by the application.

The method `render()` accepts an absolute path to the view file and the view parameters set using `$this->view->setVar()`. You could read or require it when it's necessary.

```
<?php

use Phalcon\DiInterface;
use Phalcon\Mvc\Engine;

class MyTemplateAdapter extends Engine
{
    /**
     * Adapter constructor
     *
     * @param \Phalcon\Mvc\View $view
     * @param \Phalcon\Di $di
     */
    public function __construct($view, DiInterface $di)
    {
        // Initialize here the adapter
        parent::__construct($view, $di);
    }

    /**
     * Renders a view using the template engine
     *
     * @param string $path
     * @param array $params
     */
}
```

```
*/
public function render($path, $params)
{
    // Access view
    $view = $this->_view;

    // Access options
    $options = $this->_options;

    // Render the view
    // ...

}
```

Changing the Template Engine

You can replace the template engine completely or use more than one template engine at the same time. The method `Phalcon\Mvc\View::registerEngines()` accepts an array containing data that define the template engines. The key of each engine is an extension that aids in distinguishing one from another. Template files related to the particular engine must have those extensions.

The order that the template engines are defined with `Phalcon\Mvc\View::registerEngines()` defines the relevance of execution. If *Phalcon\Mvc\View* finds two views with the same name but different extensions, it will only render the first one.

If you want to register a template engine or a set of them for each request in the application. You could register it when the view service is created:

```
<?php

use Phalcon\Mvc\View;

// Setting up the view component
$di->set(
    "view",
    function () {
        $view = new View();

        // A trailing directory separator is required
        $view->setViewsDir("../app/views/");

        // Set the engine
        $view->registerEngines(
            [
                ".my-html" => "MyTemplateAdapter",
            ]
        );

        // Using more than one template engine
        $view->registerEngines(
            [
                ".my-html" => "MyTemplateAdapter",
                ".phtml"   => "Phalcon\\Mvc\\View\\Engine\\Php",
            ]
        );
    }
);
```

```

        return $view;
    },
    true
);

```

There are adapters available for several template engines on the [Phalcon Incubator](#)

Injecting services in View

Every view executed is included inside a *Phalcon\Di\Injectable* instance, providing easy access to the application's service container.

The following example shows how to write a jQuery [ajax request](#) using a URL with the framework conventions. The service "url" (usually *Phalcon\Mvc\Url*) is injected in the view by accessing a property with the same name:

```

<script type="text/javascript">

$.ajax({
    url: "<?php echo $this->url->get("cities/get"); ?>"
})
.done(function () {
    alert("Done!");
});

</script>

```

Stand-Alone Component

All the components in Phalcon can be used as *glue* components individually because they are loosely coupled to each other:

Hierarchical Rendering

Using *Phalcon\Mvc\View* in a stand-alone mode can be demonstrated below:

```

<?php

use Phalcon\Mvc\View;

$view = new View();

// A trailing directory separator is required
$view->setViewsDir("../app/views/");

// Passing variables to the views, these will be created as local variables
$view->setVar("someProducts", $products);
$view->setVar("someFeatureEnabled", true);

// Start the output buffering
$view->start();

// Render all the view hierarchy related to the view products/list.phtml
$view->render("products", "list");

```

```
// Finish the output buffering
$view->finish();

echo $view->getContent();
```

A short syntax is also available:

```
<?php

use Phalcon\Mvc\View;

$view = new View();

echo $view->getRender(
    "products",
    "list",
    [
        "someProducts" => $products,
        "someFeatureEnabled" => true,
    ],
    function ($view) {
        // Set any extra options here

        $view->setViewsDir("../app/views/");

        $view->setRenderLevel(
            View::LEVEL_LAYOUT
        );
    }
);
```

Simple Rendering

Using *Phalcon\Mvc\View\Simple* in a stand-alone mode can be demonstrated below:

```
<?php

use Phalcon\Mvc\View\Simple as SimpleView;

$view = new SimpleView();

// A trailing directory separator is required
$view->setViewsDir("../app/views/");

// Render a view and return its contents as a string
echo $view->render("templates/welcomeMail");

// Render a view passing parameters
echo $view->render(
    "templates/welcomeMail",
    [
        "email" => $email,
        "content" => $content,
    ]
);
```

View Events

Phalcon\Mvc\View and *Phalcon\Mvc\View\Simple* are able to send events to an *EventsManager* if it is present. Events are triggered using the type “view”. Some events when returning boolean false could stop the active operation. The following events are supported:

Event Name	Triggered	Can stop operation?
beforeRender	Triggered before starting the render process	Yes
beforeRenderView	Triggered before rendering an existing view	Yes
afterRenderView	Triggered after rendering an existing view	No
afterRender	Triggered after completing the render process	No
notFoundView	Triggered when a view was not found	No

The following example demonstrates how to attach listeners to this component:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Mvc\View;

$di->set(
    "view",
    function () {
        // Create an events manager
        $eventsManager = new EventsManager();

        // Attach a listener for type "view"
        $eventsManager->attach(
            "view",
            function (Event $event, $view) {
                echo $event->getType(), " - ", $view->getActiveRenderPath(), PHP_EOL;
            }
        );

        $view = new View();

        $view->setViewsDir("../app/views/");

        // Bind the eventsManager to the view component
        $view->setEventsManager($eventsManager);

        return $view;
    },
    true
);
```

The following example shows how to create a plugin that clean/repair the HTML produced by the render process using Tidy:

```
<?php

use Phalcon\Events\Event;

class TidyPlugin
{
    public function afterRender(Event $event, $view)
    {
```

```
$tidyConfig = [
    "clean"           => true,
    "output-xhtml"    => true,
    "show-body-only" => true,
    "wrap"            => 0,
];

$tidy = tidy_parse_string(
    $view->getContent(),
    $tidyConfig,
    "UTF8"
);

$tidy->cleanRepair();

$view->setContent(
    (string) $tidy
);
}

// Attach the plugin as a listener
$eventsManager->attach(
    "view:afterRender",
    new TidyPlugin()
);
```

View Helpers (Tags)

Writing and maintaining HTML markup can quickly become a tedious task because of the naming conventions and numerous attributes that have to be taken into consideration. Phalcon deals with this complexity by offering *Phalcon\Tag*, which in turn offers view helpers to generate HTML markup.

This component can be used in a plain HTML+PHP view or in a *Volt* template.

This guide is not intended to be a complete documentation of available helpers and their arguments. Please visit the *Phalcon\Tag* page in the API for a complete reference.

Document Type of Content

Phalcon provides `Phalcon\Tag::setDoctype()` helper to set document type of the content. Document type setting may affect HTML output produced by other tag helpers. For example, if you set XHTML document type family, helpers that return or output HTML tags will produce self-closing tags to follow valid XHTML standard.

Available document type constants in *Phalcon\Tag* namespace are:

Constant	Document type
HTML32	HTML 3.2
HTML401_STRICT	HTML 4.01 Strict
HTML401_TRANSITIONAL	HTML 4.01 Transitional
HTML401_FRAMESET	HTML 4.01 Frameset
HTML5	HTML 5
XHTML10_STRICT	XHTML 1.0 Strict
XHTML10_TRANSITIONAL	XHTML 1.0 Transitional
XHTML10_FRAMESET	XHTML 1.0 Frameset
XHTML11	XHTML 1.1
XHTML20	XHTML 2.0
XHTML5	XHTML 5

Setting document type.

```
<?php
use Phalcon\Tag;

$this->tag->setDoctype(Tag::HTML401_STRICT);

?>
```

Getting document type.

```
<?= $this->tag->getDoctype() ?>
<html>
<!-- your HTML code -->
</html>
```

The following HTML will be produced.

```
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01//EN"
    "http://www.w3.org/TR/html4/strict.dtd">
<html>
<!-- your HTML code -->
</html>
```

Volt syntax:

```
{{ get_doctype() }}
<html>
<!-- your HTML code -->
</html>
```

Generating Links

A real common task in any web application or website is to produce links that allow us to navigate from one page to another. When they are internal URLs we can create them in the following manner:

```
<!-- for the default route -->
<?= $this->tag->linkTo("products/search", "Search") ?>

<!-- with CSS attributes -->
<?= $this->tag->linkTo(["products/edit/10", "Edit", "class" => "edit-btn"]) ?>
```

```
<!-- for a named route -->
<?= $this->tag->linkTo(["for" => "show-product", "title" => 123, "name" => "carrots"
↪], "Show"]) ?>
```

Actually, all produced URLs are generated by the component *Phalcon\Mvc\Url* (or service “url” failing)

Same links generated with Volt:

```
<!-- for the default route -->
{{ link_to("products/search", "Search") }}

<!-- for a named route -->
{{ link_to(["for": "show-product", "id": 123, "name": "carrots"], "Show") }}

<!-- for a named route with a HTML class -->
{{ link_to(["for": "show-product", "id": 123, "name": "carrots"], "Show", "class":
↪"edit-btn") }}
```

Creating Forms

Forms in web applications play an essential part in retrieving user input. The following example shows how to implement a simple search form using view helpers:

```
<!-- Sending the form by method POST -->
<?= $this->tag->form("products/search") ?>
    <label for="q">Search:</label>

    <?= $this->tag->textField("q") ?>

    <?= $this->tag->submitButton("Search") ?>
<?= $this->tag->endForm() ?>

<!-- Specifying another method or attributes for the FORM tag -->
<?= $this->tag->form(["products/search", "method" => "get"]); ?>
    <label for="q">Search:</label>

    <?= $this->tag->textField("q"); ?>

    <?= $this->tag->submitButton("Search"); ?>
<?= $this->tag->endForm() ?>
```

This last code will generate the following HTML:

```
<form action="/store/products/search/" method="get">
    <label for="q">Search:</label>

    <input type="text" id="q" value="" name="q" />

    <input type="submit" value="Search" />
</form>
```

Same form generated in Volt:

```
<!-- Specifying another method or attributes for the FORM tag -->
{{ form("products/search", "method": "get") }}
    <label for="q">Search:</label>
```

```

    {{ text_field("q") }}

    {{ submit_button("Search") }}
{{ endForm() }}

```

Phalcon also provides a *form builder* to create forms in an object-oriented manner.

Helpers to Generate Form Elements

Phalcon provides a series of helpers to generate form elements such as text fields, buttons and more. The first parameter of each helper is always the name of the element to be generated. When the form is submitted, the name will be passed along with the form data. In a controller you can get these values using the same name by using the `getPost()` and `getQuery()` methods on the request object (`$this->request`).

```

<?php echo $this->tag->textField("username") ?>

<?php echo $this->tag->textArea(
    [
        "comment",
        "This is the content of the text-area",
        "cols" => "6",
        "rows" => 20,
    ]
) ?>

<?php echo $this->tag->passwordField(
    [
        "password",
        "size" => 30,
    ]
) ?>

<?php echo $this->tag->hiddenField(
    [
        "parent_id",
        "value" => "5",
    ]
) ?>

```

Volt syntax:

```

{{ text_field("username") }}

{{ text_area("comment", "This is the content", "cols": "6", "rows": 20) }}

{{ password_field("password", "size": 30) }}

{{ hidden_field("parent_id", "value": "5") }}

```

Making Select Boxes

Generating select boxes (select box) is easy, especially if the related data is stored in PHP associative arrays. The helpers for select elements are `Phalcon\Tag::select()` and `Phalcon\Tag::selectStatic()`. `Phalcon\Tag::select()` has been specifically designed to work with *Phalcon\Mvc\Model*, while `Phalcon\Tag::selectStatic()` can work with PHP arrays.

```
<?php

$products = Products::find("type = 'vegetables'");

// Using data from a resultset
echo $this->tag->select(
    [
        "productId",
        $products,
        "using" => [
            "id",
            "name",
        ]
    ]
);

// Using data from an array
echo $this->tag->selectStatic(
    [
        "status",
        [
            "A" => "Active",
            "I" => "Inactive",
        ]
    ]
);
```

The following HTML will generated:

```
<select id="productId" name="productId">
  <option value="101">Tomato</option>
  <option value="102">Lettuce</option>
  <option value="103">Beans</option>
</select>

<select id="status" name="status">
  <option value="A">Active</option>
  <option value="I">Inactive</option>
</select>
```

You can add an “empty” option to the generated HTML:

```
<?php

$products = Products::find("type = 'vegetables'");

// Creating a Select Tag with an empty option
echo $this->tag->select(
    [
        "productId",
        $products,
        "using" => [
            "id",
            "name",
        ],
        "useEmpty" => true,
    ]
);
```

Produces this HTML:

```
<select id="productId" name="productId">
  <option value="">Choose..</option>
  <option value="101">Tomato</option>
  <option value="102">Lettuce</option>
  <option value="103">Beans</option>
</select>
```

```
<?php

$products = Products::find("type = 'vegetables'");

// Creating a Select Tag with an empty option with default text
echo $this->tag->select(
    [
        "productId",
        $products,
        "using"      => [
            "id",
            "name",
        ],
        "useEmpty"   => true,
        "emptyText"  => "Please, choose one...",
        "emptyValue" => "@",
    ]
);
```

```
<select id="productId" name="productId">
  <option value="@">Please, choose one..</option>
  <option value="101">Tomato</option>
  <option value="102">Lettuce</option>
  <option value="103">Beans</option>
</select>
```

Volt syntax for above example:

```
{# Creating a Select Tag with an empty option with default text #}
{{ select('productId', products, 'using': ['id', 'name'],
    'useEmpty': true, 'emptyText': 'Please, choose one...', 'emptyValue': '@') }}
```

Assigning HTML attributes

All the helpers accept an array as their first parameter which can contain additional HTML attributes for the element generated.

```
<?php $this->tag->textField(
    [
        "price",
        "size"      => 20,
        "maxlength" => 30,
        "placeholder" => "Enter a price",
    ]
) ?>
```

or using Volt:

```
{{ text_field("price", "size": 20, "maxlength": 30, "placeholder": "Enter a price") }}
```

The following HTML is generated:

```
<input type="text" name="price" id="price" size="20" maxlength="30"
      placeholder="Enter a price" />
```

Setting Helper Values

From Controllers

It is a good programming principle for MVC frameworks to set specific values for form elements in the view. You can set those values directly from the controller using `Phalcon\Tag::setDefault()`. This helper preloads a value for any helpers present in the view. If any helper in the view has a name that matches the preloaded value, it will use it, unless a value is directly assigned on the helper in the view.

```
<?php
use Phalcon\Mvc\Controller;

class ProductsController extends Controller
{
    public function indexAction()
    {
        $this->tag->setDefault("color", "Blue");
    }
}
```

At the view, a `selectStatic` helper matches the same index used to preset the value. In this case “color”:

```
<?php
echo $this->tag->selectStatic(
    [
        "color",
        [
            "Yellow" => "Yellow",
            "Blue"   => "Blue",
            "Red"    => "Red",
        ]
    ]
);
```

This will generate the following select tag with the value “Blue” selected:

```
<select id="color" name="color">
    <option value="Yellow">Yellow</option>
    <option value="Blue" selected="selected">Blue</option>
    <option value="Red">Red</option>
</select>
```

From the Request

A special feature that the *Phalcon\Tag* helpers have is that they keep the values of form helpers between requests. This way you can easily show validation messages without losing entered data.

Specifying values directly

Every form helper supports the parameter “value”. With it you can specify a value for the helper directly. When this parameter is present, any preset value using `setDefault()` or via request will be ignored.

Changing dynamically the Document Title

Phalcon\Tag offers helpers to change dynamically the document title from the controller. The following example demonstrates just that:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function initialize()
    {
        $this->tag->setTitle("Your Website");
    }

    public function indexAction()
    {
        $this->tag->prependTitle("Index of Posts - ");
    }
}
```

```
<html>
  <head>
    <?php echo $this->tag->getTitle(); ?>
  </head>

  <body>

  </body>
</html>
```

The following HTML will generated:

```
<html>
  <head>
    <title>Index of Posts - Your Website</title>
  </head>

  <body>

  </body>
</html>
```

Static Content Helpers

Phalcon\Tag also provide helpers to generate tags such as script, link or img. They aid in quick and easy generation of the static resources of your application

Images

```
<?php

// Generate 
echo $this->tag->image("img/hello.gif");

// Generate 
echo $this->tag->image(
    [
        "img/hello.gif",
        "alt" => "alternative text",
    ]
);
```

Volt syntax:

```
{# Generate  #}
{{ image("img/hello.gif") }}

{# Generate  #}
{{ image("img/hello.gif", "alt": "alternative text") }}
```

Stylesheets

```
<?php

// Generate <link rel="stylesheet" href="http://fonts.googleapis.com/css?
↳family=Rosario" type="text/css">
echo $this->tag->stylesheetLink("http://fonts.googleapis.com/css?family=Rosario",
↳false);

// Generate <link rel="stylesheet" href="/your-app/css/styles.css" type="text/css">
echo $this->tag->stylesheetLink("css/styles.css");
```

Volt syntax:

```
{# Generate <link rel="stylesheet" href="http://fonts.googleapis.com/css?
↳family=Rosario" type="text/css"> #}
{{ stylesheet_link("http://fonts.googleapis.com/css?family=Rosario", false) }}

{# Generate <link rel="stylesheet" href="/your-app/css/styles.css" type="text/css"> #}
{{ stylesheet_link("css/styles.css") }}
```


Javascript

```
<?php

// Generate <script src="http://localhost/javascript/jquery.min.js" type="text/
↪javascript"></script>
echo $this->tag->javascriptInclude("http://localhost/javascript/jquery.min.js", ↪
↪false);

// Generate <script src="/your-app/javascript/jquery.min.js" type="text/javascript"></
↪script>
echo $this->tag->javascriptInclude("javascript/jquery.min.js");
```

Volt syntax:

```
{# Generate <script src="http://localhost/javascript/jquery.min.js" type="text/
↪javascript"></script> #}
{{ javascript_include("http://localhost/javascript/jquery.min.js", false) }}

{# Generate <script src="/your-app/javascript/jquery.min.js" type="text/javascript"></
↪script> #}
{{ javascript_include("javascript/jquery.min.js") }}
```

HTML5 elements - generic HTML helper

Phalcon offers a generic HTML helper that allows the generation of any kind of HTML element. It is up to the developer to produce a valid HTML element name to the helper.

```
<?php

// Generate
// <canvas id="canvas1" width="300" class="cnvclass">
// This is my canvas
// </canvas>
echo $this->tag->tagHtml("canvas", ["id" => "canvas1", "width" => "300", "class" =>
↪"cnvclass"], false, true, true);
echo "This is my canvas";
echo $this->tag->tagHtmlClose("canvas");
```

Volt syntax:

```
{# Generate
<canvas id="canvas1" width="300" class="cnvclass">
This is my canvas
</canvas> #}
{{ tag_html("canvas", ["id": "canvas1", "width": "300", "class": "cnvclass"], false, ↪
↪true, true) }}
    This is my canvas
{{ tag_html_close("canvas") }}
```

Tag Service

Phalcon\Tag is available via the ‘tag’ service, this means you can access it from any part of the application where the services container is located:

```
<?php echo $this->tag->linkTo("pages/about", "About") ?>
```

You can easily add new helpers to a custom component replacing the service ‘tag’ in the services container:

```
<?php

use Phalcon\Tag;

class MyTags extends Tag
{
    // ...

    // Create a new helper
    public static function myAmazingHelper($parameters)
    {
        // ...
    }

    // Override an existing method
    public static function textField($parameters)
    {
        // ...
    }
}
```

Then change the definition of the service ‘tag’:

```
<?php

$di["tag"] = function () {
    return new MyTags();
};
```

Creating your own helpers

You can easily create your own helpers. First, start by creating a new folder within the same directory as your controllers and models. Give it a title that is relative to what you are creating. For our example here, we can call it “customhelpers”. Next we will create a new file titled `MyTags.php` within this new directory. At this point, we have a structure that looks similar to : `/app/customhelpers/MyTags.php`. In `MyTags.php`, we will extend the *Phalcon\Tag* and implement your own helper. Below is a simple example of a custom helper:

```
<?php

use Phalcon\Tag;

class MyTags extends Tag
{
    /**
     * Generates a widget to show a HTML5 audio tag
     *
     * @param array
     * @return string
     */
    public static function audioField($parameters)
    {
        // Converting parameters to array if it is not
```

```

        if (!is_array($parameters)) {
            $parameters = [$parameters];
        }

        // Determining attributes "id" and "name"
        if (!isset($parameters[0])) {
            $parameters[0] = $parameters["id"];
        }

        $id = $parameters[0];

        if (!isset($parameters["name"])) {
            $parameters["name"] = $id;
        } else {
            if (!$parameters["name"]) {
                $parameters["name"] = $id;
            }
        }

        // Determining widget value,
        // \Phalcon\Tag::setDefault() allows to set the widget value
        if (isset($parameters["value"])) {
            $value = $parameters["value"];

            unset($parameters["value"]);
        } else {
            $value = self::getValue($id);
        }

        // Generate the tag code
        $code = '<audio id="' . $id . '" value="' . $value . '" ';

        foreach ($parameters as $key => $attributeValue) {
            if (!is_integer($key)) {
                $code .= $key . '=' . $attributeValue . ' ';
            }
        }

        $code .= ">";

        return $code;
    }
}

```

After creating our custom helper, we will autoload the new directory that contains our helper class from our “index.php” located in the public directory.

```

<?php

use Phalcon\Loader;
use Phalcon\Mvc\Application;
use Phalcon\Di\FactoryDefault();
use Phalcon\Exception as PhalconException;

try {
    $loader = new Loader();

    $loader->registerDirs(

```

```
[
    "../app/controllers",
    "../app/models",
    "../app/customhelpers", // Add the new helpers folder
]
);

$loader->register();

$di = new FactoryDefault();

// Assign our new tag a definition so we can call it
$di->set(
    "MyTags",
    function () {
        return new MyTags();
    }
);

$app = new Application($di);

$response = $app->handle();

$response->send();
} catch (PhalconException $e) {
    echo "PhalconException: ", $e->getMessage();
}
```

Now you are ready to use your new helper within your views:

```
<body>

    <?php

    echo MyTags::audioField(
        [
            "name" => "test",
            "id"   => "audio_test",
            "src"  => "/path/to/audio.mp3",
        ]
    );

    ?>

</body>
```

In next chapter, we'll talk about *Volt* a faster template engine for PHP, where you can use a more friendly syntax for using helpers provided by *Phalcon\Tag*.

Pengelolaan Aset

Phalcon\Assets adalah komponen yang memungkinkan anda mengelola resource statik seperti CSS stylesheet atau pustaka JavaScript dalam sebuah aplikasi web.

Phalcon\Assets\Manager tersedia dalam service container, sehingga anda dapat menambahkan resource dari sembarang bagian aplikasi di mana container tersedia.

Menambah Resource

Asset mendukung dua jenis resource bawaan: CSS dan JavaScript. Anda dapat menciptakan resource lain jika dibutuhkan. Pengelola asset secara internal menyimpan dua kumpulan resource bawaan - satu untuk JavaScript dan untuk CSS.

Anda dapat menambah resource ke kumpulan seperti berikut:

```
<?php

use Phalcon\Mvc\Controller;

class IndexController extends Controller
{
    public function index()
    {
        // Tambahkan beberapa CSS lokal
        $this->assets->addCss("css/style.css");
        $this->assets->addCss("css/index.css");

        // Tambahkan beberapa Javascript
        $this->assets->addJs("js/jquery.js");
        $this->assets->addJs("js/bootstrap.min.js");
    }
}
```

di sebuah view, resource ini lalu dapat dicetak:

```
<html>
  <head>
    <title>Some amazing website</title>

    <?php $this->assets->outputCss(); ?>
  </head>

  <body>
    <!-- ... -->

    <?php $this->assets->outputJs(); ?>
  </body>
</html>
```

Sintaks Volt:

```
<html>
  <head>
    <title>Some amazing website</title>

    {{ assets.outputCss() }}
  </head>

  <body>
    <!-- ... -->

    {{ assets.outputJs() }}
  </body>
</html>
```

Untuk performa pageload yang lebih baik, disarankan untuk menempatkan JavaScript diakhir HTML daripada di `<head>`.

Resource Local/Remote

Resource lokal adalah resource yang disediakan oleh aplikasi yang sama dan terletak di document root aplikasi. URL resource lokal dibuat menggunakan 'url' service, biasanya *Phalcon\Mvc\Url*.

Resource remote adalah resource seperti pustaka umum seperti jQuery, Bootstrap, dan lain-lain. yang disediakan oleh sebuah CDN.

Parameter kedua `addCss()` dan `addJs()` menyatakan apakah resource adalah lokal atau tidak (`true` berarti lokal, `false` berarti remote). Defaultnya, pengelola asset akan mengasumsikan resource adalah lokal:

```
<?php

public function indexAction()
{
    // Tambahkan resource CSS lokal
    $this->assets->addCss("//netdna.bootstrapcdn.com/twitter-bootstrap/2.3.1/css/
    ↪bootstrap-combined.min.css", false);
    $this->assets->addCss("css/style.css", true);
    $this->assets->addCss("css/extra.css");
}
```

Koleksi

Koleksi mengelompokkan resource berjenis sama. Pengelola asset secara implisit menciptakan dua koleksi: `css` dan `js`. Anda dapat menciptakan koleksi tambahan untuk mengelompokkan resource tertentu agar mudah menempatkan resource tersebut di view:

```
<?php

// Javascripts di header
$headerCollection = $this->assets->collection("header");

$headerCollection->addJs("js/jquery.js");
$headerCollection->addJs("js/bootstrap.min.js");

// Javascripts di footer
$footerCollection = $this->assets->collection("footer");

$footerCollection->addJs("js/jquery.js");
$footerCollection->addJs("js/bootstrap.min.js");
```

dalam view:

```
<html>
  <head>
    <title>Some amazing website</title>

    <?php $this->assets->outputJs("header"); ?>
  </head>

  <body>
    <!-- ... -->
```

```

        <?php $this->assets->outputJs("footer"); ?>
    </body>
</html>

```

Sintaks Volt:

```

<html>
    <head>
        <title>Some amazing website</title>

        {{ assets.outputCss("header") }}
    </head>

    <body>
        <!-- ... -->

        {{ assets.outputJs("footer") }}
    </body>
</html>

```

Prefix URL

Koleksi dapat diberi prefix URL, memungkinkan anda mengubah satu server ke lainnya pada tiap saat:

```

<?php

$footerCollection = $this->assets->collection("footer");

if ($config->environment === "development") {
    $footerCollection->setPrefix("/");
} else {
    $footerCollection->setPrefix("http://cdn.example.com/");
}

$footerCollection->addJs("js/jquery.js");
$footerCollection->addJs("js/bootstrap.min.js");

```

Sintaks berantai tersedia pula:

```

<?php

$scripts = $assets
    ->collection("header")
    ->setPrefix("http://cdn.example.com/")
    ->setLocal(false)
    ->addJs("js/jquery.js")
    ->addJs("js/bootstrap.min.js");

```

Penyaringan dan Minifikasi

Phalcon\Assets menyediakan minifikasi resource JavaScript dan CSS bawaan. Anda dapat menciptakan koleksi resource yang memerintahkan pengelola asset mana harus disaring dan mana yang harus dibiarkan apa adanya. Tambahan diatas, Jsmin oleh Douglas Crockford adalah bagian ekstensi inti yang menawarkan minifikasi file JavaScript untuk performa maksimum. Di ranah CSS, CSSMin oleh Ryan Day juga tersedia untuk meminimalkan file CSS:

Contoh berikut menunjukkan bagaimana melakukan minifikasi pada koleksi resource:

```
<?php

$manager

    // JavaScript berikut terletak di bawah
    ->collection("jsFooter")

    // Nama file akhir
    ->setTargetPath("final.js")

    // Script tag dibuat dengan URI ini
    ->setTargetUri("production/final.js")

    // INi adalah resource remote yang tidak perlu difilter
    ->addJs("code.jquery.com/jquery-1.10.0.min.js", false, false)

    // Ini adalah resource lokal yang harus difilter
    ->addJs("common-functions.js")
    ->addJs("page-functions.js")

    // Gabung semuanya menjadi satu file
    ->join(true)

    // menggunakan filter bawaan Jsmin
    ->addFilter(
        new Phalcon\Assets\Filters\Jsmin()
    )

    // Menggunakan filter kustom
    ->addFilter(
        new MyApp\Assets\Filters\LicenseStamper()
    );
```

Sebuah koleksi dapat berisi resource JavaScript atau CSS namun tidak keduanya. Beberapa resource mungkin remote, yakni, mereka diperoleh melalui HTTP dari sumber remote untuk difilter lebih lanjut. Di sarankan untuk mengubah resource external menjadi lokal untuk performa lebih baik.

Seperti yang terlihat di atas, metode `addJs()` digunakan untuk menambah resource ke koleksi, parameter kedua menentukan apakah resource adalah eksternal atau tidak dan parameter ketiga menentukan apakah resource harus difilter atau dibiarkan apa adanya:

```
<?php

// JavaScript ini terletak di bagian bawah halaman
$jsFooterCollection = $manager->collection("jsFooter");

// resource remote berikut tidak perlu difilter
$jsFooterCollection->addJs("code.jquery.com/jquery-1.10.0.min.js", false, false);

// Resource lokal ini harus difilter
$jsFooterCollection->addJs("common-functions.js");
$jsFooterCollection->addJs("page-functions.js");
```

Filter didaftarkan di koleksi, filter lebih dari satu diizinkan, konten resource difilter dengan urutan sama seperti urutan registrasi filter:


```
<?php

// gunakan filter Jsmin bawaan
$jsFooterCollection->addFilter(
    new Phalcon\Assets\Filters\Jsmin()
);

// Gunakan filter custom
$jsFooterCollection->addFilter(
    new MyApp\Assets\Filters\LicenseStamper()
);
```

Kedua filter bawaan dan kustom dapat diterapkan secara transparan pada koleksi. Langkah terakhir adalah menentukan apakah semua resource dalam koleksi harus digabung menjadi file tunggal or masing-masing terpisah. Untuk memberitahu koleksi bawah semua resource harus digabung anda dapat menggunakan metode `join()`.

Jika resource akan digabung, kita perlu menentukan file yang digunakan untuk menyimpan resource dan URI mana yang akan digunakan menampilkannya. Pengaturan ini diset dengan `setTargetPath()` dan `setTargetUri()`:

```
<?php

$jsFooterCollection->join(true);

// Nama file akhir
$jsFooterCollection->setTargetPath("public/production/final.js");

// script HTML tag dibuat dengan URI ini
$jsFooterCollection->setTargetUri("production/final.js");
```

Filter Bawaan

Phalcon menyediakan 2 filter bawaan untuk minifikasi JavaScript dan CSS, C-backendnya menghasilkan overhead terendah untuk menjalankan tugas ini:

Filter	Keterangan
<i>Phalcon\Assets\Filters\Jsmin</i>	Mengecilkan JavaScript dengan menghapus karakter yang diabaikan oleh interpreter/kompiler Javascript
<i>Phalcon\Assets\Filters\Cssmin</i>	Mengecilkan CSS dengan menghapus karakter yang diabaikan oleh browsers

Filter Kustom

Sebagai tambahan filter bawaan, anda dapat menciptakan filter anda sendiri. Filter ini dapat memanfaatkan tool yang sudah dan lebih canggih seperti *YUI*, *Sass*, *Closure*, dan lain-lain.:

```
<?php

use Phalcon\Assets\FilterInterface;

/**
 * Filter konten CSS dengan YUI
 *
 * @param string $contents
 * @return string
```

```
*/
class CssYUICompressor implements FilterInterface
{
    protected $_options;

    /**
     * CssYUICompressor constructor
     *
     * @param array $options
     */
    public function __construct(array $options)
    {
        $this->_options = $options;
    }

    /**
     * Lakukan filtering
     *
     * @param string $contents
     *
     * @return string
     */
    public function filter($contents)
    {
        // Tulis konten string ke file sementara
        file_put_contents("temp/my-temp-1.css", $contents);

        system(
            $this->_options["java-bin"] .
            " -jar " .
            $this->_options["yui"] .
            " --type css " .
            "temp/my-temp-file-1.css " .
            $this->_options["extra-options"] .
            " -o temp/my-temp-file-2.css"
        );

        // Kembalikan isi file sementara
        return file_get_contents("temp/my-temp-file-2.css");
    }
}
```

Penggunaan:

```
<?php

// Ambil koleksi CSS
$css = $this->assets->get("head");

// Tambahkan filter kompresor YUI ke koleksi
$css->addFilter(
    new CssYUICompressor(
        [
            "java-bin"      => "/usr/local/bin/java",
            "yui"           => "/some/path/yuicompressor-x.y.z.jar",
            "extra-options" => "--charset utf8",
        ]
    )
)
```

```
);
```

di contoh sebelumnya, kita menggunakan filter kustom bernama `LicenseStamper`:

```
<?php

use Phalcon\Assets\FILTERInterface;

/**
 * Tambahkan pesan lisensi di awal file
 *
 * @param string $contents
 *
 * @return string
 */
class LicenseStamper implements FILTERInterface
{
    /**
     * Lakukan filtering
     *
     * @param string $contents
     * @return string
     */
    public function filter($contents)
    {
        $license = "/* (c) 2015 Your Name Here */";

        return $license . PHP_EOL . PHP_EOL . $contents;
    }
}
```

Output Kustom

Metode `outputJs()` dan `outputCss()` tersedia untuk menghasilkan kode HTML yang diperlukan tergantung jenis masing-masing resource. Anda dapat mengubah metode ini atau mencetak resource secara manual dengan cara berikut:

```
<?php


use Phalcon\Tag;

$jsCollection = $this->assets->collection("js");

foreach ($jsCollection as $resource) {
    echo Tag::javascriptInclude(
        $resource->getPath()
    );
}
```

Volt: Template Engine

Volt is an ultra-fast and designer friendly templating language written in C for PHP. It provides you a set of helpers to write views in an easy way. Volt is highly integrated with other components of Phalcon, just as you can use it as a stand-alone component in your applications.

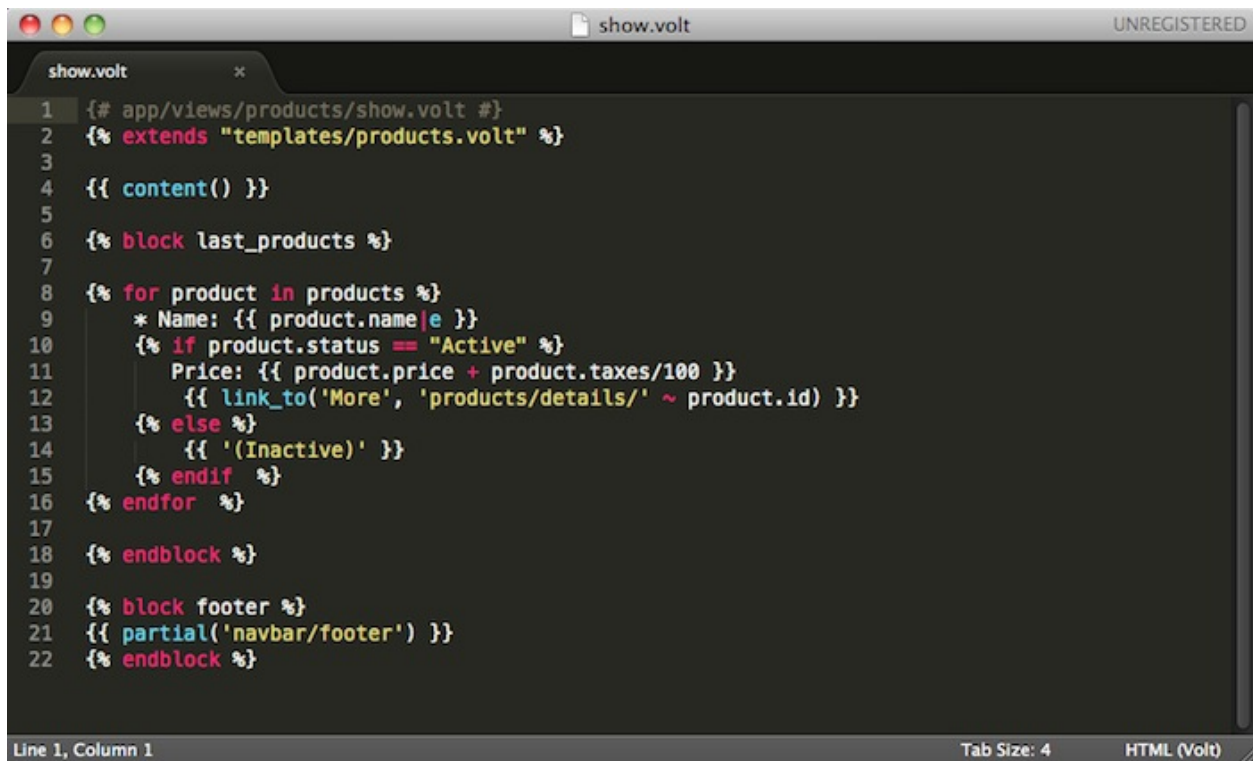

```

1  {# app/views/products/show.volt #}
2  {% extends "templates/products.volt" %}
3
4  {{ content() }}
5
6  {% block last_products %}
7
8  {% for product in products %}
9      * Name: {{ product.name|e }}
10     {% if product.status == "Active" %}
11         Price: {{ product.price + product.taxes/100 }}
12         {{ link_to('More', 'products/details/' ~ product.id) }}
13     {% else %}
14         {{ '(Inactive)' }}
15     {% endif %}
16 {% endfor %}
17
18 {% endblock %}
19
20 {% block footer %}
21 {{ partial('navbar/footer') }}
22 {% endblock %}

```

Volt is inspired by [Jinja](#), originally created by [Armin Ronacher](#). Therefore many developers will be in familiar territory using the same syntax they have been using with similar template engines. Volt's syntax and features have been enhanced with more elements and of course with the performance that developers have been accustomed to while working with Phalcon.

Introduction

Volt views are compiled to pure PHP code, so basically they save the effort of writing PHP code manually:

```

{# app/views/products/show.volt #}

{% block last_products %}

{% for product in products %}
    * Name: {{ product.name|e }}
    {% if product.status === "Active" %}
        Price: {{ product.price + product.taxes/100 }}
    {% endif %}
{% endfor %}

{% endblock %}

```

Activating Volt

As with other templating engines, you may register Volt in the view component, using a new extension or reusing the standard `.phtml`:

```

<?php

use Phalcon\Mvc\View;
use Phalcon\Mvc\View\Engine\Volt;

// Register Volt as a service
$di->set(
    "voltService",
    function ($view, $di) {
        $volt = new Volt($view, $di);

        $volt->setOptions(
            [
                "compiledPath"      => "../app/compiled-templates/",
                "compiledExtension" => ".compiled",
            ]
        );

        return $volt;
    }
);

// Register Volt as template engine
$di->set(
    "view",
    function () {
        $view = new View();

        $view->setViewsDir("../app/views/");

        $view->registerEngines(
            [
                ".volt" => "voltService",
            ]
        );

        return $view;
    }
);

```

Use the standard “.phtml” extension:

```

<?php

$view->registerEngines(
    [
        ".phtml" => "voltService",
    ]
);

```

You don’t have to specify the Volt Service in the DI; you can also use the Volt engine with the default settings:

```

<?php

$view->registerEngines(
    [
        ".volt" => "Phalcon\\Mvc\\View\\Engine\\Volt",
    ]
);

```

```
);
```

If you do not want to reuse Volt as a service, you can pass an anonymous function to register the engine instead of a service name:

```
<?php

use Phalcon\Mvc\View;
use Phalcon\Mvc\View\Engine\Volt;

// Register Volt as template engine with an anonymous function
$di->set(
    "view",
    function () {
        $view = new \Phalcon\Mvc\View();

        $view->setViewsDir("../app/views/");

        $view->registerEngines(
            [
                ".volt" => function ($view, $di) {
                    $volt = new Volt($view, $di);

                    // Set some options here

                    return $volt;
                }
            ]
        );

        return $view;
    }
);
```

The following options are available in Volt:

Option	Description	De- fault
compiledPath	A writable path where the compiled PHP templates will be placed	./
compiledExtension	An additional extension appended to the compiled PHP file	.php
compiledSeparator	Volt replaces the directory separators / and \ by this separator in order to create a single file in the compiled directory	%%
stat	Whether Phalcon must check if exists differences between the template file and its compiled path	true
compileAlways	Tell Volt if the templates must be compiled in each request or only when they change	false
prefix	Allows to prepend a prefix to the templates in the compilation path	null
autoescape	Enables globally autoescape of HTML	false

The compilation path is generated according to the above options, if the developer wants total freedom defining the compilation path, an anonymous function can be used to generate it, this function receives the relative path to the template in the views directory. The following examples show how to change the compilation path dynamically:

```
<?php

// Just append the .php extension to the template path
// leaving the compiled templates in the same directory
```

```

$volt->setOptions(
    [
        "compiledPath" => function ($templatePath) {
            return $templatePath . ".php";
        }
    ]
);

// Recursively create the same structure in another directory
$volt->setOptions(
    [
        "compiledPath" => function ($templatePath) {
            $dirName = dirname($templatePath);

            if (!is_dir("cache/" . $dirName)) {
                mkdir("cache/" . $dirName);
            }

            return "cache/" . $dirName . "/" . $templatePath . ".php";
        }
    ]
);

```

Basic Usage

A view consists of Volt code, PHP and HTML. A set of special delimiters is available to enter into Volt mode. `{% ... %}` is used to execute statements such as for-loops or assign values and `{{ ... }}`, prints the result of an expression to the template.

Below is a minimal template that illustrates a few basics:

```

{# app/views/posts/show.phtml #}
<!DOCTYPE html>
<html>
    <head>
        <title>{{ title }} - An example blog</title>
    </head>
    <body>

        {% if show_navigation %}
            <ul id="navigation">
                {% for item in menu %}
                    <li>
                        <a href="{{ item.href }}">
                            {{ item.caption }}
                        </a>
                    </li>
                {% endfor %}
            </ul>
        {% endif %}

        <h1>{{ post.title }}</h1>

        <div class="content">
            {{ post.content }}
        </div>
    </body>
</html>

```

```
</body>
</html>
```

Using *Phalcon\Mvc\View* you can pass variables from the controller to the views. In the above example, four variables were passed to the view: `show_navigation`, `menu`, `title` and `post`:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function showAction()
    {
        $post = Post::findFirst();
        $menu = Menu::findFirst();

        $this->view->show_navigation = true;
        $this->view->menu              = $menu;
        $this->view->title             = $post->title;
        $this->view->post              = $post;

        // Or...

        $this->view->setVar("show_navigation", true);
        $this->view->setVar("menu",           $menu);
        $this->view->setVar("title",          $post->title);
        $this->view->setVar("post",           $post);
    }
}
```

Variables

Object variables may have attributes which can be accessed using the syntax: `foo.bar`. If you are passing arrays, you have to use the square bracket syntax: `foo['bar']`

```
{{ post.title }} {# for $post->title #}
{{ post['title'] }} {# for $post['title'] #}
```

Filters

Variables can be formatted or modified using filters. The pipe operator `|` is used to apply filters to variables:

```
{{ post.title|e }}
{{ post.content|striptags }}
{{ name|capitalize|trim }}
```

The following is the list of available built-in filters in Volt:

Filter	Description
e	Applies <code>Phalcon\Escaper->escapeHtml()</code> to the value
escape	Applies <code>Phalcon\Escaper->escapeHtml()</code> to the value
escape_css	Applies <code>Phalcon\Escaper->escapeCss()</code> to the value
escape_js	Applies <code>Phalcon\Escaper->escapeJs()</code> to the value
escape_attr	Applies <code>Phalcon\Escaper->escapeHtmlAttr()</code> to the value
trim	Applies the <code>trim</code> PHP function to the value. Removing extra spaces
left_trim	Applies the <code>ltrim</code> PHP function to the value. Removing extra spaces
right_trim	Applies the <code>rtrim</code> PHP function to the value. Removing extra spaces
striptags	Applies the <code>striptags</code> PHP function to the value. Removing HTML tags
slashes	Applies the <code>slashes</code> PHP function to the value. Escaping values
stripslashes	Applies the <code>stripslashes</code> PHP function to the value. Removing escaped quotes
capitalize	Capitalizes a string by applying the <code>ucwords</code> PHP function to the value
lower	Change the case of a string to lowercase
upper	Change the case of a string to uppercase
length	Counts the string length or how many items are in an array or object
nl2br	Changes newlines <code>\n</code> by line breaks (<code>
</code>). Uses the PHP function <code>nl2br</code>
sort	Sorts an array using the PHP function <code>asort</code>
keys	Returns the array keys using <code>array_keys</code>
join	Joins the array parts using a separator <code>join</code>
format	Formats a string using <code>sprintf</code> .
json_encode	Converts a value into its JSON representation
json_decode	Converts a value from its JSON representation to a PHP representation
abs	Applies the <code>abs</code> PHP function to a value.
url_encode	Applies the <code>urlencode</code> PHP function to the value
default	Sets a default value in case that the evaluated expression is empty (is not set or evaluates to a falsy value)
convert_encoding	Converts a string from one charset to another

Examples:

```
{# e or escape filter #}
{{ "<h1>Hello<h1>"|e }}
{{ "<h1>Hello<h1>"|escape }}
```

```
{# trim filter #}
{{ "  hello  "|trim }}
```

```
{# striptags filter #}
{{ "<h1>Hello<h1>"|striptags }}
```

```
{# slashes filter #}
{{ "'this is a string'"|slashes }}
```

```
{# stripslashes filter #}
{{ "'this is a string'"|stripslashes }}
```

```
{# capitalize filter #}
{{ "hello"|capitalize }}
```

```
{# lower filter #}
{{ "HELLO"|lower }}
```

```
{# upper filter #}
{{ "hello"|upper }}
```

```
{# length filter #}
{{ "robots"|length }}
{{ [1, 2, 3]|length }}

{# nl2br filter #}
{{ "some\ntext"|nl2br }}

{# sort filter #}
{% set sorted = [3, 1, 2]|sort %}

{# keys filter #}
{% set keys = ['first': 1, 'second': 2, 'third': 3]|keys %}

{# join filter #}
{% set joined = "a".. "z"|join(",") %}

{# format filter #}
{{ "My real name is %s"|format(name) }}

{# json_encode filter #}
{% set encoded = robots|json_encode %}

{# json_decode filter #}
{% set decoded = '{"one":1,"two":2,"three":3}'|json_decode %}

{# url_encode filter #}
{{ post.permanent_link|url_encode }}

{# convert_encoding filter #}
{{ "désolé"|convert_encoding('utf8', 'latin1') }}
```

Comments

Comments may also be added to a template using the `{# ... #}` delimiters. All text inside them is just ignored in the final output:

```
{# note: this is a comment
    {% set price = 100; %}
#}
```

List of Control Structures

Volt provides a set of basic but powerful control structures for use in templates:

For

Loop over each item in a sequence. The following example shows how to traverse a set of “robots” and print his/her name:

```
<h1>Robots</h1>
<ul>
    {% for robot in robots %}
        <li>
```

```

        {{ robot.name|e }}
    </li>
    {% endfor %}
</ul>

```

for-loops can also be nested:

```

<h1>Robots</h1>
{% for robot in robots %}
    {% for part in robot.parts %}
        Robot: {{ robot.name|e }} Part: {{ part.name|e }} <br />
    {% endfor %}
{% endfor %}

```

You can get the element “keys” as in the PHP counterpart using the following syntax:

```

{% set numbers = ['one': 1, 'two': 2, 'three': 3] %}

{% for name, value in numbers %}
    Name: {{ name }} Value: {{ value }}
{% endfor %}

```

An “if” evaluation can be optionally set:

```

{% set numbers = ['one': 1, 'two': 2, 'three': 3] %}

{% for value in numbers if value < 2 %}
    Value: {{ value }}
{% endfor %}

{% for name, value in numbers if name != 'two' %}
    Name: {{ name }} Value: {{ value }}
{% endfor %}

```

If an ‘else’ is defined inside the ‘for’, it will be executed if the expression in the iterator result in zero iterations:

```

<h1>Robots</h1>
{% for robot in robots %}
    Robot: {{ robot.name|e }} Part: {{ part.name|e }} <br />
{% else %}
    There are no robots to show
{% endfor %}

```

Alternative syntax:

```

<h1>Robots</h1>
{% for robot in robots %}
    Robot: {{ robot.name|e }} Part: {{ part.name|e }} <br />
{% elseif %}
    There are no robots to show
{% endfor %}

```

Loop Controls

The ‘break’ and ‘continue’ statements can be used to exit from a loop or force an iteration in the current block:

```
{# skip the even robots #}
{% for index, robot in robots %}
    {% if index is even %}
        {% continue %}
    {% endif %}
    ...
{% endfor %}
```

```
{# exit the foreach on the first even robot #}
{% for index, robot in robots %}
    {% if index is even %}
        {% break %}
    {% endif %}
    ...
{% endfor %}
```

If

As PHP, an “if” statement checks if an expression is evaluated as true or false:

```
<h1>Cyborg Robots</h1>
<ul>
    {% for robot in robots %}
        {% if robot.type === "cyborg" %}
            <li>{{ robot.name|e }}</li>
        {% endif %}
    {% endfor %}
</ul>
```

The else clause is also supported:

```
<h1>Robots</h1>
<ul>
    {% for robot in robots %}
        {% if robot.type === "cyborg" %}
            <li>{{ robot.name|e }}</li>
        {% else %}
            <li>{{ robot.name|e }} (not a cyborg)</li>
        {% endif %}
    {% endfor %}
</ul>
```

The ‘elseif’ control flow structure can be used together with if to emulate a ‘switch’ block:

```
{% if robot.type === "cyborg" %}
    Robot is a cyborg
{% elseif robot.type === "virtual" %}
    Robot is virtual
{% elseif robot.type === "mechanical" %}
    Robot is mechanical
{% endif %}
```

Loop Context

A special variable is available inside ‘for’ loops providing you information about

Variable	Description
loop.index	The current iteration of the loop. (1 indexed)
loop.index0	The current iteration of the loop. (0 indexed)
loop.revindex	The number of iterations from the end of the loop (1 indexed)
loop.revindex0	The number of iterations from the end of the loop (0 indexed)
loop.first	True if in the first iteration.
loop.last	True if in the last iteration.
loop.length	The number of items to iterate

```
{% for robot in robots %}
    {% if loop.first %}
        <table>
            <tr>
                <th>#</th>
                <th>Id</th>
                <th>Name</th>
            </tr>
        {% endif %}
        <tr>
            <td>{{ loop.index }}</td>
            <td>{{ robot.id }}</td>
            <td>{{ robot.name }}</td>
        </tr>
    {% if loop.last %}
        </table>
    {% endif %}
{% endfor %}
```

Assignments

Variables may be changed in a template using the instruction “set”:

```
{% set fruits = ['Apple', 'Banana', 'Orange'] %}

{% set name = robot.name %}
```

Multiple assignments are allowed in the same instruction:

```
{% set fruits = ['Apple', 'Banana', 'Orange'], name = robot.name, active = true %}
```

Additionally, you can use compound assignment operators:

```
{% set price += 100.00 %}

{% set age *= 5 %}
```

The following operators are available:

Operator	Description
=	Standard Assignment
+=	Addition assignment
-=	Subtraction assignment
*=	Multiplication assignment
/=	Division assignment

Expressions

Volt provides a basic set of expression support, including literals and common operators.

A expression can be evaluated and printed using the '{{' and '}}' delimiters:

```
{{ (1 + 1) * 2 }}
```

If an expression needs to be evaluated without be printed the 'do' statement can be used:

```
{% do (1 + 1) * 2 %}
```

Literals

The following literals are supported:

Filter	Description
"this is a string"	Text between double quotes or single quotes are handled as strings
100.25	Numbers with a decimal part are handled as doubles/floats
100	Numbers without a decimal part are handled as integers
false	Constant "false" is the boolean false value
true	Constant "true" is the boolean true value
null	Constant "null" is the Null value

Arrays

Whether you're using PHP 5.3 or >= 5.4 you can create arrays by enclosing a list of values in square brackets:

```
{# Simple array #}  
{{ ['Apple', 'Banana', 'Orange'] }}
```

```
{# Other simple array #}  
{{ ['Apple', 1, 2.5, false, null] }}
```

```
{# Multi-Dimensional array #}  
{{ [[1, 2], [3, 4], [5, 6]] }}
```

```
{# Hash-style array #}  
{{ ['first': 1, 'second': 4/2, 'third': '3'] }}
```

Curly braces also can be used to define arrays or hashes:

```
{% set myArray = {'Apple', 'Banana', 'Orange'} %}  
{% set myHash = {'first': 1, 'second': 4/2, 'third': '3'} %}
```

Math

You may make calculations in templates using the following operators:

Operator	Description
+	Perform an adding operation. <code>{{ 2 + 3 }}</code> returns 5
-	Perform a subtraction operation <code>{{ 2 - 3 }}</code> returns -1
*	Perform a multiplication operation <code>{{ 2 * 3 }}</code> returns 6
/	Perform a division operation <code>{{ 10 / 2 }}</code> returns 5
%	Calculate the remainder of an integer division <code>{{ 10 % 3 }}</code> returns 1

Comparisons

The following comparison operators are available:

Operator	Description
==	Check whether both operands are equal
!=	Check whether both operands aren't equal
<>	Check whether both operands aren't equal
>	Check whether left operand is greater than right operand
<	Check whether left operand is less than right operand
<=	Check whether left operand is less or equal than right operand
>=	Check whether left operand is greater or equal than right operand
===	Check whether both operands are identical
!==	Check whether both operands aren't identical

Logic

Logic operators are useful in the “if” expression evaluation to combine multiple tests:

Operator	Description
or	Return true if the left or right operand is evaluated as true
and	Return true if both left and right operands are evaluated as true
not	Negates an expression
(expr)	Parenthesis groups expressions

Other Operators

Additional operators seen the following operators are available:

Operator	Description
~	Concatenates both operands <code>{{ "hello " ~ "world" }}</code>
	Applies a filter in the right operand to the left <code>{{ "hello" uppercase }}</code>
..	Creates a range <code>{{ 'a'..'z' }}</code> <code>{{ 1..10 }}</code>
is	Same as == (equals), also performs tests
in	To check if an expression is contained into other expressions if "a" in "abc"
is not	Same as != (not equals)
'a' ? 'b' : 'c'	Ternary operator. The same as the PHP ternary operator
++	Increments a value
--	Decrements a value

The following example shows how to use operators:

```
{% set robots = ['Voltron', 'Astro Boy', 'Terminator', 'C3PO'] %}

{% for index in 0..robots|length %}
    {% if robots[index] is defined %}
        {{ "Name: " ~ robots[index] }}
    {% endif %}
{% endfor %}
```

Tests

Tests can be used to test if a variable has a valid expected value. The operator “is” is used to perform the tests:

```
{% set robots = ['1': 'Voltron', '2': 'Astro Boy', '3': 'Terminator', '4': 'C3PO'] %}

{% for position, name in robots %}
    {% if position is odd %}
        {{ name }}
    {% endif %}
{% endfor %}
```

The following built-in tests are available in Volt:

Test	Description
defined	Checks if a variable is defined (isset())
empty	Checks if a variable is empty
even	Checks if a numeric value is even
odd	Checks if a numeric value is odd
numeric	Checks if value is numeric
scalar	Checks if value is scalar (not an array or object)
iterable	Checks if a value is iterable. Can be traversed by a “for” statement
divisibleby	Checks if a value is divisible by other value
sameas	Checks if a value is identical to other value
type	Checks if a value is of the specified type

More examples:

```
{% if robot is defined %}
    The robot variable is defined
{% endif %}

{% if robot is empty %}
    The robot is null or isn't defined
{% endif %}

{% for key, name in [1: 'Voltron', 2: 'Astro Boy', 3: 'Bender'] %}
    {% if key is even %}
        {{ name }}
    {% endif %}
{% endfor %}

{% for key, name in [1: 'Voltron', 2: 'Astro Boy', 3: 'Bender'] %}
    {% if key is odd %}
        {{ name }}
    {% endif %}
{% endfor %}
```



```
{% for key, name in [1: 'Voltron', 2: 'Astroy Boy', 'third': 'Bender'] %}
    {% if key is numeric %}
        {{ name }}
    {% endif %}
{% endfor %}

{% set robots = [1: 'Voltron', 2: 'Astroy Boy'] %}
{% if robots is iterable %}
    {% for robot in robots %}
        ...
    {% endfor %}
{% endif %}

{% set world = "hello" %}
{% if world is sameas("hello") %}
    {{ "it's hello" }}
{% endif %}

{% set external = false %}
{% if external is type('boolean') %}
    {{ "external is false or true" }}
{% endif %}
```

Macros

Macros can be used to reuse logic in a template, they act as PHP functions, can receive parameters and return values:

```
{# Macro "display a list of links to related topics" #}
{%- macro related_bar(related_links) %}
    <ul>
        {%- for link in related_links %}
            <li>
                <a href="{{ url(link.url) }}" title="{{ link.title|striptags }}">
                    {{ link.text }}
                </a>
            </li>
        {%- endfor %}
    </ul>
{%- endmacro %}

{# Print related links #}
{{ related_bar(links) }}

<div>This is the content</div>

{# Print related links again #}
{{ related_bar(links) }}
```

When calling macros, parameters can be passed by name:

```
{%- macro error_messages(message, field, type) %}
    <div>
        <span class="error-type">{{ type }}</span>
        <span class="error-field">{{ field }}</span>
        <span class="error-message">{{ message }}</span>
    </div>
```

```
{%- endmacro %}

{# Call the macro #}
{{ error_messages('type': 'Invalid', 'message': 'The name is invalid', 'field': 'name'
→) }}

```

Macros can return values:

```
{%- macro my_input(name, class) %}
    {% return text_field(name, 'class': class) %}
{%- endmacro %}

{# Call the macro #}
{{ '<p>' ~ my_input('name', 'input-text') ~ '</p>' }}

```

And receive optional parameters:

```
{%- macro my_input(name, class="input-text") %}
    {% return text_field(name, 'class': class) %}
{%- endmacro %}

{# Call the macro #}
{{ '<p>' ~ my_input('name') ~ '</p>' }}
{{ '<p>' ~ my_input('name', 'input-text') ~ '</p>' }}

```

Using Tag Helpers

Volt is highly integrated with *Phalcon\Tag*, so it's easy to use the helpers provided by that component in a Volt template:

```
{{ javascript_include("js/jquery.js") }}

{{ form('products/save', 'method': 'post') }}

    <label for="name">Name</label>
    {{ text_field("name", "size": 32) }}

    <label for="type">Type</label>
    {{ select("type", productTypes, 'using': ['id', 'name']) }}

    {{ submit_button('Send') }}

{{ end_form() }}

```

The following PHP is generated:

```
<?php echo Phalcon\Tag::javascriptInclude("js/jquery.js") ?>

<?php echo Phalcon\Tag::form(array('products/save', 'method' => 'post')); ?>

    <label for="name">Name</label>
    <?php echo Phalcon\Tag::textField(array('name', 'size' => 32)); ?>

    <label for="type">Type</label>
    <?php echo Phalcon\Tag::select(array('type', $productTypes, 'using' => array('id',
→ 'name'))); ?>

```

```
<?php echo Phalcon\Tag::submitButton('Send'); ?>

{{ end_form() }}
```

To call a *Phalcon\Tag* helper, you only need to call an uncamelized version of the method:

Method	Volt function
Phalcon\Tag::linkTo	link_to
Phalcon\Tag::textField	text_field
Phalcon\Tag::passwordField	password_field
Phalcon\Tag::hiddenField	hidden_field
Phalcon\Tag::fileField	file_field
Phalcon\Tag::checkField	check_field
Phalcon\Tag::radioField	radio_field
Phalcon\Tag::dateField	date_field
Phalcon\Tag::emailField	email_field
Phalcon\Tag::numericField	numeric_field
Phalcon\Tag::submitButton	submit_button
Phalcon\Tag::selectStatic	select_static
Phalcon\Tag::select	select
Phalcon\Tag::textArea	text_area
Phalcon\Tag::form	form
Phalcon\Tag::endForm	end_form
Phalcon\Tag::getTitle	get_title
Phalcon\Tag::stylesheetLink	stylesheet_link
Phalcon\Tag::javascriptInclude	javascript_include
Phalcon\Tag::image	image
Phalcon\Tag::friendlyTitle	friendly_title

Functions

The following built-in functions are available in Volt:

Name	Description
content	Includes the content produced in a previous rendering stage
get_content	Same as content
partial	Dynamically loads a partial view in the current template
super	Render the contents of the parent block
time	Calls the PHP function with the same name
date	Calls the PHP function with the same name
dump	Calls the PHP function <code>var_dump()</code>
version	Returns the current version of the framework
constant	Reads a PHP constant
url	Generate a URL using the 'url' service

View Integration

Also, Volt is integrated with *Phalcon\Mvc\View*, you can play with the view hierarchy and include partials as well:

```
{{ content() }}
```

```
<!-- Simple include of a partial -->
<div id="footer">{{ partial("partials/footer") }}</div>

<!-- Passing extra variables -->
<div id="footer">{{ partial("partials/footer", ['links': links]) }}</div>
```

A partial is included in runtime, Volt also provides “include”, this compiles the content of a view and returns its contents as part of the view which was included:

```
{# Simple include of a partial #}
<div id="footer">
    {% include "partials/footer" %}
</div>

{# Passing extra variables #}
<div id="footer">
    {% include "partials/footer" with ['links': links] %}
</div>
```

Include

‘include’ has a special behavior that will help us improve performance a bit when using Volt, if you specify the extension when including the file and it exists when the template is compiled, Volt can inline the contents of the template in the parent template where it’s included. Templates aren’t inlined if the ‘include’ have variables passed with ‘with’:

```
{# The contents of 'partials/footer.volt' is compiled and inlined #}
<div id="footer">
    {% include "partials/footer.volt" %}
</div>
```

Partial vs Include

Keep the following points in mind when choosing to use the “partial” function or “include”:

- ‘Partial’ allows you to include templates made in Volt and in other template engines as well
- ‘Partial’ allows you to pass an expression like a variable allowing to include the content of other view dynamically
- ‘Partial’ is better if the content that you have to include changes frequently
- ‘Include’ copies the compiled content into the view which improves the performance
- ‘Include’ only allows to include templates made with Volt
- ‘Include’ requires an existing template at compile time

Template Inheritance

With template inheritance you can create base templates that can be extended by others templates allowing to reuse code. A base template define *blocks* than can be overridden by a child template. Let’s pretend that we have the following base template:

```
{# templates/base.volt #}
<!DOCTYPE html>
<html>
  <head>
    {% block head %}
      <link rel="stylesheet" href="style.css" />
    {% endblock %}

    <title>{% block title %}{% endblock %} - My Webpage</title>
  </head>

  <body>
    <div id="content">{% block content %}{% endblock %}</div>

    <div id="footer">
      {% block footer %}&copy; Copyright 2015, All rights reserved.{% endblock
→ %}
    </div>
  </body>
</html>
```

From other template we could extend the base template replacing the blocks:

```
{% extends "templates/base.volt" %}

{% block title %}Index{% endblock %}

{% block head %}<style type="text/css">.important { color: #336699; }</style>{%
→ endblock %}

{% block content %}
  <h1>Index</h1>
  <p class="important">Welcome on my awesome homepage.</p>
{% endblock %}
```

Not all blocks must be replaced at a child template, only those that are needed. The final output produced will be the following:

```
<!DOCTYPE html>
<html>
  <head>
    <style type="text/css">.important { color: #336699; }</style>

    <title>Index - My Webpage</title>
  </head>

  <body>
    <div id="content">
      <h1>Index</h1>
      <p class="important">Welcome on my awesome homepage.</p>
    </div>

    <div id="footer">
      &copy; Copyright 2015, All rights reserved.
    </div>
  </body>
</html>
```

Multiple Inheritance

Extended templates can extend other templates. The following example illustrates this:

```
{# main.volt #}  
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Title</title>  
  </head>  
  
  <body>  
    {% block content %}{% endblock %}  
  </body>  
</html>
```

Template “layout.volt” extends “main.volt”

```
{# layout.volt #}  
{% extends "main.volt" %}  
  
{% block content %}  
  
  <h1>Table of contents</h1>  
  
{% endblock %}
```

Finally a view that extends “layout.volt”:

```
{# index.volt #}  
{% extends "layout.volt" %}  
  
{% block content %}  
  
  {{ super() }}  
  
  <ul>  
    <li>Some option</li>  
    <li>Some other option</li>  
  </ul>  
  
{% endblock %}
```

Rendering “index.volt” produces:

```
<!DOCTYPE html>  
<html>  
  <head>  
    <title>Title</title>  
  </head>  
  
  <body>  
  
    <h1>Table of contents</h1>  
  
    <ul>  
      <li>Some option</li>  
      <li>Some other option</li>
```

```

        </ul>

    </body>
</html>

```

Note the call to the function `super()`. With that function it's possible to render the contents of the parent block.

As partials, the path set to “extends” is a relative path under the current views directory (i.e. `app/views/`).

By default, and for performance reasons, Volt only checks for changes in the children templates to know when to re-compile to plain PHP again, so it is recommended initialize Volt with the option `'compileAlways' => true`. Thus, the templates are compiled always taking into account changes in the parent templates.

Autoescape mode

You can enable auto-escaping of all variables printed in a block using the autoescape mode:

```

Manually escaped: {{ robot.name|e }}

{% autoescape true %}
    Autoescaped: {{ robot.name }}
{% autoescape false %}
    No Autoescaped: {{ robot.name }}
{% endautoescape %}
{% endautoescape %}

```

Extending Volt

Unlike other template engines, Volt itself is not required to run the compiled templates. Once the templates are compiled there is no dependence on Volt. With performance independence in mind, Volt only acts as a compiler for PHP templates.

The Volt compiler allow you to extend it adding more functions, tests or filters to the existing ones.

Functions

Functions act as normal PHP functions, a valid string name is required as function name. Functions can be added using two strategies, returning a simple string or using an anonymous function. Always is required that the chosen strategy returns a valid PHP string expression:

```

<?php

use Phalcon\Mvc\View\Engine\Volt;

$volt = new Volt($view, $di);

$compiler = $volt->getCompiler();

// This binds the function name 'shuffle' in Volt to the PHP function 'str_shuffle'
$compiler->addFunction("shuffle", "str_shuffle");

```

Register the function with an anonymous function. This case we use `$resolvedArgs` to pass the arguments exactly as were passed in the arguments:

```
<?php

$compiler->addFunction(
    "widget",
    function ($resolvedArgs, $exprArgs) {
        return "MyLibrary\\Widgets::get(" . $resolvedArgs . ")";
    }
);
```

Treat the arguments independently and unresolved:

```
<?php

$compiler->addFunction(
    "repeat",
    function ($resolvedArgs, $exprArgs) use ($compiler) {
        // Resolve the first argument
        $firstArgument = $compiler->expression($exprArgs[0]['expr']);

        // Checks if the second argument was passed
        if (isset($exprArgs[1])) {
            $secondArgument = $compiler->expression($exprArgs[1]['expr']);
        } else {
            // Use '10' as default
            $secondArgument = '10';
        }

        return "str_repeat(" . $firstArgument . ", " . $secondArgument . ")";
    }
);
```

Generate the code based on some function availability:

```
<?php

$compiler->addFunction(
    "contains_text",
    function ($resolvedArgs, $exprArgs) {
        if (function_exists("mb_stripos")) {
            return "mb_stripos(" . $resolvedArgs . ")";
        } else {
            return "stripos(" . $resolvedArgs . ")";
        }
    }
);
```

Built-in functions can be overridden adding a function with its name:

```
<?php

// Replace built-in function dump
$compiler->addFunction("dump", "print_r");
```


Filters

A filter has the following form in a template: `leftExprName(optional-args)`. Adding new filters is similar as seen with the functions:

```
<?php

// This creates a filter 'hash' that uses the PHP function 'md5'
$compiler->addFilter("hash", "md5");
```

```
<?php

$compiler->addFilter(
    "int",
    function ($resolvedArgs, $exprArgs) {
        return "intval(" . $resolvedArgs . ")";
    }
);
```

Built-in filters can be overridden adding a function with its name:

```
<?php

// Replace built-in filter 'capitalize'
$compiler->addFilter("capitalize", "lcfirst");
```

Extensions

With extensions the developer has more flexibility to extend the template engine, and override the compilation of a specific instruction, change the behavior of an expression or operator, add functions/filters, and more.

An extension is a class that implements the events triggered by Volt as a method of itself.

For example, the class below allows to use any PHP function in Volt:

```
<?php

class PhpFunctionExtension
{
    /**
     * This method is called on any attempt to compile a function call
     */
    public function compileFunction($name, $arguments)
    {
        if (function_exists($name)) {
            return $name . "(" . $arguments . ")";
        }
    }
}
```

The above class implements the method ‘`compileFunction`’ which is invoked before any attempt to compile a function call in any template. The purpose of the extension is to verify if a function to be compiled is a PHP function allowing to call it from the template. Events in extensions must return valid PHP code, this will be used as result of the compilation instead of the one generated by Volt. If an event doesn’t return a string the compilation is done using the default behavior provided by the engine.

The following compilation events are available to be implemented in extensions:

Event/Method	Description
compileFunction	Triggered before trying to compile any function call in a template
compileFilter	Triggered before trying to compile any filter call in a template
resolveExpression	Triggered before trying to compile any expression. This allows the developer to override operators
compileStatement	Triggered before trying to compile any expression. This allows the developer to override any statement

Volt extensions must be in registered in the compiler making them available in compile time:

```
<?php

// Register the extension in the compiler
$compiler->addExtension(
    new PhpFunctionExtension()
);
```

Caching view fragments

With Volt it's easy cache view fragments. This caching improves performance preventing that the contents of a block from being executed by PHP each time the view is displayed:

```
{% cache "sidebar" %}
    <!-- generate this content is slow so we are going to cache it -->
{% endcache %}
```

Setting a specific number of seconds:

```
{# cache the sidebar by 1 hour #}
{% cache "sidebar" 3600 %}
    <!-- generate this content is slow so we are going to cache it -->
{% endcache %}
```

Any valid expression can be used as cache key:

```
{% cache ("article-" ~ post.id) 3600 %}

    <h1>{{ post.title }}</h1>

    <p>{{ post.content }}</p>

{% endcache %}
```

The caching is done by the *Phalcon\Cache* component via the view component. Learn more about how this integration works in the section “*Caching View Fragments*”.

Inject Services into a Template

If a service container (DI) is available for Volt, you can use the services by only accessing the name of the service in the template:

```
{# Inject the 'flash' service #}
<div id="messages">{{ flash.output() }}</div>

{# Inject the 'security' service #}
<input type="hidden" name="token" value="{{ security.getToken() }}">
```

Stand-alone component

Using Volt in a stand-alone mode can be demonstrated below:

```
<?php

use Phalcon\Mvc\View\Engine\Volt\Compiler as VoltCompiler;

// Create a compiler
$compiler = new VoltCompiler();

// Optionally add some options
$compiler->setOptions(
    [
        // ...
    ]
);

// Compile a template string returning PHP code
echo $compiler->compileString(
    "{{ 'hello' }}"
);

// Compile a template in a file specifying the destination file
$compiler->compileFile(
    "layouts/main.volt",
    "cache/layouts/main.volt.php"
);

// Compile a template in a file based on the options passed to the compiler
$compiler->compile(
    "layouts/main.volt"
);

// Require the compiled templated (optional)
require $compiler->getCompiledTemplatePath();
```

External Resources

- A bundle for Sublime/Textmate is available [here](#)
- Album-O-Rama is a sample application using Volt as template engine, [[Album-O-Rama on Github](#)]
- Our website is running using Volt as template engine, [[Our website on Github](#)]
- Phosphorum, the Phalcon's forum, also uses Volt, [[Phosphorum on Github](#)]
- Vökuró, is another sample application that use Volt, [[Vökuró on Github](#)]

Aplikasi MVC

Semua kerja keras mengatur operasi dalam MVC di Phalcon normalnya dilakukan oleh *Phalcon\Mvc\Application*. Komponen ini membungkus semua operasi kompleks yang diperlukan dibelakang layar, menciptakan semua komponen yang diperlukan dan menyatukannya dengan proyek, memungkinkan pola MVC bekerja sesuai yang diinginkan.

Aplikasi Modul Tunggal atau Jamak

Dengan komponen ini anda dapat menjalankan beragam tipe struktur MVC:

Modul Tunggal

Aplikasi MVC tunggal terdiri atas satu modul saja. Namespace dapat digunakan namun tidak wajib. Aplikasi seperti ini memiliki struktur file sebagai berikut:

```
single/  
  app/  
    controllers/  
    models/  
    views/  
  public/  
    css/  
    img/  
    js/
```

Jika namespace tidak digunakan, file bootstrap berikut dapat digunakan untuk mengatur alir MVC:

```
<?php  
  
use Phalcon\Loader;  
use Phalcon\Mvc\View;  
use Phalcon\Mvc\Application;  
use Phalcon\Di\FactoryDefault;  
  
$loader = new Loader();  
  
$loader->registerDirs(  
    [  
        "../apps/controllers/",  
        "../apps/models/",  
    ]  
);  
  
$loader->register();  
  
$di = new FactoryDefault();  
  
// Daftarkan komponen view  
$di->set(  
    "view",  
    function () {  
        $view = new View();  
  
        $view->setViewsDir("../apps/views/");  
  
        return $view;  
    }  
);  
  
$application = new Application($di);  
  
try {  
    $response = $application->handle();
```

```

        $response->send();
    } catch (\Exception $e) {
        echo $e->getMessage();
    }

```

Jika namespace digunakan, bootstrap berikut bisa dipakai:

```

<?php

use Phalcon\Loader;
use Phalcon\Mvc\View;
use Phalcon\Mvc\Dispatcher;
use Phalcon\Mvc\Application;
use Phalcon\Di\FactoryDefault;

$loader = new Loader();

// Gunakan autoloading dengan prefix namespace
$loader->registerNamespaces(
    [
        "Single\\Controllers" => "../apps/controllers/",
        "Single\\Models"      => "../apps/models/",
    ]
);

$loader->register();

$di = new FactoryDefault();

// Daftarkan namespace default untuk dispatcher bagi controller
$di->set(
    "dispatcher",
    function () {
        $dispatcher = new Dispatcher();

        $dispatcher->setDefaultNamespace("Single\\Controllers");

        return $dispatcher;
    }
);

// Register the view component
$di->set(
    "view",
    function () {
        $view = new View();

        $view->setViewsDir("../apps/views/");

        return $view;
    }
);

$application = new Application($di);

try {
    $response = $application->handle();
}

```

```
$response->send();
} catch (\Exception $e) {
    echo $e->getMessage();
}
```

Modul Jamak

Sebuah aplikasi dengan module lebih dari satu, menggunakan document root sama untuk lebih dari satu modul. Di kasus ini, struktur file berikut dapat dipakai:

```
multiple/
  apps/
    frontend/
      controllers/
      models/
      views/
      Module.php
    backend/
      controllers/
      models/
      views/
      Module.php
  public/
    css/
    img/
    js/
```

Tiap direktori dalam apps/ punya struktur MVC sendiri. File Module.php disediakan untuk mengkonfigurasi setting spesifik tiap modul seperti autoloader atau custom services:

```
<?php

namespace Multiple\Backend;

use Phalcon\Loader;
use Phalcon\Mvc\View;
use Phalcon\DiInterface;
use Phalcon\Mvc\Dispatcher;
use Phalcon\Mvc\ModuleDefinitionInterface;

class Module implements ModuleDefinitionInterface
{
    /**
     * Register a specific autoloader for the module
     */
    public function registerAutoloaders(DiInterface $di = null)
    {
        $loader = new Loader();

        $loader->registerNamespaces(
            [
                "Multiple\\Backend\\Controllers" => "../apps/backend/controllers/",
                "Multiple\\Backend\\Models"      => "../apps/backend/models/",
            ]
        );
    }
}
```

```

        $loader->register();
    }

    /**
     * Register specific services for the module
     */
    public function registerServices(DiInterface $di)
    {
        // Registering a dispatcher
        $di->set(
            "dispatcher",
            function () {
                $dispatcher = new Dispatcher();

                $dispatcher->setDefaultNamespace("Multiple\\Backend\\Controllers");

                return $dispatcher;
            }
        );

        // Registering the view component
        $di->set(
            "view",
            function () {
                $view = new View();

                $view->setViewsDir("../apps/backend/views/");

                return $view;
            }
        );
    }
}

```

Sebuah file bootstrap khusus diperlukan untuk memuat arsitektur MVC bermodul jamak:

```

<?php

use Phalcon\Mvc\Router;
use Phalcon\Mvc\Application;
use Phalcon\Di\FactoryDefault;

$di = new FactoryDefault();

// Specify routes for modules
// More information how to set the router up https://docs.phalconphp.com/id/latest/reference/routing.html
$di->set(
    "router",
    function () {
        $router = new Router();

        $router->setDefaultModule("frontend");

        $router->add(
            "/login",
            [

```

```
        "module"      => "backend",
        "controller" => "login",
        "action"     => "index",
    ]
);

$router->add(
    "/admin/products/:action",
    [
        "module"      => "backend",
        "controller" => "products",
        "action"     => 1,
    ]
);

$router->add(
    "/products/:action",
    [
        "controller" => "products",
        "action"     => 1,
    ]
);

return $router;
}
);

// Create an application
$application = new Application($di);

// Register the installed modules
$application->registerModules(
    [
        "frontend" => [
            "className" => "Multiple\\Frontend\\Module",
            "path"      => "../apps/frontend/Module.php",
        ],
        "backend" => [
            "className" => "Multiple\\Backend\\Module",
            "path"      => "../apps/backend/Module.php",
        ]
    ]
);

try {
    // Handle the request
    $response = $application->handle();

    $response->send();
} catch (\Exception $e) {
    echo $e->getMessage();
}
```

Jika anda ingin mengelola konfigurasi modul dalam file bootstrap anda dapat menggunakan fungsi anonim untuk mendaftarkan modul:

```
<?php
```



```

use Phalcon\Mvc\View;

// Creating a view component
$view = new View();

// Set options to view component
// ...

// Register the installed modules
$app->registerModules(
    [
        "frontend" => function ($di) use ($view) {
            $di->setShared(
                "view",
                function () use ($view) {
                    $view->setViewsDir("../apps/frontend/views/");

                    return $view;
                }
            );
        },
        "backend" => function ($di) use ($view) {
            $di->setShared(
                "view",
                function () use ($view) {
                    $view->setViewsDir("../apps/backend/views/");

                    return $view;
                }
            );
        }
    ]
);

```

Ketika *Phalcon\Mvc\Application* memiliki module yang terdaftar, penting untuk tiap route yang cocok mengembalikan module yang sah. Tiap modul yang terdaftar memiliki sebuah kelas terkait yang menyediakan fungsi-fungsi untuk menyiapkan modul. Tiap definisi modul kelas wajib mengimplementasi dua metode: *registerAutoloaders()* dan *registerServices()*, yang akan dipanggil oleh *Phalcon\Mvc\Application* tergantung modul mana yang dijalankan.

Event Aplikasi

Phalcon\Mvc\Application mampu mengirim pesan kejadian ke *EventsManager* (jika ada). Event dipicu menggunakan tipe "application". Event berikut didukung:

Nama Event	Dipicu
boot	Dieksekusi ketika aplikasi pertama kali menjalankan request
beforeStartModule	Sebelum inisialisasi modul, hanya bila modul terdaftar
afterStartModule	Setelah inisialisasi modul, hanya bila modul terdaftar
beforeHandleRequest	Sebelum eksekusi loop dispatch
afterHandleRequest	Setelah eksekusi loop dispatch

Contoh berikut menunjukkan bagaimana memasang listener ke komponen ini:

```

<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

```

```
$eventsManager = new EventsManager();

$application->setEventsManager($eventsManager);

$eventsManager->attach(
    "application",
    function (Event $event, $application) {
        // ...
    }
);
```

Sumber Luar

- [MVC examples on Github](#)

Routing

The router component allows you to define routes that are mapped to controllers or handlers that should receive the request. A router simply parses a URI to determine this information. The router has two modes: MVC mode and match-only mode. The first mode is ideal for working with MVC applications.

Defining Routes

Phalcon\Mvc\Router provides advanced routing capabilities. In MVC mode, you can define routes and map them to controllers/actions that you require. A route is defined as follows:

```
<?php

use Phalcon\Mvc\Router;

// Create the router
$router = new Router();

// Define a route
$router->add(
    "/admin/users/my-profile",
    [
        "controller" => "users",
        "action"      => "profile",
    ]
);

// Another route
$router->add(
    "/admin/users/change-password",
    [
        "controller" => "users",
        "action"      => "changePassword",
    ]
);

$router->handle();
```

The first parameter of the `add()` method is the pattern you want to match and, optionally, the second parameter is a set of paths. In this case, if the URI is `/admin/users/my-profile`, then the “users” controller with its action “profile” will be executed. It’s important to remember that the router does not execute the controller and action, it only collects this information to inform the correct component (ie. *Phalcon\Mvc\Dispatcher*) that this is the controller/action it should execute.

An application can have many paths and defining routes one by one can be a cumbersome task. In these cases we can create more flexible routes:

```
<?php
use Phalcon\Mvc\Router;

// Create the router
$router = new Router();

// Define a route
$router->add(
    "/admin/:controller/a/:action/:params",
    [
        "controller" => 1,
        "action"      => 2,
        "params"      => 3,
    ]
);
```

In the example above, we’re using wildcards to make a route valid for many URIs. For example, by accessing the following URL (`/admin/users/a/delete/dave/301`) would produce:

Controller	users
Action	delete
Parameter	dave
Parameter	301

The `add()` method receives a pattern that can optionally have predefined placeholders and regular expression modifiers. All the routing patterns must start with a forward slash character (`/`). The regular expression syntax used is the same as the [PCRE regular expressions](#). Note that, it is not necessary to add regular expression delimiters. All route patterns are case-insensitive.

The second parameter defines how the matched parts should bind to the controller/action/parameters. Matching parts are placeholders or subpatterns delimited by parentheses (round brackets). In the example given above, the first subpattern matched (`:controller`) is the controller part of the route, the second the action and so on.

These placeholders help writing regular expressions that are more readable for developers and easier to understand. The following placeholders are supported:

Placeholder	Regular Expression	Usage
<code>/:module</code>	<code>/([a-zA-Z0-9_\-]+)</code>	Matches a valid module name with alpha-numeric characters only
<code>/:controller</code>	<code>/([a-zA-Z0-9_\-]+)</code>	Matches a valid controller name with alpha-numeric characters only
<code>/:action</code>	<code>/([a-zA-Z0-9_]+)</code>	Matches a valid action name with alpha-numeric characters only
<code>/:params</code>	<code>(/.*)*</code>	Matches a list of optional words separated by slashes. Only use this placeholder at the end of a route
<code>/:namespace</code>	<code>/([a-zA-Z0-9_\-]+)</code>	Matches a single level namespace name
<code>/:int</code>	<code>/([0-9]+)</code>	Matches an integer parameter

Controller names are camelized, this means that characters (`-`) and (`_`) are removed and the next character is upper-cased. For instance, `some_controller` is converted to `SomeController`.

Since you can add many routes as you need using the `add()` method, the order in which routes are added indicate their relevance, latest routes added have more relevance than first added. Internally, all defined routes are traversed in reverse order until *Phalcon\Mvc\Router* finds the one that matches the given URI and processes it, while ignoring the rest.

Parameters with Names

The example below demonstrates how to define names to route parameters:

```
<?php

$router->add(
    "/news/([0-9]{4})/([0-9]{2})/([0-9]{2})/:params",
    [
        "controller" => "posts",
        "action"      => "show",
        "year"        => 1, // ([0-9]{4})
        "month"       => 2, // ([0-9]{2})
        "day"         => 3, // ([0-9]{2})
        "params"      => 4, // :params
    ]
);
```

In the above example, the route doesn't define a "controller" or "action" part. These parts are replaced with fixed values ("posts" and "show"). The user will not know the controller that is really dispatched by the request. Inside the controller, those named parameters can be accessed as follows:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction()
```

```

{
    // Get "year" parameter
    $year = $this->dispatcher->getParam("year");

    // Get "month" parameter
    $month = $this->dispatcher->getParam("month");

    // Get "day" parameter
    $day = $this->dispatcher->getParam("day");

    // ...
}

```

Note that the values of the parameters are obtained from the dispatcher. This happens because it is the component that finally interacts with the drivers of your application. Moreover, there is also another way to create named parameters as part of the pattern:

```

<?php
$router->add(
    "/documentation/{chapter}/{name}.{type:[a-z]+}",
    [
        "controller" => "documentation",
        "action"      => "show",
    ]
);

```

You can access their values in the same way as before:

```

<?php
use Phalcon\Mvc\Controller;

class DocumentationController extends Controller
{
    public function showAction()
    {
        // Get "name" parameter
        $name = $this->dispatcher->getParam("name");

        // Get "type" parameter
        $type = $this->dispatcher->getParam("type");

        // ...
    }
}

```

Short Syntax

If you don't like using an array to define the route paths, an alternative syntax is also available. The following examples produce the same result:

```

<?php

// Short form

```

```
$router->add(
    "/posts/{year:[0-9]+}/{title:[a-z\-\-]+}",
    "Posts::show"
);

// Array form
$router->add(
    "/posts/([0-9]+)/([a-z\-\-]+)",
    [
        "controller" => "posts",
        "action"      => "show",
        "year"        => 1,
        "title"       => 2,
    ]
);
```

Mixing Array and Short Syntax

Array and short syntax can be mixed to define a route, in this case note that named parameters automatically are added to the route paths according to the position on which they were defined:

```
<?php

// First position must be skipped because it is used for
// the named parameter 'country'
$router->add(
    "/news/{country:[a-z]{2}}/([a-z]+)/([a-z\-\-]+)",
    [
        "section" => 2, // Positions start with 2
        "article" => 3,
    ]
);
```

Routing to Modules

You can define routes whose paths include modules. This is specially suitable to multi-module applications. It's possible to define a default route that includes a module wildcard:

```
<?php

use Phalcon\Mvc\Router;

$router = new Router(false);

$router->add(
    "[:module]/:controller/:action/:params",
    [
        "module"      => 1,
        "controller"  => 2,
        "action"      => 3,
        "params"      => 4,
    ]
);
```

In this case, the route always must have the module name as part of the URL. For example, the following URL: `/admin/users/edit/sonny`, will be processed as:

Module	admin
Controller	users
Action	edit
Parameter	sonny

Or you can bind specific routes to specific modules:

```
<?php

$router->add(
    "/login",
    [
        "module"      => "backend",
        "controller" => "login",
        "action"      => "index",
    ]
);

$router->add(
    "/products/:action",
    [
        "module"      => "frontend",
        "controller" => "products",
        "action"      => 1,
    ]
);
```

Or bind them to specific namespaces:

```
<?php

$router->add(
    "namespace/login",
    [
        "namespace" => 1,
        "controller" => "login",
        "action"     => "index",
    ]
);
```

Namespaces/class names must be passed separated:

```
<?php

$router->add(
    "/login",
    [
        "namespace" => "Backend\\Controllers",
        "controller" => "login",
        "action"     => "index",
    ]
);
```

HTTP Method Restrictions

When you add a route using simply `add()`, the route will be enabled for any HTTP method. Sometimes we can restrict a route to a specific method, this is especially useful when creating RESTful applications:

```
<?php

// This route only will be matched if the HTTP method is GET
$router->addGet(
    "/products/edit/{id}",
    "Products::edit"
);

// This route only will be matched if the HTTP method is POST
$router->addPost(
    "/products/save",
    "Products::save"
);

// This route will be matched if the HTTP method is POST or PUT
$router->add(
    "/products/update",
    "Products::update"
)->via(
    [
        "POST",
        "PUT",
    ]
);
```

Using converters

Convertors allow you to freely transform the route's parameters before passing them to the dispatcher. The following examples show how to use them:

```
<?php

// The action name allows dashes, an action can be: /products/new-ipod-nano-4-
↳ generation
$route = $router->add(
    "/products/{slug:[a-z\-\-]+}",
    [
        "controller" => "products",
        "action"      => "show",
    ]
);

$route->convert(
    "slug",
    function ($slug) {
        // Transform the slug removing the dashes
        return str_replace("-", "", $slug);
    }
);
```

Another use case for converters is binding a model into a route. This allows the model to be passed into the defined

action directly:

```
<?php

// This example works off the assumption that the ID is being used as parameter in
the url: /products/4
$route = $router->add(
    "/products/{id}",
    [
        "controller" => "products",
        "action"      => "show",
    ]
);

$route->convert(
    "id",
    function ($id) {
        // Fetch the model
        return Product::findFirstById($id);
    }
);
```

Groups of Routes

If a set of routes have common paths they can be grouped to easily maintain them:

```
<?php

use Phalcon\Mvc\Router;
use Phalcon\Mvc\Router\Group as RouterGroup;

$router = new Router();

// Create a group with a common module and controller
$blog = new RouterGroup(
    [
        "module"      => "blog",
        "controller" => "index",
    ]
);

// All the routes start with /blog
$blog->setPrefix("/blog");

// Add a route to the group
$blog->add(
    "/save",
    [
        "action" => "save",
    ]
);

// Add another route to the group
$blog->add(
    "/edit/{id}",
    [
        "action" => "edit",
    ]
);
```

```
    ]
);

// This route maps to a controller different than the default
$blog->add(
    "/blog",
    [
        "controller" => "blog",
        "action"      => "index",
    ]
);

// Add the group to the router
$router->mount($blog);
```

You can move groups of routes to separate files in order to improve the organization and code reusing in the application:

```
<?php

use Phalcon\Mvc\Router\Group as RouterGroup;

class BlogRoutes extends RouterGroup
{
    public function initialize()
    {
        // Default paths
        $this->setPaths(
            [
                "module"    => "blog",
                "namespace" => "Blog\\Controllers",
            ]
        );

        // All the routes start with /blog
        $this->setPrefix("/blog");

        // Add a route to the group
        $this->add(
            "/save",
            [
                "action" => "save",
            ]
        );

        // Add another route to the group
        $this->add(
            "/edit/{id}",
            [
                "action" => "edit",
            ]
        );

        // This route maps to a controller different than the default
        $this->add(
            "/blog",
            [
                "controller" => "blog",
                "action"      => "index",
            ]
        );
    }
}
```

```

        ]
    );
}
}

```

Then mount the group in the router:

```

<?php

// Add the group to the router
$router->mount(
    new BlogRoutes()
);

```

Matching Routes

A valid URI must be passed to the Router so that it can process it and find a matching route. By default, the routing URI is taken from the `$_GET["_url"]` variable that is created by the rewrite engine module. A couple of rewrite rules that work very well with Phalcon are:

```

RewriteEngine On
RewriteCond    %{REQUEST_FILENAME} !-d
RewriteCond    %{REQUEST_FILENAME} !-f
RewriteRule    ^((?s).*)$ index.php?url=/$1 [QSA,L]

```

In this configuration, any requests to files or folders that don't exist will be sent to `index.php`.

The following example shows how to use this component in stand-alone mode:

```

<?php

use Phalcon\Mvc\Router;

// Creating a router
$router = new Router();

// Define routes here if any
// ...

// Taking URI from $_GET["_url"]
$router->handle();

// Or Setting the URI value directly
$router->handle("/employees/edit/17");

// Getting the processed controller
echo $router->getControllerName();

// Getting the processed action
echo $router->getActionName();

// Get the matched route
$route = $router->getMatchedRoute();

```

Naming Routes

Each route that is added to the router is stored internally as a *Phalcon\Mvc\Router\Route* object. That class encapsulates all the details of each route. For instance, we can give a name to a path to identify it uniquely in our application. This is especially useful if you want to create URLs from it.

```
<?php

$route = $router->add(
    "/posts/{year}/{title}",
    "Posts::show"
);

$route->setName("show-posts");
```

Then, using for example the component *Phalcon\Mvc\Url* we can build routes from its name:

```
<?php

// Returns /posts/2012/phalcon-1-0-released
echo $url->get(
    [
        "for"    => "show-posts",
        "year"   => "2012",
        "title"  => "phalcon-1-0-released",
    ]
);
```

Usage Examples

The following are examples of custom routes:

```
<?php

// Matches "/system/admin/a/edit/7001"
$router->add(
    "/system/:controller/a/:action/:params",
    [
        "controller" => 1,
        "action"     => 2,
        "params"     => 3,
    ]
);

// Matches "/es/news"
$router->add(
    "/([a-z]{2})/:controller",
    [
        "controller" => 2,
        "action"     => "index",
        "language"   => 1,
    ]
);

// Matches "/es/news"
$router->add(
   ("/{language:[a-z]{2}}/:controller",
```

```

        [
            "controller" => 2,
            "action"      => "index",
        ]
    );

    // Matches "/admin/posts/edit/100"
    $router->add(
        "/admin/:controller/:action/:int",
        [
            "controller" => 1,
            "action"      => 2,
            "id"          => 3,
        ]
    );

    // Matches "/posts/2015/02/some-cool-content"
    $router->add(
        "/posts/([0-9]{4})/([0-9]{2})/([a-z\-\-]+)",
        [
            "controller" => "posts",
            "action"      => "show",
            "year"        => 1,
            "month"       => 2,
            "title"       => 4,
        ]
    );

    // Matches "/manual/en/translate.adapter.html"
    $router->add(
        "/manual/([a-z]{2})/([a-z\-\-]+\.\html",
        [
            "controller" => "manual",
            "action"      => "show",
            "language"    => 1,
            "file"        => 2,
        ]
    );

    // Matches "/feed/fr/le-robots-hot-news.atom"
    $router->add(
        "/feed/{lang:[a-z]+}/{blog:[a-z\-\-]+\.\{type:[a-z\-\-]+\}",
        "Feed::get"
    );

    // Matches "/api/v1/users/peter.json"
    $router->add(
        "/api/(v1|v2)/{method:[a-z]+}/{param:[a-z]+\.\(json|xml)",
        [
            "controller" => "api",
            "version"     => 1,
            "format"      => 4,
        ]
    );

```

Beware of characters allowed in regular expression for controllers and namespaces. As these become class names and in turn they're passed through the file system could be used by attackers to read unauthorized files. A safe regular expression is: `/([a-zA-Z0-9_-\-]+)`

Default Behavior

Phalcon\Mvc\Router has a default behavior that provides a very simple routing that always expects a URI that matches the following pattern: `/:controller/:action/:params`

For example, for a URL like this *http://phalconphp.com/documentation/show/about.html*, this router will translate it as follows:

Controller	documentation
Action	show
Parameter	about.html

If you don't want the router to have this behavior, you must create the router passing `false` as the first parameter:

```
<?php
use Phalcon\Mvc\Router;

// Create the router without default routes
$router = new Router(false);
```

Setting the default route

When your application is accessed without any route, the `/` route is used to determine what paths must be used to show the initial page in your website/application:

```
<?php
$router->add(
    "/",
    [
        "controller" => "index",
        "action"      => "index",
    ]
);
```

Not Found Paths

If none of the routes specified in the router are matched, you can define a group of paths to be used in this scenario:

```
<?php
// Set 404 paths
$router->notFound(
    [
        "controller" => "index",
        "action"      => "route404",
    ]
);
```

This is typically for an Error 404 page.

Setting default paths

It's possible to define default values for the module, controller or action. When a route is missing any of those paths they can be automatically filled by the router:

```
<?php

// Setting a specific default
$router->setDefaultModule("backend");
$router->setDefaultNamespace("Backend\\Controllers");
$router->setDefaultController("index");
$router->setDefaultAction("index");

// Using an array
$router->setDefaults(
    [
        "controller" => "index",
        "action"      => "index",
    ]
);
```

Dealing with extra/trailing slashes

Sometimes a route could be accessed with extra/trailing slashes. Those extra slashes would lead to produce a not-found status in the dispatcher. You can set up the router to automatically remove the slashes from the end of handled route:

```
<?php

use Phalcon\Mvc\Router;

$router = new Router();

// Remove trailing slashes automatically
$router->removeExtraSlashes(true);
```

Or, you can modify specific routes to optionally accept trailing slashes:

```
<?php

// The [/{0,1}] allows this route to have optionally have a trailing slash
$router->add(
   ("/{language:[a-z]{2}}/:controller[/]{0,1}"),
    [
        "controller" => 2,
        "action"      => "index",
    ]
);
```

Match Callbacks

Sometimes, routes should only be matched if they meet specific conditions. You can add arbitrary conditions to routes using the `beforeMatch()` callback. If this function return `false`, the route will be treated as non-matched:

```
<?php
```

```
$route = $router->add("/login",
[
    "module"      => "admin",
    "controller" => "session",
]
);

$route->beforeMatch(
    function ($uri, $route) {
        // Check if the request was made with Ajax
        if (isset($_SERVER["HTTP_X_REQUESTED_WITH"]) && $_SERVER["HTTP_X_REQUESTED_
WITH"] === "XMLHttpRequest") {
            return false;
        }

        return true;
    }
);
```

You can re-use these extra conditions in classes:

```
<?php

class AjaxFilter
{
    public function check()
    {
        return $_SERVER["HTTP_X_REQUESTED_WITH"] === "XMLHttpRequest";
    }
}
```

And use this class instead of the anonymous function:

```
<?php

$route = $router->add(
    "/get/info/{id}",
    [
        "controller" => "products",
        "action"      => "info",
    ]
);

$route->beforeMatch(
    [
        new AjaxFilter(),
        "check"
    ]
);
```

As of Phalcon 3, there is another way to check this:

```
<?php

$route = $router->add(
    "/login",
    [
        "module"      => "admin",
```



```

        "controller" => "session",
    ]
);

$route->beforeMatch(
    function ($uri, $route) {
        /**
         * @var string $uri
         * @var \Phalcon\Mvc\Router\Route $route
         * @var \Phalcon\DiInterface $this
         * @var \Phalcon\Http\Request $request
         */
        $request = $this->getShared("request");

        // Check if the request was made with Ajax
        return $request->isAjax();
    }
);

```

Hostname Constraints

The router allows you to set hostname constraints, this means that specific routes or a group of routes can be restricted to only match if the route also meets the hostname constraint:

```

<?php

$route = $router->add(
    "/login",
    [
        "module"      => "admin",
        "controller"  => "session",
        "action"      => "login",
    ]
);

$route->setHostName("admin.company.com");

```

The hostname can also be passed as a regular expressions:

```

<?php

$route = $router->add(
    "/login",
    [
        "module"      => "admin",
        "controller"  => "session",
        "action"      => "login",
    ]
);

$route->setHostName("[a-z]+.company.com");

```

In groups of routes you can set up a hostname constraint that apply for every route in the group:

```

<?php

```

```
use Phalcon\Mvc\Router\Group as RouterGroup;

// Create a group with a common module and controller
$blog = new RouterGroup(
    [
        "module"      => "blog",
        "controller" => "posts",
    ]
);

// Hostname restriction
$blog->setHostName("blog.mycompany.com");

// All the routes start with /blog
$blog->setPrefix("/blog");

// Default route
$blog->add(
    "/",
    [
        "action" => "index",
    ]
);

// Add a route to the group
$blog->add(
    "/save",
    [
        "action" => "save",
    ]
);

// Add another route to the group
$blog->add(
    "/edit/{id}",
    [
        "action" => "edit",
    ]
);

// Add the group to the router
$router->mount($blog);
```

URI Sources

By default the URI information is obtained from the `$_GET["_url"]` variable, this is passed by the Rewrite-Engine to Phalcon, you can also use `$_SERVER["REQUEST_URI"]` if required:

```
<?php

use Phalcon\Mvc\Router;

// ...

// Use $_GET["_url"] (default)
$router->setUriSource(
```

```

    Router::URI_SOURCE_GET_URL
);

// Use $_SERVER["REQUEST_URI"]
$router->setUriSource(
    Router::URI_SOURCE_SERVER_REQUEST_URI
);

```

Or you can manually pass a URI to the `handle()` method:

```

<?php

$router->handle("/some/route/to/handle");

```

Testing your routes

Since this component has no dependencies, you can create a file as shown below to test your routes:

```

<?php

use Phalcon\Mvc\Router;

// These routes simulate real URIs
$testRoutes = [
    "/",
    "/index",
    "/index/index",
    "/index/test",
    "/products",
    "/products/index/",
    "/products/show/101",
];

$router = new Router();

// Add here your custom routes
// ...

// Testing each route
foreach ($testRoutes as $testRoute) {
    // Handle the route
    $router->handle($testRoute);

    echo "Testing ", $testRoute, "<br>";

    // Check if some route was matched
    if ($router->wasMatched()) {
        echo "Controller: ", $router->getControllerName(), "<br>";
        echo "Action: ", $router->getActionName(), "<br>";
    } else {
        echo "The route wasn't matched by any route<br>";
    }

    echo "<br>";
}

```

Annotations Router

This component provides a variant that's integrated with the *annotations* service. Using this strategy you can write the routes directly in the controllers instead of adding them in the service registration:

```
<?php

use Phalcon\Mvc\Router\Annotations as RouterAnnotations;

$di["router"] = function () {
    // Use the annotations router. We're passing false as we don't want the router to
    ↪ add its default patterns
    $router = new RouterAnnotations(false);

    // Read the annotations from ProductsController if the URI starts with /api/
    ↪ products
    $router->addResource("Products", "/api/products");

    return $router;
};
```

The annotations can be defined in the following way:

```
<?php

/**
 * @RoutePrefix("/api/products")
 */
class ProductsController
{
    /**
     * @Get (
     *     "/"
     * )
     */
    public function indexAction()
    {

    }

    /**
     * @Get (
     *     "/edit/{id:[0-9]+}",
     *     name="edit-robot"
     * )
     */
    public function editAction($id)
    {

    }

    /**
     * @Route (
     *     "/save",
     *     methods={"POST", "PUT"},
     *     name="save-robot"
     * )
     */
```

```

public function saveAction()
{

}

/**
 * @Route(
 *     "/delete/{id:[0-9]+}",
 *     methods="DELETE",
 *     converters={
 *         id="MyConvertors::checkId"
 *     }
 * )
 */
public function deleteAction($id)
{

}

public function infoAction($id)
{

}
}

```

Only methods marked with valid annotations are used as routes. List of annotations supported:

Name	Description	Usage
RoutePrefix	A prefix to be prepended to each route URI. This annotation must be placed at the class' docblock	@RoutePrefix("/api/products")
Route	This annotation marks a method as a route. This annotation must be placed in a method docblock	@Route("/api/products/show")
Get	This annotation marks a method as a route restricting the HTTP method to GET	@Get("/api/products/search")
Post	This annotation marks a method as a route restricting the HTTP method to POST	@Post("/api/products/save")
Put	This annotation marks a method as a route restricting the HTTP method to PUT	@Put("/api/products/save")
Delete	This annotation marks a method as a route restricting the HTTP method to DELETE	@Delete("/api/products/delete/{id}")
Options	This annotation marks a method as a route restricting the HTTP method to OPTIONS	@Option("/api/products/info")

For annotations that add routes, the following parameters are supported:

Name	Description	Usage
methods	Define one or more HTTP method that route must meet with	@Route("/api/products", methods={"GET", "POST"})
name	Define a name for the route	@Route("/api/products", name="get-products")
paths	An array of paths like the one passed to <code>Phalcon\Mvc\Router::add()</code>	@Route("/posts/{id}/{slug}", paths={module="backend"})
convertors	A hash of convertors to be applied to the parameters	@Route("/posts/{id}/{slug}", convertors={id="MyConvertor::getId"})

If you're using modules in your application, it is better use the `addModuleResource()` method:

```
<?php

use Phalcon\Mvc\Router\Annotations as RouterAnnotations;

$di["router"] = function () {
    // Use the annotations router
    $router = new RouterAnnotations(false);

    // Read the annotations from Backend\Controllers\ProductsController if the URI
    ↪ starts with /api/products
    $router->addModuleResource("backend", "Products", "/api/products");

    return $router;
};
```

Registering Router instance

You can register router during service registration with Phalcon dependency injector to make it available inside the controllers.

You need to add code below in your bootstrap file (for example index.php or app/config/services.php if you use [Phalcon Developer Tools](#))

```
<?php

/**
 * Add routing capabilities
 */
$di->set(
    "router",
    function () {
        require __DIR__ . "../app/config/routes.php";

        return $router;
    }
);
```

You need to create app/config/routes.php and add router initialization code, for example:

```
<?php

use Phalcon\Mvc\Router;

$router = new Router();

$router->add(
    "/login",
    [
        "controller" => "login",
        "action"      => "index",
    ]
);

$router->add(
    "/products/:action",
    [
        "controller" => "products",
```

```

        "action"      => 1,
    ]
);
return $router;

```

Implementing your own Router

The *Phalcon\Mvc\RouterInterface* interface must be implemented to create your own router replacing the one provided by Phalcon.

Dispatch Kontroler

Phalcon\Mvc\Dispatcher adalah komponen yang bertanggung jawab menciptakan kontroler dan menjalankan aksi yang dibutuhkan dalam sebuah aplikasi MVC. Memahami operasi dan kemampuannya membantu kita mendapat lebih dari service yang disediakan framework.

Dispatch Loop

Ini adalah proses penting yang berkaitan dengan alir MVC sendiri, terutama dengan bagian kontroler. Kerja ini terjadi dalam kontroler dispatcher. File kontroler dibaca, dimuat dan kontroler diciptakan. lalu aksi yang diminta dijalankan. Jika sebuah aksi mengarahkan alir ke kontroler/aksi lain, dispatcher kontroler mulai lagi. Untuk menjelaskan lebih baik, contoh berikut menunjukkan proses yang dijalankan dalam *Phalcon\Mvc\Dispatcher*:

```

<?php

// Dispatch loop
while (!$finished) {
    $finished = true;

    $controllerClass = $controllerName . "Controller";

    // Menciptakan kelas kontroler melalui autoloaders
    $controller = new $controllerClass();

    // Eksekusi aksi
    call_user_func_array(
        [
            $controller,
            $actionName . "Action"
        ],
        $params
    );

    // '$finished' should be reloaded to check if the flow was forwarded to another_
    ↪controller
    $finished = true;
}

```

Kode diatas tidak memiliki validasi, filter dan pengecekan tambahan, namun ia mendemonstrasikan alir operasi normal dalam dispatcher.

Kejadian Dispatch Loop

Phalcon\Mvc\Dispatcher mampu mengirim event ke *EventsManager* jika tersedia. Event dipicu dengan menggunakan tipe “dispatch”. Beberapa event ketika mengembalikan nilai false dapat menghentikan operasi aktif. Event berikut didukung:

Panduan *INVO* menunjukkan bagaimana memanfaatkan event dispatching untuk mengimplementasi filter keamanan dengan *Acl*

Contoh berikut menunjukkan bagaimana memasang listener ke komponen ini:

```
<?php

use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

$di->set(
    "dispatcher",
    function () {
        // Buat event manager
        $eventsManager = new EventsManager();

        // Memasang listener untuk tipe "dispatch"
        $eventsManager->attach(
            "dispatch",
            function (Event $event, $dispatcher) {
                // ...
            }
        );

        $dispatcher = new MvcDispatcher();

        // Ikat eventsManager ke komponen view
        $dispatcher->setEventsManager($eventsManager);

        return $dispatcher;
    },
    true
);
```

Kontroller yang diciptakan otomatis bertindak sebagai sebuah listener untuk mengirim event, anda dapat mengimplement metode sebagai callback:

```
<?php

use Phalcon\Mvc\Controller;
use Phalcon\Mvc\Dispatcher;

class PostsController extends Controller
{
    public function beforeExecuteRoute(Dispatcher $dispatcher)
    {
        // Eksekusi sebelum tiap aksi
    }

    public function afterExecuteRoute(Dispatcher $dispatcher)
    {
    }
}
```



```

        // Eksekusi setelah tiap aksi
    }
}

```

Note: Metode apda event listener menerima objek *Phalcon\Events\Event* sebagai parameter pertama - metode dalam kontroller tidak.

Mengarahkan ke aksi lain

Dispatch loop memungkinkan kita mengarahkan alir ke kontroler/aksi lain. Ini sangat berguna untuk menguji apakah user dapat mengakses opsi tertentu, mengarahkan user ke screen lain atau sekedar menggunakan ulang kode.

```

<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction($year, $postTitle)
    {
        // ... Store some product and forward the user

        // Forward flow to the index action
        $this->dispatcher->forward(
            [
                "controller" => "posts",
                "action"      => "index",
            ]
        );
    }
}

```

Yang harus diingat membuat sebuah “forward” tidak sama dengan membuat HTTP redirect. Meski keduanya menghasilkan hasil sama. “forward” tidak memuat ulang halaman saat ini, semua terjadi dalam satu request, sementara HTTP redirect butuh dua request untuk menyelesaikan proses.

Contoh forwarding:

```

<?php

// Arahkan ali ke aksi lain dalam kontroler saat ini
$this->dispatcher->forward(
    [
        "action" => "search"
    ]
);

// Arahkan alir ke aksi lain dalam kontroler saa ini
// dengan melewati parameter
$this->dispatcher->forward(

```

```
[  
    "action" => "search",  
    "params" => [1, 2, 3]  
];
```

Aksi forward menerima parameter berikut:

Parameter	Memacu
controller	Sebuah nama kontroler sah untuk tujuan forward.
action	Sebuah nama aksi sah untuk tujuan forward.
params	Sebuah array parameter aksi.
namespace	Sebuah nama namespace sah dimana kontroler menjadi bagian

Menyiapkan Parameter

Terima kasih ke hook point yang disediakan *Phalcon\Mvc\Dispatcher* anda dapat dengan mudah mengubah aplikasi anda ke sembarang URL schema:

Contoh, anda ingin URL seperti: <http://example.com/controller/key1/value1/key2/value>

Parameter secara default dilewatkan sesuai tempatnya di URL ke aksi, anda dapat mengubahnya ke schema yang anda mau:

```
<?php  
  
use Phalcon\Dispatcher;  
use Phalcon\Mvc\Dispatcher as MvcDispatcher;  
use Phalcon\Events\Event;  
use Phalcon\Events\Manager as EventsManager;  
  
$di->set(  
    "dispatcher",  
    function () {  
        // Buat sebuah EventsManager  
        $eventsManager = new EventsManager();  
  
        // Pasang listener  
        $eventsManager->attach(  
            "dispatch:beforeDispatchLoop",  
            function (Event $event, $dispatcher) {  
                $params = $dispatcher->getParams();  
  
                $keyParams = [];  
  
                // Gunakan paramter ganjil sebagai key dan genap sebagai value  
                foreach ($params as $i => $value) {  
                    if ($i & 1) {  
                        // Previous param  
                        $key = $params[$i - 1];  
  
                        $keyParams[$key] = $value;  
                    }  
                }  
  
                // Override parameters  
                $dispatcher->setParams($keyParams);  
            }  
        );  
    }  
);
```

```

    }
    );

    $dispatcher = new MvcDispatcher();

    $dispatcher->setEventManager($eventsManager);

    return $dispatcher;
}
);

```

Jika schema yang diinginkan adalah: <http://example.com/controller/key1:value1/key2:value>, kode berikut diperlukan:

```

<?php

use Phalcon\Dispatcher;
use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

$di->set(
    "dispatcher",
    function () {
        // Buat sebuah EventsManager
        $eventsManager = new EventsManager();

        // Pasang sebuah listener
        $eventsManager->attach(
            "dispatch:beforeDispatchLoop",
            function (Event $event, $dispatcher) {
                $params = $dispatcher->getParams();

                $keyParams = [];

                // Pisah tiap parameter sebagai pasangan key,value
                foreach ($params as $number => $value) {
                    $parts = explode(":", $value);

                    $keyParams[$parts[0]] = $parts[1];
                }

                // Override parameters
                $dispatcher->setParams($keyParams);
            }
        );

        $dispatcher = new MvcDispatcher();

        $dispatcher->setEventManager($eventsManager);

        return $dispatcher;
    }
);

```

Mengambil Parameters

Ketika sebuah route menyediakan parameter bernama, anda dapat menerimanya dalam sebuah kontroler, view atau komponen lain turunan *Phalcon\DI\Injectable*.

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        // Ambil judul post yang dilewatkan sebagai parameter
        // atau yang disiapkan dalam sebuah event
        $title = $this->dispatcher->getParam("title");

        // Ambil tahun post yang dilewatkan sebagai parameter
        // atau yang disiapkan dalam sebuah event juga lakukan filter
        $year = $this->dispatcher->getParam("year", "int");

        // ...
    }
}
```

Menyiapkan aksi

Anda dapat mendefinisikan sembarang schema bagi aksi sebelum dispatch.

Camel-case nama aksi

Jika ULR asli: <http://example.com/admin/products/show-latest-products>, dan misalnya anda ingin mengubahnya menjadi camel-case 'show-latest-products' ke 'ShowLatestProducts', kode berikut ini diperlukan:

```
<?php

use Phalcon\Text;
use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

$di->set(
    "dispatcher",
    function () {
        // Buat EventsManager
        $eventsManager = new EventsManager();

        // Ubah aksi menjadi camel-case
        $eventsManager->attach(
            "dispatch:beforeDispatchLoop",
```

```

        function (Event $event, $dispatcher) {
            $dispatcher->setActionName(
                Text::camelize($dispatcher->getActionName())
            );
        }
    );

    $dispatcher = new MvcDispatcher();

    $dispatcher->setEventsManager($eventsManager);

    return $dispatcher;
}
);

```

Hapus ekstensi lama

Jika URL asli selalu berisi ekstensi '.php':

<http://example.com/admin/products/show-latest-products.php> <http://example.com/admin/products/index.php>

Anda dapat menghapusnya sebelum dispatch kombinasi controller/action:

```

<?php

use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

$di->set(
    "dispatcher",
    function () {
        // Buat EventsManager
        $eventsManager = new EventsManager();

        // Hapus ekstensi sebelum dispatch
        $eventsManager->attach(
            "dispatch:beforeDispatchLoop",
            function (Event $event, $dispatcher) {
                $action = $dispatcher->getActionName();

                // Hapus ekstensi
                $action = preg_replace("/\.php$/", "", $action);

                // Override action
                $dispatcher->setActionName($action);
            }
        );

        $dispatcher = new MvcDispatcher();

        $dispatcher->setEventsManager($eventsManager);

        return $dispatcher;
    }
);

```

Inject model instances

Di contoh ini, developer ingin menginspeksi parameter yang sebuah aksi akan terima untuk menginjek instance model secara dinamis.

Kontroler terlihat seperti berikut:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    /**
     * Tampilkan post
     *
     * @param \Posts $post
     */
    public function showAction(Posts $post)
    {
        $this->view->post = $post;
    }
}
```

Metode ‘showAction’ menerima instance model Posts, developer dapat menginspeksinya sebelum mengirim aksi dan menyiapkan parameter yang sesuai:

```
<?php

use Exception;
use Phalcon\Mvc\Model;
use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use ReflectionMethod;

$di->set(
    "dispatcher",
    function () {
        // Buat EventsManager
        $eventsManager = new EventsManager();

        $eventsManager->attach(
            "dispatch:beforeDispatchLoop",
            function (Event $event, $dispatcher) {
                // Nama kelas yang mungkin
                $controllerName = $dispatcher->getControllerClass();

                // nama metode yang mungkin
                $actionName = $dispatcher->getActiveMethod();

                try {
                    // Ambil reflection untuk metode untuk dieksekusi
                    $reflection = new ReflectionMethod($controllerName, $actionName);

                    $parameters = $reflection->getParameters();

                    // Cek parameter
                }
            }
        );
    }
);
```

```

        foreach ($parameters as $parameter) {
            // Ambil nama model yang diharapkan
            $className = $parameter->getClass()->name;

            // Uji apakah parameter mengharapkan instance model
            if (is_subclass_of($className, Model::class)) {
                $model = $className::findFirstById($dispatcher->
↳getParams()[0]);

                // Override parameters menggunakan model instance
                $dispatcher->setParams([$model]);
            }
        }
    } catch (Exception $e) {
        // exception terjadi, mungkin kelas atau aksi tidak ada?
    }
}

);

$dispatcher = new MvcDispatcher();

$dispatcher->setEventManager($eventsManager);

return $dispatcher;
}
);

```

Contoh di atas telah disederhanakan untuk tujuan akademis. Developer dapat memperbaikinya dengan menginjek sembarang ketergantungan atau model dalam aksi sebelum dieksekusi.

From 3.1.x onwards the dispatcher also comes with an option to handle this internally for all models passed into a controller action by using `Phalcon\Mvc\Model\Binder`.

```

use Phalcon\Mvc\Dispatcher;
use Phalcon\Mvc\Model\Binder;

$dispatcher = new Dispatcher();

$dispatcher->setModelBinder(new Binder());

return $dispatcher;

```

Since Binder object is using internally Reflection Api which can be heavy there is ability to set cache. This can be done by using second argument in `setModelBinder()` which can also accept service name or just by passing cache instance to Binder constructor.

It also introduces a new interface `Phalcon\Mvc\Model\Binder\BindableInterface` which allows you to define the controllers associated models to allow models binding in base controllers.

For example, you have a base `CrudController` which your `PostsController` extends from. Your `CrudController` looks something like this:

```

use Phalcon\Mvc\Controller;
use Phalcon\Mvc\Model;

class CrudController extends Controller
{
    /**

```

```
* Show action
*
* @param Model $model
*/
public function showAction(Model $model)
{
    $this->view->model = $model;
}
}
```

In your `PostsController` you need to define which model the controller is associated with. This is done by implementing the `Phalcon\Mvc\Model\Binder\BindableInterface` which will add the `getModelName()` method from which you can return the model name. It can return string with just one model name or associative array where key is parameter name.

```
use Phalcon\Mvc\Model\Binder\BindableInterface;
use Models\Posts;

class PostsController extends CrudController implements BindableInterface
{
    public static function getModelName()
    {
        return Posts::class;
    }
}
```

By declaring the model associated with the `PostsController` the binder can check the controller for the `getModelName()` method before passing the defined model into the parent show action.

If your project structure does not use any parent controller you can of course still bind the model directly into the controller action:

```
use Phalcon\Mvc\Controller;
use Models\Posts;

class PostsController extends Controller
{
    /**
     * Shows posts
     *
     * @param Posts $post
     */
    public function showAction(Posts $post)
    {
        $this->view->post = $post;
    }
}
```

Currently the binder will only use the models primary key to perform a `findFirst()` on. An example route for the above would be `/posts/show/{1}`

Menangani Eksepsi tidak ditemukan

Menggunakan *EventsManager* dimungkinkan untuk menyisipkan hook point sebelum dispatcher melemparkan eksepsi ketika kombinasi kontroler/aksi tidak ditemukan:


```

<?php

use Exception;
use Phalcon\Dispatcher;
use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Mvc\Dispatcher\Exception as DispatchException;

$di->setShared(
    "dispatcher",
    function () {
        // Buat EventsManager
        $eventsManager = new EventsManager();

        // Pasang listener
        $eventsManager->attach(
            "dispatch:beforeException",
            function (Event $event, $dispatcher, Exception $exception) {
                // Tangani eksepsi 404
                if ($exception instanceof DispatchException) {
                    $dispatcher->forward(
                        [
                            "controller" => "index",
                            "action"      => "show404",
                        ]
                    );

                    return false;
                }

                // cara lain, kontroler atau aksi tidak ada
                switch ($exception->getCode()) {
                    case Dispatcher::EXCEPTION_HANDLER_NOT_FOUND:
                    case Dispatcher::EXCEPTION_ACTION_NOT_FOUND:
                        $dispatcher->forward(
                            [
                                "controller" => "index",
                                "action"      => "show404",
                            ]
                        );

                        return false;
                    }
                }
            }
        );

        $dispatcher = new MvcDispatcher();

        // Ikat EventsManager ke dispatcher
        $dispatcher->setEventsManager($eventsManager);

        return $dispatcher;
    }
);

```

Tentu metode ini dapat dipindah ke dalam kelas plugin independen, sehingga memungkinkan lebih dari satu kelas mengambil aksi ketika sebuah eksepsi dihasilkan dalam dispatch loop:

```
<?php

use Exception;
use Phalcon\Events\Event;
use Phalcon\Mvc\Dispatcher;
use Phalcon\Mvc\Dispatcher\Exception as DispatchException;

class ExceptionsPlugin
{
    public function beforeException(Event $event, Dispatcher $dispatcher, Exception
    ↳$exception)
    {
        // Default error action
        $action = "show503";

        // Tangani eksepsi 404
        if ($exception instanceof DispatchException) {
            $action = "show404";
        }

        $dispatcher->forward([
            "controller" => "index",
            "action"      => $action,
        ]);

        return false;
    }
}
```

Hanya eksepsi yang dihasilkan dispatcher dan eksepsi yang dihasilkan dalam aksi yang dijalankan diberitahu dalam event ‘beforeException’. Eksepsi yang dihasilkan dalam listener atau event kontroler diarahkan ke try/catch paling akhir.

Mengimplementasi Dispatcher anda sendiri

Interface *Phalcon\Mvc\DispatcherInterface* harus diimplementasi untuk menciptakan dispatcher anda sendiri menggantikan yang disediakan Phalcon.

Micro Applications

With Phalcon you can create “Micro-Framework like” applications. By doing this, you only need to write a minimal amount of code to create a PHP application. Micro applications are suitable to implement small applications, APIs and prototypes in a practical way.

```
<?php

use Phalcon\Mvc\Micro;

$app = new Micro();

$app->get(
    "/say/welcome/{name}",
    function ($name) {
```

```

        echo "<h1>Welcome $name!</h1>";
    }
);

$app->handle();

```

Creating a Micro Application

Phalcon\Mvc\Micro is the class responsible for implementing a micro application.

```

<?php

use Phalcon\Mvc\Micro;

$app = new Micro();

```

Defining routes

After instantiating the object, you will need to add some routes. *Phalcon\Mvc\Router* manages routing internally. Routes must always start with /. A HTTP method constraint is optionally required when defining routes, so as to instruct the router to match only if the request also matches the HTTP methods. The following example shows how to define a route for the method GET:

```

<?php

$app->get (
    "/say/hello/{name}",
    function ($name) {
        echo "<h1>Hello! $name</h1>";
    }
);

```

The “get” method indicates that the associated HTTP method is GET. The route `/say/hello/{name}` also has a parameter `{ $name }` that is passed directly to the route handler (the anonymous function). Handlers are executed when a route is matched. A handler could be any callable item in the PHP userland. The following example shows how to define different types of handlers:

```

<?php

// With a function
function say_hello($name) {
    echo "<h1>Hello! $name</h1>";
}

$app->get (
    "/say/hello/{name}",
    "say_hello"
);

// With a static method
$app->get (
    "/say/hello/{name}",
    "SomeClass::someSayMethod"
);

```

```
// With a method in an object
$myController = new MyController();
$app->get(
    "/say/hello/{name}",
    [
        $myController,
        "someAction"
    ]
);

// Anonymous function
$app->get(
    "/say/hello/{name}",
    function ($name) {
        echo "<h1>Hello! $name</h1>";
    }
);
```

Phalcon\Mvc\Micro provides a set of methods to define the HTTP method (or methods) which the route is constrained for:

```
<?php

// Matches if the HTTP method is GET
$app->get(
    "/api/products",
    "get_products"
);

// Matches if the HTTP method is POST
$app->post(
    "/api/products/add",
    "add_product"
);

// Matches if the HTTP method is PUT
$app->put(
    "/api/products/update/{id}",
    "update_product"
);

// Matches if the HTTP method is DELETE
$app->delete(
    "/api/products/remove/{id}",
    "delete_product"
);

// Matches if the HTTP method is OPTIONS
$app->options(
    "/api/products/info/{id}",
    "info_product"
);

// Matches if the HTTP method is PATCH
$app->patch(
    "/api/products/update/{id}",
    "info_product"
```

```
);

// Matches if the HTTP method is GET or POST
$app->map(
    "/repos/store/refs",
    "action_product"
)->via(
    [
        "GET",
        "POST",
    ]
);
```

To access the HTTP method data `$app` needs to be passed into the closure:

```
<?php

// Matches if the HTTP method is POST
$app->post(
    "/api/products/add",
    function () use ($app) {
        echo $app->request->getPost("productID");
    }
);
```

Routes with Parameters

Defining parameters in routes is very easy as demonstrated above. The name of the parameter has to be enclosed in brackets. Parameter formatting is also available using regular expressions to ensure consistency of data. This is demonstrated in the example below:

```
<?php

// This route have two parameters and each of them have a format
$app->get(
    "/posts/{year:[0-9]+}/{title:[a-zA-Z\-\]}",
    function ($year, $title) {
        echo "<h1>Title: $title</h1>";
        echo "<h2>Year: $year</h2>";
    }
);
```

Starting Route

Normally, the starting route in an application is the route `/`, and it will more frequent to be accessed by the method GET. This scenario is coded as follows:

```
<?php

// This is the start route
$app->get(
    "/",
    function () {
        echo "<h1>Welcome!</h1>";
    }
);
```

```
    }  
);
```

Rewrite Rules

The following rules can be used together with Apache to rewrite the URIs:

```
<IfModule mod_rewrite.c>  
    RewriteEngine On  
    RewriteCond %{REQUEST_FILENAME} !-f  
    RewriteRule ^((?s).*)$ index.php?url=/$1 [QSA,L]  
</IfModule>
```

Working with Responses

You are free to produce any kind of response in a handler: directly make an output, use a template engine, include a view, return a json, etc.:

```
<?php  
  
// Direct output  
$app->get(  
    "/say/hello",  
    function () {  
        echo "<h1>Hello! $name</h1>";  
    }  
);  
  
// Requiring another file  
$app->get(  
    "/show/results",  
    function () {  
        require "views/results.php";  
    }  
);  
  
// Returning JSON  
$app->get(  
    "/get/some-json",  
    function () {  
        echo json_encode(  
            [  
                "some",  
                "important",  
                "data",  
            ]  
        );  
    }  
);
```

In addition to that, you have access to the service “*response*”, with which you can manipulate better the response:

```
<?php
```

```

$app->get (
    "/show/data",
    function () use ($app) {
        // Set the Content-Type header
        $app->response->setContentType("text/plain");

        $app->response->sendHeaders();

        // Print a file
        readfile("data.txt");
    }
);

```

Or create a response object and return it from the handler:

```

<?php

$app->get (
    "/show/data",
    function () {
        // Create a response
        $response = new Phalcon\Http\Response();

        // Set the Content-Type header
        $response->setContentType("text/plain");

        // Pass the content of a file
        $response->setContent(file_get_contents("data.txt"));

        // Return the response
        return $response;
    }
);

```

Making redirections

Redirections could be performed to forward the execution flow to another route:

```

<?php

// This route makes a redirection to another route
$app->post("/old/welcome",
    function () use ($app) {
        $app->response->redirect("new/welcome");

        $app->response->sendHeaders();
    }
);

$app->post("/new/welcome",
    function () use ($app) {
        echo "This is the new Welcome";
    }
);

```

Generating URLs for Routes

Phalcon\Mvc\Url can be used to produce URLs based on the defined routes. You need to set up a name for the route; by this way the “url” service can produce the corresponding URL:

```
<?php

// Set a route with the name "show-post"
$app->get(
    "/blog/{year}/{title}",
    function ($year, $title) use ($app) {
        // ... Show the post here
    }
)->setName("show-post");

// Produce a URL somewhere
$app->get(
    "/",
    function () use ($app) {
        echo '<a href="', $app->url->get(
            [
                "for"    => "show-post",
                "title"   => "php-is-a-great-framework",
                "year"    => 2015
            ],
            ">Show the post</a>';
    }
);
```

Interacting with the Dependency Injector

In the micro application, a *Phalcon\Di\FactoryDefault* services container is created implicitly; additionally you can create outside the application a container to manipulate its services:

```
<?php

use Phalcon\Mvc\Micro;
use Phalcon\Di\FactoryDefault;
use Phalcon\Config\Adapter\Ini as IniConfig;

$di = new FactoryDefault();

$di->set(
    "config",
    function () {
        return new IniConfig("config.ini");
    }
);

$app = new Micro();

$app->setDI($di);

$app->get(
    "/",
    function () use ($app) {
        // Read a setting from the config
    }
);
```



```

        echo $app->config->app_name;
    }
);

$app->post(
    "/contact",
    function () use ($app) {
        $app->flash->success("Yes!, the contact was made!");
    }
);

```

The array-syntax is allowed to easily set/get services in the internal services container:

```

<?php

use Phalcon\Mvc\Micro;
use Phalcon\Db\Adapter\Pdo\Mysql as MysqlAdapter;

$app = new Micro();

// Setup the database service
$app["db"] = function () {
    return new MysqlAdapter(
        [
            "host"      => "localhost",
            "username" => "root",
            "password" => "secret",
            "dbname"    => "test_db"
        ]
    );
};

$app->get(
    "/blog",
    function () use ($app) {
        $news = $app["db"]->query("SELECT * FROM news");

        foreach ($news as $new) {
            echo $new->title;
        }
    }
);

```

Not-Found Handler

When a user tries to access a route that is not defined, the micro application will try to execute the “Not-Found” handler. An example of that behavior is below:

```

<?php

$app->notFound(
    function () use ($app) {
        $app->response->setStatusCode(404, "Not Found");

        $app->response->sendHeaders();
    }
);

```

```
        echo "This is crazy, but this page was not found!";
    }
);
```

Models in Micro Applications

Models can be used transparently in Micro Applications, only is required an autoloader to load models:

```
<?php

$loader = new \Phalcon\Loader();

$loader->registerDirs(
    [
        __DIR__ . "/models/"
    ]
)->register();

$app = new \Phalcon\Mvc\Micro();

$app->get(
    "/products/find",
    function () {
        $products = Products::find();

        foreach ($products as $product) {
            echo $product->name, "<br>";
        }
    }
);

$app->handle();
```

Inject model instances

By using class `Phalcon\Mvc\Model\Binder` you can inject model instances into your routes:

```
<?php

$loader = new \Phalcon\Loader();

$loader->registerDirs(
    [
        __DIR__ . "/models/"
    ]
)->register();

$app = new \Phalcon\Mvc\Micro();
$app->setModelBinder(new \Phalcon\Mvc\Model\Binder());

$app->get(
    "/products/{product:[0-9]+}",
    function (Products $product) {
        // do anything with $product object
    }
);
```

```
);  
  
$app->handle();
```

Since Binder object is using internally Reflection Api which can be heavy there is ability to set cache. This can be done by using second argument in `setModelBinder()` which can also accept service name or just by passing cache instance to Binder constructor.

Currently the binder will only use the models primary key to perform a `findFirst()` on. An example route for the above would be `/products/1`

Micro Application Events

Phalcon\Mvc\Micro is able to send events to the *EventsManager* (if it is present). Events are triggered using the type “micro”. The following events are supported:

Event Name	Triggered	Can stop operation?
beforeHandleRoute	The main method is just called, at this point the application doesn't know if there is some matched route	Yes
beforeExecuteRoute	A route has been matched and it contains a valid handler, at this point the handler has not been executed	Yes
afterExecuteRoute	Triggered after running the handler	No
beforeNotFound	Triggered when any of the defined routes match the requested URI	Yes
afterHandleRoute	Triggered after completing the whole process in a successful way	Yes
afterBinding	Triggered after models are bound but before executing the handler	Yes

In the following example, we explain how to control the application security using events:

```
<?php  
  
use Phalcon\Mvc\Micro;  
use Phalcon\Events\Event;  
use Phalcon\Events\Manager as EventsManager;  
  
// Create a events manager  
$eventsManager = new EventsManager();  
  
$eventsManager->attach(  
    "micro:beforeExecuteRoute",  
    function (Event $event, $app) {  
        if ($app->session->get("auth") === false) {  
            $app->flashSession->error("The user isn't authenticated");  
  
            $app->response->redirect("/");  
  
            $app->response->sendHeaders();  
  
            // Return (false) stop the operation  
            return false;  
        }  
    }  
);
```

```
$app = new Micro();

// Bind the events manager to the app
$app->setEventsManager($eventsManager);
```

Middleware events

In addition to the events manager, events can be added using the methods ‘before’, ‘after’ and ‘finish’:

```
<?php

$app = new Phalcon\Mvc\Micro();

// Executed before every route is executed
// Return false cancels the route execution
$app->before(
    function () use ($app) {
        if ($app["session"]->get("auth") === false) {
            $app["flashSession"]->error("The user isn't authenticated");

            $app["response"]->redirect("/error");

            // Return false stops the normal execution
            return false;
        }

        return true;
    }
);

$app->map(
    "/api/robots",
    function () {
        return [
            "status" => "OK",
        ];
    }
);

$app->after(
    function () use ($app) {
        // This is executed after the route is executed
        echo json_encode($app->getReturnedValue());
    }
);

$app->finish(
    function () use ($app) {
        // This is executed when the request has been served
    }
);
```

You can call the methods several times to add more events of the same type:

```
<?php

$app->finish(
    function () use ($app) {
        // First 'finish' middleware
    }
);

$app->finish(
    function () use ($app) {
        // Second 'finish' middleware
    }
);
```

Code for middlewares can be reused using separate classes:

```
<?php

use Phalcon\Mvc\Micro\MiddlewareInterface;

/**
 * CacheMiddleware
 *
 * Caches pages to reduce processing
 */
class CacheMiddleware implements MiddlewareInterface
{
    public function call($application)
    {
        $cache = $application["cache"];
        $router = $application["router"];

        $key = preg_replace("/^[a-zA-Z0-9]/", "", $router->getRewriteUri());

        // Check if the request is cached
        if ($cache->exists($key)) {
            echo $cache->get($key);

            return false;
        }

        return true;
    }
}
```

Then add the instance to the application:

```
<?php

$app->before(
    new CacheMiddleware()
);
```

The following middleware events are available:

Event Name	Triggered	Can stop operation?
before	Before executing the handler. It can be used to control the access to the application	Yes
after	Executed after the handler is executed. It can be used to prepare the response	No
finish	Executed after sending the response. It can be used to perform clean-up	No

finish | Executed after sending the response. It can be used to perform clean-up | No |

Using Controllers as Handlers

Medium applications using the `Mvc\Micro` approach may require organize handlers in controllers. You can use *Phalcon\Mvc\Micro\Collection* to group handlers that belongs to controllers:

```
<?php

use Phalcon\Mvc\Micro\Collection as MicroCollection;

$posts = new MicroCollection();

// Set the main handler. ie. a controller instance
$posts->setHandler(
    new PostsController()
);

// Set a common prefix for all routes
$posts->setPrefix("/posts");

// Use the method 'index' in PostsController
$posts->get("/", "index");

// Use the method 'show' in PostsController
$posts->get("/show/{slug}", "show");

$app->mount($posts);
```

The controller ‘PostsController’ might look like this:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function index()
    {
        // ...
    }

    public function show($slug)
```

```

    {
        // ...
    }
}

```

In the above example the controller is directly instantiated, Collection also have the ability to lazy-load controllers, this option provide better performance loading controllers only if the related routes are matched:

```

<?php

$posts->setHandler("PostsController", true);
$posts->setHandler("Blog\Controllers\PostsController", true);

```

Returning Responses

Handlers may return raw responses using *Phalcon\Http\Response* or a component that implements the relevant interface. When responses are returned by handlers they are automatically sent by the application.

```

<?php

use Phalcon\Mvc\Micro;
use Phalcon\Http\Response;

$app = new Micro();

// Return a response
$app->get(
    "/welcome/index",
    function () {
        $response = new Response();

        $response->setStatusCode(401, "Unauthorized");

        $response->setContent("Access is not authorized");

        return $response;
    }
);

```

Rendering Views

Phalcon\Mvc\View\Simple can be used to render views, the following example shows how to do that:

```

<?php

$app = new Phalcon\Mvc\Micro();

$app["view"] = function () {
    $view = new \Phalcon\Mvc\View\Simple();

    $view->setViewsDir("app/views/");

    return $view;
};

```

```
// Return a rendered view
$app->get (
    "/products/show",
    function () use ($app) {
        // Render app/views/products/show.phtml passing some variables
        echo $app["view"]->render (
            "products/show",
            [
                "id"    => 100,
                "name" => "Artichoke"
            ]
        );
    }
);
```

Please note that this code block uses *Phalcon\Mvc\View\Simple* which uses relative paths instead of controllers and actions. If you would like to use *Phalcon\Mvc\View\Simple* instead, you will need to change the parameters of the `render()` method:

```
<?php

$app = new Phalcon\Mvc\Micro();

$app["view"] = function () {
    $view = new \Phalcon\Mvc\View();

    $view->setViewsDir("app/views/");

    return $view;
};

// Return a rendered view
$app->get (
    "/products/show",
    function () use ($app) {
        // Render app/views/products/show.phtml passing some variables
        echo $app["view"]->render (
            "products",
            "show",
            [
                "id"    => 100,
                "name" => "Artichoke"
            ]
        );
    }
);
```

Error Handling

A proper response can be generated if an exception is raised in a micro handler:

```
<?php

$app = new Phalcon\Mvc\Micro();

$app->get (
```



```

"/",
function () {
    throw new \Exception("An error");
}
);

$app->error(
function ($exception) {
    echo "An error has occurred";
}
);

```

If the handler returns “false” the exception is stopped.

Related Sources

- *Creating a Simple REST API* is a tutorial that explains how to create a micro application to implement a RESTful web service.
- *Stickers Store* is a very simple micro-application making use of the micro-mvc approach [[Github](#)].

Working with Namespaces

Namespaces can be used to avoid class name collisions; this means that if you have two controllers in an application with the same name, a namespace can be used to differentiate them. Namespaces are also useful for creating bundles or modules.

Setting up the framework

Using namespaces has some implications when loading the appropriate controller. To adjust the framework behavior to namespaces is necessary to perform one or all of the following tasks:

Use an autoload strategy that takes into account the namespaces, for example with *Phalcon\Loader*:

```

<?php

$loader->registerNamespaces (
    [
        "Store\\Admin\\Controllers" => "../bundles/admin/controllers/",
        "Store\\Admin\\Models"      => "../bundles/admin/models/",
    ]
);

```

Specify it in the routes as a separate parameter in the route’s paths:

```

<?php

$router->add(
    "/admin/users/my-profile",
    [
        "namespace" => "Store\\Admin",
        "controller" => "Users",
        "action"     => "profile",
    ]
);

```

Passing it as part of the route:

```
<?php

$router->add(
    "namespace/admin/users/my-profile",
    [
        "namespace" => 1,
        "controller" => "Users",
        "action"     => "profile",
    ]
);
```

If you are only working with the same namespace for every controller in your application, then you can define a default namespace in the Dispatcher, by doing this, you don't need to specify a full class name in the router path:

```
<?php

use Phalcon\Mvc\Dispatcher;

// Registering a dispatcher
$di->set(
    "dispatcher",
    function () {
        $dispatcher = new Dispatcher();

        $dispatcher->setDefaultNamespace(
            "Store\Admin\Controllers"
        );

        return $dispatcher;
    }
);
```

Controllers in Namespaces

The following example shows how to implement a controller that use namespaces:

```
<?php

namespace Store\Admin\Controllers;

use Phalcon\Mvc\Controller;

class UsersController extends Controller
{
    public function indexAction()
    {

    }

    public function profileAction()
    {

    }
}
```

Models in Namespaces

Take the following into consideration when using models in namespaces:

```
<?php

namespace Store\Models;

use Phalcon\Mvc\Model;

class Robots extends Model
{
}
```

If models have relationships they must include the namespace too:

```
<?php

namespace Store\Models;

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->hasMany(
            "id",
            "Store\\Models\\Parts",
            "robots_id",
            [
                "alias" => "parts",
            ]
        );
    }
}
```

In PHQL you must write the statements including namespaces:

```
<?php

$phql = "SELECT r.* FROM Store\Models\Robots r JOIN Store\Models\Parts p";
```

Events Manager

Tugas komponen ini adalah mengintersepsi eksekusi sebagian besar komponen lain dalam framework dengan menciptakan “hook points”. Hook point ini memungkinkan developer mendapatkan informasi status, manipulasi data atau mengubah alir eksekusi selama proses sebuah komponen.

Konvensi Penamaan

Event Phalcon menggunakan namespace untuk menghindari tabrakan penamaan. Tiap komponen dalam Phalcon menempati sebuah namespace berbeda dan anda bebas menciptakan milik anda sesuai kebutuhan. Nama kejadian

diformat sebagai “component:event”. Contoh, karena *Phalcon\Db* menempati namespace “db”, nama lengkap event “afterQuery” adalah “db:afterQuery”.

Ketika memasang event listener ke event manager, anda dapat menggunakan “component” untuk menangkap semua kejadian dari komponen tersebut (contoh “db” untuk menangkap semua kejadian *Phalcon\Db*) atau “component:event” untuk mengacu kejadian tertentu(contoh “db:afterQuery”).

Contoh Penggunaan

Di contoh berikut, kita menggunakan EventsManager untuk mendengarkan kejadian yang dihasilkan oleh koneksi MySQL yang dikelola *Phalcon\Db*. Pertama, kita perlu sebuah objek listener untuk melakukannya. Kita menciptakan sebuah kelas yang metodenya adalah event yang ingin kita dengarkan:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Db\Adapter\Pdo\Mysql as DbAdapter;

$eventsManager = new EventsManager();

$eventsManager->attach(
    "db:afterQuery",
    function (Event $event, $connection) {
        echo $connection->getSQLStatement();
    }
);

$connection = new DbAdapter(
    [
        "host"      => "localhost",
        "username" => "root",
        "password" => "secret",
        "dbname"   => "invo",
    ]
);

// Pasang eventsManager ke instance adapter db
$connection->setEventsManager($eventsManager);

// Kirim perintah SQL ke server database
$connection->query(
    "SELECT * FROM products p WHERE p.status = 1"
);
```

Sekarang tiap kali sebuah query dieksekusi, pernyataan SQL akan dicetak. Parameter pertama yang dilewatkan ke fungsi lambda berisi informasi kontekstual tentang kejadian yang berjalan, yang kedua adalah sumber kejadian (dalam hal ini koneksi itu sendiri). Parameter ketiga dapat juga ditentukan yang akan berisi data sembarang terkait kejadian.

You must explicitly set the Events Manager to a component using the `setEventsManager()` method in order for that component to trigger events. You can create a new Events Manager instance for each component or you can set the same Events Manager to multiple components as the naming convention will avoid conflicts.

Selain menggunakan fungsi lambda, anda dapat menggunakan kelas event listener. Event listener juga memungkinkan anda untuk mendengarkan kejadian lebih dari satu. Di contoh ini, kita akan mengimplementasi *Phalcon\Db\Profiler* untuk mendeteksi pernyataan SQL yang butuh waktu lama untuk dieksekusi dari perkiraan:

```

<?php

use Phalcon\Db\Profiler;
use Phalcon\Events\Event;
use Phalcon\Logger;
use Phalcon\Logger\Adapter\File;

class MyDbListener
{
    protected $_profiler;

    protected $_logger;

    /**
     * Buat profiler dan mulai catat log
     */
    public function __construct()
    {
        $this->_profiler = new Profiler();
        $this->_logger    = new Logger("../apps/logs/db.log");
    }

    /**
     * Ini dieksekusi ketika event dipicu adalah 'beforeQuery'
     */
    public function beforeQuery(Event $event, $connection)
    {
        $this->_profiler->startProfile(
            $connection->getSQLStatement()
        );
    }

    /**
     * Ini dieksekusi ketika event dipicu adalah 'afterQuery'
     */
    public function afterQuery(Event $event, $connection)
    {
        $this->_logger->log(
            $connection->getSQLStatement(),
            Logger::INFO
        );

        $this->_profiler->stopProfile();
    }

    public function getProfiler()
    {
        return $this->_profiler;
    }
}

```

Memasang sebuah event listener ke event manager sederhana berikut ini:

```

<?php

// Buat listener database
$dbListener = new MyDbListener();

```

```
// Dengarkan semua kejadian database
$eventsManager->attach(
    "db",
    $dbListener
);
```

Profile data yang dihasilkan dapat diperoleh dari listener:

```
<?php

// Kirim perintah SQL ke server database
$connection->execute(
    "SELECT * FROM products p WHERE p.status = 1"
);

foreach ($dbListener->getProfiler()->getProfiles() as $profile) {
    echo "SQL Statement: ", $profile->getSQLStatement(), "\n";
    echo "Start Time: ", $profile->getInitialTime(), "\n";
    echo "Final Time: ", $profile->getFinalTime(), "\n";
    echo "Total Elapsed Time: ", $profile->getTotalElapsedSeconds(), "\n";
}
```

Menciptakan komponen yang memicu kejadian

Anda dapat menciptakan komponen dalam aplikasi anda yang memicu kejadian ke EventsManager. Sebagai akibatnya, mungkin ada listener lain yang bereaksi ketika kejadian ini dibangkitkan. Di contoh berikut, kita menciptakan sebuah komponen bernama called “MyComponent”. Komponen ini peduli EventsManager (ia mengimplementasi *Phalcon\Events\EventsAwareInterface*); ketika metode `someTask()` dieksekusi, ia memicu dua kejadian ke tiap listener dalam EventsManager:

```
<?php

use Phalcon\Events\EventsAwareInterface;
use Phalcon\Events\Manager as EventsManager;

class MyComponent implements EventsAwareInterface
{
    protected $_eventsManager;

    public function setEventsManager(EventsManager $eventsManager)
    {
        $this->_eventsManager = $eventsManager;
    }

    public function getEventsManager()
    {
        return $this->_eventsManager;
    }

    public function someTask()
    {
        $this->_eventsManager->fire("my-component:beforeSomeTask", $this);

        // Lakukan tugas
        echo "Here, someTask\n";
    }
}
```

```

        $this->_eventsManager->fire("my-component:afterSomeTask", $this);
    }
}

```

Perhatikan di contoh ini kita menggunakan namespace event “my-component”. Sekarang kita butuh menciptakan event listener untuk komponen ini:

```

<?php

use Phalcon\Events\Event;

class SomeListener
{
    public function beforeSomeTask(Event $event, $myComponent)
    {
        echo "Here, beforeSomeTask\n";
    }

    public function afterSomeTask(Event $event, $myComponent)
    {
        echo "Here, afterSomeTask\n";
    }
}

```

Sekarang mari bkita buat semuanya bekerja bersama:

```

<?php

use Phalcon\Events\Manager as EventsManager;

// Buat Events Manager
$eventsManager = new EventsManager();

// Buat instance MyComponent
$myComponent = new MyComponent();

// Ikat eventsManager ke instance tersebut
$myComponent->setEventsManager($eventsManager);

// Pasangkan listener ke EventsManager
$eventsManager->attach(
    "my-component",
    new SomeListener()
);

// Eksekusi metode dalam komponen
$myComponent->someTask();

```

Saat someTask() dieksekusi, dua metode dalam listener akan dieksekusi, menghasilkan output berikut:

```

Here, beforeSomeTask
Here, someTask
Here, afterSomeTask

```

Data tambahan dapat juga dilewatkan ketika memicu kejadian menggunakan parameter ketiga fire():

```

<?php

```

```
$eventsManager->fire("my-component:afterSomeTask", $this, $extraData);
```

Dalam sebuah listener parameter ketiga juga menerima data ini:

```
<?php

use Phalcon\Events\Event;

$eventsManager->attach(
    "my-component",
    function (Event $event, $component, $data) {
        print_r($data);
    }
);

// Terima data dari konteks kejadian
$eventsManager->attach(
    "my-component",
    function (Event $event, $component) {
        print_r($event->getData());
    }
);
```

Using Services From The DI

By extending *Phalcon\Mvc\User\Plugin*, you can access services from the DI, just like you would in a controller:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Mvc\User\Plugin;

class SomeListener extends Plugin
{
    public function beforeSomeTask(Event $event, $myComponent)
    {
        echo "Here, beforeSomeTask\n";

        $this->logger->debug(
            "beforeSomeTask has been triggered";
        );
    }

    public function afterSomeTask(Event $event, $myComponent)
    {
        echo "Here, afterSomeTask\n";

        $this->logger->debug(
            "afterSomeTask has been triggered";
        );
    }
}
```


Perambatan/Pembatalan Event

Banyak listener dapat ditambahkan ke event manager yang sama. Ini artinya untuk kejadian berjenis sama, banyak listener dapat diberitahu. Listener diberi tahu dalam urutan mereka didaftarkan dalam EventsManager. Beberapa kejadian dapat dibatalkan, yang artinya kejadian ini bisa dihentikan sehingga mencegah listener lain diberitahu kejadian ini:

```
<?php

use Phalcon\Events\Event;

$eventsManager->attach(
    "db",
    function (Event $event, $connection) {
        // We stop the event if it is cancelable
        if ($event->isCancelable()) {
            // Stop the event, so other listeners will not be notified about this
            $event->stop();
        }

        // ...
    }
);
```

Defaultnya, event dapat dibatalkan, bahkan sebagian besar kejadian yang dihasilkan oleh framework dapat dibatalkan. Anda dapat memicu kejadian yang tidak dapat dibatalkan dengan melewati `false` di parameter keempat `fire()`:

```
<?php

$eventsManager->fire("my-component:afterSomeTask", $this, $extraData, false);
```

Prioritas Listener

Ketika memasang listener anda dapat menentukan prioritas tertentu. Dengan fitur ini anda dapat memasang listener dengan mengindikasikan urutan mereka harus dipanggil:

```
<?php

$eventsManager->enablePriorities(true);

$eventsManager->attach("db", new DbListener(), 150); // More priority
$eventsManager->attach("db", new DbListener(), 100); // Normal priority
$eventsManager->attach("db", new DbListener(), 50);  // Less priority
```

Mengumpulkan Response

Event manager dapat mengumpulkan tiap response yang dikembalikan oleh semua listener yang diberitahu. Contoh ini menjelaskan bagaimana ia bekerja:

```
<?php

use Phalcon\Events\Manager as EventsManager;

$eventsManager = new EventsManager();
```

```
// Siapkan event manager untuk mengumpulkan response
$eventsManager->collectResponses(true);

// Pasang sebuah listener
$eventsManager->attach(
    "custom:custom",
    function () {
        return "first response";
    }
);

// Pasang listener
$eventsManager->attach(
    "custom:custom",
    function () {
        return "second response";
    }
);

// Picu kejadian
$eventsManager->fire("custom:custom", null);

// Ambil semua response yang terkumpul
print_r($eventsManager->getResponses());
```

Contoh diatas menghasilkan:

```
Array ( [0] => first response [1] => second response )
```

Mengimplementasi EventsManager sendiri

Interface *Phalcon\Events\ManagerInterface* harus diimplementasi untuk menciptakan EventsManager anda sendiri menggantikan yang disediakan Phalcon.

Request Environment

Every HTTP request (usually originated by a browser) contains additional information regarding the request such as header data, files, variables, etc. A web based application needs to parse that information so as to provide the correct response back to the requester. *Phalcon\Http\Request* encapsulates the information of the request, allowing you to access it in an object-oriented way.

```
<?php

use Phalcon\Http\Request;

// Getting a request instance
$request = new Request();

// Check whether the request was made with method POST
if ($request->isPost()) {
    // Check whether the request was made with Ajax
    if ($request->isAjax()) {
        echo "Request was made using POST and AJAX";
    }
}
```

Getting Values

PHP automatically fills the superglobal arrays `$_GET` and `$_POST` depending on the type of the request. These arrays contain the values present in forms submitted or the parameters sent via the URL. The variables in the arrays are never sanitized and can contain illegal characters or even malicious code, which can lead to [SQL injection](#) or [Cross Site Scripting \(XSS\)](#) attacks.

Phalcon\Http\Request allows you to access the values stored in the `$_REQUEST`, `$_GET` and `$_POST` arrays and sanitize or filter them with the 'filter' service, (by default *Phalcon\Filter*). The following examples offer the same behavior:

```
<?php

use Phalcon\Filter;

$filter = new Filter();

// Manually applying the filter
$email = $filter->sanitize($_POST["user_email"], "email");

// Manually applying the filter to the value
$email = $filter->sanitize($request->getPost("user_email"), "email");

// Automatically applying the filter
$email = $request->getPost("user_email", "email");

// Setting a default value if the param is null
$email = $request->getPost("user_email", "email", "some@example.com");

// Setting a default value if the param is null without filtering
$email = $request->getPost("user_email", null, "some@example.com");
```

Accessing the Request from Controllers

The most common place to access the request environment is in an action of a controller. To access the *Phalcon\Http\Request* object from a controller you will need to use the `$this->request` public property of the controller:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        // Check if request has made with POST
        if ($this->request->isPost()) {
            // Access POST data
            $customerName = $this->request->getPost("name");
            $customerBorn = $this->request->getPost("born");
        }
    }
}
```

```
}  
}
```

Uploading Files

Another common task is file uploading. *Phalcon\Http\Request* offers an object-oriented way to achieve this task:

```
<?php  
  
use Phalcon\Mvc\Controller;  
  
class PostsController extends Controller  
{  
    public function uploadAction()  
    {  
        // Check if the user has uploaded files  
        if ($this->request->hasFiles()) {  
            $files = $this->request->getUploadedFiles();  
  
            // Print the real file names and sizes  
            foreach ($files as $file) {  
                // Print file details  
                echo $file->getName(), " ", $file->getSize(), "\n";  
  
                // Move the file into the application  
                $file->moveTo(  
                    "files/" . $file->getName()  
                );  
            }  
        }  
    }  
}
```

Each object returned by `Phalcon\Http\Request::getUploadedFiles()` is an instance of the *Phalcon\Http\Request\File* class. Using the `$_FILES` superglobal array offers the same behavior. *Phalcon\Http\Request\File* encapsulates only the information related to each file uploaded with the request.

Working with Headers

As mentioned above, request headers contain useful information that allow us to send the proper response back to the user. The following examples show usages of that information:

```
<?php  
  
// Get the Http-X-Requested-With header  
$requestedWith = $request->getHeader("HTTP_X_REQUESTED_WITH");  
  
if ($requestedWith === "XMLHttpRequest") {  
    echo "The request was made with Ajax";  
}  
  
// Same as above  
if ($request->isAjax()) {  
    echo "The request was made with Ajax";  
}
```

```
// Check the request layer
if ($request->isSecure()) {
    echo "The request was made using a secure layer";
}

// Get the servers's IP address. ie. 192.168.0.100
$ipAddress = $request->getServerAddress();

// Get the client's IP address ie. 201.245.53.51
$ipAddress = $request->getClientAddress();

// Get the User Agent (HTTP_USER_AGENT)
$userAgent = $request->getUserAgent();

// Get the best acceptable content by the browser. ie text/xml
$contentType = $request->getAcceptableContent();

// Get the best charset accepted by the browser. ie. utf-8
$charset = $request->getBestCharset();

// Get the best language accepted configured in the browser. ie. en-us
$language = $request->getBestLanguage();
```

Returning Responses

Part of the HTTP cycle is returning responses to clients. *Phalcon\Http\Response* is the Phalcon component designed to achieve this task. HTTP responses are usually composed by headers and body. The following is an example of basic usage:

```
<?php

use Phalcon\Http\Response;

// Getting a response instance
$response = new Response();

// Set status code
$response->setStatusCode(404, "Not Found");

// Set the content of the response
$response->setContent("Sorry, the page doesn't exist");

// Send response to the client
$response->send();
```

If you are using the full MVC stack there is no need to create responses manually. However, if you need to return a response directly from a controller's action follow this example:

```
<?php

use Phalcon\Http\Response;
use Phalcon\Mvc\Controller;

class FeedController extends Controller
{
```

```
public function getAction()
{
    // Getting a response instance
    $response = new Response();

    $feed = // ... Load here the feed

    // Set the content of the response
    $response->setContent(
        $feed->asString()
    );

    // Return the response
    return $response;
}
```

Working with Headers

Headers are an important part of the HTTP response. It contains useful information about the response state like the HTTP status, type of response and much more.

You can set headers in the following way:

```
<?php

// Setting a header by its name
$response->setHeader("Content-Type", "application/pdf");
$response->setHeader("Content-Disposition", 'attachment; filename="downloaded.pdf"');

// Setting a raw header
$response->setRawHeader("HTTP/1.1 200 OK");
```

A *Phalcon\Http\Response\Headers* bag internally manages headers. This class retrieves the headers before sending it to client:

```
<?php

// Get the headers bag
$headers = $response->getHeaders();

// Get a header by its name
$contentType = $headers->get("Content-Type");
```

Making Redirections

With *Phalcon\Http\Response* you can also execute HTTP redirections:

```
<?php

// Redirect to the default URI
$response->redirect();

// Redirect to the local base URI
$response->redirect("posts/index");
```

```
// Redirect to an external URL
$response->redirect("http://en.wikipedia.org", true);

// Redirect specifying the HTTP status code
$response->redirect("http://www.example.com/new-location", true, 301);
```

All internal URIs are generated using the ‘url’ service (by default *Phalcon\Mvc\Url*). This example demonstrates how you can redirect using a route you have defined in your application:

```
<?php

// Redirect based on a named route
return $response->redirect(
    [
        "for"          => "index-lang",
        "lang"          => "jp",
        "controller" => "index",
    ]
);
```

Note that a redirection doesn’t disable the view component, so if there is a view associated with the current action it will be executed anyway. You can disable the view from a controller by executing `$this->view->disable()`;

HTTP Cache

One of the easiest ways to improve the performance in your applications and reduce the traffic is using HTTP Cache. Most modern browsers support HTTP caching and is one of the reasons why many websites are currently fast.

HTTP Cache can be altered in the following header values sent by the application when serving a page for the first time:

- *Expires*: With this header the application can set a date in the future or the past telling the browser when the page must expire.
- *Cache-Control*: This header allows to specify how much time a page should be considered fresh in the browser.
- *Last-Modified*: This header tells the browser which was the last time the site was updated avoiding page re-loads
- *ETag*: An etag is a unique identifier that must be created including the modification timestamp of the current page

Setting an Expiration Time

The expiration date is one of the easiest and most effective ways to cache a page in the client (browser). Starting from the current date we add the amount of time the page will be stored in the browser cache. Until this date expires no new content will be requested from the server:

```
<?php

$expiryDate = new DateTime();
$expiryDate->modify("+2 months");

$response->setExpires($expiryDate);
```

The Response component automatically shows the date in GMT timezone as expected in an Expires header.

If we set this value to a date in the past the browser will always refresh the requested page:

```
<?php

$expiryDate = new DateTime();
$expiryDate->modify("-10 minutes");

$response->setExpires($expiryDate);
```

Browsers rely on the client's clock to assess if this date has passed or not. The client clock can be modified to make pages expire and this may represent a limitation for this cache mechanism.

Cache-Control

This header provides a safer way to cache the pages served. We simply must specify a time in seconds telling the browser how long it must keep the page in its cache:

```
<?php

// Starting from now, cache the page for one day
$response->setHeader("Cache-Control", "max-age=86400");
```

The opposite effect (avoid page caching) is achieved in this way:

```
<?php

// Never cache the served page
$response->setHeader("Cache-Control", "private, max-age=0, must-revalidate");
```

E-Tag

An “entity-tag” or “E-tag” is a unique identifier that helps the browser realize if the page has changed or not between two requests. The identifier must be calculated taking into account that this must change if the previously served content has changed:

```
<?php

// Calculate the E-Tag based on the modification time of the latest news
$mostRecentDate = News::maximum(
    [
        "column" => "created_at"
    ]
);

$eTag = md5($mostRecentDate);

// Send an E-Tag header
$response->setHeader("E-Tag", $eTag);
```

Pengelolaan Cookies

Cookies adalah cara yang berguna untuk menyimpan potongan data kecil di mesin klien yang dapat dibaca meski pengguna menutup brosernya. *Phalcon\Http\Response\Cookies* bertindak sebagai penampung global untuk cookies. Cookies disimpan disini selama eksekusi request dan dikirim otomatis diakhir request.

Penggunaan Dasar

Anda dapat mengubah/membaca cookies dengan mengakses 'cookies' service disembarang bagian aplikasi di mana service bisa diakses:

```
<?php

use Phalcon\Mvc\Controller;

class SessionController extends Controller
{
    public function loginAction()
    {
        // Uji apakah cookies sebelumnya sudah diset
        if ($this->cookies->has("remember-me")) {
            // Baca cookie
            $rememberMeCookie = $this->cookies->get("remember-me");

            // Baca isi cookie
            $value = $rememberMeCookie->getValue();
        }

        public function startAction()
        {
            $this->cookies->set(
                "remember-me",
                "some value",
                time() + 15 * 86400
            );
        }

        public function logoutAction()
        {
            $rememberMeCookie = $this->cookies->get("remember-me");

            // Hapus cookie
            $rememberMe->delete();
        }
    }
}
```

Enkripsi/Dekripsi Cookies

Secara default, cookies secara otomatis dienkripsi sebelum dikirim ke klien dan didekripsi ketika dibaca dari pengguna. Perlindungan ini mencegah pengguna yang tidak berhak melihat isi cookies di klien (browser). Meski ada perlindungan ini, data sensitif seharusnya tidak disimpan di cookies.

Anda dapat mematikan enkripsi dengan cara berikut:

```
<?php

use Phalcon\Http\Response\Cookies;

$di->set(
    "cookies",
    function () {
        $cookies = new Cookies();
    }
);
```

```
        $cookies->useEncryption(false);

        return $cookies;
    }
};
```

Jika anda ingin menggunakan enkripsi, sebuah key global harus diset di 'crypt' service:

```
<?php

use Phalcon\Crypt;

$di->set(
    "crypt",
    function () {
        $crypt = new Crypt();

        $crypt->setKey('#1dj8$=dp?.ak//j1V$'); // Gunakan key anda sendiri!

        return $crypt;
    }
);
```

Mengirim data cookies tanpa enkripsi ke klien termasuk struktur objek kompleks, result sets, informasi layanan, dan lain-lain. dapat membuka detail internal aplikasi yang dapat dimanfaatkan penyerang untuk menyerang aplikasi. Jika anda tidak ingin menggunakan enkripsi, kami sarankan anda hanya mengirim data cookie sangat sederhana atau string literal kecil.

Generating URLs and Paths

Phalcon\Mvc\Url is the component responsible of generate URLs in a Phalcon application. It's capable of produce independent URLs based on routes.

Setting a base URI

Depending of which directory of your document root your application is installed, it may have a base URI or not.

For example, if your document root is /var/www/htdocs and your application is installed in /var/www/htdocs/invo then your baseUri will be /invo/. If you are using a VirtualHost or your application is installed on the document root, then your baseUri is /. Execute the following code to know the base URI detected by Phalcon:

```
<?php

use Phalcon\Mvc\Url;

$url = new Url();

echo $url->getBaseUri();
```

By default, Phalcon automatically may detect your baseUri, but if you want to increase the performance of your application is recommended setting up it manually:

```
<?php
```

```

use Phalcon\Mvc\Url;

$url = new Url();

// Setting a relative base URI
$url->setBaseUri("/invo/");

// Setting a full domain as base URI
$url->setBaseUri("//my.domain.com/");

// Setting a full domain as base URI
$url->setBaseUri("http://my.domain.com/my-app/");

```

Usually, this component must be registered in the Dependency Injector container, so you can set up it there:

```

<?php

use Phalcon\Mvc\Url;

$di->set(
    "url",
    function () {
        $url = new Url();

        $url->setBaseUri("/invo/");

        return $url;
    }
);

```

Generating URIs

If you are using the *Router* with its default behavior. Your application is able to match routes based on the following pattern: `/:controller/:action/:params`. Accordingly it is easy to create routes that satisfy that pattern (or any other pattern defined in the router) passing a string to the method “get”:

```

<?php echo $url->get("products/save"); ?>

```

Note that isn’t necessary to prepend the base URI. If you have named routes you can easily change it creating it dynamically. For Example if you have the following route:

```

<?php

$router->add(
    "/blog/{year}/{month}/{title}",
    [
        "controller" => "posts",
        "action"      => "show",
    ]
)->setName("show-post");

```

A URL can be generated in the following way:

```

<?php

// This produces: /blog/2015/01/some-blog-post

```

```
$url->get (
    [
        "for"    => "show-post",
        "year"   => "2015",
        "month"  => "01",
        "title"  => "some-blog-post",
    ]
);
```

Producing URLs without mod_rewrite

You can use this component also to create URLs without mod_rewrite:

```
<?php

use Phalcon\Mvc\Url;

$url = new Url();

// Pass the URI in $_GET["_url"]
$url->setBaseUri("/invo/index.php?_url=/");

// This produce: /invo/index.php?_url=/products/save
echo $url->get("products/save");
```

You can also use `$_SERVER["REQUEST_URI"]`:

```
<?php

use Phalcon\Mvc\Url;

$url = new Url();

// Pass the URI in $_GET["_url"]
$url->setBaseUri("/invo/index.php?_url=/");

// Pass the URI using $_SERVER["REQUEST_URI"]
$url->setBaseUri("/invo/index.php/");
```

In this case, it's necessary to manually handle the required URI in the Router:

```
<?php

use Phalcon\Mvc Router;

$router = new Router();

// ... Define routes

$uri = str_replace($_SERVER["SCRIPT_NAME"], "", $_SERVER["REQUEST_URI"]);

$router->handle($uri);
```

The produced routes would look like:

```
<?php

// This produce: /invo/index.php/products/save
echo $url->get("products/save");
```

Producing URLs from Volt

The function “url” is available in volt to generate URLs using this component:

```
<a href="{{ url('posts/edit/1002') }}">Edit</a>
```

Generate static routes:

```
<link rel="stylesheet" href="{{ static_url('css/style.css') }}" type="text/css" />
```

Static vs. Dynamic URIs

This component allow you to set up a different base URI for static resources in the application:

```
<?php

use Phalcon\Mvc\Url;

$url = new Url();

// Dynamic URIs are
$url->setBaseUri("/");

// Static resources go through a CDN
$url->setStaticBaseUri("http://static.mywebsite.com/");
```

PhalconTag will request both dynamical and static URIs using this component.

Implementing your own URL Generator

The *Phalcon\Mvc\UrlInterface* interface must be implemented to create your own URL generator replacing the one provided by Phalcon.

Pesan Flash

Pesan flash digunakan untuk memberitahu user tentang status aksi yang dibuatnya atau sekedar menunjukkan informasi ke user. Pesan semacam ini dapat dibuat dengan menggunakan komponen ini.

Adapter

Komponen ini menggunakan adapter untuk mendefinisikan perilaku pesan setelah dilewatkan ke Flasher:

Adapter	Keterangan	API
Direct	Cetak pesan langsung setelah dilewatkan ke flasher	<i>PhalconFlash\Direct</i>
Session	Simpan pesan disession sementara, lalu pesan dicetak di request berikutnya	<i>PhalconFlash\Session</i>

Penggunaan

Biasanya layanan Flash Messaging diminta dari services container. Jika anda menggunakan *Phalcon\DI\FactoryDefault* maka *Phalcon\Flash\Direct* otomatis terdaftar sebagai seervice bernama “flash” dan *Phalcon\Flash\Session* ittinatus terdaftar sebagai “flashSession” service. Anda dapat juga mendaftarkannya secara manual:

```
<?php

use Phalcon\Flash\Direct as FlashDirect;
use Phalcon\Flash\Session as FlashSession;

// Siapkan flash service
$di->set(
    "flash",
    function () {
        return new FlashDirect();
    }
);

// Siapkan flash session service
$di->set(
    "flashSession",
    function () {
        return new FlashSession();
    }
);
```

Dengan cara ini, anda dapat menggunakannya dalam kontroler atau view:

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        $this->flash->success("The post was correctly saved!");
    }
}
```

Berikut ini adalah empat jenis pesan bawaan yang didukung:

```
<?php

$this->flash->error("too bad! the form had errors");

$this->flash->success("yes!, everything went very smoothly");

$this->flash->notice("this a very important information");

$this->flash->warning("best check yo self, you're not looking too good.");
```

Anda dapat juga menambahkan pesan dengan tipe milik anda sendiri menggunakan metode `message()`:

```
<?php
$this->flash->message("debug", "this is debug message, you don't say");
```

Mencetak Pesan

Pesan yang dikirim ke flash service otomatis diformat berupa HTML:

```
<div class="errorMessage">too bad! the form had errors</div>

<div class="successMessage">yes!, everything went very smoothly</div>

<div class="noticeMessage">this a very important information</div>

<div class="warningMessage">best check yo self, you're not looking too good.</div>
```

Dapat Anda lihat, kelas CSS ditambahkan otomatis ke `<div>`'s. Kelas ini memungkinkan anda menentukan pesentasi grafis pesan di browser. Kelas CSS ini dapat di override, misal jika anda menggunakan Twitter Bootstrap, ia dapat dikonfigurasi sebagai:

```
<?php

use Phalcon\Flash\Direct as FlashDirect;

// Daftarkan flash service dengan kelas CSS custom
$di->set(
    "flash",
    function () {
        $flash = new FlashDirect(
            [
                "error"    => "alert alert-danger",
                "success"  => "alert alert-success",
                "notice"   => "alert alert-info",
                "warning"  => "alert alert-warning",
            ]
        );

        return $flash;
    }
);
```

maka pesan dapat dicetak sebagai berikut:

```
<div class="alert alert-danger">too bad! the form had errors</div>

<div class="alert alert-success">yes!, everything went very smoothly</div>

<div class="alert alert-info">this a very important information</div>

<div class="alert alert-warning">best check yo self, you're not looking too good.</div>
```

Flush Implisit vs. Session

Tergantung adapter yang digunakan untuk mengirim pesan, ia dapat menghasilkan output langsung, atau menyimpan pesan sementara di session untuk ditampilkan nanti. Kapan anda harus menggunakan masing-masing? Itu tergantung jenis redirection yang anda lakukan setelah mengirim pesan. Contoh, jika anda membuat “forward” tidak perlu menyimpan pesan dalam session, tetapi jika anda melakukan HTTP redirect, mereka harus disimpan di session:

```
<?php

use Phalcon\Mvc\Controller;

class ContactController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        // Simpan post

        // Menggunakan direct flash
        $this->flash->success("Your information was stored correctly!");

        // Forward ke index action
        return $this->dispatcher->forward(
            [
                "action" => "index"
            ]
        );
    }
}
```

Atau menggunakan HTTP redirection:

```
<?php

use Phalcon\Mvc\Controller;

class ContactController extends Controller
{
    public function indexAction()
    {

    }

    public function saveAction()
    {
        // Simpan post

        // Menggunakan session flash
        $this->flashSession->success("Your information was stored correctly!");

        // Buat HTTP redirection penuh
        return $this->response->redirect("contact/index");
    }
}
```


Dalam hal anda perlu mencetak pesan secara manual di view terkait:

```
<!-- app/views/contact/index.phtml -->

<p><?php $this->flashSession->output() ?></p>
```

Atribut ‘flashSession’ adalah flash yang sebelumnya diset ke kontainer dependency injection. Anda perlu menjalankan *session* terlebih dahulu untuk dapat menggunakan flashSession messenger.

Storing data in Session

The session component provides object-oriented wrappers to access session data.

Reasons to use this component instead of raw-sessions:

- You can easily isolate session data across applications on the same domain
- Intercept where session data is set/get in your application
- Change the session adapter according to the application needs

Starting the Session

Some applications are session-intensive, almost any action that performs requires access to session data. There are others who access session data casually. Thanks to the service container, we can ensure that the session is accessed only when it’s clearly needed:

```
<?php

use Phalcon\Session\Adapter\Files as Session;

// Start the session the first time when some component request the session service
$di->setShared(
    "session",
    function () {
        $session = new Session();

        $session->start();

        return $session;
    }
);
```

Storing/Retrieving data in Session

From a controller, a view or any other component that extends *Phalcon\Di\Injectable* you can access the session service and store items and retrieve them in the following way:

```
<?php

use Phalcon\Mvc\Controller;

class UserController extends Controller
{
    public function indexAction()
    {
```

```
// Set a session variable
$this->session->set("user-name", "Michael");
}

public function welcomeAction()
{
    // Check if the variable is defined
    if ($this->session->has("user-name")) {
        // Retrieve its value
        $name = $this->session->get("user-name");
    }
}
}
```

Removing/Destroying Sessions

It's also possible remove specific variables or destroy the whole session:

```
<?php
use Phalcon\Mvc\Controller;

class UserController extends Controller
{
    public function removeAction()
    {
        // Remove a session variable
        $this->session->remove("user-name");
    }

    public function logoutAction()
    {
        // Destroy the whole session
        $this->session->destroy();
    }
}
```

Isolating Session Data between Applications

Sometimes a user can use the same application twice, on the same server, in the same session. Surely, if we use variables in session, we want that every application have separate session data (even though the same code and same variable names). To solve this, you can add a prefix for every session variable created in a certain application:

```
<?php
use Phalcon\Session\Adapter\Files as Session;

// Isolating the session data
$di->set(
    "session",
    function () {
        // All variables created will prefixed with "my-app-1"
        $session = new Session(
            [
```

```

        "uniqueId" => "my-app-1",
    ]
);

$session->start();

return $session;
}
);

```

Adding a unique ID is not necessary.

Session Bags

Phalcon\Session\Bag is a component that helps separating session data into “namespaces”. Working by this way you can easily create groups of session variables into the application. By only setting the variables in the “bag”, it’s automatically stored in session:

```

<?php

use Phalcon\Session\Bag as SessionBag;

$user = new SessionBag("user");

$user->setDI($di);

$user->name = "Kimbra Johnson";
$user->age  = 22;

```

Persistent Data in Components

Controller, components and classes that extends *Phalcon\Di\Injectable* may inject a *Phalcon\Session\Bag*. This class isolates variables for every class. Thanks to this you can persist data between requests in every class in an independent way.

```

<?php

use Phalcon\Mvc\Controller;

class UserController extends Controller
{
    public function indexAction()
    {
        // Create a persistent variable "name"
        $this->persistent->name = "Laura";
    }

    public function welcomeAction()
    {
        if (isset($this->persistent->name)) {
            echo "Welcome, ", $this->persistent->name;
        }
    }
}

```

In a component:

```
<?php

use Phalcon\Mvc\Controller;

class Security extends Component
{
    public function auth()
    {
        // Create a persistent variable "name"
        $this->persistent->name = "Laura";
    }

    public function getAuthName()
    {
        return $this->persistent->name;
    }
}
```

The data added to the session (`$this->session`) are available throughout the application, while persistent (`$this->persistent`) can only be accessed in the scope of the current class.


Implementing your own adapters

The *Phalcon\Session\AdapterInterface* interface must be implemented in order to create your own session adapters or extend the existing ones.

There are more adapters available for this components in the [Phalcon Incubator](#)

Penyaringan dan Sanitasi

Sanitasi input pengguna adalah bagian penting pengembangan software. Mempercayai atau mengabaikan sanitasi input pengguna dapat mengarah ke akses terlarang ke isi aplikasi Anda, terutama data pengguna, atau bahkan server di mana aplikasi anda disimpan.

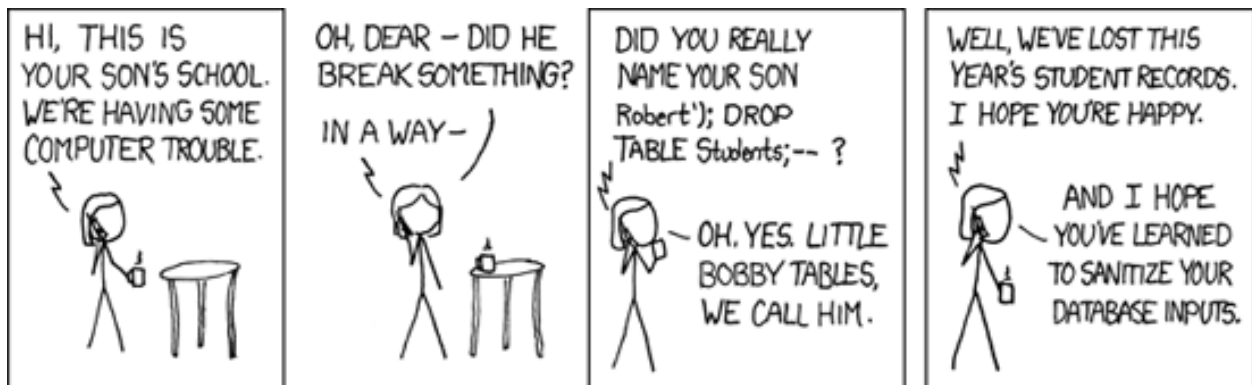

Gambar penuh (dari xkcd)

Komponen *Phalcon\Filter* menyediakan himpunan filter dan helper untuk sanitasi data yang umum digunakan. Ia menyediakan pembungkus berorientasi objek untuk ekstensi filter PHP.

Jenis Filter Bawaan

Berikut ini adalah filter bawaan yang disediakan komponen ini:

Nama	Keterangan
string	Melucuti tag dan entiti HTML, termasuk petik tunggal dan ganda.
email	Hapus semua karakter kecuali huruf, angka dan <code>!#\$%&*+./=?^_`{ }~@.[]</code> .
int	Hapus semua karakter kecuali angka dan tanda plus minus.
float	Hapus semua karakter kecuali angka, titik, dan tanda plus minus.
alphanum	Hapus semua karakter kecuali <code>[a-zA-Z0-9]</code>
striptags	Terapkan fungsi <code>strip_tags</code>
trim	Terapkan fungsi <code>trim</code>
lower	Terapkan fungsi <code>strtolower</code>
upper	Terapkan fungsi <code>strtoupper</code>

Sanitasi data

Sanitasi data adalah proses menghapus karakter tertentu dari sebuah nilai, yang tidak diperlukan atau tidak diinginkan oleh user atau aplikasi. Dengan sanitasi input kita memastikan integritas aplikasi tetap terjaga.

```
<?php
use Phalcon\Filter;

$filter = new Filter();

// Mengembalikan "someone@example.com"
$filter->sanitize("some(one)@exa\mple.com", "email");

// Mengembalikan "hello"
$filter->sanitize("hello<<", "string");

// Mengembalikan "100019"
$filter->sanitize("!100a019", "int");

// Mengembalikan "100019.01"
$filter->sanitize("!100a019.01a", "float");
```

Sanitasi dari Kontroler

Anda dapat mengakses sebuah objek `Phalcon\Filter` dari controller anda ketika mengakses data input GET atau POST (melalui objek request). Parameter pertama adalah nama variabel yang diambil; kedua adalah filter yang diterapkan kepadanya.

```
<?php
use Phalcon\Mvc\Controller;

class ProductsController extends Controller
{
    public function indexAction()
    {

    }
}
```

```
public function saveAction()
{
    // Sanitasi input bernama price
    $price = $this->request->getPost("price", "double");

    // Sanitasi email dari input
    $email = $this->request->getPost("customerEmail", "email");
}
```

Menyaring Parameter Aksi

Contoh berikut menunjukkan kepada anda bagaimana membersihkan parameter dalam sebuah aksi kontroler:

```
<?php

use Phalcon\Mvc\Controller;

class ProductsController extends Controller
{
    public function indexAction()
    {

    }

    public function showAction($productId)
    {
        $productId = $this->filter->sanitize($productId, "int");
    }
}
```

Menyaring data

Selain sanitasi, *Phalcon\Filter* juga menyediakan penyaringan dengan menghapus atau mengubah data input ke format yang kita harapkan.

```
<?php

use Phalcon\Filter;

$filter = new Filter();

// Mengembalikan "Hello"
$filter->sanitize("<h1>Hello</h1>", "striptags");

// Mengembalikan "Hello"
$filter->sanitize(" Hello ", "trim");
```

Menggabung Filter

Anda dapat menjalankan beberapa filter pada sebuah string pada saat bersamaan dengan melewati array pengenalan filter pada parameter kedua:

```
<?php

use Phalcon\Filter;

$filter = new Filter();

// Mengembalikan "Hello"
$filter->sanitize(
    "<h1> Hello </h1> ",
    [
        "striptags",
        "trim",
    ]
);
```

Menciptakan Filter anda sendiri

Anda dapat menambahkan filter milik anda ke *Phalcon\Filter*. Fungsi filter dapat pula berupa fungsi anonim:

```
<?php

use Phalcon\Filter;

$filter = new Filter();

// Menggunakan fungsi anonim
$filter->add(
    "md5",
    function ($value) {
        return preg_replace("/^[^0-9a-f]/", "", $value);
    }
);

// Sanitasi dengan filter "md5"
$filtered = $filter->sanitize($possibleMd5, "md5");
```

atau, jika anda suka, anda dapat mengimplementasi filter dalam sebuah kelas:

```
<?php

use Phalcon\Filter;

class IPv4Filter
{
    public function filter($value)
    {
        return filter_var($value, FILTER_VALIDATE_IP, FILTER_FLAG_IPV4);
    }
}

$filter = new Filter();

// Menggunakan sebuah objek
$filter->add(
    "ipv4",
    new IPv4Filter()
```

```
);  
  
// Sanitasi dengan filter "ipv4"  
$filteredIp = $filter->sanitize("127.0.0.1", "ipv4");
```

Sanitasi dan Penyaringan Kompleks

PHP sendiri menyediakan ekstensi filter bagus untuk anda gunakan. Lihat dokumentasinya: [Data Filtering at PHP Documentation](#)

Mengimplementasi Filter anda sendiri

Interface *Phalcon\FilterInterface* harus diimplementasi untuk menciptakan layanan penyaringan anda sendiri menggantikan yang disediakan Phalcon.

Escape Kontekstual

Website dan aplikasi web rawan serangan [XSS](#) dan meski PHP menyediakan fungsionalitas escape, di beberapa konteks ia tidak cukup/cocok. *Phalcon\Escaper* menyediakan escape kontekstual dan ditulis dalam Zephir, menghadirkan overhead minimal ketika escape beragam teks berbeda.

Kami merancang komponen ini berdasar [XSS \(Cross Site Scripting\) Prevention Cheat Sheet](#) yang dibuat OWASP.

Tambahan lagi, komponen ini bergantung pada [mbstring](#) untuk mendukung hampir semua charset.

Untuk menggambarkan bagaimana komponen ini bekerja dan mengapa ia penting, lihat contoh berikut:

```
<?php  
  
use Phalcon\Escaper;  
  
// Title dokumen dengan HTML tags ekstra yang jahat  
$maliciousTitle = "</title><script>alert(1)</script>";  
  
// CSS class name yang jahat  
$className = ";'(";  
  
// CSS font name jahat  
$fontName = "Verdana\"</style>";  
  
// Javascript text jahat  
$javascriptText = "<script>Hello";  
  
// Membuat escaper  
$e = new Escaper();  
  
?>  
  
<html>  
  <head>  
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />  
  
    <title>  
      <?php echo $e->escapeHtml($maliciousTitle); ?>  
    </title>
```



```

<style type="text/css">
    .<?php echo $e->escapeCss($className); ?> {
        font-family: "<?php echo $e->escapeCss($fontName); ?>";
        color: red;
    }
</style>

</head>

<body>

    <div class='<?php echo $e->escapeHtmlAttr($className); ?>'>
        hello
    </div>

    <script>
        var some = '<?php echo $e->escapeJs($javascriptText); ?>';
    </script>

</body>
</html>

```

Yang menghasilkan berikut ini:

```

<html>
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />

    <title>
      &lt;/title&gt;&lt;script&gt;alert(1)&lt;/script&gt;
    </title>

    <style type="text/css">
      .\3c \2f style\3e {
        font-family: "Verdana\22 \3c \2f style\3e";
        color: red;
      }
    </style>

  </head>

  <body>

    <div class='&#x3c &#x2f style&#x3e '>
      hello
    </div>

    <script>
      var some = '\x27\x3b\x3c\2fscript\x3eHello';
    </script>

  </body>
</html>

```

Tiap teks diescape berdasarkan konteksnya masing-masing. Menggunakan konteks yang tepat penting untuk menghindari serangan XSS.

Escape HTML

Situasi umum ketika menyisipkan data tidak aman adalah antara tag HTML:

```
<div class="comments">
    <!-- Escape untrusted data here! -->
</div>
```

Anda dapat escape data tersebut dengan metode `escapeHtml`:

```
<div class="comments">
    <?php echo $e->escapeHtml('</div><h1>myattack</h1>'); ?>
</div>
```

Yang menghasilkan:

```
<div class="comments">
    &gt;&lt;/div&gt;&lt;h1&gt;myattack&lt;/h1&gt;
</div>
```

Escape Atribut HTML

Escape atribut HTML berbeda dari escape konten HTML. Escaper bekerja dengan mengubah tiap karakter bukan alfanumerik ke bentuk itu. Escape macam ini ditujukan untuk atribut paling sederhana dan tidak menyertakan atribut kompleks seperti 'href' atau 'url':

```
<table width="Escape untrusted data here!">
    <tr>
        <td>
            Hello
        </td>
    </tr>
</table>
```

Anda dapat escape atribut HTML menggunakan metode `escapeHtmlAttr`:

```
<table width="<?php echo $e->escapeHtmlAttr('<"><h1>Hello</table>'); ?>">
    <tr>
        <td>
            Hello
        </td>
    </tr>
</table>
```

Yang menghasilkan:

```
<table width="&#x22;&#x3e;&#x3c;h1&#x3e;Hello&#x3c;&#x2f;table">
    <tr>
        <td>
            Hello
        </td>
    </tr>
</table>
```

Escape URL

Beberapa atribut HTML seperti 'href' atau 'url' perlu di escape secara berbeda:

```
<a href="Escape untrusted data here!">
    Some link
</a>
```

Anda dapat escape sebuah atribut HTML menggunakan metode `escapeUrl`:

```
<a href="<?php echo $e->escapeUrl('<script>alert(1)</script><a href="#"'); ?>">
    Some link
</a>
```

Yang menghasilkan:

```
<a href="%22%3E%3Cscript%3Ealert%281%29%3C%2Fscript%3E%3Ca%20href%3D%22%23">
    Some link
</a>
```

Escape CSS

Pengenal/nilai CSS dapat di escape juga:

```
<a style="color: Escape untrusted data here">
    Some link
</a>
```

Anda dapat escape CSS menggunakan metode `escapeCss`:

```
<a style="color: <?php echo $e->escapeCss('<script>alert(1)</script><a href="#"'); ?>
↪">
    Some link
</a>
```

Yang menghasilkan:

```
<a style="color: \22 \3e \3c script\3e alert\28 1\29 \3c \2f script\3e \3c a\20_
↪href\3d \22 \23 ">
    Some link
</a>
```

Escape JavaScript

String yang disisipkan ke kode JavaScript juga harus di escape dengan benar:

```
<script>
    document.title = 'Escape untrusted data here';
</script>
```

Anda dapat escape kode JavaScript menggunakan metode `escapeJs`:

```
<script>
    document.title = '<?php echo $e->escapeJs('"'; alert(100); var x='"'); ?>';
</script>
```

```
<script>
    document.title = '\x27; alert(100); var x\x3d\x27';
</script>
```

Validation

Phalcon\Validation is an independent validation component that validates an arbitrary set of data. This component can be used to implement validation rules on data objects that do not belong to a model or collection.

The following example shows its basic usage:

```
<?php

use Phalcon\Validation;
use Phalcon\Validation\Validator\Email;
use Phalcon\Validation\Validator\PresenceOf;

$validation = new Validation();

$validation->add(
    "name",
    new PresenceOf(
        [
            "message" => "The name is required",
        ]
    )
);

$validation->add(
    "email",
    new PresenceOf(
        [
            "message" => "The e-mail is required",
        ]
    )
);

$validation->add(
    "email",
    new Email(
        [
            "message" => "The e-mail is not valid",
        ]
    )
);

$messages = $validation->validate($_POST);

if (count($messages)) {
    foreach ($messages as $message) {
        echo $message, "<br>";
    }
}
```

The loosely-coupled design of this component allows you to create your own validators along with the ones provided by the framework.

Initializing Validation

Validation chains can be initialized in a direct manner by just adding validators to the *Phalcon\Validation* object. You can put your validations in a separate file for better re-use code and organization:

```
<?php

use Phalcon\Validation;
use Phalcon\Validation\Validator\Email;
use Phalcon\Validation\Validator\PresenceOf;

class MyValidation extends Validation
{
    public function initialize()
    {
        $this->add(
            "name",
            new PresenceOf(
                [
                    "message" => "The name is required",
                ]
            )
        );

        $this->add(
            "email",
            new PresenceOf(
                [
                    "message" => "The e-mail is required",
                ]
            )
        );

        $this->add(
            "email",
            new Email(
                [
                    "message" => "The e-mail is not valid",
                ]
            )
        );
    }
}
```

Then initialize and use your own validator:

```
<?php

$validation = new MyValidation();

$messages = $validation->validate($_POST);

if (count($messages)) {
    foreach ($messages as $message) {
        echo $message, "<br>";
    }
}
```

Validators

Phalcon exposes a set of built-in validators for this component:

The following example explains how to create additional validators for this component:

```
<?php

use Phalcon\Validation;
use Phalcon\Validation\Message;
use Phalcon\Validation\Validator;

class IpValidator extends Validator
{
    /**
     * Executes the validation
     *
     * @param Phalcon\Validation $validator
     * @param string $attribute
     * @return boolean
     */
    public function validate(Validation $validator, $attribute)
    {
        $value = $validator->getValue($attribute);

        if (!filter_var($value, FILTER_VALIDATE_IP, FILTER_FLAG_IPV4 | FILTER_FLAG_
→IPV6)) {
            $message = $this->getOption("message");

            if (!$message) {
                $message = "The IP is not valid";
            }

            $validator->appendMessage(
                new Message($message, $attribute, "Ip")
            );

            return false;
        }

        return true;
    }
}
```

It is important that validators return a valid boolean value indicating if the validation was successful or not.

Validation Messages

Phalcon\Validation has a messaging subsystem that provides a flexible way to output or store the validation messages generated during the validation processes.

Each message consists of an instance of the class *Phalcon\Validation\Message*. The set of messages generated can be retrieved with the `getMessages()` method. Each message provides extended information like the attribute that generated the message or the message type:

```
<?php

$messages = $validation->validate();
```

```

if (count($messages)) {
    foreach ($messages as $message) {
        echo "Message: ", $message->getMessage(), "\n";
        echo "Field: ", $message->getField(), "\n";
        echo "Type: ", $message->getType(), "\n";
    }
}

```

You can pass a ‘message’ parameter to change/translate the default message in each validator:

```

<?php

use Phalcon\Validation\Validator\Email;

$validation->add(
    "email",
    new Email(
        [
            "message" => "The e-mail is not valid",
        ]
    )
);

```

By default, the `getMessages()` method returns all the messages generated during validation. You can filter messages for a specific field using the `filter()` method:

```

<?php

$messages = $validation->validate();

if (count($messages)) {
    // Filter only the messages generated for the field 'name'
    $filteredMessages = $messages->filter("name");

    foreach ($filteredMessages as $message) {
        echo $message;
    }
}

```

Filtering of Data

Data can be filtered prior to the validation ensuring that malicious or incorrect data is not validated.

```

<?php

use Phalcon\Validation;

$validation = new Validation();

$validation->add(
    "name",
    new PresenceOf(
        [
            "message" => "The name is required",
        ]
    )
);

```

```
)
);

$validation->add(
    "email",
    new PresenceOf(
        [
            "message" => "The email is required",
        ]
    )
);

// Filter any extra space
$validation->setFilters("name", "trim");
$validation->setFilters("email", "trim");
```

Filtering and sanitizing is performed using the *filter* component. You can add more filters to this component or use the built-in ones.

Validation Events

When validations are organized in classes, you can implement the `beforeValidation()` and `afterValidation()` methods to perform additional checks, filters, clean-up, etc. If the `beforeValidation()` method returns false the validation is automatically cancelled:

```
<?php

use Phalcon\Validation;

class LoginValidation extends Validation
{
    public function initialize()
    {
        // ...
    }

    /**
     * Executed before validation
     *
     * @param array $data
     * @param object $entity
     * @param Phalcon\Validation\Message\Group $messages
     * @return bool
     */
    public function beforeValidation($data, $entity, $messages)
    {
        if ($this->request->getHttpHost() !== "admin.mydomain.com") {
            $messages->appendMessage(
                new Message("Only users can log on in the administration domain")
            );

            return false;
        }

        return true;
    }
}
```



```

/**
 * Executed after validation
 *
 * @param array $data
 * @param object $entity
 * @param Phalcon\Validation\Message\Group $messages
 */
public function afterValidation($data, $entity, $messages)
{
    // ... Add additional messages or perform more validations
}

```

Cancelling Validations

By default all validators assigned to a field are tested regardless if one of them have failed or not. You can change this behavior by telling the validation component which validator may stop the validation:

```

<?php

use Phalcon\Validation;
use Phalcon\Validation\Validator\Regex;
use Phalcon\Validation\Validator\PresenceOf;

$validation = new Validation();

$validation->add(
    "telephone",
    new PresenceOf(
        [
            "message" => "The telephone is required",
            "cancelOnFail" => true,
        ]
    )
);

$validation->add(
    "telephone",
    new Regex(
        [
            "message" => "The telephone is required",
            "pattern" => "/\+44 [0-9]+/",
        ]
    )
);

$validation->add(
    "telephone",
    new StringLength(
        [
            "messageMinimum" => "The telephone is too short",
            "min" => 2,
        ]
    )
);

```

The first validator has the option ‘cancelOnFail’ with a value of true, therefore if that validator fails the remaining

validators in the chain are not executed.

If you are creating custom validators you can dynamically stop the validation chain by setting the 'cancelOnFail' option:

```
<?php

use Phalcon\Validation;
use Phalcon\Validation\Message;
use Phalcon\Validation\Validator;

class MyValidator extends Validator
{
    /**
     * Executes the validation
     *
     * @param Phalcon\Validation $validator
     * @param string $attribute
     * @return boolean
     */
    public function validate(Validation $validator, $attribute)
    {
        // If the attribute value is name we must stop the chain
        if ($attribute === "name") {
            $validator->setOption("cancelOnFail", true);
        }

        // ...
    }
}
```

Avoid validate empty values

You can pass the option 'allowEmpty' to all the built-in validators to avoid the validation to be performed if an empty value is passed:

```
<?php

use Phalcon\Validation;
use Phalcon\Validation\Validator\Regex;

$validation = new Validation();

$validation->add(
    "telephone",
    new Regex(
        [
            "message"    => "The telephone is required",
            "pattern"     => "/\+44 [0-9]+/",
            "allowEmpty" => true,
        ]
    )
);
```

Recursive Validation

You can also run Validation instances within another via the `afterValidation()` method. In this example, validating the `CompanyValidation` instance will also check the `PhoneValidation` instance:

```
<?php

use Phalcon\Validation;

class CompanyValidation extends Validation
{
    /**
     * @var PhoneValidation
     */
    protected $phoneValidation;

    public function initialize()
    {
        $this->phoneValidation = new PhoneValidation();
    }

    public function afterValidation($data, $entity, $messages)
    {
        $phoneValidationMessages = $this->phoneValidation->validate(
            $data["phone"]
        );

        $messages->appendMessages(
            $phoneValidationMessages
        );
    }
}
```

Forms

`Phalcon\Forms` is a component that aids you in the creation and maintenance of forms in web applications.

The following example shows its basic usage:

```
<?php

use Phalcon\Forms\Form;
use Phalcon\Forms\Element\Text;
use Phalcon\Forms\Element\Select;

$form = new Form();

$form->add(
    new Text(
        "name"
    )
);
```

```
$form->add(
    new Text(
        "telephone"
    )
);

$form->add(
    new Select(
        "telephoneType",
        [
            "H" => "Home",
            "C" => "Cell",
        ]
    )
);
```

Forms can be rendered based on the form definition:

```
<h1>
    Contacts
</h1>

<form method="post">

    <p>
        <label>
            Name
        </label>

        <?php echo $form->render("name"); ?>
    </p>

    <p>
        <label>
            Telephone
        </label>

        <?php echo $form->render("telephone"); ?>
    </p>

    <p>
        <label>
            Type
        </label>

        <?php echo $form->render("telephoneType"); ?>
    </p>

    <p>
        <input type="submit" value="Save" />
    </p>

</form>
```

Each element in the form can be rendered as required by the developer. Internally, *Phalcon\Tag* is used to produce the correct HTML for each element and you can pass additional HTML attributes as the second parameter of `render()`:

```

<p>
    <label>
        Name
    </label>

    <?php echo $form->render("name", ["maxlength" => 30, "placeholder" => "Type your_
↵name"]); ?>
</p>

```

HTML attributes also can be set in the element's definition:

```

<?php

$form->add(
    new Text(
        "name",
        [
            "maxlength" => 30,
            "placeholder" => "Type your name",
        ]
    )
);

```

Initializing forms

As seen before, forms can be initialized outside the form class by adding elements to it. You can re-use code or organize your form classes implementing the form in a separated file:

```

<?php

use Phalcon\Forms\Form;
use Phalcon\Forms\Element\Text;
use Phalcon\Forms\Element\Select;

class ContactForm extends Form
{
    public function initialize()
    {
        $this->add(
            new Text(
                "name"
            )
        );

        $this->add(
            new Text(
                "telephone"
            )
        );

        $this->add(
            new Select(
                "telephoneType",
                TelephoneTypes::find(),
                [
                    "using" => [

```

```
        "id",  
        "name",  
    ]  
    ]  
    )  
    );  
}  
}
```

Phalcon\Forms\Form extends *Phalcon\DI\Injectable* so you have access to the application services if needed:

```
<?php  
  
use Phalcon\Forms\Form;  
use Phalcon\Forms\Element\Text;  
use Phalcon\Forms\Element\Hidden;  
  
class ContactForm extends Form  
{  
    /**  
     * This method returns the default value for field 'csrf'  
     */  
    public function getCsrft()  
    {  
        return $this->security->getToken();  
    }  
  
    public function initialize()  
    {  
        // Set the same form as entity  
        $this->setEntity($this);  
  
        // Add a text element to capture the 'email'  
        $this->add(  
            new Text(  
                "email"  
            )  
        );  
  
        // Add a text element to put a hidden CSRF  
        $this->add(  
            new Hidden(  
                "csrf"  
            )  
        );  
    }  
}
```

The associated entity added to the form in the initialization and custom user options are passed to the form constructor:

```
<?php  
  
use Phalcon\Forms\Form;  
use Phalcon\Forms\Element\Text;  
use Phalcon\Forms\Element\Hidden;  
  
class UsersForm extends Form  
{
```

```

/**
 * Forms initializer
 *
 * @param Users $user
 * @param array $options
 */
public function initialize(Users $user, array $options)
{
    if ($options["edit"]) {
        $this->add(
            new Hidden(
                "id"
            )
        );
    } else {
        $this->add(
            new Text(
                "id"
            )
        );
    }

    $this->add(
        new Text(
            "name"
        )
    );
}
}

```

In the form's instantiation you must use:

```

<?php

$form = new UsersForm(
    new Users(),
    [
        "edit" => true,
    ]
);

```

Validation

Phalcon forms are integrated with the *validation* component to offer instant validation. Built-in or custom validators could be set to each element:

```

<?php

use Phalcon\Forms\Element\Text;
use Phalcon\Validation\Validator\PresenceOf;
use Phalcon\Validation\Validator\StringLength;

$name = new Text(
    "name"
);

```

```
$name->addValidator(  
    new PresenceOf(  
        [  
            "message" => "The name is required",  
        ]  
    )  
);  
  
$name->addValidator(  
    new StringLength(  
        [  
            "min"                => 10,  
            "messageMinimum" => "The name is too short",  
        ]  
    )  
);  
  
$form->add($name);
```

Then you can validate the form according to the input entered by the user:

```
<?php  
  
if (!$form->isValid($_POST)) {  
    $messages = $form->getMessages();  
  
    foreach ($messages as $message) {  
        echo $message, "<br>";  
    }  
}
```

Validators are executed in the same order as they were registered.

By default messages generated by all the elements in the form are joined so they can be traversed using a single foreach, you can change this behavior to get the messages separated by the field:

```
<?php  
  
foreach ($form->getMessages(false) as $attribute => $messages) {  
    echo "Messages generated by ", $attribute, ":", "\n";  
  
    foreach ($messages as $message) {  
        echo $message, "<br>";  
    }  
}
```

Or get specific messages for an element:

```
<?php  
  
$messages = $form->getMessagesFor("name");  
  
foreach ($messages as $message) {  
    echo $message, "<br>";  
}
```


Filtering

A form is also able to filter data before it is validated. You can set filters in each element:

```
<?php

use Phalcon\Forms\Element\Text;

$name = new Text(
    "name"
);

// Set multiple filters
$name->setFilters(
    [
        "string",
        "trim",
    ]
);

$form->add($name);

$email = new Text(
    "email"
);

// Set one filter
$email->setFilters(
    "email"
);

$form->add($email);
```

Learn more about filtering in Phalcon by reading the [Filter documentation](#).

Forms + Entities

An entity such as a model/collection/plain instance or just a plain PHP class can be linked to the form in order to set default values in the form's elements or assign the values from the form to the entity easily:

```
<?php

$robot = Robots::findFirst();

$form = new Form($robot);

$form->add(
    new Text(
        "name"
    )
);

$form->add(
    new Text(
        "year"
    )
);
```

```
    )  
);
```

Once the form is rendered if there is no default values assigned to the elements it will use the ones provided by the entity:

```
<?php echo $form->render("name"); ?>
```

You can validate the form and assign the values from the user input in the following way:

```
<?php  
  
$form->bind($_POST, $robot);  
  
// Check if the form is valid  
if ($form->isValid()) {  
    // Save the entity  
    $robot->save();  
}
```

Setting up a plain class as entity also is possible:

```
<?php  
  
class Preferences  
{  
    public $timezone = "Europe/Amsterdam";  
  
    public $receiveEmails = "No";  
}
```

Using this class as entity, allows the form to take the default values from it:

```
<?php  
  
$form = new Form(  
    new Preferences()  
);  
  
$form->add(  
    new Select(  
        "timezone",  
        [  
            "America/New_York" => "New York",  
            "Europe/Amsterdam" => "Amsterdam",  
            "America/Sao_Paulo" => "Sao Paulo",  
            "Asia/Tokyo"       => "Tokyo",  
        ]  
    )  
);  
  
$form->add(  
    new Select(  
        "receiveEmails",  
        [  
            "Yes" => "Yes, please!",  
            "No"  => "No, thanks",  
        ]  
    )  
);
```

```

    )
);

```

Entities can implement getters, which have a higher precedence than public properties. These methods give you more freedom to produce values:

```

<?php

class Preferences
{
    public $timezone;

    public $receiveEmails;

    public function getTimezone()
    {
        return "Europe/Amsterdam";
    }

    public function getReceiveEmails()
    {
        return "No";
    }
}

```

Form Elements

Phalcon provides a set of built-in elements to use in your forms, all these elements are located in the *Phalcon\Forms\Element* namespace:

Name	Description
<i>Phalcon\Forms\Element\Text</i>	Generate INPUT[type=text] elements
<i>Phalcon\Forms\Element>Password</i>	Generate INPUT[type=password] elements
<i>Phalcon\Forms\Element>Select</i>	Generate SELECT tag (combo lists) elements based on choices
<i>Phalcon\Forms\Element\Check</i>	Generate INPUT[type=check] elements
<i>Phalcon\Forms\Element\TextArea</i>	Generate TEXTAREA elements
<i>Phalcon\Forms\Element\Hidden</i>	Generate INPUT[type=hidden] elements
<i>Phalcon\Forms\Element\File</i>	Generate INPUT[type=file] elements
<i>Phalcon\Forms\Element\Date</i>	Generate INPUT[type=date] elements
<i>Phalcon\Forms\Element\Numeric</i>	Generate INPUT[type=number] elements
<i>Phalcon\Forms\Element\Submit</i>	Generate INPUT[type=submit] elements

Event Callbacks

Whenever forms are implemented as classes, the callbacks: `beforeValidation()` and `afterValidation()` can be implemented in the form's class to perform pre-validations and post-validations:

```

<?php

use Phalcon\Forms\Form;

class ContactForm extends Form

```

```
{  
    public function beforeValidation()  
    {  
    }  
}
```

Rendering Forms

You can render the form with total flexibility, the following example shows how to render each element using a standard procedure:

```
<?php  
  
<form method="post">  
    <?php  
        // Traverse the form  
        foreach ($form as $element) {  
            // Get any generated messages for the current element  
            $messages = $form->getMessagesFor(  
                $element->getName()  
            );  
  
            if (count($messages)) {  
                // Print each element  
                echo '<div class="messages">';  
  
                foreach ($messages as $message) {  
                    echo $message;  
                }  
  
                echo "</div>";  
            }  
  
            echo "<p>";  
  
            echo '<label for="' . $element->getName() . '">', $element->getLabel(), "</  
=>label>";  
  
            echo $element;  
  
            echo "</p>";  
        }  
    ?>  
  
    <input type="submit" value="Send" />  
</form>
```

Or reuse the logic in your form class:

```
<?php  
  
use Phalcon\Forms\Form;
```

```

class ContactForm extends Form
{
    public function initialize()
    {
        // ...
    }

    public function renderDecorated($name)
    {
        $element = $this->get($name);

        // Get any generated messages for the current element
        $messages = $this->getMessagesFor(
            $element->getName()
        );

        if (count($messages)) {
            // Print each element
            echo '<div class="messages">';

            foreach ($messages as $message) {
                echo $this->flash->error($message);
            }

            echo "</div>";
        }

        echo "<p>";

        echo '<label for="' . $element->getName() . '">' . $element->getLabel() . "</>label>";

        echo $element;

        echo "</p>";
    }
}

```

In the view:

```

<?php
echo $element->renderDecorated("name");

echo $element->renderDecorated("telephone");

```

Creating Form Elements

In addition to the form elements provided by Phalcon you can create your own custom elements:

```

<?php
use Phalcon\Forms\Element;

class MyElement extends Element
{

```

```
public function render($attributes = null)
{
    $html = // ... Produce some HTML

    return $html;
}
```

Forms Manager

This component provides a forms manager that can be used by the developer to register forms and access them via the service locator:

```
<?php

use Phalcon\Forms\Manager as FormsManager;

$di["forms"] = function () {
    return new FormsManager();
};
```

Forms are added to the forms manager and referenced by a unique name:

```
<?php

$this->forms->set(
    "login",
    new LoginForm()
);
```

Using the unique name, forms can be accessed in any part of the application:

```
<?php

$loginForm = $this->forms->get("login");

echo $loginForm->render();
```

External Resources

- [Vökuró](#), is a sample application that uses the forms builder to create and manage forms, [\[Github\]](#)

Membaca Konfigurasi

Phalcon\Config adalah komponen yang digunakan untuk membaca file konfigurasi beragam format (menggunakan adapter) ke dalam objek PHP untuk digunakan dalam aplikasi.

Array Native

Contoh berikut menunjukkan bagaimana mengubah array native ke objek *Phalcon\Config*. Pilihan ini menawarkan performa terbaik karena tidak ada file yang dibaca selama request.

```

<?php

use Phalcon\Config;

$settings = [
    "database" => [
        "adapter" => "Mysql",
        "host"     => "localhost",
        "username" => "scott",
        "password" => "cheetah",
        "dbname"   => "test_db"
    ],
    "app" => [
        "controllersDir" => "../app/controllers/",
        "modelsDir"       => "../app/models/",
        "viewsDir"        => "../app/views/"
    ],
    "mysetting" => "the-value"
];

$config = new Config($settings);

echo $config->app->controllersDir, "\n";
echo $config->database->username, "\n";
echo $config->mysetting, "\n";

```

Jika anda ingi mengelola proyek anda lebih baik anda dapat menyimpan array ke file lain dan membacanya.

```

<?php

use Phalcon\Config;

require "config/config.php";

$config = new Config($settings);

```

File Adapters

Adapter yang tersedia:

Tipe File	Keterangan
<i>Phalcon\Config\Adapter\Ini</i>	Menggunakan file INI untuk menyimpan setting. Didalamnya adapter menggunakan fungsi PHP <code>parse_ini_file</code> .
<i>Phalcon\Config\Adapter\Json</i>	Uses JSON files to store settings.
<i>Phalcon\Config\Adapter\Php</i>	Uses PHP multidimensional arrays to store settings. This adapter offers the best performance.
<i>Phalcon\Config\Adapter\Yaml</i>	Uses YAML files to store settings.

Membaca file INI

File Ini adalah cara umum menyimpan setting. *Phalcon\Config* menggunakan fungsi PHP `parse_ini_file` untuk membaca file. Seksi file dipecah menjadi sub setting untuk akses lebih mudah.

```
[database]
adapter   = Mysql
host      = localhost
username  = scott
password  = cheetah
dbname    = test_db

[phalcon]
controllersDir = "../app/controllers/"
modelsDir      = "../app/models/"
viewsDir       = "../app/views/"

[models]
metadata.adapter = "Memory"
```

Anda dapat membaca file sebagai berikut:

```
<?php

use Phalcon\Config\Adapter\Ini as ConfigIni;

$config = new ConfigIni("path/config.ini");

echo $config->phalcon->controllersDir, "\n";
echo $config->database->username, "\n";
echo $config->models->metadata->adapter, "\n";
```

Menggabung Konfigurasi

Phalcon\Config dapat menggabung properti satu objek konfigurasi ke lainnya secara rekursif. Properti baru ditambahkan dan properti yang sudah ada diperbarui.

```
<?php

use Phalcon\Config;

$config = new Config(
    [
        "database" => [
            "host"    => "localhost",
            "dbname"  => "test_db",
        ],
        "debug" => 1,
    ]
);

$config2 = new Config(
    [
        "database" => [
            "dbname"  => "production_db",
            "username" => "scott",
            "password" => "secret",
        ],
        "logging" => 1,
    ]
);
```



```
$config->merge($config2);

print_r($config);
```

Kode di atas menghasilkan berikut:

```
Phalcon\Config Object
(
    [database] => Phalcon\Config Object
        (
            [host] => localhost
            [dbname] => production_db
            [username] => scott
            [password] => secret
        )
    [debug] => 1
    [logging] => 1
)
```

Ada lebih banyak adapter tersedia untuk komponen ini di [Phalcon Incubator](#)

Injeksi ketergantungan Konfigurasi

Ada dapat menginjeksi ketergantungan terhadap konfigurasi ke controller yang memungkinkan kita menggunakan *Phalcon\Config* dalam *Phalcon\Mvc\Controller*. Agar dapat melakukannya, tambahkan kode berikut dalam script dependency injector.

```
<?php

use Phalcon\Di\FactoryDefault;
use Phalcon\Config;

// Buat DI
$di = new FactoryDefault();

$di->set(
    "config",
    function () {
        $configData = require "config/config.php";

        return new Config($configData);
    }
);
```

Sekarang dalam controller anda dapat mengakses konfigurasi memanfaatkan fitur dependency injection dengan nama *config* seperti kode berikut:

```
<?php

use Phalcon\Mvc\Controller;

class MyController extends Controller
{
    private function getDatabaseName()
    {
```

```
        return $this->config->database->dbname;
    }
}
```

Pagination

The process of pagination takes place when we need to present big groups of arbitrary data gradually. Phalcon\Paginator offers a fast and convenient way to split these sets of data into browsable pages.

Data Adapters

This component makes use of adapters to encapsulate different sources of data:

Adapter	Description
<i>Phalcon\Paginator\Adapter\NativeArray</i>	Use a PHP array as source data
<i>Phalcon\Paginator\Adapter\Model</i>	Use a <i>Phalcon\Mvc\Model\Resultset</i> object as source data. Since PDO doesn't support scrollable cursors this adapter shouldn't be used to paginate a large number of records
<i>Phalcon\Paginator\Adapter\QueryBuilder</i>	Use a <i>Phalcon\Mvc\Model\Query\Builder</i> object as source data

Examples

In the example below, the paginator will use the result of a query from a model as its source data, and limit the displayed data to 10 records per page:

```
<?php

use Phalcon\Paginator\Adapter\Model as PaginatorModel;

// Current page to show
// In a controller/component this can be:
// $this->request->getQuery("page", "int"); // GET
// $this->request->getPost("page", "int"); // POST
$currentPage = (int) $_GET["page"];

// The data set to paginate
$robots = Robots::find();

// Create a Model paginator, show 10 rows by page starting from $currentPage
$paginator = new PaginatorModel(
    [
        "data" => $robots,
        "limit" => 10,
        "page" => $currentPage,
    ]
);

// Get the paginated results
$page = $paginator->getPaginate();
```

The `$currentPage` variable controls the page to be displayed. The `$paginator->getPaginate()` returns a `$page` object that contains the paginated data. It can be used for generating the pagination:

```

<table>
  <tr>
    <th>Id</th>
    <th>Name</th>
    <th>Type</th>
  </tr>
  <?php foreach ($page->items as $item) { ?>
    <tr>
      <td><?php echo $item->id; ?></td>
      <td><?php echo $item->name; ?></td>
      <td><?php echo $item->type; ?></td>
    </tr>
  <?php } ?>
</table>

```

The \$page object also contains navigation data:

```

<a href="/robots/search">First</a>
<a href="/robots/search?page=?= $page->before; ?>">Previous</a>
<a href="/robots/search?page=?= $page->next; ?>">Next</a>
<a href="/robots/search?page=?= $page->last; ?>">Last</a>

<?php echo "You are in page ", $page->current, " of ", $page->total_pages; ?>

```

Adapters Usage

An example of the source data that must be used for each adapter:

```

<?php

use Phalcon\Paginator\Adapter\Model as PaginatorModel;
use Phalcon\Paginator\Adapter\NativeArray as PaginatorArray;
use Phalcon\Paginator\Adapter\QueryBuilder as PaginatorQueryBuilder;

// Passing a resultset as data
$pagepaginator = new PaginatorModel(
    [
        "data" => Products::find(),
        "limit" => 10,
        "page" => $currentPage,
    ]
);

// Passing an array as data
$pagepaginator = new PaginatorArray(
    [
        "data" => [
            ["id" => 1, "name" => "Artichoke"],
            ["id" => 2, "name" => "Carrots"],
            ["id" => 3, "name" => "Beet"],
            ["id" => 4, "name" => "Lettuce"],
            ["id" => 5, "name" => ""],
        ],
        "limit" => 2,
        "page" => $currentPage,
    ]
);

```

```
);

// Passing a QueryBuilder as data

$builder = $this->modelsManager->createBuilder()
    ->columns("id, name")
    ->from("Robots")
    ->orderBy("name");

$paginator = new PaginatorQueryBuilder(
    [
        "builder" => $builder,
        "limit"    => 20,
        "page"     => 1,
    ]
);
```

Page Attributes

The `$page` object has the following attributes:

Attribute	Description
items	The set of records to be displayed at the current page
current	The current page
before	The previous page to the current one
next	The next page to the current one
last	The last page in the set of records
total_pages	The number of pages
total_items	The number of items in the source data

Implementing your own adapters

The `Phalcon\Paginator\AdapterInterface` interface must be implemented in order to create your own paginator adapters or extend the existing ones:

```
<?php

use Phalcon\Paginator\AdapterInterface as PaginatorInterface;

class MyPaginator implements PaginatorInterface
{
    /**
     * Adapter constructor
     *
     * @param array $config
     */
    public function __construct($config);

    /**
     * Set the current page number
     *
     * @param int $page
     */
    public function setCurrentPage($page);
```

```

/**
 * Returns a slice of the resultset to show in the pagination
 *
 * @return stdClass
 */
public function getPaginate();
}

```

Meningkatkan Performa dengan Cache

Phalcon menyediakan kelas *Phalcon\Cache* yang memungkinkan akses lebih cepat ke data terproses yang sering digunakan. *Phalcon\Cache* ditulis dalam C, menghasilkan performa lebih tinggi dan menurunkan overhead ketika mengambil item dari backend. Kelas ini menggunakan struktur internal komponen frontend dan backend. Komponen front-end bertugas sebagai sumber input atau antar muka, sementara komponen backend menyediakan opsi penyimpanan bagi kelas.

Kapan mengimplementasi cache?

Meski komponen ini sangat cepat, mengimplementasinya dalam kasus ia tidak dibutuhkan dapat menyebabkan kehilangan performa daripada kenaikan. Kami sarankan anda cek kasus ini sebelum menggunakan cache:

- Anda membuat kalkulasi kompleks yang selalu menghasilkan hasil yang sama (jarang berubah)
- Anda menggunakan banyak helper dan output yang dihasilkan hampir selalu sama
- Anda mengakses database terus menerus dan data ini jarang berubah

NOTE Bahkan setelah mengimplementasi cache, anda harus cek hit ratio cache terhadap periode waktu. Ini dapat mudah dilakukan, khususnya untuk Memcache atau Apc, dengan tool relevan yang disediakan backend.

Perilaku Caching

Proses cache terbagi dua bagian:

- **Frontend:** Bagian ini bertanggung jawab untuk menguji apakah key telah kedaluwarsa dan melakukan transformasi tambahan terhadap data sebelum disimpan dan setelah diambil dari backend.
- **Backend:** Bagian ini bertanggung jawab untuk berkomunikasi, menulis/membaca data yang diperlukan frontend.

Caching Potongan Output

Output fragment adalah penggalan HTML atau teks yang dicache sebagaimana adanya dan dikembalikan apa adanya. Outputnya otomatis ditangkap dari fungsi `ob_*` atau output PHP sehingga dapat disimpan di cache. Contoh berikut menunjukkan penggunaannya. Kode tersebut menerima output yang dibangkitkan oleh PHP dan menyimpannya di sebuah file. Isi file diperbarui tiap 172800 detik (2 hari).

Implementasi mekanisme caching ini memungkinkan kita memperoleh kenaikan performa dengan tidak mengeksekusi pemanggilan helper `Phalcon\Tag::linkTo()` kapanpun potongan kode tersebut dipanggil.

```

<?php
use Phalcon\Tag;

```

```
use Phalcon\Cache\Backend\File as BackFile;
use Phalcon\Cache\Frontend\Output as FrontOutput;

// Buat output frontend. Cache file selama 2 hari
$frontCache = new FrontOutput(
    [
        "lifetime" => 172800,
    ]
);

// Buat komponen yang akan menyimpan cache "Output" ke backend "File"
// Set direktori cache, penting menambahkan "/" diakhir
// untuk nama folder
$cache = new BackFile(
    $frontCache,
    [
        "cacheDir" => "../app/cache/",
    ]
);

// Get/Set cache file ke ../app/cache/my-cache.html
$content = $cache->start("my-cache.html");

// Jika $content null maka isi akan dibuat untuk cache
if ($content === null) {
    // Cetak tanggal dan waktu
    echo date("r");

    // Buat link ke sign-up action
    echo Tag::linkTo(
        [
            "user/signup",
            "Sign Up",
            "class" => "signup-button",
        ]
    );

    // Simpan output ke file cache
    $cache->save();
} else {
    // Echo output yang dicache
    echo $content;
}
```

NOTE Pada contoh di atas, Kode kita tetap sama, mencetak output ke user seperti yang sudah dilakukannya sebelumnya. Komponen cache kita secara transparan menangkap output dan menyimpannya dalam file cache (ketika cache dibuat) atau mengirimkan kembali ke user hasil pre-kompilasi dari pemanggilan sebelumnya, sehingga menghindari operasi yang mahal.

Caching Data Sembarang

Caching data sama pentingnya bagi aplikasi anda. Caching dapat menurunkan beban database dengan menggunakan ulang data yang sering digunakan (namun tidak berubah), sehingga mempercepat aplikasi anda.

Contoh File Backend

Salah satu adapter caching adalah 'File'. Yang paling penting untuk adapter ini adalah lokasi dimana file cache akan disimpan. Ini dikendalikan oleh opsi `cacheDir` yang *wajib* memiliki backslash diakhir.

```
<?php

use Phalcon\Cache\Backend\File as BackFile;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache file selama 2 days menggunakan Data frontend
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

// Buat komponen yang akan menyimpan cache "Data" ke "File" backend
// Atur direktori file cache - penting untuk menambah "/" diakhir
// folder
$cache = new BackFile(
    $frontCache,
    [
        "cacheDir" => "../app/cache/",
    ]
);

$cacheKey = "robots_order_id.cache";

// Coba ambil record yang dicache
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // $robots null karena cache kedaluwarsa atau data tidak ada
    // Buat panggilan database dan isi variabel
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    // Simpan dalam cache
    $cache->save($cacheKey, $robots);
}

// Gunakan $robots :)
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

Contoh Memcached Backend

Contoh di atas berubah sedikit (terutama dalam hal konfigurasi) ketika kita menggunakan Memcached backend.

```
<?php
```

```
use Phalcon\Cache\Frontend\Data as FrontData;
use Phalcon\Cache\Backend\Libmemcached as BackMemCached;

// Cache data selama satu jam
$frontCache = new FrontData(
    [
        "lifetime" => 3600,
    ]
);

// Buat komponen yang akan cache "Data" ke "Memcached" backend
// Pengaturan koneksi Memcached
$cache = new BackMemCached(
    $frontCache,
    [
        "servers" => [
            [
                "host"    => "127.0.0.1",
                "port"    => "11211",
                "weight" => "1",
            ]
        ]
    ]
);

$cacheKey = "robots_order_id.cache";

// Coba ambil record yang dicache
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // $robots null karena cache kedaluwarsa atau karena data tidak ada
    // Buat panggilan database dan isi variabel
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    // Simpan di cache
    $cache->save($cacheKey, $robots);
}

// Gunakan $robots :)
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

Menanyakan cache

Elemen ditambahkan ke cache diidentifikasi secara unik menggunakan sebuah key. Dalam hal File backend, key-nya adalah nama file aktual. Untuk menerima data dari cache, kita cukup memanggilnya menggunakan key unik. Jika key tidak ada, metode get akan mengembalikan null.

```
<?php
```



```
// Ambil produk dengan key "myProducts"
$products = $cache->get("myProducts");
```

Jika anda ingin tahu key mana yang disimpan di cache, anda dapat memanggil metode queryKeys:

```
<?php

// Query all keys used in the cache
$keys = $cache->queryKeys();

foreach ($keys as $key) {
    $data = $cache->get($key);

    echo "Key=", $key, " Data=", $data;
}

// Query keys in the cache that begins with "my-prefix"
$keys = $cache->queryKeys("my-prefix");
```

Menghapus data dari cache

Ada kalanya anda akan membutuhkan untuk menghapus entri cache (karena pembaruan pada data yang dicache). Yang diperlukan hanya key ke data yang disimpan bersamanya.

```
<?php

// Hapus sebuah item dengan key spesifik
$cache->delete("someKey");

$keys = $cache->queryKeys();

// Hapus semua item dari cache
foreach ($keys as $key) {
    $cache->delete($key);
}
```

Menguji keberadaan cache

Dimungkinkan untuk menguji apakah sebuah cache sudah ada dengan key yang ada:

```
<?php

if ($cache->exists("someKey")) {
    echo $cache->get("someKey");
} else {
    echo "Cache does not exists!";
}
```

Masa hidup

“Masa hidup” adalah waktu dalam detik sebuah cache dapat hidup sebelum kedaluwarsa. Secara default, semua cache yang diciptakan menggunakan masa idup yang diatur dalam penciptaan frontend. Anda dapat mengatur masa hidup tertentu saat menciptakan atau mengambil data dari cache:

Mengatur ,asa hidup ketika mengambil:

```
<?php

$cacheKey = "my.cache";

// Mengatur cache ketika mengambil result
$robots = $cache->get($cacheKey, 3600);

if ($robots === null) {
    $robots = "some robots";

    // Simpan dicache
    $cache->save($cacheKey, $robots);
}
```

Mengatur masa hidup ketika menyimpan:

```
<?php

$cacheKey = "my.cache";

$robots = $cache->get($cacheKey);

if ($robots === null) {
    $robots = "some robots";

    // Atur cache saat menyimpan
    $cache->save($cacheKey, $robots, 3600);
}
```

Cache Banyak-Tingkat

Fitur komponen cache ini, megizinkan developer untuk membuat implementasi cache banyak-tingkat. Fitur baru ini sangat berguna karena anda dapat menyimpan data sama di beberapa lokasi cache dengan masa hidup berbeda, membaca pertama kali dari adapter yang lebih cepat dan berakhir di yang paling lambat hingga data kedaluwarsa:

```
<?php

use Phalcon\Cache\Multiple;
use Phalcon\Cache\Backend\Apc as ApcCache;
use Phalcon\Cache\Backend\File as FileCache;
use Phalcon\Cache\Frontend\Data as DataFrontend;
use Phalcon\Cache\Backend\Memcache as MemcacheCache;

$ultraFastFrontend = new DataFrontend(
    [
        "lifetime" => 3600,
    ]
);

$fastFrontend = new DataFrontend(
    [
        "lifetime" => 86400,
    ]
);
```

```

$slowFrontend = new DataFrontend(
    [
        "lifetime" => 604800,
    ]
);

// Backend didaftarkan dari yang tercepat ke yang lambat
$cache = new Multiple(
    [
        new ApcCache(
            $ultraFastFrontend,
            [
                "prefix" => "cache",
            ]
        ),
        new MemcacheCache(
            $fastFrontend,
            [
                "prefix" => "cache",
                "host"    => "localhost",
                "port"    => "11211",
            ]
        ),
        new FileCache(
            $slowFrontend,
            [
                "prefix"    => "cache",
                "cacheDir" => "../app/cache/",
            ]
        ),
    ]
);

// Simpan disemua backend
$cache->save("my-key", $data);

```

Adapter Frontend

Adapter frontend yang tersedia yang digunakan sebagai antarmuka atau sumber input cache adalah:

Adapter	Keterangan
<i>Phalcon\Cache\Frontend\Output</i>	Membaca input dari standard PHP output
<i>Phalcon\Cache\Frontend\Data</i>	Digunakan untuk cache sembarang data PHP (big arrays, objects, text, dan lain-lain). Data di serialisasi sebelum disimpan di backend.
<i>Phalcon\Cache\Frontend\Binary</i>	Digunakan untuk cache data biner. Data. Data di serialisasi dengan base64_encode sebelum disimpan di backend.
<i>Phalcon\Cache\Frontend\Json</i>	Data di encode dalam JSON sebelum disimpan backend. Di decode setelah dibaca.
<i>Phalcon\Cache\Frontend\Igbinary</i>	Frontend berguna untuk berbagi data dengan bahasa atau framework lain.
<i>Phalcon\Cache\Frontend\Igdinary</i>	Digunakan untuk cache beragam data PHP (big arrays, objects, text, dan lain-lain). Data di serialisasi menggunakan Igdinary sebelum disimpan di backend.
<i>Phalcon\Cache\Frontend\None</i>	Digunakan untuk cache beragam data PHP data tanpa serialisasi.

Mengimplementasi adapter Frontend anda sendiri

Interface *Phalcon\Cache\FrontendInterface* harus diimplementasi untuk dapat menciptakan adapter frontend anda atau mengembangkan yang sudah ada.

Adapter Backend

Adapter backend yang tersedia untuk menyimpan cache:

Adapter	Keterangan	Info	Ekstensi yang diperlukan
<i>Phalcon\Cache\Backend\File</i>	Menyimpan data ke file lokal		
<i>Phalcon\Cache\Backend\Memcache</i>	Menyimpan data ke server memcached	Mem-cached	memcache
<i>Phalcon\Cache\Backend\Apc</i>	Menyimpan data ke Alternative PHP Cache (APC)	APC	APC extension
<i>Phalcon\Cache\Backend\Mongo</i>	Menyimpan data ke Mongo Database	Mon-goDb	Mongo
<i>Phalcon\Cache\Backend\Xcache</i>	Menyimpan data di in XCache	XCache	xcache extension
<i>Phalcon\Cache\Backend\Redis</i>	Menyimpan data di Redis	Redis	redis extension

Mengimplementasi adapter Backend anda sendiri

Interface *Phalcon\Cache\BackendInterface* harus diimplementasi untuk menciptakan adapter backend anda sendiri atau mengembangkan yang sudah ada.

Opsi File Backend

Backend ini akan menyimpan konten yang dicache ke file di server lokal. Opsi yang tersedia untuk backend ini:

Option	Keterangan
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key
cacheDir	Direktori yang writable dimana file cache diletakkan

Opsi Memcached Backend

Backend ini akan menyimpan konten yang dicache di server memcached. Opsi yang tersedia untuk backend ini:

Option	Description
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key
host	memcached host
port	memcached port
persistent	Membuat koneksi persistent ke memcached?

APC Backend Options

Backend ini akan menyimpan konten yang dicache di Alternative PHP Cache (APC). Opsi yang tersedia untuk backend ini:

Option	Keterangan
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key

Opsi Mongo Backend

Backend ini akan menyimpan konten yang dicache di server MongoDB. Opsi yang tersedia untuk backend ini:

Option	Keterangan
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key
server	MongoDB connection string
db	Mongo database name
collection	Mongo collection dalam database

Opsi XCache Backend

Backend ini akan menyimpan konten yang dicache di XCache ([XCache](#)). Opsi yang tersedia untuk backend ini:

Option	Keterangan
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key

Opsi Redis Backend

Backend ini akan menyimpan konten yang dicache di server Redis ([Redis](#)). Opsi yang tersedia untuk backend ini:

Option	Description
prefix	Sebuah prefix yang otomatis ditambahkan didepan cache key
host	Redis host
port	Redis port
auth	Password untuk autentikasi ke server Redis yang dilindungi password
persistent	Menciptakan koneksi persistent ke Redis
index	Index database Redis database yang digunakan

Ada lebih banyak adapter tersedia untuk komponen ini di [Phalcon Incubator](#)

Security

This component aids the developer in common security tasks such as password hashing and Cross-Site Request Forgery protection (CSRF).

Password Hashing

Storing passwords in plain text is a bad security practice. Anyone with access to the database will immediately have access to all user accounts thus being able to engage in unauthorized activities. To combat that, many applications use the familiar one way hashing methods “md5” and “sha1”. However, hardware evolves each day, and becomes faster, these algorithms are becoming vulnerable to brute force attacks. These attacks are also known as [rainbow tables](#).

To solve this problem we can use hash algorithms as [bcrypt](#). Why bcrypt? Thanks to its “Eksblowfish” key setup algorithm we can make the password encryption as “slow” as we want. Slow algorithms make the process to calculate the real password behind a hash extremely difficult if not impossible. This will protect your for a long time from a possible attack using rainbow tables.

This component gives you the ability to use this algorithm in a simple way:

```
<?php

use Phalcon\Mvc\Controller;

class UsersController extends Controller
{
    public function registerAction()
    {
        $user = new Users();

        $login    = $this->request->getPost("login");
        $password = $this->request->getPost("password");

        $user->login = $login;

        // Store the password hashed
        $user->password = $this->security->hash($password);

        $user->save();
    }
}
```

We saved the password hashed with a default work factor. A higher work factor will make the password less vulnerable as its encryption will be slow. We can check if the password is correct as follows:

```
<?php

use Phalcon\Mvc\Controller;

class SessionController extends Controller
{
    public function loginAction()
    {
        $login    = $this->request->getPost("login");
        $password = $this->request->getPost("password");

        $user = Users::findFirstByLogin($login);
        if ($user) {
            if ($this->security->checkHash($password, $user->password)) {
                // The password is valid
            }
        } else {
            // To protect against timing attacks. Regardless of whether a user exists,
            ↪ or not, the script will take roughly the same amount as it will always be computing
            ↪ a hash.
            $this->security->hash(rand());
        }

        // The validation has failed
    }
}
```

The salt is generated using pseudo-random bytes with the PHP's function `openssl_random_pseudo_bytes` so is required to have the `openssl` extension loaded.

Cross-Site Request Forgery (CSRF) protection

This is another common attack against web sites and applications. Forms designed to perform tasks such as user registration or adding comments are vulnerable to this attack.

The idea is to prevent the form values from being sent outside our application. To fix this, we generate a [random nonce](#) (token) in each form, add the token in the session and then validate the token once the form posts data back to our application by comparing the stored token in the session to the one submitted by the form:

```
<?php echo Tag::form('session/login') ?>

    <!-- Login and password inputs ... -->

    <input type="hidden" name="<?php echo $this->security->getTokenKey() ?>"
        value="<?php echo $this->security->getToken() ?>"/>

</form>
```

Then in the controller's action you can check if the CSRF token is valid:

```
<?php
use Phalcon\Mvc\Controller;

class SessionController extends Controller
{
    public function loginAction()
    {
        if ($this->request->isPost()) {
            if ($this->security->checkToken()) {
                // The token is OK
            }
        }
    }
}
```

Remember to add a session adapter to your Dependency Injector, otherwise the token check won't work:

```
<?php

$di->setShared(
    "session",
    function () {
        $session = new \Phalcon\Session\Adapter\Files();

        $session->start();

        return $session;
    }
);
```

Adding a [captcha](#) to the form is also recommended to completely avoid the risks of this attack.

Setting up the component

This component is automatically registered in the services container as 'security', you can re-register it to setup its options:

```
<?php

use Phalcon\Security;

$di->set(
    "security",
    function () {
        $security = new Security();

        // Set the password hashing factor to 12 rounds
        $security->setWorkFactor(12);

        return $security;
    },
    true
);
```

Random

The *Phalcon\Security\Random* class makes it really easy to generate lots of types of random data.

```
<?php

use Phalcon\Security\Random;

$random = new Random();

// ...
$bytes = $random->bytes();

// Generate a random hex string of length $len.
$hex = $random->hex($len);

// Generate a random base64 string of length $len.
$base64 = $random->base64($len);

// Generate a random URL-safe base64 string of length $len.
$base64Safe = $random->base64Safe($len);

// Generate a UUID (version 4). See https://en.wikipedia.org/wiki/Universally\_unique\_
↪identifier
$uuid = $random->uuid();

// Generate a random integer between 0 and $n.
$number = $random->number($n);
```

External Resources

- **Vökuró**, is a sample application that uses the Security component for avoid CSRF and password hashing, [\[Github\]](#)

Enkripsi/Dekripsi

Phalcon menyediakan fasilitas enkripsi melalui komponen *Phalcon\Crypt*. Kelas ini menawarkan pembungkus berorientasi objek sederhana ke pustaka enkripsi *openssl* milik PHP.

Secara default, komponen ini menyediakan enkripsi aman menggunakan AES-256-CFB.

Anda harus menggunakan panjang key sesuai algoritma saat ini. Untuk algoritma yang digunakan secara default ukurannya 32 bytes.

Penggunaan Dasar

Komponen ini dirancang untuk menyediakan cara penggunaan sangat sederhana:

```
<?php

use Phalcon\Crypt;

// Buat instance
$crypt = new Crypt();

$key = "This is a secret key (32 bytes).";
$text = "This is the text that you want to encrypt.";

$encrypted = $crypt->encrypt($text, $key);

echo $crypt->decrypt($encrypted, $key);
```

Anda dapat menggunakan instance sama untuk enkripsi/dekripsi beberapa kali:

```
<?php

use Phalcon\Crypt;

// Buat instance
$crypt = new Crypt();

$texts = [
    "my-key"    => "This is a secret text",
    "other-key" => "This is a very secret",
];

foreach ($texts as $key => $text) {
    // Lakukan enkripsi
    $encrypted = $crypt->encrypt($text, $key);

    // Sekarang dekripsi
    echo $crypt->decrypt($encrypted, $key);
}
```

Opsi Enkripsi

Opsi berikut tersedia untuk mengubah perilaku enkripsi:

Nama	Keterangan
Cipher	Cipher adalah algoritma enkripsi yang didukung openssl. Anda dapat melihat daftarnya di sini

Contoh:

```
<?php

use Phalcon\Crypt;

// Buat instance
$crypt = new Crypt();

// Gunakan blowfish
$crypt->setCipher("bf-cbc");

$key = "le password";
$text = "This is a secret text";

echo $crypt->encrypt($text, $key);
```

Dukungan Base64

Agar enkripsi dapat ditransmisi (email) atau ditampilkan (browser) dengan benar **base64** encoding biasanya diterapkan pada teks terenkripsi:

```
<?php

use Phalcon\Crypt;

// Buat instance
$crypt = new Crypt();

$key = "le password";
$text = "This is a secret text";

$encrypt = $crypt->encryptBase64($text, $key);

echo $crypt->decryptBase64($encrypt, $key);
```

Menyiapkan Layanan Enkripsi

Anda dapat menyiapkan komponen enkripsi dalam service container agar dapat menggunakannya disembarang bagian aplikasi:

```
<?php

use Phalcon\Crypt;

$di->set(
    "crypt",
    function () {
        $crypt = new Crypt();

        // Set key enkripsi global
        $crypt->setKey(
            "%31.1e$i86e$f!8jz"
        );
    }
);
```

```

        return $crypt;
    },
    true
);

```

lalu, contohnya, dalam sebuah kontroler anda dapat menggunakannya sebagai berikut:

```

<?php

use Phalcon\Mvc\Controller;

class SecretsController extends Controller
{
    public function saveAction()
    {
        $secret = new Secrets();

        $text = $this->request->getPost("text");

        $secret->content = $this->crypt->encrypt($text);

        if ($secret->save()) {
            $this->flash->success(
                "Secret was successfully created!"
            );
        }
    }
}

```

Access Control Lists (ACL)

Phalcon\Acl menghadirkan pengelolaan ACL yang mudah termasuk izin yang melekat padanya. [Access Control Lists](#) (ACL) memungkinkan sebuah aplikasi mengendalikan akses ke area aplikasi dan objek di dalamnya melalui request. Anda disarankan membaca lebih jauh tentang metodologi ACL agar familiar dengan konsepnya.

Singkatnya, ACL memiliki role dan resource. Resource adalah objek yang mematuhi izin yang didefinisikan terhadapnya oleh ACL. Role adalah objek yang meminta akses ke resource dan dapat diberi atau ditolak oleh mekanisme ACL.

Menciptakan sebuah ACL

Komponen ini dirancang awalnya bekerja di memori. Hal ini memberikan kemudahan pakai dan kecepatan akses ke semua aspek di daftar. Konstruktor *Phalcon\Acl* parameter pertama mengharapakan sebuah adapter yang digunakan untuk mengambil informasi terkait control list. Contoh menggunakan adapter memori adalah sebagai berikut:

```

<?php

use Phalcon\Acl\Adapter\Memory as AclList;

$acl = new AclList();

```

Defaultnya *Phalcon\Acl* mengizinkan akses ke aksi pada resource yang belum didefinisi. Untuk meningkatkan level keamanan access list, kita dapat mendefinisikan level “deny” sebagai level akses default.

```
<?php

use Phalcon\Acl;

// Aksi default adalah deny access
$acl->setDefaultAction(
    Acl::DENY
);
```

Menambahkan Role ke ACL

Sebuah role adalah objek yang bisa atau tidak bisa mengakses resource tertentu dalam access list. Sebagai contoh, kita akan mendefinisikan role sebagai sebuah grup orang dalam sebuah organisasi. Kelas *Phalcon\Acl\Role* tersedia untuk menciptakan role dengan cara yang lebih terstruktur. Mari kita tambahkan beberapa role ke dalam list yang baru kita ciptakan:

```
<?php

use Phalcon\Acl\Role;

// Tambahkan beberapa role.
// Parameter pertama adalah nama dan parameter kedua adalah deskripsi tidak wajib.
$roleAdmins = new Role("Administrators", "Super-User role");
$roleGuests = new Role("Guests");

// Tambahkan "Guests" role ke ACL
$acl->addRole($roleGuests);

// Tambahkan "Designers" role ke ACL tanpa menggunakan Phalcon\Acl\Role
$acl->addRole("Designers");
```

Seperti yang bisa Anda lihat, role didefinisi langsung tanpa menggunakan instance.

Menambah Resource

Resource adalah object-object yang aksesnya terkontrol. Normalnya dalam aplikasi MVC resource mengacu pada kontroler. Meski tidak wajib, kelas *Phalcon\Acl\Resource* dapat digunakan untuk mendefinisikan resource. Hal penting adalah menambahkan aksi atau operasi terkait ke resource sehingga ACL dapat mengerti apa yang harus dikendalikan.

```
<?php

use Phalcon\Acl\Resource;

// Definisikan resource "Customers"
$customersResource = new Resource("Customers");

// Tambahkan resource "customers" dengan beberapa operasi

$acl->addResource(
    $customersResource,
    "search"
);

$acl->addResource(
    $customersResource,
```

```
[
    "create",
    "update",
];
);
```

Menentukan Kontrol Akses

Sekarang kita punya role dan resource, saatnya untuk mendefinisikan ACL (yaitu role yang dapat mengakses resource). Bagian ini sangat penting terutama menentukan default level akses “allow” atau “deny”.

```
<?php
// Set level akses role ke resource

$acl->allow("Guests", "Customers", "search");

$acl->allow("Guests", "Customers", "create");

$acl->deny("Guests", "Customers", "update");
```

Metode `allow()` memberikan role tersebut akses ke resource tertentu. Metode `deny()` melakukan sebaliknya.

Meminta ACL

Setelah daftar sudah terdefinisi. Kita dapat bertanya untuk menguji apakah sebuah role punya izin atau tidak.

```
<?php
// Uji apakah role punya akses ke operasi

// Mengembalikan 0
$acl->isAllowed("Guests", "Customers", "edit");

// Mengembalikan 1
$acl->isAllowed("Guests", "Customers", "search");

// Mengembalikan 1
$acl->isAllowed("Guests", "Customers", "create");
```

Akses berbasis Fungsi

Anda dapat juga menambahkan parameter ke-4 berupa fungsi kustom yang mengembalikan nilai boolean. Fungsi tersebut akan dipanggil ketika menggunakan metode `isAllowed()`. Anda dapat melewati parameter sebagai array asosiatif ke metode `isAllowed()` sebagai argumen ke-4 dimana key adalah nama parameter difungsi yang kita definisi.

```
<?php
// Set level akses role ke resource menggunakan fungsi kustom
$acl->allow(
    "Guests",
    "Customers",
    "search",
```

```
function ($a) {
    return $a % 2 === 0;
}

);

// Uji apakah role punya akses ke operasi menggunakan fungsi kustom

// Mengembalikan true
$acl->isAllowed(
    "Guests",
    "Customers",
    "search",
    [
        "a" => 4,
    ]
);

// Mengembalikan false
$acl->isAllowed(
    "Guests",
    "Customers",
    "search",
    [
        "a" => 3,
    ]
);
```

Jika anda tidak menyediakan parameter di metode `isAllowed()` maka perilaku defaultnya adalah `Acl::ALLOW`. Anda dapat mengubahnya dengan menggunakan `setNoArgumentsDefaultAction()`.

```
use Phalcon\Acl;

<?php
// Set level akses role ke resource engan fungsi kustom
$acl->allow(
    "Guests",
    "Customers",
    "search",
    function ($a) {
        return $a % 2 === 0;
    }
);

// Uji apakah role punya akses ke operasi menggunakan fungsi kustom

// Mengembalikan true
$acl->isAllowed(
    "Guests",
    "Customers",
    "search"
);

// Ubah aksi default tanpa argumen
$acl->setNoArgumentsDefaultAction(
    Acl::DENY
);

// Mengembalikan false
```

```
$acl->isAllowed(
    "Guests",
    "Customers",
    "search"
);
```

Objek sebagai nama role dan nama resource

Anda dapat melewati objek sebagai roleName and resourceName. Kelas anda harus membuat implementasi *Phalcon\Acl\RoleAware* untuk roleName dan *Phalcon\Acl\ResourceAware* untuk resourceName.

Kelas UserRole kita

```
<?php

use Phalcon\Acl\RoleAware;

// Buat kelas yang akan digunakan sebagai roleName
class UserRole implements RoleAware
{
    protected $id;

    protected $roleName;

    public function __construct($id, $roleName)
    {
        $this->id      = $id;
        $this->roleName = $roleName;
    }

    public function getId()
    {
        return $this->id;
    }

    // Implementasi fungsi dari RoleAware Interface
    public function getRoleName()
    {
        return $this->roleName;
    }
}
```

dan kelas ModelResource

```
<?php

use Phalcon\Acl\ResourceAware;

// Buat kelas yang akan digunakan sebagai resourceName
class ModelResource implements ResourceAware
{
    protected $id;

    protected $resourceName;

    protected $userId;
```

```
public function __construct($id, $resourceName, $userId)
{
    $this->id          = $id;
    $this->resourceName = $resourceName;
    $this->userId       = $userId;
}

public function getId()
{
    return $this->id;
}

public function getUserId()
{
    return $this->userId;
}

// Implementasi fungsi ResourceAware Interface
public function getResourceName()
{
    return $this->resourceName;
}
}
```

Selanjutnya anda dapat menggunakannya dalam metode `isAllowed()`.

```
<?php

use UserRole;
use ModelResource;

// Set level akses role ke resource
$acl->allow("Guests", "Customers", "search");
$acl->allow("Guests", "Customers", "create");
$acl->deny("Guests", "Customers", "update");

// Buat objek yang menyediakan roleName dan resourceName

$customer = new ModelResource(
    1,
    "Customers",
    2
);

$designer = new UserRole(
    1,
    "Designers"
);

$guest = new UserRole(
    2,
    "Guests"
);

$anotherGuest = new UserRole(
    3,
    "Guests"
);
```



```
// Uji apakah objek user memiliki akses ke operasi pada objek model

// Mengembalikan false
$acl->isAllowed(
    $designer,
    $customer,
    "search"
);

// Mengembalikan true
$acl->isAllowed(
    $guest,
    $customer,
    "search"
);

// Mengembalikan true
$acl->isAllowed(
    $anotherGuest,
    $customer,
    "search"
);
```

Anda dapat mengakses objek tersebut dalam fungsi kustom Anda di `allow()` atau `deny()`. Mereka otomatis akan diikat ke parameter menggunakan tipe dalam fungsi.

```
<?php

use UserRole;
use ModelResource;

// Set level akses role ke resource dengan fungsi kustom
$acl->allow(
    "Guests",
    "Customers",
    "search",
    function (UserRole $user, ModelResource $model) { // Kelas User dan Model wajib
        return $user->getId == $model->getUserId();
    }
);

$acl->allow(
    "Guests",
    "Customers",
    "create"
);

$acl->deny(
    "Guests",
    "Customers",
    "update"
);

// Buat objek yang menyediakan roleName and resourceName

$customer = new ModelResource(
    1,
```

```
        "Customers",
        2
    );

    $designer = new UserRole(
        1,
        "Designers"
    );

    $guest = new UserRole(
        2,
        "Guests"
    );

    $anotherGuest = new UserRole(
        3,
        "Guests"
    );

    // Uji apakah objek user memiliki akses ke operasi pada objek model

    // Mengembalikan false
    $acl->isAllowed(
        $designer,
        $customer,
        "search"
    );

    // Mengembalikan true
    $acl->isAllowed(
        $guest,
        $customer,
        "search"
    );

    // Mengembalikan false
    $acl->isAllowed(
        $anotherGuest,
        $customer,
        "search"
    );
};
```

Anda dapat menambah parameter kustom ke fungsi dan melewati array asosiatif dalam metode `isAllowed()`. Urutannya juga tidak penting.

Penurunan Role

Anda dapat membangun struktur role kompleks menggunakan inheritance yang disediakan *Phalcon\Acl\Role*. Role dapat diturunkan dari role lain, sehingga memungkinkan akses ke himpunan resource yang lebih luas atau lebih sempit. Untuk menggunakan penurunan role, anda perlu melewati role turunan sebagai parameter kedua pada pemanggilan metode, ketika menambah role ke daftar.

```
<?php

use Phalcon\Acl\Role;
```

```
// ...

// Buat beberapa role

$roleAdmins = new Role("Administrators", "Super-User role");

$roleGuests = new Role("Guests");

// Tambahkan role "Guests" ke ACL
$acl->addRole($roleGuests);

// Tambahkan role "Administrators" yang diturunkan dari "Guests"
$acl->addRole($roleAdmins, $roleGuests);
```

Serialisasi Daftar ACL

Untuk meningkatkan performa instance *Phalcon\Acl* dapat diserialisasi dan disimpan dalam APC, session, file text atau tabel database sehingga mereka dapat dimuat sesukanya tanpa perlu mendefinisi ulang seluruh daftar. Anda dapat melakukannya sebagai berikut:

```
<?php

use Phalcon\Acl\Adapter\Memory as AclList;

// ...

// Uji apakah data ACL sudah ada
if (!is_file("app/security/acl.data")) {
    $acl = new AclList();

    // ... Definisi role, resource, akses, dan lain-lain

    // Simpan daftar terserialisasi ke plain file
    file_put_contents(
        "app/security/acl.data",
        serialize($acl)
    );
} else {
    // Restore ACL object dari serialized file
    $acl = unserialize(
        file_get_contents("app/security/acl.data")
    );
}

// Gunakan ACL list seperlunya
if ($acl->isAllowed("Guests", "Customers", "edit")) {
    echo "Access granted!";
} else {
    echo "Access denied :(";
}
```

Sangat disarankan menggunakan adapter Memory selama pengembangan dan menggunakan salah satu adapter lain diproduksi.

Event ACL

Phalcon\Acl dapat mengirim event ke *EventsManager* jika ada. Event dipicu menggunakan tipe “acl”. Beberapa event ketika mengembalikan nilai boolean false dapat menghentikan operasi yang aktif. Event berikut ini didukung:

Nama Event	Dipicu	Bisa stop operasi?
beforeCheckAccess	Dipicu sebelum menguji apakah role punya akses	Yes
afterCheckAccess	Dipicu sesudah menguji apakah role punya akses	No

Contoh berikut menunjukkan bagaimana memasang listener ke komponen ini:

```
<?php

use Phalcon\Acl\Adapter\Memory as AclList;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;

// ...

// Buat event manager
$eventsManager = new EventsManager();

// Pasangkan listener tipe "acl"
$eventsManager->attach(
    "acl:beforeCheckAccess",
    function (Event $event, $acl) {
        echo $acl->getActiveRole();

        echo $acl->getActiveResource();

        echo $acl->getActiveAccess();
    }
);

$acl = new AclList();

// Setup $acl
// ...

// Ikat eventsManager ke komponen ACL
$acl->setEventsManager($eventsManager);
```

Implementasi adapter Anda sendiri

Interface *Phalcon\Acl\AdapterInterface* harus diimplementasi untuk menciptakan adapter ACL anda sendiri atau mengubah yang sudah ada.

Multi-lingual Support

The component *Phalcon\Translate* aids in creating multilingual applications. Applications using this component, display content in different languages, based on the user’s chosen language supported by the application.

Adapters

This component makes use of adapters to read translation messages from different sources in a unified way.

Adapter	Description
<i>Phalcon\Translate\Adapter\NativeArray</i>	Uses PHP arrays to store the messages. This is the best option in terms of performance.

Component Usage

Translation strings are stored in files. The structure of these files could vary depending of the adapter used. Phalcon gives you the freedom to organize your translation strings. A simple structure could be:

```
app/messages/en.php
app/messages/es.php
app/messages/fr.php
app/messages/zh.php
```

Each file contains an array of the translations in a key/value manner. For each translation file, keys are unique. The same array is used in different files, where keys remain the same and values contain the translated strings depending on each language.

```
<?php

// app/messages/en.php
$messages = [
    "hi"      => "Hello",
    "bye"     => "Good Bye",
    "hi-name" => "Hello %name%",
    "song"    => "This song is %song%",
];
```

```
<?php

// app/messages/fr.php
$messages = [
    "hi"      => "Bonjour",
    "bye"     => "Au revoir",
    "hi-name" => "Bonjour %name%",
    "song"    => "La chanson est %song%",
];
```

Implementing the translation mechanism in your application is trivial but depends on how you wish to implement it. You can use an automatic detection of the language from the user's browser or you can provide a settings page where the user can select their language.

A simple way of detecting the user's language is to parse the `$_SERVER['HTTP_ACCEPT_LANGUAGE']` contents, or if you wish, access it directly by calling `$this->request->getBestLanguage()` from an action/controller:

```
<?php

use Phalcon\Mvc\Controller;
use Phalcon\Translate\Adapter\NativeArray;

class UserController extends Controller
{
    protected function getTranslation()
    {
        // Ask browser what is the best language
        $language = $this->request->getBestLanguage();
```

```
$translationFile = "app/messages/" . $language . ".php";

// Check if we have a translation file for that lang
if (file_exists($translationFile)) {
    require $translationFile;
} else {
    // Fallback to some default
    require "app/messages/en.php";
}

// Return a translation object
return new NativeArray(
    [
        "content" => $messages,
    ]
);

public function indexAction()
{
    $this->view->name = "Mike";
    $this->view->t      = $this->getTranslation();
}
}
```

The `_getTranslation()` method is available for all actions that require translations. The `$t` variable is passed to the views, and with it, we can translate strings in that layer:

```
<!-- welcome -->
<!-- String: hi => 'Hello' -->
<p><?php echo $t->_("hi"), " ", $name; ?></p>
```

The `_()` method is returning the translated string based on the index passed. Some strings need to incorporate placeholders for calculated data i.e. Hello `%name%`. These placeholders can be replaced with passed parameters in the `_()` method. The passed parameters are in the form of a key/value array, where the key matches the placeholder name and the value is the actual data to be replaced:

```
<!-- welcome -->
<!-- String: hi-name => 'Hello %name%' -->
<p><?php echo $t->_("hi-name", ["name" => $name]); ?></p>
```

Some applications implement multilingual on the URL such as <http://www.mozilla.org/es-ES/firefox/>. Phalcon can implement this by using a *Router*.

Implementing your own adapters

The *Phalcon\Translate\AdapterInterface* interface must be implemented in order to create your own translate adapters or extend the existing ones:

```
<?php

use Phalcon\Translate\AdapterInterface;

class MyTranslateAdapter implements AdapterInterface
{
    /**
```

```

    * Adapter constructor
    *
    * @param array $data
    */
    public function __construct($options);

    /**
     * Returns the translation string of the given key
     *
     * @param string $translateKey
     * @param array $placeholders
     * @return string
     */
    public function _($translateKey, $placeholders = null);

    /**
     * Returns the translation related to the given key
     *
     * @param string $index
     * @param array $placeholders
     * @return string
     */
    public function query($index, $placeholders = null);

    /**
     * Check whether is defined a translation key in the internal array
     *
     * @param string $index
     * @return bool
     */
    public function exists($index);
}

```

There are more adapters available for this components in the [Phalcon Incubator](#)

Class Autoloader

PhalconLoader allows you to load project classes automatically, based on some predefined rules. Since this component is written in C, it provides the lowest overhead in reading and interpreting external PHP files.

The behavior of this component is based on the PHP's capability of [autoloading classes](#). If a class that does not yet exist is used in any part of the code, a special handler will try to load it. *PhalconLoader* serves as the special handler for this operation. By loading classes on a need-to-load basis, the overall performance is increased since the only file reads that occur are for the files needed. This technique is called [lazy initialization](#).

With this component you can load files from other projects or vendors, this autoloader is [PSR-0](#) and [PSR-4](#) compliant.

PhalconLoader offers four options to autoload classes. You can use them one at a time or combine them.

Security Layer

PhalconLoader offers a security layer sanitizing by default class names avoiding possible inclusion of unauthorized files. Consider the following example:

```
<?php
```

```
// Basic autoloader
spl_autoload_register(
    function ($className) {
        $filepath = $className . ".php";

        if (file_exists($filepath)) {
            require $filepath;
        }
    }
);
```

The above auto-loader lacks any kind of security. If a function mistakenly launches the auto-loader and a malicious prepared string is used as parameter this would allow to execute any file accessible by the application:

```
<?php

// This variable is not filtered and comes from an insecure source
$className = "../processes/important-process";

// Check if the class exists triggering the auto-loader
if (class_exists($className)) {
    // ...
}
```

If ‘../processes/important-process.php’ is a valid file, an external user could execute the file without authorization.

To avoid these or most sophisticated attacks, *Phalcon\Loader* removes invalid characters from the class name, reducing the possibility of being attacked.

Registering Namespaces

If you’re organizing your code using namespaces, or using external libraries which do, the `registerNamespaces()` method provides the autoloading mechanism. It takes an associative array; the keys are namespace prefixes and their values are directories where the classes are located in. The namespace separator will be replaced by the directory separator when the loader tries to find the classes. Always remember to add a trailing slash at the end of the paths.

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Register some namespaces
$loader->registerNamespaces(
    [
        "Example\Base"    => "vendor/example/base/",
        "Example\Adapter" => "vendor/example/adapter/",
        "Example"          => "vendor/example/",
    ]
);

// Register autoloader
$loader->register();

// The required class will automatically include the
```



```
// file vendor/example/adapter/Some.php
$some = new \Example\Adapter\Some();
```

Registering Directories

The third option is to register directories, in which classes could be found. This option is not recommended in terms of performance, since Phalcon will need to perform a significant number of file stats on each folder, looking for the file with the same name as the class. It's important to register the directories in relevance order. Remember always add a trailing slash at the end of the paths.

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Register some directories
$loader->registerDirs(
    [
        "library/MyComponent/",
        "library/OtherComponent/Other/",
        "vendor/example/adapters/",
        "vendor/example/",
    ]
);

// Register autoloader
$loader->register();

// The required class will automatically include the file from
// the first directory where it has been located
// i.e. library/OtherComponent/Other/Some.php
$some = new \Some();
```

Registering Classes

The last option is to register the class name and its path. This autoloader can be very useful when the folder convention of the project does not allow for easy retrieval of the file using the path and the class name. This is the fastest method of autoloading. However the more your application grows, the more classes/files need to be added to this autoloader, which will effectively make maintenance of the class list very cumbersome and it is not recommended.

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Register some classes
$loader->registerClasses(
    [
        "Some"          => "library/OtherComponent/Other/Some.php",
        "Example\Base" => "vendor/example/adapters/Example/BaseClass.php",
    ]
);
```

```
    ]
);

// Register autoloader
$loader->register();

// Requiring a class will automatically include the file it references
// in the associative array
// i.e. library/OtherComponent/Other/Some.php
$some = new \Some();
```

Registering Files

You can also registers files that are “non-classes” hence needing a “require”. This is very useful for including files that only have functions:

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Register some classes
$loader->registerFiles([
    "functions.php",
    "arrayFunctions.php",
]);

// Register autoloader
$loader->register();
```

These files are automatically loaded in the `register()` method.

Additional file extensions

Some autoloading strategies such as “prefixes”, “namespaces” or “directories” automatically append the “php” extension at the end of the checked file. If you are using additional extensions you could set it with the method “`setExtensions`”. Files are checked in the order as it were defined:

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Set file extensions to check
$loader->setExtensions([
    "php",
    "inc",
    "phb",
```

```
    ]
);
```

Modifying current strategies

Additional auto-loading data can be added to existing values by passing “true” as the second parameter:

```
<?php

// Adding more directories
$loader->registerDirs(
    [
        "../app/library/",
        "../app/plugins/",
    ],
    true
);
```

Autoloading Events

In the following example, the EventsManager is working with the class loader, allowing us to obtain debugging information regarding the flow of operation:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Loader;

$eventsManager = new EventsManager();

$loader = new Loader();

$loader->registerNamespaces(
    [
        "Example\\Base"      => "vendor/example/base/",
        "Example\\Adapter"    => "vendor/example/adapter/",
        "Example"             => "vendor/example/",
    ]
);

// Listen all the loader events
$eventsManager->attach(
    "loader:beforeCheckPath",
    function (Event $event, Loader $loader) {
        echo $loader->getCheckedPath();
    }
);

$loader->setEventsManager($eventsManager);

$loader->register();
```

Some events when returning boolean false could stop the active operation. The following events are supported:

Event Name	Triggered
beforeCheckClass	Triggered before starting the autoloading process
pathFound	Triggered when the loader locate a class
afterCheckClass	Triggered after finish the autoloading process. If this event is launched the autoloader didn't find the class file

Troubleshooting

Some things to keep in mind when using the universal autoloader:

- Auto-loading process is case-sensitive, the class will be loaded as it is written in the code
- Strategies based on namespaces/prefixes are faster than the directories strategy
- If a cache bytecode like [APC](#) is installed this will be used to retrieve the requested file (an implicit caching of the file is performed)

Logging

Phalcon\Logger adalah komponen yang kegunaannya menyediakan layanan logging bagi aplikasi. Ia menyediakan logging ke backend berbeda dengan adapter berbeda. Ia juga menyediakan logging transaksi, opsi konfigurasi format berbeda dan filter. Anda dapat menggunakan *Phalcon\Logger* untuk semua kebutuhan logging aplikasi Anda, mulai debugging proses hingga melacak alir aplikasi.

Adapter

Komponen ini memanfaatkan adapter untuk menyimpan pesan log. Penggunaan adapter memungkinkan antar muka umum bagi logging memudahkan berpindah backend jika diperlukan. Adapter yang didukung:

Adapter	Deskripsi
<i>Phalcon\Logger\Adapter\File</i>	Log ke plain text file
<i>Phalcon\Logger\Adapter\Stream</i>	Log ke PHP Streams
<i>Phalcon\Logger\Adapter\Syslog</i>	Log ke system logger
<i>Phalcon\Logger\Adapter\FirePHP</i>	Log ke FirePHP

Menciptakan Log

Contoh berikut menunjukkan bagaimana menciptakan sebuah log dan menambah pesan kedalamnya:

```
<?php

use Phalcon\Logger;
use Phalcon\Logger\Adapter\File as FileAdapter;

$logger = new FileAdapter("app/logs/test.log");

// Ini adalah bermacam level log yang tersedia:

$logger->critical(
    "This is a critical message"
);

$logger->emergency(
```

```

    "This is an emergency message"
);

$logger->debug(
    "This is a debug message"
);

$logger->error(
    "This is an error message"
);

$logger->info(
    "This is an info message"
);

$logger->notice(
    "This is a notice message"
);

$logger->warning(
    "This is a warning message"
);

$logger->alert(
    "This is an alert message"
);

// Anda dapat menggunakan metode log() dengan Logger constant:
$logger->log(
    "This is another error message",
    Logger::ERROR
);

// Jika tidak ditentukan diasumsikan Logger::DEBUG.
$logger->log(
    "This is a message"
);

// You can also pass context parameters like this
$logger->log(
    "This is a {message}",
    [
        'message' => 'parameter'
    ]
);

```

Log yang dihasilkan seperti berikut:

```

[Tue, 28 Jul 15 22:09:02 -0500][CRITICAL] This is a critical message
[Tue, 28 Jul 15 22:09:02 -0500][EMERGENCY] This is an emergency message
[Tue, 28 Jul 15 22:09:02 -0500][DEBUG] This is a debug message
[Tue, 28 Jul 15 22:09:02 -0500][ERROR] This is an error message
[Tue, 28 Jul 15 22:09:02 -0500][INFO] This is an info message
[Tue, 28 Jul 15 22:09:02 -0500][NOTICE] This is a notice message
[Tue, 28 Jul 15 22:09:02 -0500][WARNING] This is a warning message
[Tue, 28 Jul 15 22:09:02 -0500][ALERT] This is an alert message

```

```
[Tue, 28 Jul 15 22:09:02 -0500][ERROR] This is another error message
[Tue, 28 Jul 15 22:09:02 -0500][DEBUG] This is a message
[Tue, 28 Jul 15 22:09:02 -0500][DEBUG] This is a parameter
```

Anda dapat mengatur level log menggunakan metode `setLogLevel()`. Metode ini membutuhkan Logger constant dan hanya akan menyimpan pesan log yang sama atau lebih penting dari nilai konstan:

```
<?php

use Phalcon\Logger;
use Phalcon\Logger\Adapter\File as FileAdapter;

$logger = new FileAdapter("app/logs/test.log");

$logger->setLogLevel(
    Logger::CRITICAL
);
```

Di contoh di atas, hanya pesan kritis dan darurat yang akan disimpan di log. Defaultnya, semua disimpan.

Transaksi

Logging data ke adapter misal File (file system) adalah operasi mahal ditinjau dari sisi performa. Untuk melawannya, anda dapat menggunakan transaksi logging. Transaksi menyimpan data log sementara di memori yang nanti ditulis ke adapter terkait (dalam hal ini File) dalam operasi atomik tunggal.

```
<?php

use Phalcon\Logger\Adapter\File as FileAdapter;

// Buat logger
$logger = new FileAdapter("app/logs/test.log");

// Mulai transaksi
$logger->begin();

// Tambahkan pesan

$logger->alert(
    "This is an alert"
);

$logger->error(
    "This is another error"
);

// Commit pesan ke file
$logger->commit();
```

Logging ke Handlers lebih dari satu

Phalcon\Logger dapat mengirim pesan ke handler lebih dari satu dengan sekali pemanggilan:

```
<?php
```

```

use Phalcon\Logger;
use Phalcon\Logger\Multiple as MultipleStream;
use Phalcon\Logger\Adapter\File as FileAdapter;
use Phalcon\Logger\Adapter\Stream as StreamAdapter;

$logger = new MultipleStream();

$logger->push(
    new FileAdapter("test.log")
);

$logger->push(
    new StreamAdapter("php://stdout")
);

$logger->log(
    "This is a message"
);

$logger->log(
    "This is an error",
    Logger::ERROR
);

$logger->error(
    "This is another error"
);

```

Pesan tersebut akan dikirim ke handler sesuai urutan pendaftarannya.

Format Pesan

Komponen ini menggunakan ‘formatters’ untuk mengatur format pesan sebelum dikirim ke backend. Formatter yang tersedia:

Adapter	Keterangan
<i>Phalcon\Logger\Formatter\Line</i>	Format pesan dengan string satu baris
<i>Phalcon\Logger\Formatter\Firephp</i>	Format pesan agar dapat dikirim ke FirePHP
<i>Phalcon\Logger\Formatter\Json</i>	Siapkan pesan untuk di encode sebagai JSON
<i>Phalcon\Logger\Formatter\Syslog</i>	Siapkan pesan untuk diirim ke syslog

Line Formatter

Format pesan menggunakan string satu baris. Default format logging adalah:

```
[%date%] [%type%] %message%
```

Anda dapat mengubah format default dengan `setFormat()`, ini memungkinkan anda mengubah format pesan log dengan mendefinisikan format anda sendiri. Format variabel yang diizinkan adalah:

Variabel	Keterangan
<code>%message%</code>	Pesan yang akan di log
<code>%date%</code>	Tanggal pesan ditambahkan
<code>%type%</code>	Tipe pesan dalam format uppercase

Contoh di bawah menunjukkan bagaimana mengubah format log:

```
<?php
use Phalcon\Logger\Formatter\Line as LineFormatter;

$formatter = new LineFormatter("%date% - %message%");

// Ubah format logger
$logger->setFormatter($formatter);
```

Membuat formatter Anda sendiri

Interface *Phalcon\Logger\FormatterInterface* harus diimplementasi untuk dapat menciptakan formatter logger Anda atau mengubah yang sudah ada.

Adapters

Contoh berikut menunjukkan penggunaan dasar masing-masing adapter:

Stream Logger

Stream logger menulis pesan ke stream yang valid dalam PHP. Daftar stream yang tersedia [di sini](#):

```
<?php
use Phalcon\Logger\Adapter\Stream as StreamAdapter;

// Buka stream dengan kompresi zlib
$logger = new StreamAdapter("compress.zlib://week.log.gz");

// Tulis log ke stderr
$logger = new StreamAdapter("php://stderr");
```

File Logger

Logger ini menggunakan plain file untuk menyimpan log beragam data. Defaultnya semua logger file dibuka dengan mode append yang membuka file untuk penulisan saja; dan menempatkan pointer di akhir file. Jika file tidak ada, maka file akan dicoba dibuat. Anda dapat mengubah mode ini dengan melewati opsi tambahan ke konstruktor:

```
<?php
use Phalcon\Logger\Adapter\File as FileAdapter;

// Buat file logger dalam mode 'w'
$logger = new FileAdapter(
    "app/logs/test.log",
```



```
[
    "mode" => "w",
]
);
```

Syslog Logger

Logger ini mengirim pesan ke system logger. Perilaku syslog bisa jadi berbeda antara satu sistem operasi dengan lainnya.

```
<?php

use Phalcon\Logger\Adapter\Syslog as SyslogAdapter;

// Penggunaan dasar
$logger = new SyslogAdapter(null);

// Setting ident/mode/facility
$logger = new SyslogAdapter(
    "ident-name",
    [
        "option" => LOG_NDELAY,
        "facility" => LOG_MAIL,
    ]
);
```

FirePHP Logger

Logger ini mengirim pesan ke HTTP response headers yang ditampilkan oleh [FirePHP](#), sebuah ekstensi [Firebug](#) untuk Firefox.

```
<?php

use Phalcon\Logger;
use Phalcon\Logger\Adapter\Firephp as Firephp;

$logger = new Firephp("");

$logger->log(
    "This is a message"
);

$logger->log(
    "This is an error",
    Logger::ERROR
);

$logger->error(
    "This is another error"
);
```

Membuat adapter anda sendiri

Interface `Phalcon\Logger\AdapterInterface` harus diimplementasi untuk dapat menciptakan adapter logger Anda sendiri atau mengubah yang sudah ada.

Parser Anotasi

Ini kali pertama sebuah komponen parser anotasi ditulis dalam C untuk dunia PHP. `Phalcon\Annotations` adalah komponen umum yang menyediakan parsing dan caching anotasi dalam kelas PHP untuk digunakan dalam aplikasi.

Anotasi dibaca dari docblocks dalam kelas, metode dan properti. Sebuah anotasi dapat ditempatkan di sembarang posisi dalam docblock:

```
<?php

/**
 * Ini deskripsi kelas
 *
 * @AmazingClass(true)
 */
class Example
{
    /**
     * Ini properti dengan fitur spesial
     *
     * @SpecialFeature
     */
    protected $someProperty;

    /**
     * Ini metode
     *
     * @SpecialFeature
     */
    public function someMethod()
    {
        // ...
    }
}
```

Sebuah anotasi memiliki sintaks berikut:

```
/**
 * @Annotation-Name
 * @Annotation-Name(param1, param2, ...)
 */
```

sebuah anotasi dapat juga ditempatkan di sembarang bagian di sebuah docblock:

```
<?php

/**
 * This a property with a special feature
 *
 * @SpecialFeature
 *
 * More comments
 */
```

```
*
* @AnotherSpecialFeature(true)
*/
```

Parser nya sangat fleksibel, docblock berikut adalah sah:

```
<?php

/**
 * This a property with a special feature @SpecialFeature({
someParameter="the value", false

 }) More comments @AnotherSpecialFeature(true) @MoreAnnotations
 */
```

Namun untuk membuat kode lebih mudah dirawat dan dipahami, disarankan untuk menempatkan anotasi di akhir docblock:

```
<?php

/**
 * This a property with a special feature
 * More comments
 *
 * @SpecialFeature({someParameter="the value", false})
 * @AnotherSpecialFeature(true)
 */
```

Membaca Anotasi

Sebuah reflector diimplementasi untuk mendapatkan anotasi yang didefinisi dalam sebuah kelas secara mudah menggunakan interface berorientasi objek:

```
<?php

use Phalcon\Annotations\Adapter\Memory as MemoryAdapter;

$reader = new MemoryAdapter();

// Reflect the annotations in the class Example
$reflector = $reader->get("Example");

// Read the annotations in the class' docblock
$annotations = $reflector->getClassAnnotations();

// Traverse the annotations
foreach ($annotations as $annotation) {
    // Print the annotation name
    echo $annotation->getName(), PHP_EOL;

    // Print the number of arguments
    echo $annotation->numberArguments(), PHP_EOL;

    // Print the arguments
    print_r($annotation->getArguments());
}
```

Proses pembacaan anotasi sangat cepat, namun, untuk alasan performa disarankan untuk menyimpan anotasi yang sudah diparsing menggunakan adapter. Adapter menyimpan anotasi yang sudah diproses sehingga menghindari kebutuhan untuk melakukan parsing anotasi terus menerus.

Phalcon\Annotations\Adapter\Memory digunakan untuk contoh di atas. Adapter ini hanya menyimpan anotasi selama request berjalan dan untuk alasan ini, adapter ini hanya cocok untuk tahap pengembangan. Ada adapter lain untuk ditukar ketika aplikasi berada dalam tahap produksi.

Jenis Anotasi

Anotasi dapat memiliki parameter atau tidak. Sebuah parameter dapat berupa nilai literal sederhana (string, angka, boolean, null), array, hashed list atau anotasi lain:

```
<?php

/**
 * Simple Annotation
 *
 * @SomeAnnotation
 */

/**
 * Annotation with parameters
 *
 * @SomeAnnotation("hello", "world", 1, 2, 3, false, true)
 */

/**
 * Annotation with named parameters
 *
 * @SomeAnnotation(first="hello", second="world", third=1)
 * @SomeAnnotation(first: "hello", second: "world", third: 1)
 */

/**
 * Passing an array
 *
 * @SomeAnnotation([1, 2, 3, 4])
 * @SomeAnnotation({1, 2, 3, 4})
 */

/**
 * Passing a hash as parameter
 *
 * @SomeAnnotation({first=1, second=2, third=3})
 * @SomeAnnotation({'first'=1, 'second'=2, 'third'=3})
 * @SomeAnnotation({'first': 1, 'second': 2, 'third': 3})
 * @SomeAnnotation(['first': 1, 'second': 2, 'third': 3])
 */

/**
 * Nested arrays/hashes
 *
 * @SomeAnnotation({"name"="SomeName", "other"={
 *     "foo1": "bar1", "foo2": "bar2", {1, 2, 3},
 * }})
 */
```

```
/**
 * Nested Annotations
 *
 * @SomeAnnotation(first=@AnotherAnnotation(1, 2, 3))
 */
```

Penggunaan Praktis

Berikutnya kita akan menjelaskan contoh praktis penggunaan anotasi di aplikasi PHP:

Cache Enabler dengan Anotasi

Anggap kita telah menciptakan controller berikut dan anda ingin menciptakan plugin yang otomatis memulai cache ketika aksi terakhir yang dieksekusi ditandai sebagai dapat di cache. Pertama, kita daftarkan sebuah plugin ke layanan Dispatcher untuk diberi tahu ketika sebuah route dieksekusi:

```
<?php

use Phalcon\Mvc\Dispatcher as MvcDispatcher;
use Phalcon\Events\Manager as EventsManager;

$di["dispatcher"] = function () {
    $eventsManager = new EventsManager();

    // Attach the plugin to 'dispatch' events
    $eventsManager->attach(
        "dispatch",
        new CacheEnablerPlugin()
    );

    $dispatcher = new MvcDispatcher();

    $dispatcher->setEventsManager($eventsManager);

    return $dispatcher;
};
```

CacheEnablerPlugin adalah plugin yang menyadap tiap aksi yang dieksekusi dispatcher dan menghidupkan cache jika diperlukan:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Mvc\Dispatcher;
use Phalcon\Mvc\User\Plugin;

/**
 * Enables the cache for a view if the latest
 * executed action has the annotation @Cache
 */
class CacheEnablerPlugin extends Plugin
{
    /**
     * This event is executed before every route is executed in the dispatcher
     */
}
```

```
*/
public function beforeExecuteRoute(Event $event, Dispatcher $dispatcher)
{
    // Parse the annotations in the method currently executed
    $annotations = $this->annotations->getMethod(
        $dispatcher->getControllerClass(),
        $dispatcher->getActiveMethod()
    );

    // Check if the method has an annotation 'Cache'
    if ($annotations->has("Cache")) {
        // The method has the annotation 'Cache'
        $annotation = $annotations->get("Cache");

        // Get the lifetime
        $lifetime = $annotation->getNamedParameter("lifetime");

        $options = [
            "lifetime" => $lifetime,
        ];

        // Check if there is a user defined cache key
        if ($annotation->hasNamedParameter("key")) {
            $options["key"] = $annotation->getNamedParameter("key");
        }

        // Enable the cache for the current method
        $this->view->cache($options);
    }
}
```

Kita dapat menggunakan anotasi dalam sebuah controller:

```
<?php

use Phalcon\Mvc\Controller;

class NewsController extends Controller
{
    public function indexAction()
    {

    }

    /**
     * This is a comment
     *
     * @Cache(lifetime=86400)
     */
    public function showAllAction()
    {
        $this->view->article = Articles::find();
    }

    /**
     * This is a comment
     *
     */
}
```

```

        * @Cache(key="my-key", lifetime=86400)
        */
    public function showAction($slug)
    {
        $this->view->article = Articles::findFirstByTitle($slug);
    }
}

```

Private/Public area dengan Anotasi

Anda dapat menggunakan anotasi untuk memberitahu ACL kontroller mana yang termasuk area administratif:

```

<?php

use Phalcon\Acl;
use Phalcon\Acl\Role;
use Phalcon\Acl\Resource;
use Phalcon\Events\Event;
use Phalcon\Mvc\User\Plugin;
use Phalcon\Mvc\Dispatcher;
use Phalcon\Acl\Adapter\Memory as AclList;

/**
 * This is the security plugin which controls that users only have access to the
 * modules they're assigned to
 */
class SecurityAnnotationsPlugin extends Plugin
{
    /**
     * This action is executed before execute any action in the application
     */
    * @param Event $event
    * @param Dispatcher $dispatcher
    */
    public function beforeDispatch(Event $event, Dispatcher $dispatcher)
    {
        // Possible controller class name
        $controllerName = $dispatcher->getControllerClass();

        // Possible method name
        $actionName = $dispatcher->getActiveMethod();

        // Get annotations in the controller class
        $annotations = $this->annotations->get($controllerName);

        // The controller is private?
        if ($annotations->getClassAnnotations()->has("Private")) {
            // Check if the session variable is active?
            if (!$this->session->get("auth")) {

                // The user is no logged redirect to login
                $dispatcher->forward(
                    [
                        "controller" => "session",
                        "action"      => "login",
                    ]
                );
            }
        }
    }
}

```

```
        );  
  
        return false;  
    }  
}  
  
// Continue normally  
return true;  
}  
}
```

Adapter Anotasi

Komponen ini menggunakan adapter untuk cache atau tidak anotasi yang terproses sehingga meningkatkan performa dan menyediakan fasilitas untuk pengembangan/pengujian:

Class	Keterangan
<i>Phalcon\Annotations\Adapter\Memory</i>	Anotasi ini dicache di memori saja. Ketika request berakhir cache dibersihkan dan memuat ulang anotasi di tiap request. Adapter ini cocok untuk tahap pengembangan
<i>Phalcon\Annotations\Adapter\File</i>	Anotasi yang sudah diparsing dan diproses disimpan permanent di file PHP untuk meningkatkan performa. Adapter ini harus digunakan bersama bytecode cache.
<i>Phalcon\Annotations\Adapter\Apc</i>	Anotasi yang sudah diparsing dan diproses disimpan permanent di APC cache untuk meningkatkan performa. Ini adalah adapter yang lebih cepat
<i>Phalcon\Annotations\Adapter\Xcache</i>	Anotasi yang sudah diparsing dan diproses disimpan permanent di XCache cache untuk meningkatkan performa. Ini adalah adapter yang lebih cepat

Implementasi adapter Anda

Interface *Phalcon\Annotations\AdapterInterface* harus diimplementasi untuk bisa menciptakan adapter anotasi anda sendiri atau mengembangkan yang sudah ada.

Sumber Luar

- Tutorial: Creating a custom model's initializer with Annotations

Aplikasi Command Line

Aplikasi CLI dijalankan dari command line. Mereka berguna untuk menjalankan cron job, script, utiliti dan lainnya.

Struktur

Struktur minimal aplikasi CLI terlihat seperti berikut:

- app/config/config.php
- app/tasks/MainTask.php
- app/cli.php <– file bootstrap utama

Menciptakan sebuah Bootstrap

Sebagai aplikasi Mvc biasa, sebuah file bootstrap digunakan untuk memulai aplikasi. Alih-alih index.php untuk memulai aplikasi web, kita menggunakan file cli.php.

Di bawah ini adalah contoh bootstrap yang digunakan untuk contoh ini.

```
<?php

use Phalcon\Di\FactoryDefault\Cli as CliDI;
use Phalcon\Cli\Console as ConsoleApp;
use Phalcon\Loader;

// Menggunakan service container factory default CLI
$di = new CliDI();

/**
 * Daftarkan autoloade dan daftarkan direktori task
 */
$loader = new Loader();

$loader->registerDirs(
    [
        __DIR__ . "/tasks",
    ]
);

$loader->register();

// Muat file konfigurasi (bila ada)
$configFile = __DIR__ . "/config/config.php";

if (is_readable($configFile)) {
    $config = include $configFile;

    $di->set("config", $config);
}

// Buat aplikasi konsol
$console = new ConsoleApp();

$console->setDI($di);

/**
 * Proses argumen
 */
$arguments = [];
```

```
foreach ($argv as $k => $arg) {
    if ($k === 1) {
        $arguments["task"] = $arg;
    } elseif ($k === 2) {
        $arguments["action"] = $arg;
    } elseif ($k >= 3) {
        $arguments["params"][] = $arg;
    }
}

try {
    // Handle argumen yang masuk
    $console->handle($arguments);
} catch (\Phalcon\Exception $e) {
    echo $e->getMessage();

    exit(255);
}
```

Potongan kode ini dapat dijalankan menggunakan:

```
$ php app/cli.php

This is the default task and the default action
```

Tugas

Tugas bekerja mirip kontroller. Tiap aplikasi CLI butuh paling tidak satu MainTask dan mainAction dan tiap tugas butuh sebuah mainAction yang dijalankan bila tidak ada aksi yang diberikan secara eksplisit.

Di bawah ini adalah contoh file app/tasks/MainTask.php:

```
<?php

use Phalcon\Cli\Task;

class MainTask extends Task
{
    public function mainAction()
    {
        echo "This is the default task and the default action" . PHP_EOL;
    }
}
```

Memroses parameter aksi

Dimungkinkan untuk melewati parameter ke aksi, kode untuk ini sudah dihadirkan di contoh bootstrap.

Jika aplikasi jalan dengan parameter dan aksi berikut:

```
<?php

use Phalcon\Cli\Task;
```

```

class MainTask extends Task
{
    public function mainAction()
    {
        echo "This is the default task and the default action" . PHP_EOL;
    }

    /**
     * @param array $params
     */
    public function testAction(array $params)
    {
        echo sprintf(
            "hello %s",
            $params[0]
        );

        echo PHP_EOL;

        echo sprintf(
            "best regards, %s",
            $params[1]
        );

        echo PHP_EOL;
    }
}

```

Kita dapat menjalankan perintah berikut:

```

$ php app/cli.php main test world universe

hello world
best regards, universe

```

Menjalankan tugas secara berantai

Dimungkinkan juga menjalankan tugas secara berantai jika diperlukan. Untuk mencapai hal ini anda harus menambah console ke DI:

```

<?php

$di->setShared("console", $console);

try {
    // Handle incoming arguments
    $console->handle($arguments);
} catch (\Phalcon\Exception $e) {
    echo $e->getMessage();

    exit(255);
}

```

Lalu anda dapat menggunakan console dalam tiap tugas. Dibawah ini adalah contoh MainTask.php yang sudah dimodifikasi:

```
<?php
use Phalcon\Cli\Task;

class MainTask extends Task
{
    public function mainAction()
    {
        echo "This is the default task and the default action" . PHP_EOL;

        $this->console->handle(
            [
                "task"    => "main",
                "action" => "test",
            ]
        );
    }

    public function testAction()
    {
        echo "I will get printed too!" . PHP_EOL;
    }
}
```

Namun, lebih baik untuk menggunakan *Phalcon\Cli\Task* dan mengimplementasi logika ini disana.

Images

Phalcon\Image is the component that allows you to manipulate image files. Multiple operations can be performed on the same image object.

This guide is not intended to be a complete documentation of available methods and their arguments. Please visit the [API](#) for a complete reference.

Adapters

This component makes use of adapters to encapsulate specific image manipulator programs. The following image manipulator programs are supported:

Class	Description
<i>Phalcon\Image\Adapter\Gd</i>	Requires the GD PHP extension.
<i>Phalcon\Image\Adapter\Imagick</i>	Requires the ImageMagick PHP extension.

Implementing your own adapters

The *Phalcon\Image\AdapterInterface* interface must be implemented in order to create your own image adapters or extend the existing ones.

Saving and rendering images

Before we begin with the various features of the image component, it's worth understanding how to save and render these images.

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

// ...

// Overwrite the original image
$image->save();
```

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

// ...

// Save to 'new-image.jpg'
$image->save("new-image.jpg");
```

You can also change the format of the image:

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

// ...

// Save as a PNG file
$image->save("image.png");
```

When saving as a JPEG, you can also specify the quality as the second parameter:

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

// ...

// Save as a JPEG with 80% quality
$image->save("image.jpg", 80);
```

Resizing images

There are several modes of resizing:

- \Phalcon\Image::WIDTH
- \Phalcon\Image::HEIGHT
- \Phalcon\Image::NONE
- \Phalcon\Image::TENSILE
- \Phalcon\Image::AUTO
- \Phalcon\Image::INVERSE
- \Phalcon\Image::PRECISE

\Phalcon\Image::WIDTH

The height will automatically be generated to keep the proportions the same; if you specify a height, it will be ignored.

```
<?php
$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->resize(
    300,
    null,
    \Phalcon\Image::WIDTH
);

$image->save("resized-image.jpg");
```

\Phalcon\Image::HEIGHT

The width will automatically be generated to keep the proportions the same; if you specify a width, it will be ignored.

```
<?php
$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->resize(
    null,
    300,
    \Phalcon\Image::HEIGHT
);

$image->save("resized-image.jpg");
```

\Phalcon\Image::NONE

The NONE constant ignores the original image's ratio. Neither width and height are required. If a dimension is not specified, the original dimension will be used. If the new proportions differ from the original proportions, the image may be distorted and stretched.

```
<?php
$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->resize(
    400,
    200,
    \Phalcon\Image::NONE
);

$image->save("resized-image.jpg");
```

`\Phalcon\Image::TENSILE`

Similar to the `NONE` constant, the `TENSILE` constant ignores the original image's ratio. Both width and height are required. If the new proportions differ from the original proportions, the image may be distorted and stretched.

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->resize(
    400,
    200,
    \Phalcon\Image::NONE
);

$image->save("resized-image.jpg");
```

Cropping images

For example, to get a 100px by 100px square from the centre of the image:

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$width  = 100;
$height = 100;
$offsetX = (($image->getWidth() - $width) / 2);
$offsetY = (($image->getHeight() - $height) / 2);

$image->crop($width, $height, $offsetX, $offsetY);

$image->save("cropped-image.jpg");
```

Rotating images

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

// Rotate an image by 90 degrees clockwise
$image->rotate(90);

$image->save("rotated-image.jpg");
```

Flipping images

You can flip an image horizontally (using the `\Phalcon\Image::HORIZONTAL` constant) and vertically (using the `\Phalcon\Image::VERTICAL` constant):

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");
```

```
// Flip an image horizontally
$image->flip(
    \Phalcon\Image::HORIZONTAL
);

$image->save("flipped-image.jpg");
```

Sharpening images

The `sharpen()` method takes a single parameter - an integer between 0 (no effect) and 100 (very sharp):

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->sharpen(50);

$image->save("sharpened-image.jpg");
```

Adding watermarks to images

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$watermark = new \Phalcon\Image\Adapter\Gd("me.jpg");

// Put the watermark in the top left corner
$offsetX = 10;
$offsetY = 10;

$opacity = 70;

$image->watermark(
    $watermark,
    $offsetX,
    $offsetY,
    $opacity
);

$image->save("watermarked-image.jpg");
```

Of course, you can also manipulate the watermarked image before applying it to the main image:

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$watermark = new \Phalcon\Image\Adapter\Gd("me.jpg");

$watermark->resize(100, 100);
$watermark->rotate(90);
$watermark->sharpen(5);
```



```
// Put the watermark in the bottom right corner with a 10px margin
$offsetX = ($image->getWidth() - $watermark->getWidth() - 10);
$offsetY = ($image->getHeight() - $watermark->getHeight() - 10);

$opacity = 70;

$image->watermark(
    $watermark,
    $offsetX,
    $offsetY,
    $opacity
);

$image->save("watermarked-image.jpg");
```

Blurring images

The `blur()` method takes a single parameter - an integer between 0 (no effect) and 100 (very blurry):

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->blur(50);

$image->save("blurred-image.jpg");
```

Pixelating images

The `pixelate()` method takes a single parameter - the higher the integer, the more pixelated the image becomes:

```
<?php

$image = new \Phalcon\Image\Adapter\Gd("image.jpg");

$image->pixelate(10);

$image->save("pixelated-image.jpg");
```

Queueing

Activities like processing videos, resizing images or sending emails aren't suitable to be executed online or in real time because it may slow the loading time of pages and severely impact the user experience.

The best solution here is to implement background jobs. The web application puts jobs into a queue and which will be processed separately.

While you can find more sophisticated PHP extensions to address queueing in your applications like [RabbitMQ](#); Phalcon provides a client for [Beanstalk](#), a job queueing backend inspired by [Memcache](#). It's simple, lightweight, and completely specialized for job queueing.

Attention: Some of the returns from queue methods require that the module Yaml be installed. Please refer to <http://php.net/manual/book.yaml.php> for more information. For PHP < 7, Yaml 1.3.0 is acceptable. For PHP >= 7, you will need to use Yaml >= 2.0.0.

Putting Jobs into the Queue

After connecting to Beanstalk you can insert as many jobs as required. You can define the message structure according to the needs of the application:

```
<?php

use Phalcon\Queue\Beanstalk;

// Connect to the queue
$queue = new Beanstalk(
    [
        "host" => "192.168.0.21",
        "port" => "11300",
    ]
);

// Insert the job in the queue
$queue->put(
    [
        "processVideo" => 4871,
    ]
);
```

Available connection options are:

Option	Description	Default
host	IP where the beanstalk server is located	127.0.0.1
port	Connection port	11300

In the above example we stored a message which will allow a background job to process a video. The message is stored in the queue immediately and does not have a certain time to live.

Additional options as time to run, priority and delay can be passed as second parameter:

```
<?php

// Insert the job in the queue with options
$queue->put(
    [
        "processVideo" => 4871,
    ],
    [
        "priority" => 250,
        "delay"     => 10,
        "ttr"       => 3600,
    ]
);
```

The following options are available:

Option	Description
priority	It's an integer $< 2^{32}$. Jobs with smaller priority values will be scheduled before jobs with larger priorities. The most urgent priority is 0; the least urgent priority is 4,294,967,295.
delay	It's an integer number of seconds to wait before putting the job in the ready queue. The job will be in the "delayed" state during this time.
ttr	Time to run – is an integer number of seconds to allow a worker to run this job. This time is counted from the moment a worker reserves this job.

Every job put into the queue returns a "job id" which you can use to track the status of the job:

```
<?php
$jobId = $queue->put (
    [
        "processVideo" => 4871,
    ]
);
```

Retrieving Messages

Once a job is placed into the queue, those messages can be consumed by a background worker which will have enough time to complete the task:

```
<?php
while (($job = $queue->peekReady()) !== false) {
    $message = $job->getBody();

    var_dump($message);

    $job->delete();
}
```

Jobs must be removed from the queue to avoid double processing. If multiple background jobs workers are implemented, jobs must be "reserved" so other workers don't re-process them while other workers have them reserved:

```
<?php
while (($job = $queue->reserve()) !== false) {
    $message = $job->getBody();

    var_dump($message);

    $job->delete();
}
```

Our client implement a basic set of the features provided by Beanstalkd but enough to allow you to build applications implementing queues.

Lapisan Abstraksi Database

Phalcon\Db adalah komponen di belakang *Phalcon\Mvc\Model* yang memberi tenaga lapisan model dalam framework. Ia terdiri atas lapisan abstraksi independen terhadap sistem database, yang ditulis sepenuhnya dalam C.

Komponen ini memungkinkan manipulasi database level bawah menggunakan model tradisional.

Panduan ini tidak dimaksudkan sebagai dokumentasi lengkap metode yang tersedia dan argumennya. Silakan kunjungi [API](#) untuk referensi lengkap.

Adapter Database

Komponen ini menggunakan adapter untuk membungkus detail spesifik sistem database. Phalcon menggunakan [PDO](#) untuk menyambung ke database. Engine database berikut didukung:

Class	Keterangan
<i>Phalcon\Db\Adapter\Pdo\Mysql</i>	Sistem manajemen database relasional (RDBMS) yang paling banyak digunakan di dunia yang berjalan sebagai sebuah server yang menyediakan akses banyak pengguna ke sejumlah database
<i>Phalcon\Db\Adapter\Pdo\Postgresql</i>	PostgreSQL adalah sistem database relasional open source yang bertenaga. Ia aktif dikembangkan lebih dari 15 tahun dan memiliki arsitektur teruji yang telah memperoleh reputasi untuk keandalan, integritasi data dan kebenaran.
<i>Phalcon\Db\Adapter\Pdo\Sqlite</i>	SQLite adalah pustaka software yang mengimplementasi engine SQL database transaksional yang berdiri sendiri, tanpa server dan tanpa konfigurasi

Mengimplementasi Adapter anda sendiri

Interface [*Phalcon\Db\AdapterInterface*](#) harus diimplementasi untuk dapat menciptakan apater database anda sendiri atau mengembangkan yang sudah ada.

Dialek Database

Phalcon membungkus detail spesifik tiap engine database dalam dialek. Mereka menyediakan fungsi umum dan pembangkit SQL untuk adapter.

Class	Keterangan
<i>Phalcon\Db\Dialect\Mysql</i>	Dialek SQL spesifik untuk sistem database MySQL
<i>Phalcon\Db\Dialect\Postgresql</i>	Dialek SQL spesifik untuk sistem database PostgreSQL
<i>Phalcon\Db\Dialect\Sqlite</i>	Dialek SQL spesifik untuk sistem database SQLite

Mengimplementasi dialek anda sendiri

Interface [*Phalcon\Db\DialectInterface*](#) harus diimplementasi untuk dapat menciptakan dialek database anda sendiri atau mengembangkan yang sudah ada.

Menyambung ke Database

Untuk menciptakan koneksi harus dilakukan dengan menciptakan kelas adapter. Butuh sebuah array berisi parameter koneksi. Contoh dibawah menunjukkan bagaimana menciptakan sebuah koneksi dengan melewati parameter wajib dan tidak:

```
<?php
// Wajib
$config = [
    "host"      => "127.0.0.1",
    "username"  => "mike",
    "password"  => "sigma",
```

```

    "dbname"    => "test_db",
];

// Opsional
$config["persistent"] = false;

// Buat koneksi
$connection = new \Phalcon\Db\Adapter\Pdo\Mysql($config);

```

```

<?php

// wajib
$config = [
    "host"      => "localhost",
    "username"  => "postgres",
    "password"  => "secret1",
    "dbname"    => "template",
];

// Opsional
$config["schema"] = "public";

// Buat koneksi
$connection = new \Phalcon\Db\Adapter\Pdo\Postgresql($config);

```

```

<?php

// Wajib
$config = [
    "dbname" => "/path/to/database.db",
];

// Buat koneksi
$connection = new \Phalcon\Db\Adapter\Pdo\Sqlite($config);

```

Menyiapkan opsi tambahan PDO

Anda dapat mengatur opsi PDO saat koneksi dengan melewati parameter ‘options’:

```

<?php

// Buat koneksi dengan opsi PDO
$connection = new \Phalcon\Db\Adapter\Pdo\Mysql(
    [
        "host"      => "localhost",
        "username"  => "root",
        "password"  => "sigma",
        "dbname"    => "test_db",
        "options"   => [
            PDO::MYSQL_ATTR_INIT_COMMAND => "SET NAMES 'UTF8'",
            PDO::ATTR_CASE                => PDO::CASE_LOWER,
        ]
    ]
);

```

Mencari Row

Phalcon\Db menyediakan beberapa metode untuk query baris ke tabel. Sintaks SQL spesifik target engine database diperlukan dalam hal ini:

```
<?php

$sql = "SELECT id, name FROM robots ORDER BY name";

// Kirim pernyataan SQL ke sistem database
$result = $connection->query($sql);

// Cetak nama tiap robot
while ($robot = $result->fetch()) {
    echo $robot["name"];
}

// Dapatkan semua row dalam sebuah array
$robots = $connection->fetchAll($sql);
foreach ($robots as $robot) {
    echo $robot["name"];
}

// Ambil baris pertama saja
$robot = $connection->fetchOne($sql);
```

Secara default pemanggilan ini menciptakan array dengan indeks asosiatif dan numerik. Anda dapat mengubah perilaku ini menggunakan `Phalcon\Db\Result::setFetchMode()`. Metode ini menerima sebuah konstan, yang menentukan tipe indeks yang diperlukan.

Konstan	Keterangan
<code>Phalcon\Db::FETCH_NUM</code>	Kembalikan array dengan indeks numerik
<code>Phalcon\Db::FETCH_ASSOC</code>	Kembalikan array dengan indeks asosiatif
<code>Phalcon\Db::FETCH_BOTH</code>	Kembalikan array dengan indeks asosiatif dan numerik
<code>Phalcon\Db::FETCH_OBJ</code>	Kembalikan objek daripada array

```
<?php

$sql = "SELECT id, name FROM robots ORDER BY name";
$result = $connection->query($sql);

$result->setFetchMode(Phalcon\Db::FETCH_NUM);
while ($robot = $result->fetch()) {
    echo $robot[0];
}
```

`Phalcon\Db::query()` mengembalikan instance *Phalcon\Db\Result\Pdo*. Objek ini membungkus semua fungsionalitas terkait result set yang dikembalikan yakni menelusuri, mencari record tertentu, jumlah dan lain-lain.

```
<?php

$sql = "SELECT id, name FROM robots";
$result = $connection->query($sql);

// Menelusuri resultset
while ($robot = $result->fetch()) {
    echo $robot["name"];
}
```

```
// Mencari row ketiga
$result->seek(2);
$robot = $result->fetch();

// Hitung jumlah resultset
echo $result->numRows();
```

Mengikat Parameter

Parameter terikat juga didukung *Phalcon\Db*. Meski ada dampak kecil di performa dengan menggunakan parameter terikat, anda disarankan untuk menggunakan metodologi ini untuk menghilangkan kemungkinan kode anda terkena serangan SQL injection. Baik string maupun positional placeholder didukung. Mengikat parameter dapat dilakukan seperti berikut:

```
<?php

// Mengikat dengan placeholder numerik
$sql = "SELECT * FROM robots WHERE name = ? ORDER BY name";
$result = $connection->query(
    $sql,
    [
        "Wall-E",
    ]
);

// Mengikat dengan placeholder bernama
$sql = "INSERT INTO `robots` (name`, year) VALUES (:name, :year)";
$success = $connection->query(
    $sql,
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);
```

Ketika menggunakan placeholder numerik, anda akan harus menentukannya sebagai integer yakni 1 atau 2. Untuk kasus “1” atau “2” mereka dianggap string dan bukan integer, sehingga placeholder tidak dapat diganti dengan benar. Dengan sembarang adapter data otomatis di escape menggunakan [PDO Quote](#).

Fungsi ini memerhitungkan connection charset, sehingga disarankan untuk menentukan charset yang benar dalam parameter koneksi atau dalam konfigurasi server database, karena charset keliru akan menghasilkan dampak tidak diinginkan ketika menyimpan atau mengambil data.

Anda dapat juga melewati parameter langsung ke metode execute/query. untuk hal ini parameter terikat langsung dilewatkan ke PDO:

```
<?php

// Mengikat placeholder PDO
$sql = "SELECT * FROM robots WHERE name = ? ORDER BY name";
$result = $connection->query(
    $sql,
    [
        1 => "Wall-E",
    ]
);
```

Menambah/Mengubah/Menghapus Row

Untuk menambah, mengubah atau menghapus row, anda dapat menggunakan SQL atau menggunakan fungsi yang telah tersedia oleh kelas ini:

```
<?php

// Menambah data dengan perintah SQL
$sql      = "INSERT INTO `robots`(`name`, `year`) VALUES ('Astro Boy', 1952)";
$success  = $connection->execute($sql);

// Dengan placeholder
$sql      = "INSERT INTO `robots`(`name`, `year`) VALUES (?, ?)";
$success  = $connection->execute(
    $sql,
    [
        "Astro Boy",
        1952,
    ]
);

// Membangkitkan SQL yang diperlukan secara dinamis
$success  = $connection->insert(
    "robots",
    [
        "Astro Boy",
        1952,
    ],
    [
        "name",
        "year",
    ],
);

// Membangkitkan SQL yang diperlukan secara dinamis (sintaks lain)
$success  = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ],
);

// Mengubah data dengan pernyataan SQL
$sql      = "UPDATE `robots` SET `name` = 'Astro boy' WHERE `id` = 101";
$success  = $connection->execute($sql);

// Dengan placeholders
$sql      = "UPDATE `robots` SET `name` = ? WHERE `id` = ?";
$success  = $connection->execute(
    $sql,
    [
        "Astro Boy",
        101,
    ]
);
```



```

);

// Membangkitkan SQL yang diperlukan secara dinamis
$success = $connection->update(
    "robots",
    [
        "name",
    ],
    [
        "New Astro Boy",
    ],
    "id = 101" // Peringatan! Disini, nilainya tidak di escape
);

// Membangkitkan SQL yang diperlukan secara dinamis (sintaks lain)
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
    ],
    "id = 101" // Peringatan! Disini, nilainya tidak di escape
);

// Dengan kondisi escape
$success = $connection->update(
    "robots",
    [
        "name",
    ],
    [
        "New Astro Boy",
    ],
    [
        "conditions" => "id = ?",
        "bind"        => [101],
        "bindTypes"   => [PDO::PARAM_INT], // Parameter opsional
    ]
);
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
    ],
    [
        "conditions" => "id = ?",
        "bind"        => [101],
        "bindTypes"   => [PDO::PARAM_INT], // Parameter opsional
    ]
);

// Menghapus data dengan pernyataan SQL
$sql = "DELETE `robots` WHERE `id` = 101";
$success = $connection->execute($sql);

// Dengan placeholder
$sql = "DELETE `robots` WHERE `id` = ?";
$success = $connection->execute($sql, [101]);

```

```
// Membangkitkan SQL yang diperlukan secara dinamis
$success = $connection->delete(
    "robots",
    "id = ?",
    [
        101,
    ]
);
```

Transaksi dan Transaksi Bersarang

Bekerja dengan transaksi didukung seperti halnya dengan PDO. Melakukan manipulasi data dalam transaksi sering kali menaikkan performa pada sebagian besar sistem database:

```
<?php

try {
    // Mulai transaksi
    $connection->begin();

    // Eksekusi beberapa pernyataan SQL
    $connection->execute("DELETE `robots` WHERE `id` = 101");
    $connection->execute("DELETE `robots` WHERE `id` = 102");
    $connection->execute("DELETE `robots` WHERE `id` = 103");

    // Commit jika semuanya berjalan baik
    $connection->commit();
} catch (Exception $e) {
    // Exception terjadi rollback transaksi
    $connection->rollback();
}
```

Sebagai tambahan transaksi baku, *Phalcon\Db* menyediakan dukungan bawaan untuk **transaksi bersarang** (jika sistem database yang digunakan mendukung). Ketika anda memanggil `begin()` untuk kedua kali sebuah transaksi bersarang diciptakan:

```
<?php

try {
    // Mulai sebuah transaksi
    $connection->begin();

    // Eksekusi pernyataan SQL
    $connection->execute("DELETE `robots` WHERE `id` = 101");

    try {
        // Mulai transaksi bersarang
        $connection->begin();

        // Execute these SQL statements into the nested transaction
        $connection->execute("DELETE `robots` WHERE `id` = 102");
        $connection->execute("DELETE `robots` WHERE `id` = 103");

        // Buat save point
        $connection->commit();
    } catch (Exception $e) {
```

```

        // Kesalahan terjadi, lepaskan transaksi bersarang
        $connection->rollback();
    }

    // Lanjutkan, eksekusi pernyataan SQL lain
    $connection->execute("DELETE `robots` WHERE `id` = 104");

    // Commit jika semua berjalan baik
    $connection->commit();
} catch (Exception $e) {
    // Kesalahan terjadi, batalkan transaksi
    $connection->rollback();
}

```

Kejadian Database

Phalcon\Db mampu mengirim kejadian ke sebuah *EventsManager* jika ada. Beberapa kejadian yang ketika mengembalikan nilai boolean false dapat menghentikan operasi yang aktif. Kejadian berikut didukung:

Nama Event	Dipicu	Bisa stop operasi?
afterConnect	Setelah koneksi sukses ke sistem database	Tidak
beforeQuery	Sebelum mengirim pernyataan SQL ke sistem database	Ya
afterQuery	Setelah mengirim pernyataan SQL ke sistem database	Tidak
beforeDisconnect	Sebelum menutup koneksi database sementara	Tidak
beginTransaction	Sebelum memulai transaksi	Tidak
rollbackTransaction	Sebelum membatalkan transaksi	Tidak
commitTransaction	Sebelum commit transaksi	Tidak

Mengikat sebuah *EventsManager* ke sebuah koneksi mudah, *Phalcon\Db* akan memicu kejadian bertipe “db”:

```

<?php

use Phalcon\Events\Manager as EventsManager;
use Phalcon\Db\Adapter\Pdo\Mysql as Connection;

$eventsManager = new EventsManager();

// Pantau semua kejadian database
$eventsManager->attach('db', $dbListener);

$connection = new Connection(
    [
        "host"      => "localhost",
        "username"  => "root",
        "password"  => "secret",
        "dbname"    => "invo",
    ]
);

// Salin eventsManager ke instance adapter db
$connection->setEventsManager($eventsManager);

```

Menghentikan operasi SQL berguna jika misalnya anda ingin membuat implementasi pengujian SQL injeksi:

```

<?php

```

```
use Phalcon\Events\Event;

$eventsManager->attach(
    "db:beforeQuery",
    function (Event $event, $connection) {
        $sql = $connection->getSQLStatement();

        // Uji untuk kata-kata berbahaya dalam pernyataan SQL
        if (preg_match("/DROP|ALTER/i", $sql)) {
            // Operasi DROP/ALTER tidak izinkan di aplikasi ini,
            // Ini pastinya SQL injection!
            return false;
        }

        // OK
        return true;
    }
);
```

Profiling SQL Statements

Phalcon\Db menyertakan komponen profiling bernama *Phalcon\Db\Profiler*, yang digunakan untuk menganalisa performa operasi database juga mendiagnosa masalah performa dan menemukan bottleneck.

Profiling database sangat mudah dengan *Phalcon\Db\Profiler*:

```
<?php

use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Db\Profiler as DbProfiler;

$eventsManager = new EventsManager();

$profiler = new DbProfiler();

// Pantau semua kejadian database
$eventsManager->attach(
    "db",
    function (Event $event, $connection) use ($profiler) {
        if ($event->getType() === "beforeQuery") {
            $sql = $connection->getSQLStatement();

            // Mulai profil koneksi aktif
            $profiler->startProfile($sql);
        }

        if ($event->getType() === "afterQuery") {
            // Hentikan profil aktif
            $profiler->stopProfile();
        }
    }
);

// Salin eventsManager ke connection
$connection->setEventsManager($eventsManager);
```

```

$sql = "SELECT buyer_name, quantity, product_name "
      . "FROM buyers "
      . "LEFT JOIN products ON buyers.pid = products.id";

// Eksekusi perintah SQL
$connection->query($sql);

// Ambil profil terakhir dari profiler
$profile = $profiler->getLastProfile();

echo "SQL Statement: ", $profile->getSQLStatement(), "\n";
echo "Start Time: ", $profile->getInitialTime(), "\n";
echo "Final Time: ", $profile->getFinalTime(), "\n";
echo "Total Elapsed Time: ", $profile->getTotalElapsedSeconds(), "\n";

```

Anda dapat menciptakan kelas profil anda sendiri berdasar *Phalcon\Db\Profiler* untuk merekam statistik real time perintah yang dikirim ke sistem database:

```

<?php

use Phalcon\Events\Manager as EventsManager;
use Phalcon\Db\Profiler as Profiler;
use Phalcon\Db\Profiler\Item as Item;

class DbProfiler extends Profiler
{
    /**
     * Dieksekusi sebelum perintah SQL dikirim ke server db
     */
    public function beforeStartProfile(Item $profile)
    {
        echo $profile->getSQLStatement();
    }

    /**
     * Dieksekusi setelah perintah SQL dikirim ke server db
     */
    public function afterEndProfile(Item $profile)
    {
        echo $profile->getTotalElapsedSeconds();
    }
}

// Buat sebuah Events Manager
$eventsManager = new EventsManager();

// Buat pemantau
$dbProfiler = new DbProfiler();

// Pasang pemantau untuk memantau semua kejadian database
$eventsManager->attach("db", $dbProfiler);

```

Log Perintah SQL

Menggunakan komponen abstraksi level tinggi seperti *Phalcon\Db* untuk mengakses sebuah database, sulit untuk memahami perintah apa yang dikirim ke sistem database. *Phalcon\Logger* berinteraksi dengan *Phalcon\Db*, menye-

diakan kemampuan logging di lapisan abstraksi database.

```
<?php

use Phalcon\Logger;
use Phalcon\Events\Event;
use Phalcon\Events\Manager as EventsManager;
use Phalcon\Logger\Adapter\File as FileLogger;

$eventsManager = new EventsManager();

$logger = new FileLogger("app/logs/db.log");

$eventsManager->attach(
    "db:beforeQuery",
    function (Event $event, $connection) use ($logger) {
        $sql = $connection->getSQLStatement();

        $logger->log($sql, Logger::INFO);
    }
);

// Pasang eventsManager ke instance adapter db
$connection->setEventsManager($eventsManager);

// Jalankan perintah SQL
$connection->insert(
    "products",
    [
        "Hot pepper",
        3.50,
    ],
    [
        "name",
        "price",
    ]
);
```

Kode di atas, file *app/logs/db.log* akan berisi seperti ini:

```
[Sun, 29 Apr 12 22:35:26 -0500][DEBUG][Resource Id #77] INSERT INTO products
(name, price) VALUES ('Hot pepper', 3.50)
```

Implementasi Logger anda sendiri

Anda dapat mengimplementasi kelas logger anda sendiri untuk query database, dengan menciptakan sebuah kelas yang mengimplementasi sebuah metode bernama “log”. Metode ini harus menerima string sebagai argumen pertama. Anda dapat melewati objek logging ke `Phalcon\Db::setLogger()`, dan dari sana tiap perintah SQL yang dijalankan akan memanggil metode tersebut untuk log result.

Deskripsi Tables/Views

Phalcon\Db juga menyediakan metode untuk mendapatkan informasi detail tentang tabel dan view:

```

<?php

// Ambil tabel pada database test_db
$tables = $connection->listTables("test_db");

// Apakah ada tabel 'robots' dalam database?
$exists = $connection->tableExists("robots");

// Ambil nama, tipe data dan fitur khusus field 'robots'
$fields = $connection->describeColumns("robots");
foreach ($fields as $field) {
    echo "Column Type: ", $field["Type"];
}

// Ambil indeks pada tabel 'robots'
$indexes = $connection->describeIndexes("robots");
foreach ($indexes as $index) {
    print_r(
        $index->getColumns()
    );
}

// Ambil foreign keys pada tabel 'robots'
$references = $connection->describeReferences("robots");
foreach ($references as $reference) {
    // Cetak kolom yang direferensi
    print_r(
        $reference->getReferencedColumns()
    );
}

```

Sebuah deksripsi tabel sangat mirip dengan perintah describe di MySQL, ia berisi informasi berikut:

Indeks	Keterangan
Field	Nama field
Type	Tipe kolom
Key	Apakah primary key atau index?
Null	Kolom ini mengizinkan nilai null?

Metode untuk mendapatkan informasi tenant view juga diimplementasi untuk semua sistem database yang didukung:

```

<?php

// Ambil view pada database test_db
$tables = $connection->listViews("test_db");

// Apakah ada view bernama 'robots' di database?
$exists = $connection->viewExists("robots");

```

Creating/Altering/Dropping Tables

Sistem database berbeda (MySQL, Postgresql dan lain-lain.) menyediakan kemampuan untuk menciptakan, mengubah atau menghapus tabel dengan perintah seperti CREATE, ALTER atau DROP. Sintaks SQL berbeda berdasarkan pada sistem database yang digunakan. *Phalcon\Db* menawarkan antarmuka seragam untuk mengubah tabel, tanpa perlu membedakan sintaks SQL berdasarkan target sistem storage.

Menciptakan Tabel

Contoh berikut menunjukkan bagaimana menciptakan sebuah tabel:

```
<?php

use \Phalcon\Db\Column as Column;

$connection->createTable(
    "robots",
    null,
    [
        "columns" => [
            new Column(
                "id",
                [
                    "type"          => Column::TYPE_INTEGER,
                    "size"          => 10,
                    "notNull"       => true,
                    "autoIncrement" => true,
                    "primary"       => true,
                ]
            ),
            new Column(
                "name",
                [
                    "type"          => Column::TYPE_VARCHAR,
                    "size"          => 70,
                    "notNull"       => true,
                ]
            ),
            new Column(
                "year",
                [
                    "type"          => Column::TYPE_INTEGER,
                    "size"          => 11,
                    "notNull"       => true,
                ]
            ),
        ]
    ]
);
```

`Phalcon\Db::createTable()` menerima array asosiatif yang mendeskripsikan tabel. Kolom ditentukan dengan kelas *Phalcon\Db\Column*. tabel di bawah menunjukkan opsi yang tersedia untuk mendefinisikan kolom:

Option	Keterangan	Op-sional
“type”	Tipe kolom. Harus konstan <i>Phalcon\Db\Column</i> (lihat daftar dibawah)	Tidak
“primary”	True jika kolom adalah primary key tabel	Ya
“size”	Beberapa tipe kolom seperti VARCHAR atau INTEGER bisa memiliki size tertentu	Ya
“scale”	Kolom DECIMAL atau NUMBER dapat memiliki skala untuk menentukan berapa desimal yang disimpan	Ya
“unsigned”	Kolom INTEGER dapat berupa signed atau unsigned. Opsi ini tidak dapat diterapkan untuk tipe kolom lain	Ya
“notNull”	Kolom dapat menyimpan nilai null?	Ya
“default”	Nilai default (ketika digunakan dengan “notNull” => true).	Ya
“autoIncrement”	Dengan atribut ini kolom akan diisi dengan integer auto-increment. Hanya satu kolom dalam tabel yang bisa punya atribut ini.	Ya
“bind”	Salah satu konstant BIND_TYPE_* yang menjelaskan bahwiman kolom harus diikat sebelum disimpan	Ya
“first”	Kolom harus ditempatkan di posisi pertama dalam urutan kolom	Ya
“after”	Kolom harus ditempatkan setelah posisi kolom terindikasi	Ya

Phalcon\Db mendukung tipe kolom database berikut:

- `Phalcon\Db\Column::TYPE_INTEGER`
- `Phalcon\Db\Column::TYPE_DATE`
- `Phalcon\Db\Column::TYPE_VARCHAR`
- `Phalcon\Db\Column::TYPE_DECIMAL`
- `Phalcon\Db\Column::TYPE_DATETIME`
- `Phalcon\Db\Column::TYPE_CHAR`
- `Phalcon\Db\Column::TYPE_TEXT`

Array asosiatif yang dilewatkan dalam `Phalcon\Db::createTable()` dapat memiliki key berikut:

Index	Keterangan	Op-sional
“columns”	Sebuah array dengan himpunan kolom tabel ditentukan oleh <i>Phalcon\Db\Column</i>	Tidak
“indexes”	Sebuah array dengan himpunan indeks tabel ditentukan oleh <i>Phalcon\Db/Index</i>	Ya
“references”	Sebuah array dengan himpunan referensi tabel (foreign key) ditentukan oleh <i>Phalcon\Db/Reference</i>	Ya
“options”	Sebuah array dengan himpunan opsi pembuatan tabel. Opsi ini terkait dengan sistem database yang migrasi dibuat.	Ya

mengubah Tabel

Saat aplikasi anda tumbuh, anda mungkin perlu mengubah database anda, sebagai bagian dari refactoring atau menambahkan fitur baru. Tidak semua sistem database mengizinkan mengubah kolom yang sudah ada atau menambah kolom antara yang sudah ada. *Phalcon\Db* dibatasi oleh keterbatasan ini.

```
<?php
use Phalcon\Db\Column as Column;

// Menambah kolom baru
$connection->addColumn(
    "robots",
```

```
        null,
        new Column(
            "robot_type",
            [
                "type"    => Column::TYPE_VARCHAR,
                "size"    => 32,
                "notNull" => true,
                "after"   => "name",
            ]
        )
    );

// Mengubah kolom yang sudah ada
$connection->modifyColumn(
    "robots",
    null,
    new Column(
        "name",
        [
            "type"    => Column::TYPE_VARCHAR,
            "size"    => 40,
            "notNull" => true,
        ]
    )
);

// Menghapus kolom "name"
$connection->dropColumn(
    "robots",
    null,
    "name"
);
```

Menghapus Tables

Contoh menghapus tabel:

```
<?php

// Hapus tabel robot dari database aktif
$connection->dropTable("robots");

// Hapus tabel robot dari database "machines"
$connection->dropTable("robots", "machines");
```

Internationalization

Phalcon is written in C as an extension for PHP. There is a [PECL](#) extension that offers internationalization functions to PHP applications called [intl](#). Starting from PHP 5.4/5.5 this extension is bundled with PHP. Its documentation can be found in the pages of the official [PHP manual](#).

Phalcon does not offer this functionality, since creating such a component would be replicating existing code.

In the examples below, we will show you how to implement the [intl](#) extension's functionality into Phalcon powered applications.

This guide is not intended to be a complete documentation of the [intl](#) extension. Please visit its the [documentation](#) of the extension for a reference.

Find out best available Locale

There are several ways to find out the best available locale using [intl](#). One of them is to check the HTTP “Accept-Language” header:

```
<?php

$locale = Locale::acceptFromHttp($_SERVER["HTTP_ACCEPT_LANGUAGE"]);

// Locale could be something like "en_GB" or "en"
echo $locale;
```

Below method returns a locale identified. It is used to get language, culture, or regionally-specific behavior from the Locale API.

Examples of identifiers include:

- en-US (English, United States)
- ru-RU (Russian, Russia)
- zh-Hant-TW (Chinese, Traditional Script, Taiwan)
- fr-CA, fr-FR (French for Canada and France respectively)

Formatting messages based on Locale

Part of creating a localized application is to produce concatenated, language-neutral messages. The [MessageFormatter](#) allows for the production of those messages.

Printing numbers formatted based on some locale:

```
<?php

// Prints € 4 560
$formatter = new MessageFormatter("fr_FR", "€ {0, number, integer}");
echo $formatter->format([4560]);

// Prints USD$ 4,560.5
$formatter = new MessageFormatter("en_US", "USD$ {0, number}");
echo $formatter->format([4560.50]);

// Prints ARS$ 1.250,25
$formatter = new MessageFormatter("es_AR", "ARS$ {0, number}");
echo $formatter->format([1250.25]);
```

Message formatting using time and date patterns:

```
<?php

// Setting parameters
$time = time();
$values = [7, $time, $time];

// Prints "At 3:50:31 PM on Apr 19, 2015, there was a disturbance on planet 7."
```

```
$pattern = "At {1, time} on {1, date}, there was a disturbance on planet {0, number}
↪.";
$formatter = new MessageFormatter("en_US", $pattern);
echo $formatter->format($values);

// Prints "À 15:53:01 le 19 avr. 2015, il y avait une perturbation sur la planète 7."
$pattern = "À {1, time} le {1, date}, il y avait une perturbation sur la planète {0,
↪ number}.";
$formatter = new MessageFormatter("fr_FR", $pattern);
echo $formatter->format($values);
```

Locale-Sensitive comparison

The `Collator` class provides string comparison capability with support for appropriate locale-sensitive sort orderings. Check the examples below on the usage of this class:

```
<?php

// Create a collator using Spanish locale
$collator = new Collator("es");

// Returns that the strings are equal, in spite of the emphasis on the "o"
$collator->setStrength(Collator::PRIMARY);
var_dump($collator->compare("una canción", "una cancion"));

// Returns that the strings are not equal
$collator->setStrength(Collator::DEFAULT_VALUE);
var_dump($collator->compare("una canción", "una cancion"));
```

Transliteration

`Transliterator` provides transliteration of strings:

```
<?php

$id = "Any-Latin; NFC; [:Nonspacing Mark:] Remove; NFC; [:Punctuation:] Remove;_
↪Lower()";
$transliterator = Transliterator::create($id);

$string = "garçon-étudiant-où-L'école";
echo $transliterator->transliterate($string); // garconetudiantoulecole
```

Database Migrations

Migrations are a convenient way for you to alter your database in a structured and organized manner.

Important: Migrations are available in *Phalcon Developer Tools*. You need at least Phalcon Framework version 0.5.0 to use developer tools. Also, it is recommended to have PHP 5.4 or greater installed.

Often in development we need to update changes in production environments. Some of these changes could be database modifications like new fields, new tables, removing indexes, etc.


When a migration is generated a set of classes are created to describe how your database is structured at that particular moment. These classes can be used to synchronize the schema structure on remote databases setting your database

ready to work with the new changes that your application implements. Migrations describe these transformations using plain PHP.

Schema Dumping

The *Phalcon Developer Tools* provides scripts to manage migrations (generation, running and rollback).

The available options for generating migrations are:

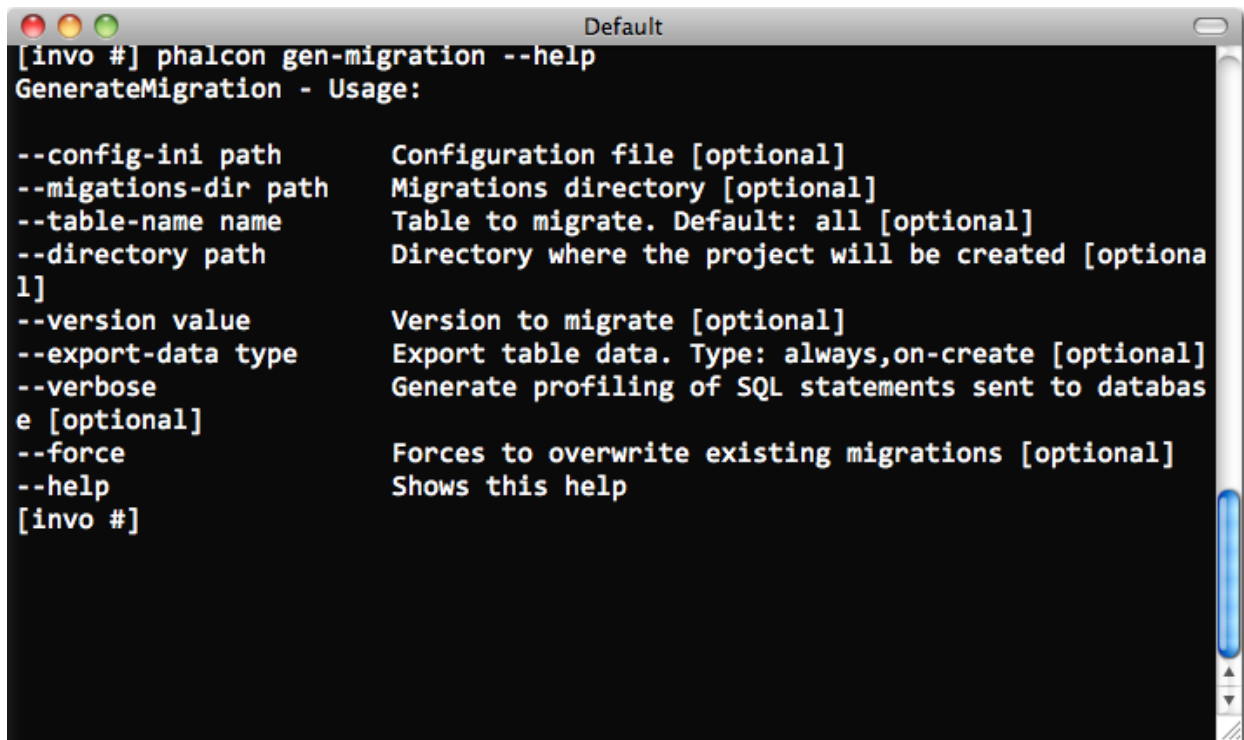

```

[inv#] phalcon gen-migration --help
GenerateMigration - Usage:

--config-ini path      Configuration file [optional]
--migrations-dir path  Migrations directory [optional]
--table-name name      Table to migrate. Default: all [optional]
--directory path       Directory where the project will be created [optional]
--version value        Version to migrate [optional]
--export-data type     Export table data. Type: always,on-create [optional]
--verbose              Generate profiling of SQL statements sent to database [optional]
--force                Forces to overwrite existing migrations [optional]
--help                Shows this help
[inv#]

```

Running this script without any parameters will simply dump every object (tables and views) from your database into migration classes.

Each migration has a version identifier associated with it. The version number allows us to identify if the migration is newer or older than the current 'version' of our database. Versions will also inform Phalcon of the running order when executing a migration.

When a migration is generated, instructions are displayed on the console to describe the different steps of the migration and the execution time of those statements. At the end, a migration version is generated.

By default *Phalcon Developer Tools* uses the *app/migrations* directory to dump the migration files. You can change the location by setting one of the parameters on the generation script. Each table in the database has its respective class generated in a separated file under a directory referring its version:

Migration Class Anatomy

Each file contains a unique class that extends the `Phalcon\Mvc\Model\Migration` class. These classes normally have two methods: `up()` and `down()`. `up()` performs the migration, while `down()` rolls it back.

`up()` also contains the *magic* method `morphTable()`. The magic comes when it recognizes the changes needed to synchronize the actual table in the database to the description given.

```
Default
T, TABLES.ENGINE, TABLES.TABLE_COLLATION FROM INFORMATION_SCHEMA
.TABLES WHERE TABLES.TABLE_SCHEMA = "invo" AND TABLES.TABLE_NAME = "test" => 1335920161.9368 (0.00032401084899902)
1335920161.9369: DESCRIBE `invo`.`users` => 1335920161.938 (0.0010280609130859)
1335920161.9383: SHOW INDEXES FROM `invo`.`users` => 1335920161.9389 (0.00062680244445801)
1335920161.939: SELECT TABLE_NAME, COLUMN_NAME, CONSTRAINT_NAME, REFERENCED_TABLE_SCHEMA, REFERENCED_TABLE_NAME, REFERENCED_COLUMN_NAME FROM INFORMATION_SCHEMA.KEY_COLUMN_USAGE WHERE REFERENCED_TABLE_NAME IS NOT NULL AND CONSTRAINT_SCHEMA = "invo" AND TABLE_NAME = "users" => 1335920161.9403 (0.0012459754943848)
1335920161.9404: SELECT TABLES.TABLE_TYPE, TABLES.AUTO_INCREMENT, TABLES.ENGINE, TABLES.TABLE_COLLATION FROM INFORMATION_SCHEMA.TABLES WHERE TABLES.TABLE_SCHEMA = "invo" AND TABLES.TABLE_NAME = "users" => 1335920161.9407 (0.00038504600524902)
Version 1.0.0 was successfully generated
[invo #]
```

```
Default
[invo #] cd app/migrations/1.0.0/
[1.0.0 #] ls
companies.php          products.php
contact.php            test.php
product_types.php      users.php
[1.0.0 #]
```

```

<?php

use Phalcon\Db\Column as Column;
use Phalcon\Db\Index as Index;
use Phalcon\Db\Reference as Reference;
use Phalcon\Mvc\Model\Migration;

class ProductsMigration_100 extends Migration
{
    public function up()
    {
        $this->morphTable(
            "products",
            [
                "columns" => [
                    new Column(
                        "id",
                        [
                            "type"          => Column::TYPE_INTEGER,
                            "size"          => 10,
                            "unsigned"      => true,
                            "notNull"       => true,
                            "autoIncrement" => true,
                            "first"         => true,
                        ]
                    ),
                    new Column(
                        "product_types_id",
                        [
                            "type"          => Column::TYPE_INTEGER,
                            "size"          => 10,
                            "unsigned"      => true,
                            "notNull"       => true,
                            "after"         => "id",
                        ]
                    ),
                    new Column(
                        "name",
                        [
                            "type"          => Column::TYPE_VARCHAR,
                            "size"          => 70,
                            "notNull"       => true,
                            "after"         => "product_types_id",
                        ]
                    ),
                    new Column(
                        "price",
                        [
                            "type"          => Column::TYPE_DECIMAL,
                            "size"          => 16,
                            "scale"         => 2,
                            "notNull"       => true,
                            "after"         => "name",
                        ]
                    ),
                ],
                "indexes" => [
                    new Index(

```

```

        "PRIMARY",
        [
            "id",
        ]
    ),
    new Index(
        "product_types_id",
        [
            "product_types_id",
        ],
    ),
],
"references" => [
    new Reference(
        "products_ibfk_1",
        [
            "referencedSchema" => "invo",
            "referencedTable"  => "product_types",
            "columns"           => ["product_types_id"],
            "referencedColumns" => ["id"],
        ]
    ),
],
"options" => [
    "TABLE_TYPE"      => "BASE TABLE",
    "ENGINE"           => "InnoDB",
    "TABLE_COLLATION" => "utf8_general_ci",
],
],
);
}
}

```

The class is called “ProductsMigration_100”. Suffix 100 refers to the version 1.0.0. `morphTable()` receives an associative array with 4 possible sections:

Index	Description	Optional
“columns”	An array with a set of table columns	No
“indexes”	An array with a set of table indexes.	Yes
“references”	An array with a set of table references (foreign keys).	Yes
“options”	An array with a set of table creation options. These options are often related to the database system in which the migration was generated.	Yes

Defining Columns

Phalcon\Db\Column is used to define table columns. It encapsulates a wide variety of column related features. Its constructor receives as first parameter the column name and an array describing the column. The following options are available when describing columns:

Option	Description	Optional
“type”	Column type. Must be a <i>Phalcon\Db\Column</i> constant (see below)	No
“size”	Some type of columns like VARCHAR or INTEGER may have a specific size	Yes
“scale”	DECIMAL or NUMBER columns may have a scale to specify how much decimals it must store	Yes
“un-signed”	INTEGER columns may be signed or unsigned. This option does not apply to other types of columns	Yes
“notNull”	Column can store null values?	Yes
“default”	Defines a default value for a column (can only be an actual value, not a function such as <i>NOW()</i>)	Yes
“autoIncrement”	With this attribute column will filled automatically with an auto-increment integer. Only one column in the table can have this attribute.	Yes
“first”	Column must be placed at first position in the column order	Yes
“after”	Column must be placed after indicated column	Yes

Database migrations support the following database column types:

- `Phalcon\Db\Column::TYPE_INTEGER`
- `Phalcon\Db\Column::TYPE_VARCHAR`
- `Phalcon\Db\Column::TYPE_CHAR`
- `Phalcon\Db\Column::TYPE_DATE`
- `Phalcon\Db\Column::TYPE_DATETIME`
- `Phalcon\Db\Column::TYPE_TIMESTAMP`
- `Phalcon\Db\Column::TYPE_DECIMAL`
- `Phalcon\Db\Column::TYPE_TEXT`
- `Phalcon\Db\Column::TYPE_BOOLEAN`
- `Phalcon\Db\Column::TYPE_FLOAT`
- `Phalcon\Db\Column::TYPE_DOUBLE`
- `Phalcon\Db\Column::TYPE_TINYBLOB`
- `Phalcon\Db\Column::TYPE_BLOB`
- `Phalcon\Db\Column::TYPE_MEDIUMBLOB`
- `Phalcon\Db\Column::TYPE_LONGBLOB`
- `Phalcon\Db\Column::TYPE_JSON`
- `Phalcon\Db\Column::TYPE_JSONB`
- `Phalcon\Db\Column::TYPE_BIGINTEGER`

Defining Indexes

Phalcon\Db\Index defines table indexes. An index only requires that you define a name for it and a list of its columns. Note that if any index has the name PRIMARY, Phalcon will create a primary key index for that table.

Defining References

Phalcon\Db\Reference defines table references (also called foreign keys). The following options can be used to define a reference:

Index	Description	Optional	Implemented in
“referencedTable”	It’s auto-descriptive. It refers to the name of the referenced table.	No	All
“columns”	An array with the name of the columns at the table that have the reference	No	All
“referenced-Columns”	An array with the name of the columns at the referenced table	No	All
“referenced-Schema”	The referenced table maybe is on another schema or database. This option allows you to define that.	Yes	All
“onDelete”	If the foreign record is removed, perform this action on the local record(s).	Yes	MySQL PostgreSQL
“onUpdate”	If the foreign record is updated, perform this action on the local record(s).	Yes	MySQL PostgreSQL

Writing Migrations

Migrations aren’t only designed to “morph” table. A migration is just a regular PHP class so you’re not limited to these functions. For example after adding a column you could write code to set the value of that column for existing records. For more details and examples of individual methods, check the *database component*.

```
<?php


use Phalcon\Mvc\Model\Migration;

class ProductsMigration_100 extends Migration
{
    public function up()
    {
        // ...


        self::$_connection->insert(
            "products",
            [
                "Malabar spinach",
                14.50,
            ],
            [
                "name",
                "price",
            ]
        );
    }
}
```

Running Migrations

Once the generated migrations are uploaded on the target server, you can easily run them as shown in the following example:

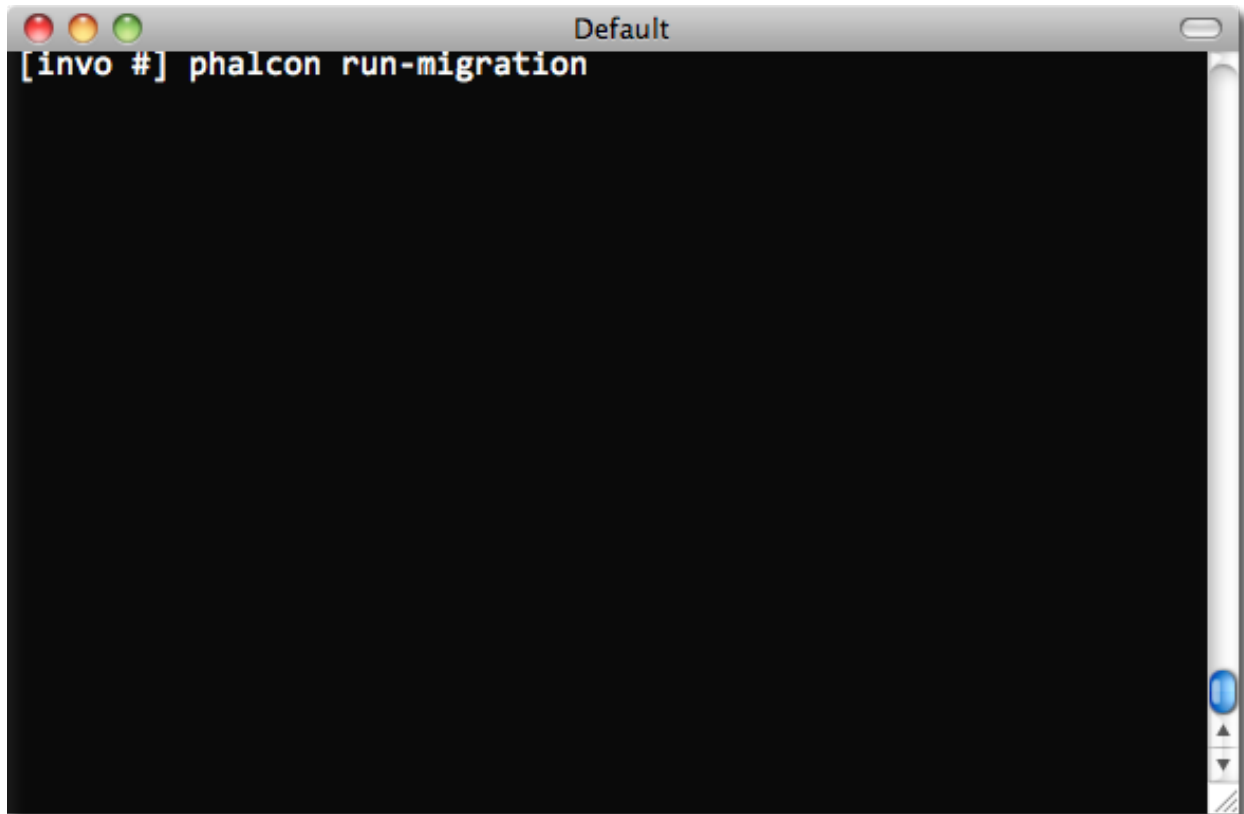


```
Default
[inv#] phalcon run-migration
```

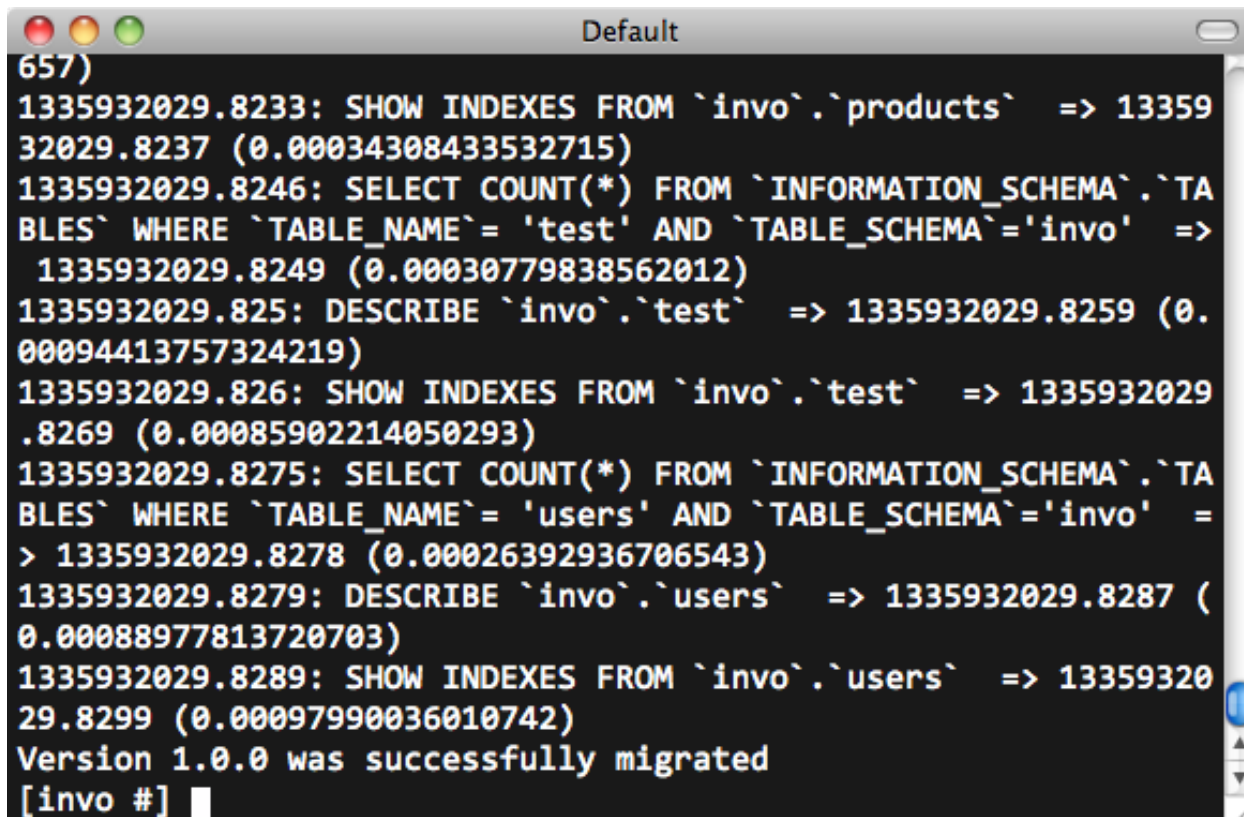

```
Default
657)
1335932029.8233: SHOW INDEXES FROM `inv`.`products` => 13359
32029.8237 (0.00034308433532715)
1335932029.8246: SELECT COUNT(*) FROM `INFORMATION_SCHEMA`.`TA
BLES` WHERE `TABLE_NAME`='test' AND `TABLE_SCHEMA`='inv' =>
1335932029.8249 (0.00030779838562012)
1335932029.825: DESCRIBE `inv`.`test` => 1335932029.8259 (0.
00094413757324219)
1335932029.826: SHOW INDEXES FROM `inv`.`test` => 1335932029
.8269 (0.00085902214050293)
1335932029.8275: SELECT COUNT(*) FROM `INFORMATION_SCHEMA`.`TA
BLES` WHERE `TABLE_NAME`='users' AND `TABLE_SCHEMA`='inv' =
> 1335932029.8278 (0.00026392936706543)
1335932029.8279: DESCRIBE `inv`.`users` => 1335932029.8287 (
0.00088977813720703)
1335932029.8289: SHOW INDEXES FROM `inv`.`users` => 13359320
29.8299 (0.00097990036010742)
Version 1.0.0 was successfully migrated
[inv#]
```

Depending on how outdated is the database with respect to migrations, Phalcon may run multiple migration versions in the same migration process. If you specify a target version, Phalcon will run the required migrations until it reaches the specified version.

Mendebug Aplikasi

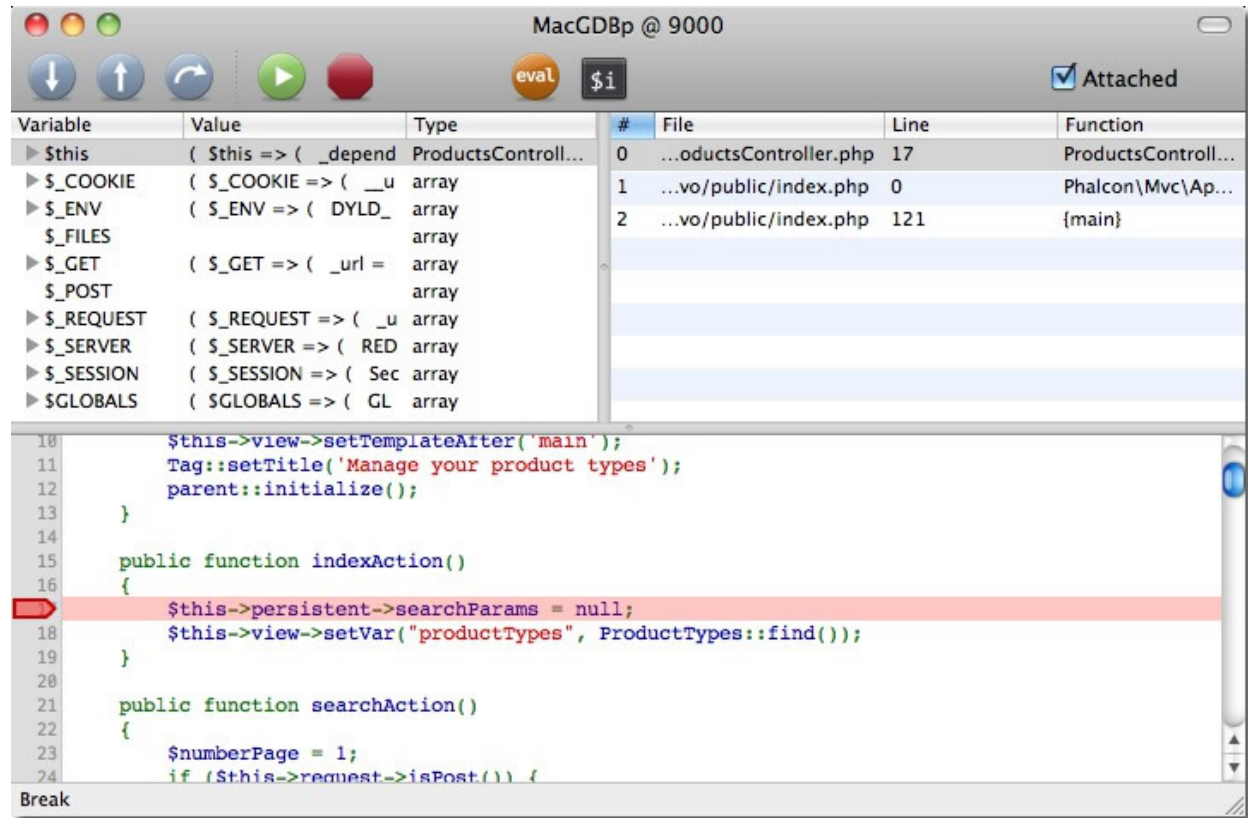

PHP menawarkan tool untuk mendebug aplikasi menggunakan pesan pemberitahuan, peringatan, kesalahan dan eksepsi. Kelas `Exception` menawarkan informasi seperti file, baris, pesan, kode numerik, backtrace dan lain-lain. dimana error terjadi. Framework OOP seperti Phalcon utamanya menggunakan kelas ini untuk membungkus fungsionalitas ini dan menyediakan informasi tersebut ke developer atau pengguna.

Meski ditulis dalam C, Phalcon menjalankan metode di ranah PHP, menyediakan kapabilitas debug yang dimiliki aplikasi atau framework lain yang ditulis dengan PHP.

Menangkap Eksepsi

Sepanjang tutorial dan contoh dokumentasi Phalcon, ada elemen umum yang menangkap eksepsi. Ini adalah blok try/catch:

```
<?php

try {

    // ... Kode Phalcon/PHP

} catch (\Exception $e) {
```

```
}
```

Tiap eksepsi yang dilempar dalam blok ini akan ditangkap dalam variabel `$e`. [Phalcon\Exception](#) diturunkan dari Kelas [Exception](#) PHP dan digunakan untuk memahami apakah eksepsi berasal dari Phalcon atau PHP.

Semua eksepsi dibangkitkan oleh PHP berasal dari kelas [Exception](#), dan paling tidak punya elemen berikut:

```
<?php

class Exception
{
    /* Properties */
    protected string $message;
    protected int $code;
    protected string $file;
    protected int $line;

    /* Methods */
    public __construct ([ string $message = "" [, int $code = 0 [, Exception
↪$previous = NULL ]]])
    final public string getMessage ( void )
    final public Exception getPrevious ( void )
    final public mixed getCode ( void )
    final public string getFile ( void )
    final public int getLine ( void )
    final public array getTrace ( void )
    final public string getTraceAsString ( void )
    public string __toString ( void )
    final private void __clone ( void )
}
```

Mengambil informasi dari [Phalcon\Exception](#) sama dengan kelas [Exception](#) PHP:

```
<?php

try {
    // ... App code ...
} catch (\Exception $e) {
    echo get_class($e), ": ", $e->getMessage(), "\n";
    echo " File=", $e->getFile(), "\n";
    echo " Line=", $e->getLine(), "\n";
    echo $e->getTraceAsString();
}
```

Oleh karena itu mudah untuk menemukan file dan baris kode aplikasi yang membangkitkan eksepsi, juga komponen yang terlibat membangkitkan eksepsi:

```
PDOException: SQLSTATE[28000] [1045] Access denied for user 'root'@'localhost'
(using password: NO)
File=/Applications/MAMP/htdocs/invo/public/index.php
Line=74
#0 [internal function]: PDO->__construct('mysql:host=loca...', 'root', '', Array)
#1 [internal function]: Phalcon\Db\Adapter\Pdo->connect(Array)
#2 /Applications/MAMP/htdocs/invo/public/index.php(74):
```

```
Phalcon\Db\Adapter\Pdo->__construct(Array)
#3 [internal function]: {closure}()
#4 [internal function]: call_user_func_array(Object(Closure), Array)
#5 [internal function]: Phalcon\Di->_factory(Object(Closure), Array)
#6 [internal function]: Phalcon\Di->get('db', Array)
#7 [internal function]: Phalcon\Di->getShared('db')
#8 [internal function]: Phalcon\Mvc\Model->getConnection()
#9 [internal function]: Phalcon\Mvc\Model::_getOrCreateResultset('Users', Array, true)
#10 /Applications/MAMP/htdocs/invo/app/controllers/SessionController.php(83):
    Phalcon\Mvc\Model::findFirst('email='demo@pha...')
#11 [internal function]: SessionController->startAction()
#12 [internal function]: call_user_func_array(Array, Array)
#13 [internal function]: Phalcon\Mvc\Dispatcher->dispatch()
#14 /Applications/MAMP/htdocs/invo/public/index.php(114): Phalcon\Mvc\Application->
    ↪handle()
#15 {main}
```

Anda dapat lihat dari output diatas kelas dan metode Phalcon ditampilkan seperti halnya komponen lain, dan bahkan menampilkan parameter yang digunakan dalam tiap pemanggilan. Method `Exception::getTrace` menyediakan informasi tambahan bila diperlukan.

Komponen Debug

Phalcon menyediakan sebuah komponen debug yang memungkinkan developer dengan mudah menemukan error yang dihasilkan aplikasi yang dibuat dengan framework ini.

Screencast berikut ini menjelaskan bagaimana ia bekerja:

Untuk menghidupkannya, tambahkan kode berikut ini di bootstrap anda:

```
<?php

$debug = new \Phalcon\Debug();
$debug->listen();
```

Tiap blok Try/Catch harus dihapus atau dimatikan agar komponen ini bekerja semestinya.

Refleksi dan Introspeksi

Tiap instance kelas Phalcon menawarkan perilaku yang sama seperti kelas PHP biasa. Dimungkinkan untuk menggunakan `Reflection API` atau print sembarang objek untuk menunjukkan status internalnya:

```
<?php

$route = new Phalcon\Mvc\Router();
print_r($route);
```

Mudah untuk mengetahui status internal tiap objek. Contoh di atas mencetak berikut:

```
Phalcon\Mvc\Router Object
(
    [_dependencyInjector:protected] =>
    [_module:protected] =>
    [_controller:protected] =>
    [_action:protected] =>
    [_params:protected] => Array
```

```

    (
    )
    [_routes:protected] => Array
    (
        [0] => Phalcon\Mvc\Router\Route Object
        (
            [_pattern:protected] => #^/([a-zA-Z0-9\_]+)[/]{0,1}$#
            [_compiledPattern:protected] => #^/([a-zA-Z0-9\_]+)[/]{0,1}$#
            [_paths:protected] => Array
            (
                [controller] => 1
            )

            [_methods:protected] =>
            [_id:protected] => 0
            [_name:protected] =>

        )

        [1] => Phalcon\Mvc\Router\Route Object
        (
            [_pattern:protected] => #^/([a-zA-Z0-9\_]+)/([a-zA-Z0-9\_]+)(/.*)*
            ↪ $#
            [_compiledPattern:protected] => #^/([a-zA-Z0-9\_]+)/([a-zA-Z0-9\_
            ↪ ]+)(/.*)*$#
            [_paths:protected] => Array
            (
                [controller] => 1
                [action] => 2
                [params] => 3
            )

            [_methods:protected] =>
            [_id:protected] => 1
            [_name:protected] =>

        )

    )
    [_matchedRoute:protected] =>
    [_matches:protected] =>
    [_wasMatched:protected] =>
    [_defaultModule:protected] =>
    [_defaultController:protected] =>
    [_defaultAction:protected] =>
    [_defaultParams:protected] => Array
    (
    )
)

```

Menggunakan XDebug

XDebug adalah tool yang keren yang melengkapi debugging aplikasi PHP. Ia juga adalah ekstensi C untuk PHP, dan anda dapat menggunakannya bersama Phalcon tanpa konfigurasi tambahan atau efek samping.

Screencast berikut menunjukkan sesi Xdebug dengan Phalcon:

Setelah anda menginstall xdebug, anda dapat menggunakan API-nya untuk mendapatkan informasi lebih detail mengenai eksepsi dan pesan.

Kami sarankan menggunakan paling tidak XDebug 2.2.3 untuk kompatibilitas lebih baik dengan Phalcon

Contoh berikut mengimplementasi `xdebug_print_function_stack` untuk menghentikan eksekusi dan menghasilkan backtrace:

```
<?php

use Phalcon\Mvc\Controller;

class SignupController extends Controller
{
    public function indexAction()
    {

    }

    public function registerAction()
    {
        // Request variabel dari form HTML
        $name = $this->request->getPost("name", "string");
        $email = $this->request->getPost("email", "email");

        // Stop eksekusi dan tunjukkan backtrace
        return xdebug_print_function_stack("stop here!");

        $user = new Users();
        $user->name = $name;
        $user->email = $email;

        // Store and check for errors
        $user->save();
    }
}
```

Di sini, Xdebug juga akan menunjukkan variabel di lingkup lokal dan backtrace nya juga:

```
Xdebug: stop here! in /Applications/MAMP/htdocs/tutorial/app/controllers/
↳ SignupController.php
   on line 19

Call Stack:
 0.0383    654600    1. {main}() /Applications/MAMP/htdocs/tutorial/public/index.
↳ php:0
 0.0392    663864    2. Phalcon\Mvc\Application->handle()
   /Applications/MAMP/htdocs/tutorial/public/index.php:37
 0.0418    738848    3. SignupController->registerAction()
   /Applications/MAMP/htdocs/tutorial/public/index.php:0
 0.0419    740144    4. xdebug_print_function_stack()
   /Applications/MAMP/htdocs/tutorial/app/controllers/SignupController.php:19
```

Xdebug menyediakan beberapa cara untuk mendapatkan informasi debug dan trace terkait eksekusi aplikasi menggunakan Phalcon. Anda dapat membaca [dokumentasi XDebug](#) untuk informasi lanjut.

Unit testing

Writing proper tests can assist in writing better software. If you set up proper test cases you can eliminate most functional bugs and better maintain your software.

Integrating PHPUnit with phalcon

If you don't already have phpunit installed, you can do it by using the following composer command:

```
composer require phpunit/phpunit:^5.0
```

or by manually adding it to composer.json:

```
{
    "require-dev": {
        "phpunit/phpunit": "^5.0"
    }
}
```

Once phpunit is installed create a directory called 'tests' in your root directory:

```
app/
public/
tests/
```

Next, we need a 'helper' file to bootstrap the application for unit testing.

The PHPUnit helper file

A helper file is required to bootstrap the application for running the tests. We have prepared a sample file. Put the file in your tests/ directory as TestHelper.php.

```
<?php

use Phalcon\Di;
use Phalcon\Di\FactoryDefault;
use Phalcon\Loader;

ini_set("display_errors", 1);
error_reporting(E_ALL);

define("ROOT_PATH", __DIR__);

set_include_path(
    ROOT_PATH . PATH_SEPARATOR . get_include_path()
);

// Required for phalcon/incubator
include __DIR__ . "../vendor/autoload.php";

// Use the application autoloader to autoload the classes
// Autoload the dependencies found in composer
$loader = new Loader();

$loader->registerDirs(
    [
        ROOT_PATH,
    ]
);

$loader->register();
```

```
$di = new FactoryDefault();

Di::reset();

// Add any needed services to the DI here

Di::setDefault($di);
```

Should you need to test any components from your own library, add them to the autoloader or use the autoloader from your main application.

To help you build the unit tests, we made a few abstract classes you can use to bootstrap the unit tests themselves. These files exist in the Phalcon incubator @ <https://github.com/phalcon/incubator>.

You can use the incubator library by adding it as a dependency:

```
composer require phalcon/incubator
```

or by manually adding it to composer.json:

```
{
    "require": {
        "phalcon/incubator": "^3.0"
    }
}
```

You can also clone the repository using the repo link above.

PHPunit.xml file

Now, create a phpunit file:

```
<?xml version="1.0" encoding="UTF-8"?>
<phpunit bootstrap="./TestHelper.php"
    backupGlobals="false"
    backupStaticAttributes="false"
    verbose="true"
    colors="false"
    convertErrorsToExceptions="true"
    convertNoticesToExceptions="true"
    convertWarningsToExceptions="true"
    processIsolation="false"
    stopOnFailure="false"
    syntaxCheck="true">
    <testsuite name="Phalcon - Testsuite">
        <directory>./</directory>
    </testsuite>
</phpunit>
```

Modify the phpunit.xml to fit your needs and save it in tests/.

This will run any tests under the tests/ directory.

Sample unit test

To run any unit tests you need to define them. The autoloader will make sure the proper files are loaded so all you need to do is create the files and phpunit will run the tests for you.

This example does not contain a config file, most test cases however, do need one. You can add it to the DI to get the UnitTestCase file.

First create a base unit test called UnitTestCase.php in your /tests directory:

```
<?php

use Phalcon\Di;
use Phalcon\Test\UnitTestCase as PhalconTestCase;

abstract class UnitTestCase extends PhalconTestCase
{
    /**
     * @var bool
     */
    private $_loaded = false;

    public function setUp()
    {
        parent::setUp();

        // Load any additional services that might be required during testing
        $di = Di::getDefault();

        // Get any DI components here. If you have a config, be sure to pass it to
        ↪ the parent

        $this->setDi($di);

        $this->_loaded = true;
    }

    /**
     * Check if the test case is setup properly
     *
     * @throws \PHPUnit_Framework_IncompleteTestError;
     */
    public function __destruct()
    {
        if (!$this->_loaded) {
            throw new \PHPUnit_Framework_IncompleteTestError(
                "Please run parent::setUp()."
            );
        }
    }
}
```

It's always a good idea to separate your Unit tests in namespaces. For this test we will create the namespace 'Test'. So create a file called testsTestUnitTest.php:

```
<?php

namespace Test;

/**
 * Class UnitTest
 */
```

```
class UnitTest extends \UnitTestCase
{
    public function testTestCase()
    {
        $this->assertEquals(
            "works",
            "works",
            "This is OK"
        );

        $this->assertEquals(
            "works",
            "works1",
            "This will fail"
        );
    }
}
```

Now when you execute ‘phpunit’ in your command-line from the tests directory you will get the following output:

```
$ phpunit
PHPUnit 3.7.23 by Sebastian Bergmann.

Configuration read from /private/var/www/tests/phpunit.xml

Time: 3 ms, Memory: 3.25Mb

There was 1 failure:

1) Test\UnitTest::testTestCase
This will fail
Failed asserting that two strings are equal.
--- Expected
+++ Actual
@@ @@
-'works'
+'works1'

/private/var/www/tests/Test/UnitTest.php:25

FAILURES!
Tests: 1, Assertions: 2, Failures: 1.
```

Now you can start building your unit tests. You can view a good guide here (we also recommend reading the PHPUnit documentation if you’re not familiar with PHPUnit):

<http://blog.stevensanderson.com/2009/08/24/writing-great-unit-tests-best-and-worst-practises/>

In Depth Explanations / Further Reading

Increasing Performance: What’s next?

Get faster applications requires refine many aspects: server, client, network, database, web server, static sources, etc. In this chapter we highlight scenarios where you can improve performance and how detect what is really slow in your application.

Profile on the Server


Each application is different, the permanent profiling is important to understand where performance can be increased. Profiling gives us a real picture on what is really slow and what does not. Profiles can vary between a request and another, so it is important to make enough measurements to make conclusions.

Profiling with XDebug

Xdebug provides an easier way to profile PHP applications, just install the extension and enable profiling in the php.ini:

```
xdebug.profiler_enable = On
```

Using a tool like [Webgrind](#) you can see which functions/methods are slower than others:

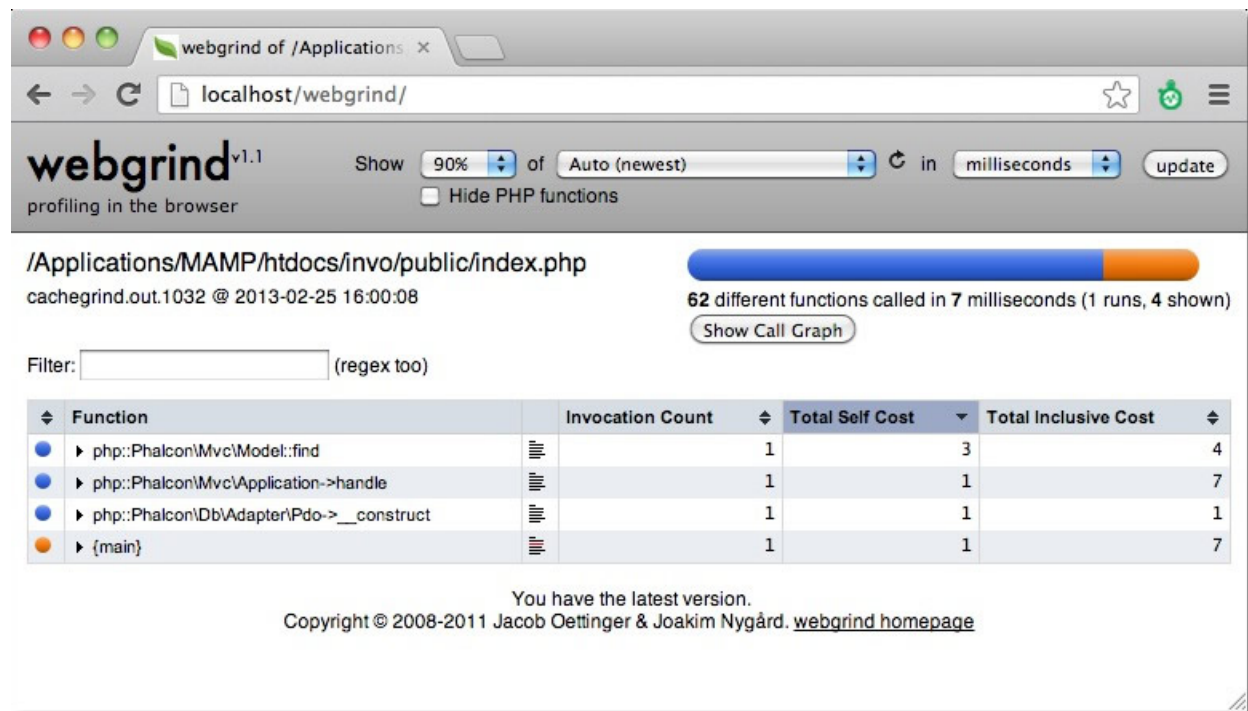

Profiling with Xhprof

Xhprof is another interesting extension to profile PHP applications. Add the following line to the start of the bootstrap file:

```
<?php
xhprof_enable(XHPROF_FLAGS_CPU + XHPROF_FLAGS_MEMORY);
```

Then at the end of the file save the profiled data:

```
<?php
$xhprof_data = xhprof_disable('/tmp');
```

```

$XHPROF_ROOT = "/var/www/xhprof/";
include_once $XHPROF_ROOT . "/xhprof_lib/utils/xhprof_lib.php";
include_once $XHPROF_ROOT . "/xhprof_lib/utils/xhprof_runs.php";

$xhprof_runs = new XHProfRuns_Default();
$run_id = $xhprof_runs->save_run($xhprof_data, "xhprof_testing");

echo "http://localhost/xhprof/xhprof_html/index.php?run={$run_id}&source=xhprof_
↳testing\n";

```

Xhprof provides a built-in HTML viewer to analyze the profiled data:

Displaying top 100 functions: Sorted by Excl. Wall Time (microsec) [\[display all \]](#)

Function Name	Calls	Calls%	Incl. Wall Time (microsec)	Wall%	Excl. Wall Time (microsec)	EWall%	Incl. CPU (microsecs)	ICpu%	Excl. CPU (microsec)	ECPU%	Incl. MemUse (bytes)
load::models/Products.php	1	0.8%	14,585	55.3%	14,585	55.3%	346	5.4%	346	5.4%	43,528
Phalcon\Mvc\Model\Criteria::fromInput	1	0.8%	18,447	69.9%	3,288	12.5%	1,515	23.7%	831	13.0%	87,544
Products::getProductTypes	5	3.8%	3,317	12.6%	3,249	12.3%	1,029	16.1%	958	15.0%	57,992
Phalcon\Mvc\Application::handle	1	0.8%	25,682	97.4%	701	2.7%	5,981	93.4%	683	10.7%	355,296
Phalcon\Mvc\Model::find	1	0.8%	675	2.6%	675	2.6%	457	7.1%	457	7.1%	16,288
Phalcon\Db\Adapter\Pdo::__construct	1	0.8%	457	1.7%	457	1.7%	217	3.4%	217	3.4%	8,664
load::products/search.phtml	1	0.8%	453	1.7%	453	1.7%	288	4.5%	288	4.5%	26,144
main()	1	0.8%	26,380	100.0%	365	1.4%	6,401	100.0%	128	2.0%	402,568
{closure}	7	5.4%	1,013	3.8%	331	1.3%	777	12.1%	308	4.8%	99,544
Phalcon\Paginator\Adapter\Model::paginate	1	0.8%	275	1.0%	275	1.0%	276	4.3%	276	4.3%	24,928
Phalcon\Mvc\View\Engine\Php::render	4	3.1%	4,174	15.8%	270	1.0%	1,864	29.1%	231	3.6%	99,664
Phalcon\Tag::linkTo	26	20.0%	277	1.1%	253	1.0%	292	4.6%	268	4.2%	9,024
ProductsController::searchAction	1	0.8%	19,640	74.5%	205	0.8%	2,479	38.7%	184	2.9%	142,392
Phalcon\Loader::autoLoad	5	3.8%	174	0.7%	128	0.5%	122	1.9%	89	1.4%	14,032
Phalcon\Config\Adapter\Ini::__construct	1	0.8%	122	0.5%	122	0.5%	123	1.9%	123	1.9%	4,480
Phalcon\Session\Adapter::start	1	0.8%	115	0.4%	115	0.4%	117	1.8%	117	1.8%	34,328
Phalcon\DI::set	8	6.2%	80	0.3%	80	0.3%	65	1.0%	65	1.0%	2,592
Elements::getMenu	1	0.8%	107	0.4%	59	0.2%	108	1.7%	52	0.8%	5,632
Security::beforeDispatch	1	0.8%	243	0.9%	52	0.2%	244	3.8%	46	0.7%	47,208
Phalcon\Loader::__construct	1	0.8%	51	0.2%	51	0.2%	15	0.2%	15	0.2%	1,160
Elements::getTabs	1	0.8%	96	0.4%	51	0.2%	97	1.5%	45	0.7%	4,504
Phalcon\DNFactoryDefault::__construct	1	0.8%	47	0.2%	47	0.2%	49	0.8%	49	0.8%	17,736

Profiling SQL Statements

Most database systems provide tools to identify slow SQL statements. Detecting and fixing slow queries is very important in order to increase performance in the server side. In the Mysql case, you can use the slow query log to know what SQL queries are taking more time than expected:


```

log-slow-queries = /var/log/slow-queries.log
long_query_time = 1.5

```

Profile on the Client

Sometimes we may need to improve the loading of static elements such as images, javascript and css to improve performance. The following tools are useful to detect common bottlenecks in the client side:

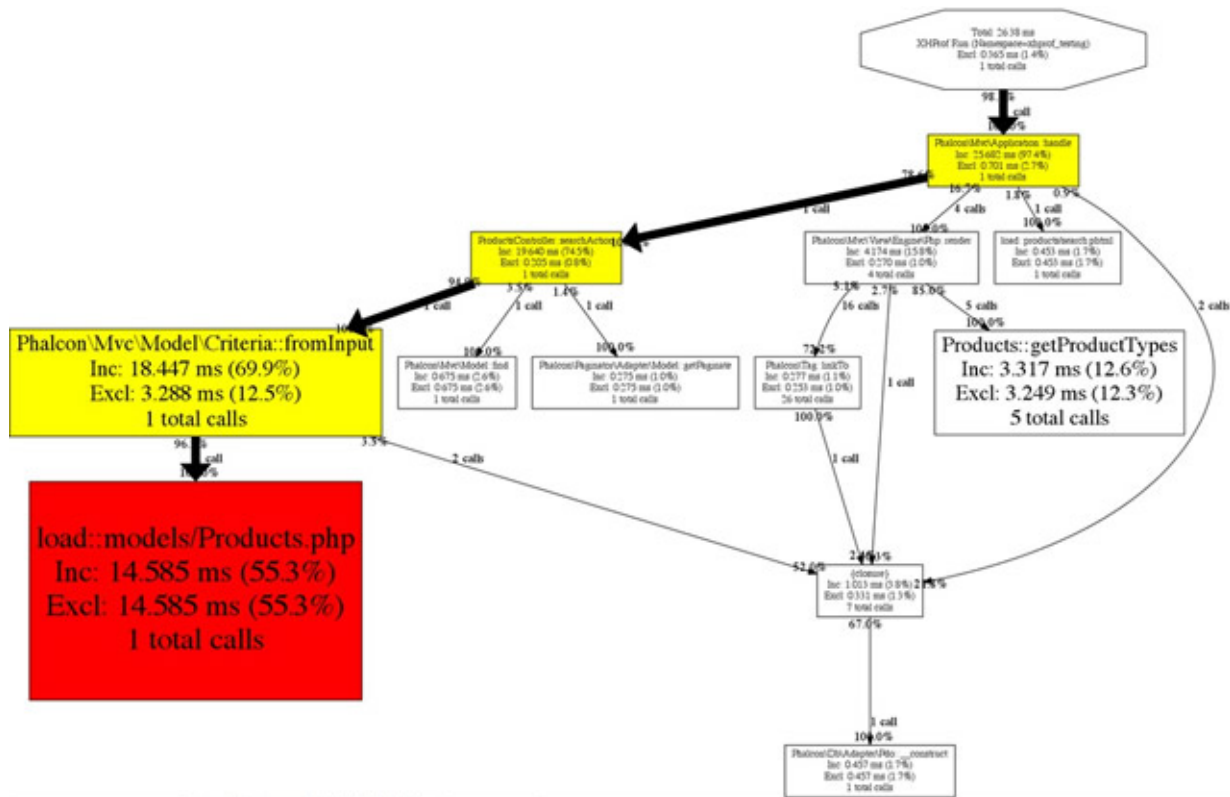

Profile with Chrome/Firefox

Most modern browsers have tools to profile the page loading time. In Chrome you can use the web inspector to know how much time is taking the loading of the different resources required by a single page:

Firebug provides a similar functionality:

Yahoo! YSlow

YSlow analyzes web pages and suggests ways to improve their performance based on a set of rules for high performance web pages


Profile with Speed Tracer

Speed Tracer is a tool to help you identify and fix performance problems in your web applications. It visualizes metrics that are taken from low level instrumentation points inside of the browser and analyzes them as your application runs. Speed Tracer is available as a Chrome extension and works on all platforms where extensions are currently supported (Windows and Linux).

This tool is very useful because it help you to get the real time used to render the whole page including HTML parsing, Javascript evaluation and CSS styling.

Use a recent PHP version

PHP is faster every day, using the latest version improves the performance of your applications and also of Phalcon.

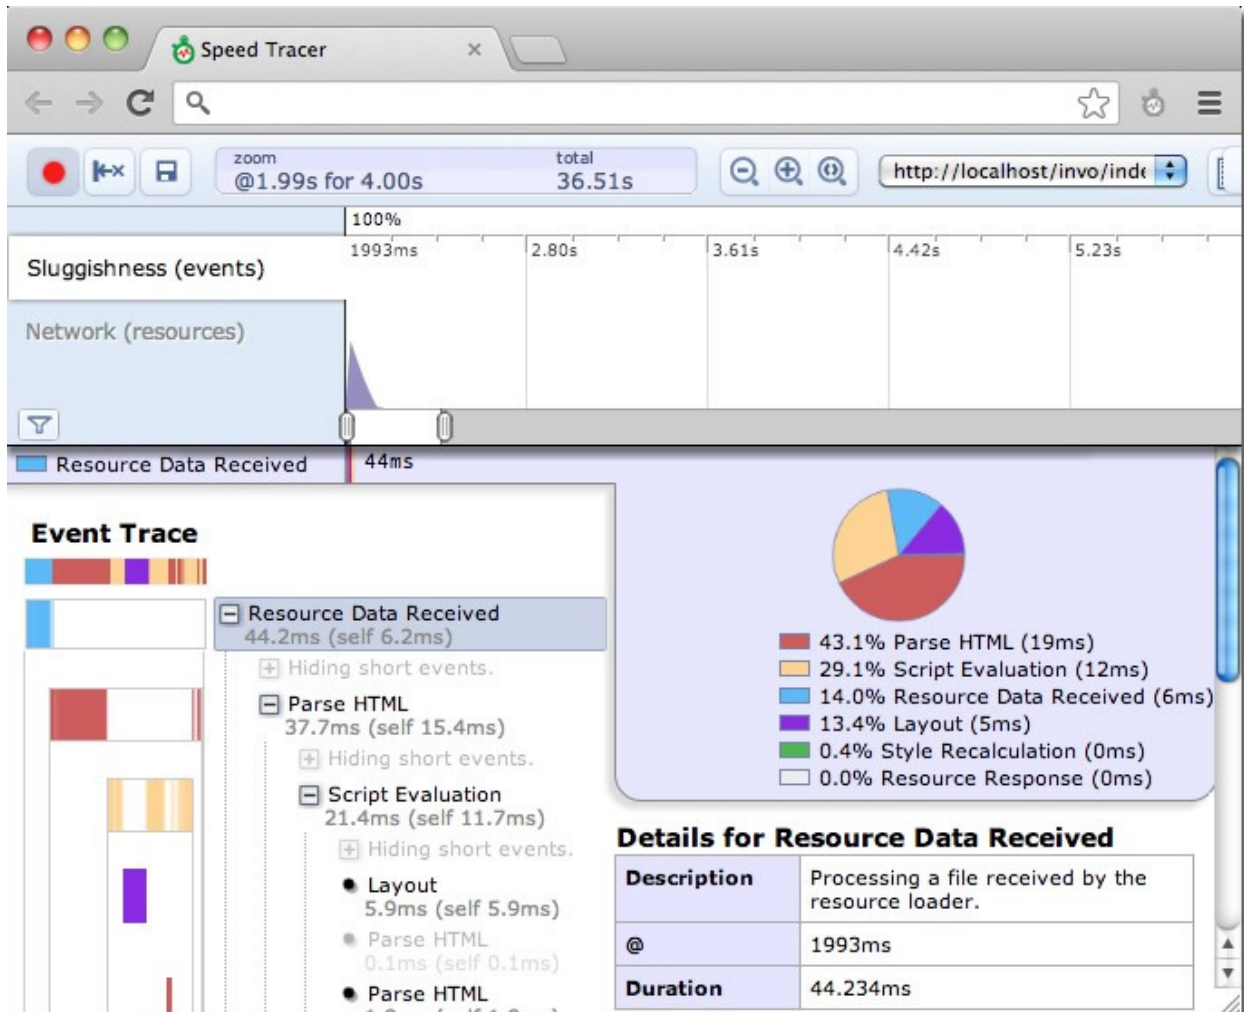

Use a PHP Bytecode Cache

APC as many other bytecode caches help an application to reduce the overhead of read, tokenize and parse PHP files in each request. Once the extension is installed use the following setting to enable APC:

```
apc.enabled = On
```

PHP 5.5 includes a built-in bytecode cache called ZendOptimizer+, this extension is also available for 5.3 and 5.4.

Do blocking work in the background

Process a video, send e-mails, compress a file or an image, etc., are slow tasks that must be processed in background jobs. There are a variety of tools that provide queuing or messaging systems that work well with PHP:

- [Beanstalkd](#)
- [Redis](#)
- [RabbitMQ](#)
- [Resque](#)
- [Gearman](#)
- [ZeroMQ](#)

Google Page Speed

`mod_pagespeed` speeds up your site and reduces page load time. This open-source Apache HTTP server module (also available for nginx as `ngx_pagespeed`) automatically applies web performance best practices to pages, and associated assets (CSS, JavaScript, images) without requiring that you modify your existing content or workflow.

Dependency Injection Explained

Contoh berikut ini agak panjang, namun ia mencoba menjelaskan mengapa Phalcon menggunakan lokasi service (service location) dan injeksi ketergantungan (dependency injection). Pertama, anggap kita mengembangkan sebuah komponen bernama `SomeComponent`. Ia mengerjakan tugas yang saat ini tidak penting. Komponen kita punya ketergantungan yakni koneksi ke sebuah database.

Di contoh pertama, koneksi diciptakan dalam komponen. Pendekatan ini tidak praktis; karena kita tidak dapat mengganti parameter koneksi atau tipe sistem database karena komponen ini hanya bekerja saat diciptakan.

```
<?php

class SomeComponent
{
    /**
     * Penciptaan koneksi di hardcode didalam
     * komponen, sehingga sulit mengganti secara eksternal
     * atau mengganti perilakunya
     */
    public function someDbTask()
    {
        $connection = new Connection(
            [
                "host"      => "localhost",
                "username" => "root",
```

```

        "password" => "secret",
        "dbname"   => "invo",
    ]
);

// ...
}

}

$some = new SomeComponent();

$some->someDbTask();

```

Untuk memecahkan ini, kita menciptakan setter yang menginjeksi ketergantungan dari luar sebelum menggunakan. Untuk sekarang, ini sepertinya solusi bagus:

```

<?php

class SomeComponent
{
    protected $_connection;

    /**
     * Set koneksi dari eksternal
     */
    public function setConnection($connection)
    {
        $this->_connection = $connection;
    }

    public function someDbTask()
    {
        $connection = $this->_connection;

        // ...
    }
}

$some = new SomeComponent();

// Buat koneksi
$connection = new Connection(
    [
        "host"      => "localhost",
        "username"  => "root",
        "password"  => "secret",
        "dbname"    => "invo",
    ]
);

// Injeksi koneksi dalam komponen
$some->setConnection($connection);

$some->someDbTask();

```

Sekarang anggap kita menggunakan komponen ini dalam bagian berbeda di aplikasi dan kita akan membutuhkan untuk menciptakan koneksi beberapa kali sebelum melewatkannya ke komponen. Menggunakan semacam registry global dimana kita memperoleh instance koneksi dan tidak perlu menciptakannya lagi dan lagi dapat memecahkan hal ini:

```
<?php

class Registry
{
    /**
     * Kembalikan koneksi
     */
    public static function getConnection()
    {
        return new Connection(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"    => "invo",
            ]
        );
    }
}

class SomeComponent
{
    protected $_connection;

    /**
     * Set koneksi dari eksternal
     */
    public function setConnection($connection)
    {
        $this->_connection = $connection;
    }

    public function someDbTask()
    {
        $connection = $this->_connection;

        // ...
    }
}

$some = new SomeComponent();

// Lewatkan koneksi yang terdefinisi dalam registry
$some->setConnection(Registry::getConnection());

$some->someDbTask();
```

Sekarang, bayangkan kita harus mengimplementasi dua metode dalam komponen, yang pertama selalu butuh menciptakan koneksi baru dan yang kedua selalu perlu menggunakan koneksi berbagi:

```
<?php

class Registry
{
    protected static $_connection;

    /**
     * Buat koneksi
```

```

    */
    protected static function _createConnection()
    {
        return new Connection(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"   => "invo",
            ]
        );
    }

    /**
     * Buat koneksi sekali dan kembalikan
     */
    public static function getSharedConnection()
    {
        if (self::$_connection === null) {
            self::$_connection = self::_createConnection();
        }

        return self::$_connection;
    }

    /**
     * Selalu kembalikan koneksi baru
     */
    public static function getNewConnection()
    {
        return self::_createConnection();
    }
}

class SomeComponent
{
    protected $_connection;

    /**
     * Set koneksi dari luar
     */
    public function setConnection($connection)
    {
        $this->_connection = $connection;
    }

    /**
     * Metode ini butuh koneksi berbagi
     */
    public function someDbTask()
    {
        $connection = $this->_connection;

        // ...
    }

    /**
     * metode ini selalu butuh koneksi baru

```

```
    */
    public function someOtherDbTask($connection)
    {

    }
}

$some = new SomeComponent();

// Injeksi koneksi berbagi
$some->setConnection(
    Registry::getSharedConnection()
);

$some->someDbTask();

// Lewatkan koneksi baru
$some->someOtherDbTask(
    Registry::getNewConnection()
);
```

Sejauh ini kita telah melihat bagaimana dependency injection memecahkan masalah kita. Melewatkan ketergantungan sebagai argumen daripada menciptakannya secara internal dalam kode membuat aplikasi kita lebih mudah dikelola dan terpisah (decoupled). Namun, di jangka panjang, bentuk injeksi ketergantungan ini punya kekurangan.

Contoh, jika komponen punya banyak ketergantungan, kita akan butuh menciptakan banyak argumen setter untuk melewati ketergantungan atau menciptakan sebuah kontruktor yang melewatkannya dalam banyak argumen, ditambah lagi menciptakan ketergantungan sebelum menggunakan komponen, setiap kali, menjadikan kode kita tidak mudah dikelola seperti yang kita mau:

```
<?php

// Buat ketergantungan atau ambil dari registry
$connection = new Connection();
$session     = new Session();
$fileSystem  = new FileSystem();
$filter      = new Filter();
$selector    = new Selector();

// Lewatkan sebagai parameter konstruktor
$some = new SomeComponent($connection, $session, $fileSystem, $filter, $selector);

// ... atau menggunakan setter
$some->setConnection($connection);
$some->setSession($session);
$some->setFileSystem($fileSystem);
$some->setFilter($filter);
$some->setSelector($selector);
```

Bayangkan bila kita harus menciptakan objek ini di banyak bagian aplikasi kita. Di masa datang, jika kita tidak lagi butuh ketergantungan, kita butuh menjelajahi semua kode untuk menghapus parameter di tiap kontruktor atau setter dimana kita injeksi kode. Untuk memecahkan hal ini, kita kembali ke registry global untuk menciptakan komponen. Namun, ia menambah lapisan abstraksi baru sebelum menciptakan objek:

```
<?php

class SomeComponent
{
```



```
// ...

/**
 * Buat metode factory untuk menciptakan instance SomeComponent dan menginjeksi_
↳ketergantungan
 */
public static function factory()
{
    $connection = new Connection();
    $session     = new Session();
    $fileSystem  = new FileSystem();
    $filter      = new Filter();
    $selector    = new Selector();

    return new self($connection, $session, $fileSystem, $filter, $selector);
}
}
```

Sekarang kita kembali ke awal, kita kembali membuat ketergantungan dalam komponen! Kita harus menemukan solusi yang menghindarkan kita dari praktek buruk.

Cara praktis dan elegan untuk menyelesaikan masalah ini adalah menggunakan sebuah kontainer untuk ketergantungan. Kontainer bertindak sebagai registry global yang kita lihat sebelumnya. Menggunakan kontainer sebagai jembatan untuk memperoleh ketergantungan memungkinkan kita menurunkan kompleksitas komponen kita:

```
<?php

use Phalcon\Di;
use Phalcon\DiInterface;

class SomeComponent
{
    protected $_di;

    public function __construct(DiInterface $di)
    {
        $this->_di = $di;
    }

    public function someDbTask()
    {
        // Ambil service koneksi
        // selalu kembalikan koneksi baru
        $connection = $this->_di->get("db");
    }

    public function someOtherDbTask()
    {
        // ambil koneksi berbagi
        // ini akan selalu mengembalikan koneksi yang sama
        $connection = $this->_di->getShared("db");

        // This method also requires an input filtering service
        $filter = $this->_di->get("filter");
    }
}

$di = new Di();
```

```
// Daftarkan service "db" dalam kontainer
$di->set(
    "db",
    function () {
        return new Connection(
            [
                "host"      => "localhost",
                "username" => "root",
                "password" => "secret",
                "dbname"    => "invo",
            ]
        );
    }
);

// Daftarkan service "filter" dalam kontainer
$di->set(
    "filter",
    function () {
        return new Filter();
    }
);

// Daftarkan service "session" dalam kontainer
$di->set(
    "session",
    function () {
        return new Session();
    }
);

// Lewatkan kontainer service ke komponen
$some = new SomeComponent($di);

$some->someDbTask();
```

Komponen sekarang dapat dengan mudah mengakses service yang diperlukan ketika membutuhkannya, bila tidak dibutuhkan ia tidak akan menginisialisasi service tersebut, sehingga menghemat resource. Komponen saat ini terpisah (highly decoupled). Contoh, kita dapat mengganti cara bagaimana koneksi dibuat, perilakunya atau aspek lain darinya dan tidak akan berpengaruh ke komponen.

Understanding How Phalcon Applications Work

Jika anda mengikuti *tutorial* atau membuat kode menggunakan *Phalcon Devtools*, anda mungkin mengenali file bootstrap berikut:

```
<?php

use Phalcon\Mvc\Application;

// Register autoloaders
// ...

// Register services
// ...
```

```
// Handle the request
$application = new Application($di);

try {
    $response = $application->handle();

    $response->send();
} catch (\Exception $e) {
    echo "Exception: ", $e->getMessage();
}
```

Inti semua kerja kontroller terjadi ketika `handle()` dipanggil:

```
<?php

$response = $application->handle();
```

Bootstrap manual

Jika anda ingin menggunakan *Phalcon\Mvc\Application*, kode di atas dapat diubah seperti berikut:

```
<?php

// Get the 'router' service
$router = $di["router"];

$router->handle();

$view = $di["view"];

$dispatcher = $di["dispatcher"];

// Pass the processed router parameters to the dispatcher
$dispatcher->setControllerName(
    $router->getControllerName()
);

$dispatcher->setActionName(
    $router->getActionName()
);

$dispatcher->setParams(
    $router->getParams()
);

// Start the view
$view->start();

// Dispatch the request
$dispatcher->dispatch();

// Render the related views
$view->render(
    $dispatcher->getControllerName(),
```

```
        $dispatcher->getActionName(),
        $dispatcher->getParams()
    );

    // Finish the view
    $view->finish();

    $response = $di["response"];

    // Pass the output of the view to the response
    $response->setContent(
        $view->getContent()
    );

    // Send the response
    $response->send();
```

Pengganti *Phalcon\Mvc\Application* berikut tidak memiliki komponen view membuatnya cocok untuk Rest API:

```
<?php

use Phalcon\Http\ResponseInterface;

// Get the 'router' service
$router = $di["router"];

$router->handle();

$dispatcher = $di["dispatcher"];

// Pass the processed router parameters to the dispatcher

$dispatcher->setControllerName(
    $router->getControllerName()
);

$dispatcher->setActionName(
    $router->getActionName()
);

$dispatcher->setParams(
    $router->getParams()
);

// Dispatch the request
$dispatcher->dispatch();

// Get the returned value by the last executed action
$response = $dispatcher->getReturnedValue();

// Check if the action returned is a 'response' object
if ($response instanceof ResponseInterface) {
    // Send the response
    $response->send();
}
```

Alternatif lain adalah menangkap eksepsi yang dihasilkan oleh dispatcher dan mengarahkan ke aksi lain:

```

<?php

use Phalcon\Http\ResponseInterface;

// Dapatkan service 'router'
$router = $di["router"];

$router->handle();

$dispatcher = $di["dispatcher"];

// Lewatkan parameter router yang telah diproses ke dispatcher

$dispatcher->setControllerName(
    $router->getControllerName()
);

$dispatcher->setActionName(
    $router->getActionName()
);

$dispatcher->setParams(
    $router->getParams()
);

try {
    // Kirim request
    $dispatcher->dispatch();
} catch (Exception $e) {
    // An exception has occurred, dispatch some controller/action aimed for that

    // Lewatkan parameter router yang telah diproses ke dispatcher
    $dispatcher->setControllerName("errors");
    $dispatcher->setActionName("action503");

    // Kirim request
    $dispatcher->dispatch();
}

// Get the returned value by the last executed action
$response = $dispatcher->getReturnedValue();

// Check if the action returned is a 'response' object
if ($response instanceof ResponseInterface) {
    // Send the response
    $response->send();
}

```

Meski implementasi di atas lebih banyak kodenya dibanding menggunakan *Phalcon\Mvc\Application*, ia menawarkan alternatif bootstrapping aplikasi anda. Tergantung kebutuhan anda, anda mungkin ingin memiliki kendali penuh terhadap apa yang harus diciptakan dan yang tidak, atau mengganti komponen tertentu dengan milik anda sendiri untuk memperluas fungsionalitas defaultnya.

API

API Indice

Abstract class `Phalcon\Acl`

Constants

integer **ALLOW**

integer **DENY**

Abstract class `Phalcon\Acl\Adapter`

implements `Phalcon\Acl\AdapterInterface`, `Phalcon\Events\EventsAwareInterface`

Adapter for `Phalcon\Acl` adapters

Methods

public **getActiveRole** ()

Role which the list is checking if it's allowed to certain resource/access

public **getActiveResource** ()

Resource which the list is checking if some role can access it

public **getActiveAccess** ()

Active access which the list is checking if some role can access it

public **setEventsManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the events manager

public **getEventsManager** ()

Returns the internal event manager

public **setDefaultAction** (*mixed* \$defaultAccess)

Sets the default access level (`Phalcon\Acl::ALLOW` or `Phalcon\Acl::DENY`)

public **getDefaultAction** ()

Returns the default ACL access level

abstract public **setNoArgumentsDefaultAction** (*mixed* \$defaultAccess) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **getNoArgumentsDefaultAction** () inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **addRole** (*mixed* \$role, [*mixed* \$accessInherits]) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **addInherit** (*mixed* \$roleName, *mixed* \$roleToInherit) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **isRole** (*mixed* \$roleName) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **isResource** (*mixed* \$resourceName) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **addResource** (*mixed* \$resourceObject, *mixed* \$accessList) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **addResourceAccess** (*mixed* \$resourceName, *mixed* \$accessList) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **dropResourceAccess** (*mixed* \$resourceName, *mixed* \$accessList) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **allow** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, [*mixed* \$func]) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **deny** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, [*mixed* \$func]) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **isAllowed** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, [*array* \$parameters]) inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **getRoles** () inherited from *Phalcon\Acl\AdapterInterface*

...

abstract public **getResources** () inherited from *Phalcon\Acl\AdapterInterface*

...

Class *Phalcon\Acl\Adapter\Memory*

extends abstract class *Phalcon\Acl\Adapter**implements* *Phalcon\Events\EventsAwareInterface*, *Phalcon\Acl\AdapterInterface*

Manages ACL lists in memory

```

<?php

$acl = new \Phalcon\Acl\Adapter\Memory();

$acl->setDefaultAction(
    \Phalcon\Acl::DENY
);

// Register roles

```

```
$roles = [
    "users" => new \Phalcon\Acl\Role("Users"),
    "guests" => new \Phalcon\Acl\Role("Guests"),
];
foreach ($roles as $role) {
    $acl->addRole($role);
}

// Private area resources
$privateResources = [
    "companies" => ["index", "search", "new", "edit", "save", "create", "delete"],
    "products" => ["index", "search", "new", "edit", "save", "create", "delete"],
    "invoices" => ["index", "profile"],
];

foreach ($privateResources as $resourceName => $actions) {
    $acl->addResource(
        new \Phalcon\Acl\Resource($resourceName),
        $actions
    );
}

// Public area resources
$publicResources = [
    "index" => ["index"],
    "about" => ["index"],
    "session" => ["index", "register", "start", "end"],
    "contact" => ["index", "send"],
];

foreach ($publicResources as $resourceName => $actions) {
    $acl->addResource(
        new \Phalcon\Acl\Resource($resourceName),
        $actions
    );
}

// Grant access to public areas to both users and guests
foreach ($roles as $role) {
    foreach ($publicResources as $resource => $actions) {
        $acl->allow($role->getName(), $resource, "*");
    }
}

// Grant access to private area to role Users
foreach ($privateResources as $resource => $actions) {
    foreach ($actions as $action) {
        $acl->allow("Users", $resource, $action);
    }
}
```

Methods

public **__construct**()

Phalcon\Acl\Adapter\Memory constructor

public **addRole** (*RoleInterface* | *string* \$role, [*array* | *string* \$accessInherits])

Adds a role to the ACL list. Second parameter allows inheriting access data from other existing role Example:

```
<?php

$acl->addRole (
    new Phalcon\Acl\Role ("administrator"),
    "consultant"
);

$acl->addRole ("administrator", "consultant");
```

public **addInherit** (*mixed* \$roleName, *mixed* \$roleToInherit)

Do a role inherit from another existing role

public **isRole** (*mixed* \$roleName)

Check whether role exist in the roles list

public **isResource** (*mixed* \$resourceName)

Check whether resource exist in the resources list

public **addResource** (*Phalcon\Acl\Resource* | *string* \$resourceValue, *array* | *string* \$accessList)

Adds a resource to the ACL list Access names can be a particular action, by example search, update, delete, etc or a list of them Example:

```
<?php

// Add a resource to the the list allowing access to an action
$acl->addResource (
    new Phalcon\Acl\Resource ("customers"),
    "search"
);

$acl->addResource ("customers", "search");

// Add a resource with an access list
$acl->addResource (
    new Phalcon\Acl\Resource ("customers"),
    [
        "create",
        "search",
    ]
);

$acl->addResource (
    "customers",
    [
        "create",
        "search",
    ]
);
```

public **addResourceAccess** (*mixed* \$resourceName, *array* | *string* \$accessList)

Adds access to resources

public **dropResourceAccess** (*mixed* \$resourceName, *array* | *string* \$accessList)

Removes an access from a resource

protected **_allowOrDeny** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, *mixed* \$action, [*mixed* \$func])

Checks if a role has access to a resource

public **allow** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, [*mixed* \$func])

Allow access to a role on a resource You can use '*' as wildcard Example:

```
<?php

//Allow access to guests to search on customers
$acl->allow("guests", "customers", "search");

//Allow access to guests to search or create on customers
$acl->allow("guests", "customers", ["search", "create"]);

//Allow access to any role to browse on products
$acl->allow("*", "products", "browse");

//Allow access to any role to browse on any resource
$acl->allow("*", "*", "browse");
```

public **deny** (*mixed* \$roleName, *mixed* \$resourceName, *mixed* \$access, [*mixed* \$func])

Deny access to a role on a resource You can use '*' as wildcard Example:

```
<?php

//Deny access to guests to search on customers
$acl->deny("guests", "customers", "search");

//Deny access to guests to search or create on customers
$acl->deny("guests", "customers", ["search", "create"]);

//Deny access to any role to browse on products
$acl->deny("*", "products", "browse");

//Deny access to any role to browse on any resource
$acl->deny("*", "*", "browse");
```

public **isAllowed** (*RoleInterface* | *RoleAware* | *string* \$roleName, *ResourceInterface* | *ResourceAware* | *string* \$resourceName, *mixed* \$access, [*array* \$parameters])

Check whether a role is allowed to access an action from a resource

```
<?php

//Does andres have access to the customers resource to create?
$acl->isAllowed("andres", "Products", "create");

//Do guests have access to any resource to edit?
$acl->isAllowed("guests", "*", "edit");
```

public **setNoArgumentsDefaultAction** (*mixed* \$defaultAccess)

Sets the default access level (Phalcon\Acl::ALLOW or Phalcon\Acl::DENY) for no arguments provided in isAllowed action if there exists func for accessKey

public **getNoArgumentsDefaultAction** ()

Returns the default ACL access level for no arguments provided in isAllowed action if there exists func for accessKey

public **getRoles** ()

Return an array with every role registered in the list

public **getResources** ()

Return an array with every resource registered in the list

public **getActiveRole** () inherited from *Phalcon\Acl\Adapter*

Role which the list is checking if it's allowed to certain resource/access

public **getActiveResource** () inherited from *Phalcon\Acl\Adapter*

Resource which the list is checking if some role can access it

public **getActiveAccess** () inherited from *Phalcon\Acl\Adapter*

Active access which the list is checking if some role can access it

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Acl\Adapter*

Sets the events manager

public **getEventManager** () inherited from *Phalcon\Acl\Adapter*

Returns the internal event manager

public **setDefaultAction** (*mixed* \$defaultAccess) inherited from *Phalcon\Acl\Adapter*

Sets the default access level (Phalcon\Acl::ALLOW or Phalcon\Acl::DENY)

public **getDefaultAction** () inherited from *Phalcon\Acl\Adapter*

Returns the default ACL access level

Class *Phalcon\Acl\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Acl\Resource](#)

implements [Phalcon\Acl\ResourceInterface](#)

This class defines resource entity and its description

Methods

public **getName** ()

Resource name

public **__toString** ()

Resource name

public **getDescription** ()

Resource description

public **__construct** (*mixed* \$name, [*mixed* \$description])

[Phalcon\Acl\Resource](#) constructor

Class [Phalcon\Acl\Role](#)

implements [Phalcon\Acl\RoleInterface](#)

This class defines role entity and its description

Methods

public **getName** ()

Role name

public **__toString** ()

Role name

public **getDescription** ()

Role description

public **__construct** (*mixed* \$name, [*mixed* \$description])

Phalcon\Acl\Role constructor

Abstract class Phalcon\Annotations\Adapter

implements Phalcon\Annotations\AdapterInterface

This is the base class for Phalcon\Annotations adapters

Methods

public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader)

Sets the annotations parser

public **getReader** ()

Returns the annotation reader

public **get** (*string* | *object* \$className)

Parses or retrieves all the annotations found in a class

public **getMethods** (*mixed* \$className)

Returns the annotations found in all the class' methods

public **getMethod** (*mixed* \$className, *mixed* \$methodName)

Returns the annotations found in a specific method

public **getProperties** (*mixed* \$className)

Returns the annotations found in all the class' methods

public **getProperty** (*mixed* \$className, *mixed* \$propertyName)

Returns the annotations found in a specific property

Class Phalcon\Annotations\Adapter\Apc

extends abstract class *Phalcon\Annotations\Adapter*

implements Phalcon\Annotations\AdapterInterface

Stores the parsed annotations in APC. This adapter is suitable for production

```
<?php
use Phalcon\Annotations\Adapter\Apc;

$annotations = new Apc();
```

Methods

public **__construct** ([array \$options])

Phalcon\Annotations\Adapter\Apc constructor

public **read** (mixed \$key)

Reads parsed annotations from APC

public **write** (mixed \$key, *Phalcon\Annotations\Reflection* \$data)

Writes parsed annotations to APC

public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader) inherited from *Phalcon\Annotations\Adapter*

Sets the annotations parser

public **getReader** () inherited from *Phalcon\Annotations\Adapter*

Returns the annotation reader

public **get** (string | object \$className) inherited from *Phalcon\Annotations\Adapter*

Parses or retrieves all the annotations found in a class

public **getMethods** (mixed \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getMethod** (mixed \$className, mixed \$methodName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific method

public **getProperties** (mixed \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getProperty** (mixed \$className, mixed \$propertyName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific property

Class *Phalcon\Annotations\Adapter\Files*

extends abstract class *Phalcon\Annotations\Adapter*

implements *Phalcon\Annotations\AdapterInterface*

Stores the parsed annotations in files. This adapter is suitable for production

```
<?php
use Phalcon\Annotations\Adapter\Files;

$annotations = new Files(
    [
        "annotationsDir" => "app/cache/annotations/",
    ]
);
```

Methods

public **__construct** ([array \$options])

Phalcon\Annotations\Adapter\Files constructor

public *Phalcon\Annotations\Reflection* **read** (string \$key)

Reads parsed annotations from files

public **write** (mixed \$key, *Phalcon\Annotations\Reflection* \$data)

Writes parsed annotations to files

public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader) inherited from *Phalcon\Annotations\Adapter*

Sets the annotations parser

public **getReader** () inherited from *Phalcon\Annotations\Adapter*

Returns the annotation reader

public **get** (string | object \$className) inherited from *Phalcon\Annotations\Adapter*

Parses or retrieves all the annotations found in a class

public **getMethods** (mixed \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getMethod** (mixed \$className, mixed \$methodName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific method

public **getProperties** (mixed \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getProperty** (mixed \$className, mixed \$propertyName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific property

Class Phalcon\Annotations\Adapter\Memory

extends abstract class *Phalcon\Annotations\Adapter*

implements *Phalcon\Annotations\AdapterInterface*

Stores the parsed annotations in memory. This adapter is the suitable development/testing

Methods

public **read** (mixed \$key)

Reads parsed annotations from memory

public **write** (mixed \$key, *Phalcon\Annotations\Reflection* \$data)

Writes parsed annotations to memory

public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader) inherited from *Phalcon\Annotations\Adapter*

Sets the annotations parser

public **getReader** () inherited from *Phalcon\Annotations\Adapter*

Returns the annotation reader

public **get** (*string* | *object* \$className) inherited from *Phalcon\Annotations\Adapter*

Parses or retrieves all the annotations found in a class

public **getMethods** (*mixed* \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getMethod** (*mixed* \$className, *mixed* \$methodName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific method

public **getProperties** (*mixed* \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getProperty** (*mixed* \$className, *mixed* \$propertyName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific property

Class *Phalcon\Annotations\Adapter\Xcache*

extends abstract class *Phalcon\Annotations\Adapter*

implements *Phalcon\Annotations\AdapterInterface*

Stores the parsed annotations to XCache. This adapter is suitable for production

```
<?php
$annotations = new \Phalcon\Annotations\Adapter\Xcache();
```

Methods

public *Phalcon\Annotations\Reflection* **read** (*string* \$key)

Reads parsed annotations from XCache

public **write** (*mixed* \$key, *Phalcon\Annotations\Reflection* \$data)

Writes parsed annotations to XCache

public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader) inherited from *Phalcon\Annotations\Adapter*

Sets the annotations parser

public **getReader** () inherited from *Phalcon\Annotations\Adapter*

Returns the annotation reader

public **get** (*string* | *object* \$className) inherited from *Phalcon\Annotations\Adapter*

Parses or retrieves all the annotations found in a class

public **getMethods** (*mixed* \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getMethod** (*mixed* \$className, *mixed* \$methodName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific method

public **getProperties** (*mixed* \$className) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in all the class' methods

public **getProperty** (*mixed* \$className, *mixed* \$propertyName) inherited from *Phalcon\Annotations\Adapter*

Returns the annotations found in a specific property

Class *Phalcon\Annotations\Annotation*

Represents a single annotation in an annotations collection

Methods

public **__construct** (*array* \$reflectionData)

Phalcon\Annotations\Annotation constructor

public **getName** ()

Returns the annotation's name

public *mixed* **getExpression** (*array* \$expr)

Resolves an annotation expression

public *array* **getExprArguments** ()

Returns the expression arguments without resolving

public *array* **getArguments** ()

Returns the expression arguments

public **numberArguments** ()

Returns the number of arguments that the annotation has

public *mixed* **getArgument** (*int* | *string* \$position)

Returns an argument in a specific position

public *boolean* **hasArgument** (*int* | *string* \$position)

Returns an argument in a specific position

public *mixed* **getNamedArgument** (*mixed* \$name)

Returns a named argument

public *mixed* **getNamedParameter** (*mixed* \$name)

Returns a named parameter

Class *Phalcon\Annotations\Collection*

implements *Iterator*, *Traversable*, *Countable*

Represents a collection of annotations. This class allows to traverse a group of annotations easily

```
<?php
//Traverse annotations
foreach ($classAnnotations as $annotation) {
    echo "Name=", $annotation->getName(), PHP_EOL;
```

```
}

//Check if the annotations has a specific
var_dump($classAnnotations->has("Cacheable"));

//Get an specific annotation in the collection
$annotation = $classAnnotations->get("Cacheable");
```

Methods

public **__construct** ([array \$reflectionData])

Phalcon\Annotations\Collection constructor

public **count** ()

Returns the number of annotations in the collection

public **rewind** ()

Rewinds the internal iterator

public *Phalcon\Annotations\Annotation* **current** ()

Returns the current annotation in the iterator

public **key** ()

Returns the current position/key in the iterator

public **next** ()

Moves the internal iteration pointer to the next position

public **valid** ()

Check if the current annotation in the iterator is valid

public **getAnnotations** ()

Returns the internal annotations as an array

public **get** (*mixed* \$name)

Returns the first annotation that match a name

public **getAll** (*mixed* \$name)

Returns all the annotations that match a name

public **has** (*mixed* \$name)

Check if an annotation exists in a collection

Class Phalcon\Annotations\Exception

extends class Exception

implements Throwable

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Annotations\Reader](#)

implements [Phalcon\Annotations\ReaderInterface](#)

Parses docblocks returning an array with the found annotations

Methods

public **parse** (*mixed* \$className)

Reads annotations from the class docblocks, its methods and/or properties

public static **parseDocBlock** (*mixed* \$docBlock, [*mixed* \$file], [*mixed* \$line])

Parses a raw doc block returning the annotations found

Class Phalcon\Annotations\Reflection

Allows to manipulate the annotations reflection in an OO manner

```
<?php

use Phalcon\Annotations\Reader;
use Phalcon\Annotations\Reflection;

// Parse the annotations in a class
$reader = new Reader();
$parsing = $reader->parse("MyComponent");

// Create the reflection
$reflection = new Reflection($parsing);

// Get the annotations in the class docblock
$classAnnotations = $reflection->getClassAnnotations();
```

Methods

public **__construct** ([array \$reflectionData])

Phalcon\Annotations\Reflection constructor

public **getClassAnnotations** ()

Returns the annotations found in the class docblock

public **getMethodsAnnotations** ()

Returns the annotations found in the methods' docblocks

public **getPropertiesAnnotations** ()

Returns the annotations found in the properties' docblocks

public array **getReflectionData** ()

Returns the raw parsing intermediate definitions used to construct the reflection

public static array data **__set_state** (mixed \$data)

Restores the state of a Phalcon\Annotations\Reflection variable export

Abstract class Phalcon\Application

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*

Base class for Phalcon\Cli\Console and Phalcon\Mvc\Application.

Methods

public **__construct** ([*Phalcon\DiInterface* \$dependencyInjector])

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the events manager

public **getEventManager** ()

Returns the internal event manager

public **registerModules** (array \$modules, [mixed \$merge])

Register an array of modules present in the application

```
<?php
$this->registerModules (
    [
        "frontend" => [
            "className" => "Multiple\\Frontend\\Module",
            "path"      => "../apps/frontend/Module.php",
        ],
        "backend" => [
            "className" => "Multiple\\Backend\\Module",
            "path"      => "../apps/backend/Module.php",
        ],
    ],
);
```

public **getModules** ()

Return the modules registered in the application

public **getModule** (mixed \$name)

Gets the module definition registered in the application via module name

public **setDefaultModule** (mixed \$defaultModule)

Sets the module name to be used if the router doesn't return a valid module

public **getDefaultModule** ()

Returns the default module name

abstract public **handle** ()

Handles a request

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\DiInjectable*

Returns the internal dependency injector

public **__get** (mixed \$propertyName) inherited from *Phalcon\DiInjectable*

Magic method __get

Class **Phalcon\Application\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Assets\Collection](#)

implements [Countable](#), [Iterator](#), [Traversable](#)

Represents a collection of resources

Methods

public **getPrefix** ()

...

public **getLocal** ()

...

public **getResources** ()

...

public **getCodes** ()
...
public **getPosition** ()
...
public **getFilters** ()
...
public **getAttributes** ()
...
public **getJoin** ()
...
public **getTargetUri** ()
...
public **getTargetPath** ()
...
public **getTargetLocal** ()
...
public **getSourcePath** ()
...
public **add** (*Phalcon\Assets\Resource* \$resource)
Adds a resource to the collection
public **addInline** (*Phalcon\Assets\Inline* \$code)
Adds an inline code to the collection
public **addCss** (*mixed* \$path, [*mixed* \$local], [*mixed* \$filter], [*mixed* \$attributes])
Adds a CSS resource to the collection
public **addInlineCss** (*mixed* \$content, [*mixed* \$filter], [*mixed* \$attributes])
Adds an inline CSS to the collection
public *Phalcon\Assets\Collection* **addJs** (*string* \$path, [*boolean* \$local], [*boolean* \$filter], [*array* \$attributes])
Adds a javascript resource to the collection
public **addInlineJs** (*mixed* \$content, [*mixed* \$filter], [*mixed* \$attributes])
Adds an inline javascript to the collection
public **count** ()
Returns the number of elements in the form
public **rewind** ()
Rewinds the internal iterator
public **current** ()
Returns the current resource in the iterator

public *int* **key** ()

Returns the current position/key in the iterator

public **next** ()

Moves the internal iteration pointer to the next position

public **valid** ()

Check if the current element in the iterator is valid

public **setTargetPath** (*mixed* \$targetPath)

Sets the target path of the file for the filtered/join output

public **setSourcePath** (*mixed* \$sourcePath)

Sets a base source path for all the resources in this collection

public **setTargetUri** (*mixed* \$targetUri)

Sets a target uri for the generated HTML

public **setPrefix** (*mixed* \$prefix)

Sets a common prefix for all the resources

public **setLocal** (*mixed* \$local)

Sets if the collection uses local resources by default

public **setAttributes** (*array* \$attributes)

Sets extra HTML attributes

public **setFilters** (*array* \$filters)

Sets an array of filters in the collection

public **setTargetLocal** (*mixed* \$targetLocal)

Sets the target local

public **join** (*mixed* \$join)

Sets if all filtered resources in the collection must be joined in a single result file

public **getRealTargetPath** (*mixed* \$basePath)

Returns the complete location where the joined/filtered collection must be written

public **addFilter** (*Phalcon\Assets\FilterInterface* \$filter)

Adds a filter to the collection

Class **Phalcon\Assets\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Assets\Filters\Cssmin](#)

implements [Phalcon\Assets\FilterInterface](#)

Minify the css - removes comments removes newlines and line feeds keeping removes last semicolon from last property

Methods

public **filter** (*mixed* \$content)

Filters the content using CSSMIN

Class Phalcon\Assets\Filters\Jsmin

implements Phalcon\Assets\FilterInterface

Deletes the characters which are insignificant to JavaScript. Comments will be removed. Tabs will be replaced with spaces. Carriage returns will be replaced with linefeeds. Most spaces and linefeeds will be removed.

Methods

public **filter** (*mixed* \$content)

Filters the content using JSMIN

Class Phalcon\Assets\Filters\None

implements Phalcon\Assets\FilterInterface

Returns the content without make any modification to the original source

Methods

public **filter** (*mixed* \$content)

Returns the content without be touched

Class Phalcon\Assets\Inline

Represents an inline asset

```
<?php
$inline = new \Phalcon\Assets\Inline("js", "alert('hello world');");
```

Methods

public **getType** ()

...

public **getContent** ()

...

public **getFilter** ()

...

public **getAttributes** ()

...

public **__construct** (*string* \$type, *string* \$content, [*boolean* \$filter], [*array* \$attributes])

Phalcon\Assets\Inline constructor

public **setType** (*mixed* \$type)

Sets the inline's type

public **setFilter** (*mixed* \$filter)

Sets if the resource must be filtered or not

public **setAttributes** (*array* \$attributes)

Sets extra HTML attributes

Class `Phalcon\Assets\Inline\Css`

extends class `Phalcon\Assets\Inline`

Represents an inlined CSS

Methods

public **__construct** (*string* \$content, [*boolean* \$filter], [*array* \$attributes])

public **getType** () inherited from *`Phalcon\Assets\Inline`*

...

public **getContent** () inherited from *`Phalcon\Assets\Inline`*

...

public **getFilter** () inherited from *`Phalcon\Assets\Inline`*

...

public **getAttributes** () inherited from *`Phalcon\Assets\Inline`*

...

public **setType** (*mixed* \$type) inherited from *`Phalcon\Assets\Inline`*

Sets the inline's type

public **setFilter** (*mixed* \$filter) inherited from *`Phalcon\Assets\Inline`*

Sets if the resource must be filtered or not

public **setAttributes** (*array* \$attributes) inherited from *`Phalcon\Assets\Inline`*

Sets extra HTML attributes

Class `Phalcon\Assets\Inline\Js`

extends class `Phalcon\Assets\Inline`

Represents an inline Javascript

Methods

public **__construct** (*string* \$content, [*boolean* \$filter], [*array* \$attributes])

public **getType** () inherited from *`Phalcon\Assets\Inline`*

...

public **getContent** () inherited from *Phalcon\Assets\Inline*
...
public **getFilter** () inherited from *Phalcon\Assets\Inline*
...
public **getAttributes** () inherited from *Phalcon\Assets\Inline*
...
public **setType** (*mixed* \$type) inherited from *Phalcon\Assets\Inline*
Sets the inline's type
public **setFilter** (*mixed* \$filter) inherited from *Phalcon\Assets\Inline*
Sets if the resource must be filtered or not
public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Assets\Inline*
Sets extra HTML attributes

Class *Phalcon\Assets\Manager*

Manages collections of CSS/Javascript assets

Methods

public **__construct** ([*array* \$options])
public **setOptions** (*array* \$options)
Sets the manager options
public **getOptions** ()
Returns the manager options
public **useImplicitOutput** (*mixed* \$implicitOutput)
Sets if the HTML generated must be directly printed or returned
public **addCss** (*mixed* \$path, [*mixed* \$local], [*mixed* \$filter], [*mixed* \$attributes])
Adds a Css resource to the 'css' collection

```
<?php
$assets->addCss("css/bootstrap.css");
$assets->addCss("http://bootstrap.my-cdn.com/style.css", false);
```

public **addInlineCss** (*mixed* \$content, [*mixed* \$filter], [*mixed* \$attributes])
Adds an inline Css to the 'css' collection
public **addJs** (*mixed* \$path, [*mixed* \$local], [*mixed* \$filter], [*mixed* \$attributes])
Adds a javascript resource to the 'js' collection

```
<?php
$assets->addJs("scripts/jquery.js");
$assets->addJs("http://jquery.my-cdn.com/jquery.js", false);
```

public **addInlineJs** (*mixed* \$content, [*mixed* \$filter], [*mixed* \$attributes])

Adds an inline javascript to the 'js' collection

public **addResourceByType** (*mixed* \$type, *Phalcon\Assets\Resource* \$resource)

Adds a resource by its type

```
<?php
$assets->addResourceByType("css",
    new \Phalcon\Assets\Resource\Css("css/style.css")
);
```

public **addInlineCodeByType** (*mixed* \$type, *Phalcon\Assets\Inline* \$code)

Adds an inline code by its type

public **addResource** (*Phalcon\Assets\Resource* \$resource)

Adds a raw resource to the manager

```
<?php
$assets->addResource(
    new \Phalcon\Assets\Resource("css", "css/style.css")
);
```

public **addInlineCode** (*Phalcon\Assets\Inline* \$code)

Adds a raw inline code to the manager

public **set** (*mixed* \$id, *Phalcon\Assets\Collection* \$collection)

Sets a collection in the Assets Manager

```
<?php
$assets->set("js", $collection);
```

public **get** (*mixed* \$id)

Returns a collection by its id

```
<?php
$scripts = $assets->get("js");
```

public **getCss** ()

Returns the CSS collection of assets

public **getJs** ()

Returns the CSS collection of assets

public **collection** (*mixed* \$name)

Creates/Returns a collection of resources

public **output** (*Phalcon\Assets\Collection* \$collection, *callback* \$callback, *string* \$type)

Traverses a collection calling the callback to generate its HTML

public **outputInline** (*Phalcon\Assets\Collection* \$collection, *string* \$type)

Traverses a collection and generate its HTML

public **outputCss** ([*string* \$collectionName])

Prints the HTML for CSS resources

public **outputInlineCss** ([*string* \$collectionName])

Prints the HTML for inline CSS

public **outputJs** ([*string* \$collectionName])

Prints the HTML for JS resources

public **outputInlineJs** ([*string* \$collectionName])

Prints the HTML for inline JS

public **getCollections** ()

Returns existing collections in the manager

public **exists** (*mixed* \$id)

Returns true or false if collection exists

Class **Phalcon\Assets\Resource**

Represents an asset resource

```
<?php
$resource = new \Phalcon\Assets\Resource("js", "javascripts/jquery.js");
```

Methods

public **getType** ()

public **getPath** ()

public **getLocal** ()

public **getFilter** ()

public **getAttributes** ()

public **getSourcePath** ()

...

public **getTargetPath** ()

...

public **getTargetUri** ()

...

public **__construct** (*string* \$type, *string* \$path, [*boolean* \$local], [*boolean* \$filter], [*array* \$attributes])

Phalcon\Assets\Resource constructor

public **setType** (*mixed* \$type)

Sets the resource's type

public **setPath** (*mixed* \$path)

Sets the resource's path

public **setLocal** (*mixed* \$local)

Sets if the resource is local or external

public **setFilter** (*mixed* \$filter)

Sets if the resource must be filtered or not

public **setAttributes** (*array* \$attributes)

Sets extra HTML attributes

public **setTargetUri** (*mixed* \$targetUri)

Sets a target uri for the generated HTML

public **setSourcePath** (*mixed* \$sourcePath)

Sets the resource's source path

public **setTargetPath** (*mixed* \$targetPath)

Sets the resource's target path

public **getContent** ([*mixed* \$basePath])

Returns the content of the resource as an string Optionally a base path where the resource is located can be set

public **getRealTargetUri** ()

Returns the real target uri for the generated HTML

public **getRealSourcePath** ([*mixed* \$basePath])

Returns the complete location where the resource is located

public **getRealTargetPath** ([*mixed* \$basePath])

Returns the complete location where the resource must be written

Class Phalcon\Assets\Resource\Css

extends class *Phalcon\Assets\Resource*

Represents CSS resources

Methods

public **__construct** (*string* \$path, [*boolean* \$local], [*boolean* \$filter], [*array* \$attributes])

public **getType** () inherited from *Phalcon\Assets\Resource*

public **getPath** () inherited from *Phalcon\Assets\Resource*

public **getLocal** () inherited from *Phalcon\Assets\Resource*

public **getFilter** () inherited from *Phalcon\Assets\Resource*

public **getAttributes** () inherited from *Phalcon\Assets\Resource*

public **getSourcePath** () inherited from *Phalcon\Assets\Resource*

...

public **getTargetPath** () inherited from *Phalcon\Assets\Resource*

...

public **getTargetUri** () inherited from *Phalcon\Assets\Resource*

...

public **setType** (*mixed* \$type) inherited from *Phalcon\Assets\Resource*

Sets the resource's type

public **setPath** (*mixed* \$path) inherited from *Phalcon\Assets\Resource*

Sets the resource's path

public **setLocal** (*mixed* \$local) inherited from *Phalcon\Assets\Resource*

Sets if the resource is local or external

public **setFilter** (*mixed* \$filter) inherited from *Phalcon\Assets\Resource*

Sets if the resource must be filtered or not

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Assets\Resource*

Sets extra HTML attributes

public **setTargetUri** (*mixed* \$targetUri) inherited from *Phalcon\Assets\Resource*

Sets a target uri for the generated HTML

public **setSourcePath** (*mixed* \$sourcePath) inherited from *Phalcon\Assets\Resource*

Sets the resource's source path

public **setTargetPath** (*mixed* \$targetPath) inherited from *Phalcon\Assets\Resource*

Sets the resource's target path

public **getContent** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the content of the resource as an string Optionally a base path where the resource is located can be set

public **getRealTargetUri** () inherited from *Phalcon\Assets\Resource*

Returns the real target uri for the generated HTML

public **getRealSourcePath** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the complete location where the resource is located

public **getRealTargetPath** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the complete location where the resource must be written

Class *Phalcon\Assets\Resource\Js*

extends class *Phalcon\Assets\Resource*

Represents Javascript resources

Methods

public **__construct** (*string* \$path, [*boolean* \$local], [*boolean* \$filter], [*array* \$attributes])

public **getType** () inherited from *Phalcon\Assets\Resource*

public **getPath** () inherited from *Phalcon\Assets\Resource*

public **getLocal** () inherited from *Phalcon\Assets\Resource*

public **getFilter** () inherited from *Phalcon\Assets\Resource*

public **getAttributes** () inherited from *Phalcon\Assets\Resource*

public **getSourcePath** () inherited from *Phalcon\Assets\Resource*

...

public **getTargetPath** () inherited from *Phalcon\Assets\Resource*

...

public **getTargetUri** () inherited from *Phalcon\Assets\Resource*

...

public **setType** (*mixed* \$type) inherited from *Phalcon\Assets\Resource*

Sets the resource's type

public **setPath** (*mixed* \$path) inherited from *Phalcon\Assets\Resource*

Sets the resource's path

public **setLocal** (*mixed* \$local) inherited from *Phalcon\Assets\Resource*

Sets if the resource is local or external

public **setFilter** (*mixed* \$filter) inherited from *Phalcon\Assets\Resource*

Sets if the resource must be filtered or not

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Assets\Resource*

Sets extra HTML attributes

public **setTargetUri** (*mixed* \$targetUri) inherited from *Phalcon\Assets\Resource*

Sets a target uri for the generated HTML

public **setSourcePath** (*mixed* \$sourcePath) inherited from *Phalcon\Assets\Resource*

Sets the resource's source path

public **setTargetPath** (*mixed* \$targetPath) inherited from *Phalcon\Assets\Resource*

Sets the resource's target path

public **getContent** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the content of the resource as an string Optionally a base path where the resource is located can be set

public **getRealTargetUri** () inherited from *Phalcon\Assets\Resource*

Returns the real target uri for the generated HTML

public **getRealSourcePath** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the complete location where the resource is located

public **getRealTargetPath** ([*mixed* \$basePath]) inherited from *Phalcon\Assets\Resource*

Returns the complete location where the resource must be written

Abstract class `Phalcon\Cache\Backend`

implements `Phalcon\Cache\BackendInterface`

This class implements common functionality for backend adapters. A backend cache adapter may extend this class

Methods

public **getFrontend** ()

...

public **setFrontend** (*mixed* \$frontend)

...

public **getOptions** ()

...

public **setOptions** (*mixed* \$options)

...

public **getLastKey** ()

...

public **setLastKey** (*mixed* \$lastKey)

...

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [*array* \$options])

Phalcon\Cache\Backend constructor

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime])

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([*mixed* \$stopBuffer])

Stops the frontend without store any cached content

public **isFresh** ()

Checks whether the last cache is fresh or cached

public **isStarted** ()

Checks whether the cache has starting buffering or not

public *int* **getLifetime** ()

Gets the last lifetime set

abstract public **get** (*mixed* \$keyName, [*mixed* \$lifetime]) inherited from *Phalcon\Cache\BackendInterface*

...

abstract public **save** ([*mixed* \$keyName], [*mixed* \$content], [*mixed* \$lifetime], [*mixed* \$stopBuffer]) inherited from *Phalcon\Cache\BackendInterface*

...

abstract public **delete** (*mixed* \$keyName) inherited from *Phalcon\Cache\BackendInterface*

...

abstract public **queryKeys** ([*mixed* \$prefix]) inherited from *Phalcon\Cache\BackendInterface*

...

abstract public **exists** ([*mixed* \$keyName], [*mixed* \$lifetime]) inherited from *Phalcon\Cache\BackendInterface*

...

Class Phalcon\Cache\Backend\Apc

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data and raw data using an APC backend

```
<?php

use Phalcon\Cache\Backend\Apc;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data for 2 days
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

$cache = new Apc(
    $frontCache,
    [
        "prefix" => "app-data",
    ]
);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*string* | *int* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the APC backend and stops the frontend

public **increment** ([*string* \$keyName], [*mixed* \$value])

Increment of a given key, by number \$value

public **decrement** ([*string* \$keyName], [*mixed* \$value])

Decrement of a given key, by number \$value

public **delete** (*mixed* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** (*mixed* \$prefix)

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** (*string* | *int* \$keyName, [*int* \$lifetime])

Checks if cache exists and it hasn't expired

public **flush** ()

Immediately invalidates all existing items.

```
<?php

use Phalcon\Cache\Backend\Apc;

$cache = new Apc($frontCache, ["prefix" => "app-data"]);

$cache->save("my-data", [1, 2, 3, 4, 5]);

// 'my-data' and all other used keys are deleted
$cache->flush();
```

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (*mixed* \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (*mixed* \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (*mixed* \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [*array* \$options]) inherited from *Phalcon\Cache\Backend*

Phalcon\Cache\Backend constructor

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([mixed \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public **int getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class *Phalcon\Cache\Backend\File*

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments using a file backend

```
<?php

use Phalcon\Cache\Backend\File;
use Phalcon\Cache\Frontend\Output as FrontOutput;

// Cache the file for 2 days
$frontendOptions = [
    "lifetime" => 172800,
];

// Create an output cache
$frontCache = FrontOutput($frontendOptions);

// Set the cache directory
$backendOptions = [
    "cacheDir" => "../app/cache/",
];

// Create the File backend
$cache = new File($frontCache, $backendOptions);

$content = $cache->start("my-cache");

if ($content === null) {
    echo "<h1>", time(), "</h1>";

    $cache->save();
} else {
    echo $content;
}
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, array \$options)

Phalcon\Cache\Backend\File constructor

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

public **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([*string* | *int* \$keyName], [*int* \$lifetime])

Checks if cache exists and it isn't expired

public **increment** ([*string* | *int* \$keyName], [*mixed* \$value])

Increment of a given key, by number \$value

public **decrement** ([*string* | *int* \$keyName], [*mixed* \$value])

Decrement of a given key, by number \$value

public **flush** ()

Immediately invalidates all existing items.

public **getKey** (*mixed* \$key)

Return a file-system safe identifier for a given key

public **useSafeKey** (*mixed* \$useSafeKey)

Set whether to use the safekey or not

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (*mixed* \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (*mixed* \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (*mixed* \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([*mixed* \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public *int* **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class *Phalcon\Cache\Backend\Libmemcached*

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data or raw data to a libmemcached backend. Per default persistent memcached connection pools are used.

```
<?php

use Phalcon\Cache\Backend\Libmemcached;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data for 2 days
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

// Create the Cache setting memcached connection options
$cache = new Libmemcached(
    $frontCache,
    [
        "servers" => [
            [
                "host"    => "127.0.0.1",
                "port"    => 11211,
                "weight" => 1,
            ],
        ],
        "client" => [
            \Memcached::OPT_HASH           => \Memcached::HASH_MD5,
            \Memcached::OPT_PREFIX_KEY => "prefix.",
        ],
    ],
);

// Cache arbitrary data
```

```
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [*array* \$options])

Phalcon\Cache\Backend\Memcache constructor

public **_connect** ()

Create internal connection to memcached

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

public *boolean* **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([*string* \$keyName], [*int* \$lifetime])

Checks if cache exists and it isn't expired

public **increment** ([*string* \$keyName], [*mixed* \$value])

Increment of given \$keyName by \$value

public **decrement** ([*string* \$keyName], [*mixed* \$value])

Decrement of \$keyName by given \$value

public **flush** ()

Immediately invalidates all existing items. Memcached does not support flush() per default. If you require flush() support, set \$config["statsKey"]. All modified keys are stored in "statsKey". Note: statsKey has a negative performance impact.

```
<?php

$cache = new \Phalcon\Cache\Backend\Libmemcached(
    $frontCache,
    [
        "statsKey" => "_PHCM",
    ]
);
```



```

    ]
);

$cache->save("my-data", [1, 2, 3, 4, 5]);

// 'my-data' and all other used keys are deleted
$cache->flush();

```

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (*mixed* \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (*mixed* \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (*mixed* \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([*mixed* \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public *int* **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class *Phalcon\Cache\Backend\Memcache*

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data or raw data to a memcache backend

This adapter uses the special memcached key “_PHCM” to store all the keys internally used by the adapter

```
<?php

use Phalcon\Cache\Backend\Memcache;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data for 2 days
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

// Create the Cache setting memcached connection options
$cache = new Memcache(
    $frontCache,
    [
        "host"      => "localhost",
        "port"      => 11211,
        "persistent" => false,
    ]
);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [*array* \$options])

Phalcon\Cache\Backend\Memcache constructor

public **_connect** ()

Create internal connection to memcached

public **addServers** (*mixed* \$host, *mixed* \$port, [*mixed* \$persistent])

Add servers to memcache pool

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

public *boolean* **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
```

```
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([string \$keyName], [int \$lifetime])

Checks if cache exists and it isn't expired

public **increment** ([string \$keyName], [mixed \$value])

Increment of given \$keyName by \$value

public **decrement** ([string \$keyName], [mixed \$value])

Decrement of \$keyName by given \$value

public **flush** ()

Immediately invalidates all existing items.

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (mixed \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (mixed \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (mixed \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public mixed **start** (int | string \$keyName, [int \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([mixed \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public int **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class Phalcon\Cache\Backend\Memory

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*, *Serializable*

Stores content in memory. Data is lost when the request is finished

```
<?php

use Phalcon\Cache\Backend\Memory;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data
$frontCache = new FrontData();

$cache = new Memory($frontCache);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the backend and stops the frontend

public *boolean* **delete** (*string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([*string* | *int* \$keyName], [*int* \$lifetime])

Checks if cache exists and it hasn't expired

public **increment** ([*string* \$keyName], [*mixed* \$value])

Increment of given \$keyName by \$value

public **decrement** ([*string* \$keyName], [*mixed* \$value])

Decrement of \$keyName by given \$value

public **flush** ()

Immediately invalidates all existing items.

public **serialize** ()

Required for interface \Serializable

public **unserialize** (*mixed* \$data)

Required for interface \Serializable

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (*mixed* \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (*mixed* \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (*mixed* \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [array \$options]) inherited from *Phalcon\Cache\Backend*

Phalcon\Cache\Backend constructor

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([*mixed* \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public *int* **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class *Phalcon\Cache\Backend\Mongo*

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data or raw data to a MongoDB backend

```
<?php

use Phalcon\Cache\Backend\Mongo;
use Phalcon\Cache\Frontend\Base64;

// Cache data for 2 days
$frontCache = new Base64(
    [
        "lifetime" => 172800,
    ]
);

// Create a MongoDB cache
$cache = new Mongo(
    $frontCache,
    [
        "server"      => "mongodb://localhost",
        "db"           => "caches",
        "collection" => "images",
    ]
);

// Cache arbitrary data
$cache->save(
    "my-data",
    file_get_contents("some-image.jpg")
);

// Get data
$data = $cache->get("my-data");
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [array \$options])

Phalcon\Cache\Backend\Mongo constructor

final protected *MongoCollection* **_getCollection** ()

Returns a MongoDB collection based on the backend parameters

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

public *boolean* **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
```

```
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([string \$keyName], [int \$lifetime])

Checks if cache exists and it isn't expired

public *collection->remove(...)* **gc** ()

gc

public **increment** (int | string \$keyName, [mixed \$value])

Increment of a given key by \$value

public **decrement** (int | string \$keyName, [mixed \$value])

Decrement of a given key by \$value

public **flush** ()

Immediately invalidates all existing items.

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (mixed \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (mixed \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (mixed \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public mixed **start** (int | string \$keyName, [int \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([mixed \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public int **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class Phalcon\Cache\Backend\Redis

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data or raw data to a redis backend

This adapter uses the special redis key “_PHCR” to store all the keys internally used by the adapter

```
<?php

use Phalcon\Cache\Backend\Redis;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data for 2 days
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

// Create the Cache setting redis connection options
$cache = new Redis(
    $frontCache,
    [
        "host"      => "localhost",
        "port"      => 6379,
        "auth"      => "foobared",
        "persistent" => false,
        "index"     => 0,
    ]
);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [array \$options])

Phalcon\Cache\Backend\Redis constructor

public **_connect** ()

Create internal connection to redis

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

```
<?php
```



```
$cache->save("my-key", $data);

// Save data termlessly
$cache->save("my-key", $data, -1);
```

public **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([*mixed* \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([*string* \$keyName], [*int* \$lifetime])

Checks if cache exists and it isn't expired

public **increment** ([*string* \$keyName], [*mixed* \$value])

Increment of given \$keyName by \$value

public **decrement** ([*string* \$keyName], [*mixed* \$value])

Decrement of \$keyName by given \$value

public **flush** ()

Immediately invalidates all existing items.

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (*mixed* \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (*mixed* \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (*mixed* \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public *mixed* **start** (*int* | *string* \$keyName, [*int* \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([*mixed* \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public **int getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class Phalcon\Cache\Backend\Xcache

extends abstract class *Phalcon\Cache\Backend*

implements *Phalcon\Cache\BackendInterface*

Allows to cache output fragments, PHP data and raw data using an XCache backend

```
<?php

use Phalcon\Cache\Backend\Xcache;
use Phalcon\Cache\Frontend\Data as FrontData;

// Cache data for 2 days
$frontCache = new FrontData(
    [
        "lifetime" => 172800,
    ]
);

$cache = new Xcache(
    $frontCache,
    [
        "prefix" => "app-data",
    ]
);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");
```

Methods

public **__construct** (*Phalcon\Cache\FrontendInterface* \$frontend, [array \$options])

Phalcon\Cache\Backend\Xcache constructor

public **get** (*mixed* \$keyName, [*mixed* \$lifetime])

Returns a cached content

public **save** ([*int* | *string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into the file backend and stops the frontend

public *boolean* **delete** (*int* | *string* \$keyName)

Deletes a value from the cache by its key

public **queryKeys** ([mixed \$prefix])

Query the existing cached keys.

```
<?php

$cache->save("users-ids", [1, 2, 3]);
$cache->save("projects-ids", [4, 5, 6]);

var_dump($cache->queryKeys("users")); // ["users-ids"]
```

public **exists** ([string \$keyName], [int \$lifetime])

Checks if cache exists and it isn't expired

public **increment** (string \$keyName, [mixed \$value])

Atomic increment of a given key, by number \$value

public **decrement** (string \$keyName, [mixed \$value])

Atomic decrement of a given key, by number \$value

public **flush** ()

Immediately invalidates all existing items.

public **getFrontend** () inherited from *Phalcon\Cache\Backend*

...

public **setFrontend** (mixed \$frontend) inherited from *Phalcon\Cache\Backend*

...

public **getOptions** () inherited from *Phalcon\Cache\Backend*

...

public **setOptions** (mixed \$options) inherited from *Phalcon\Cache\Backend*

...

public **getLastKey** () inherited from *Phalcon\Cache\Backend*

...

public **setLastKey** (mixed \$lastKey) inherited from *Phalcon\Cache\Backend*

...

public mixed **start** (int | string \$keyName, [int \$lifetime]) inherited from *Phalcon\Cache\Backend*

Starts a cache. The keyname allows to identify the created fragment

public **stop** ([mixed \$stopBuffer]) inherited from *Phalcon\Cache\Backend*

Stops the frontend without store any cached content

public **isFresh** () inherited from *Phalcon\Cache\Backend*

Checks whether the last cache is fresh or cached

public **isStarted** () inherited from *Phalcon\Cache\Backend*

Checks whether the cache has starting buffering or not

public int **getLifetime** () inherited from *Phalcon\Cache\Backend*

Gets the last lifetime set

Class `Phalcon\Cache\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private `Exception` **__clone** () inherited from `Exception`

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [`Exception` \$previous]) inherited from `Exception`

Exception constructor

public **__wakeup** () inherited from `Exception`

...

final public *string* **getMessage** () inherited from `Exception`

Gets the Exception message

final public *int* **getCode** () inherited from `Exception`

Gets the Exception code

final public *string* **getFile** () inherited from `Exception`

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from `Exception`

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from `Exception`

Gets the stack trace

final public `Exception` **getPrevious** () inherited from `Exception`

Returns previous Exception

final public `Exception` **getTraceAsString** () inherited from `Exception`

Gets the stack trace as a string

public *string* **__toString** () inherited from `Exception`

String representation of the exception

Class `Phalcon\Cache\Frontend\Base64`

implements `Phalcon\Cache\FrontendInterface`

Allows to cache data converting/deconverting them to base64.

This adapter uses the `base64_encode`/`base64_decode` PHP's functions

```

<?php

<?php

// Cache the files for 2 days using a Base64 frontend
$frontCache = new \Phalcon\Cache\Frontend\Base64 (
    [
        "lifetime" => 172800,
    ]
);

//Create a MongoDB cache
$cache = new \Phalcon\Cache\Backend\Mongo(
    $frontCache,
    [
        "server"      => "mongodb://localhost",
        "db"           => "caches",
        "collection" => "images",
    ]
);

$cacheKey = "some-image.jpg.cache";

// Try to get cached image
$image = $cache->get($cacheKey);

if ($image === null) {
    // Store the image in the cache
    $cache->save(
        $cacheKey,
        file_get_contents("tmp-dir/some-image.jpg")
    );
}

header("Content-Type: image/jpeg");

echo $image;

```

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Base64 constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Actually, does nothing in this adapter

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (*mixed* \$data)

Serializes data before storing them

public **afterRetrieve** (*mixed* \$data)

Unserializes data after retrieval

Class `Phalcon\Cache\Frontend\Data`

implements `Phalcon\Cache\FrontendInterface`

Allows to cache native PHP data in a serialized form

```
<?php

use Phalcon\Cache\Backend\File;
use Phalcon\Cache\Frontend\Data;

// Cache the files for 2 days using a Data frontend
$frontCache = new Data(
    [
        "lifetime" => 172800,
    ]
);

// Create the component that will cache "Data" to a 'File' backend
// Set the cache file directory - important to keep the '/' at the end of
// of the value for the folder
$cache = new File(
    $frontCache,
    [
        "cacheDir" => "../app/cache/",
    ]
);

$cacheKey = "robots_order_id.cache";

// Try to get cached records
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // $robots is null due to cache expiration or data does not exist
    // Make the database call and populate the variable
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    // Store it in the cache
    $cache->save($cacheKey, $robots);
}

// Use $robots :)
foreach ($robots as $robot) {
```

```

    echo $robot->name, "\n";
}

```

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Data constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Actually, does nothing

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (mixed \$data)

Serializes data before storing them

public **afterRetrieve** (mixed \$data)

Unserializes data after retrieval

Class Phalcon\Cache\Frontend\Igbinary

extends class *Phalcon\Cache\Frontend\Data*

implements *Phalcon\Cache\FrontendInterface*

Allows to cache native PHP data in a serialized form using igbinary extension

```

<?php

// Cache the files for 2 days using Igbinary frontend
$frontCache = new \Phalcon\Cache\Frontend\Igbinary(
    [
        "lifetime" => 172800,
    ]
);

// Create the component that will cache "Igbinary" to a "File" backend
// Set the cache file directory - important to keep the "/" at the end of
// of the value for the folder
$cache = new \Phalcon\Cache\Backend\File(
    $frontCache,
    [
        "cacheDir" => "../app/cache/",
    ]
);

```

```
]
);

$cacheKey = "robots_order_id.cache";

// Try to get cached records
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // $robots is null due to cache expiration or data do not exist
    // Make the database call and populate the variable
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    // Store it in the cache
    $cache->save($cacheKey, $robots);
}

// Use $robots :)
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Data constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Actually, does nothing

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (*mixed* \$data)

Serializes data before storing them

public **afterRetrieve** (*mixed* \$data)

Unserializes data after retrieval

Class Phalcon\Cache\Frontend\Json

implements Phalcon\Cache\FrontendInterface

Allows to cache data converting/deconverting them to JSON.

This adapter uses the json_encode/json_decode PHP's functions

As the data is encoded in JSON other systems accessing the same backend could process them

```

<?php

<?php

// Cache the data for 2 days
$frontCache = new \Phalcon\Cache\Frontend\Json (
    [
        "lifetime" => 172800,
    ]
);

// Create the Cache setting memcached connection options
$cache = new \Phalcon\Cache\Backend\Memcache (
    $frontCache,
    [
        "host"      => "localhost",
        "port"      => 11211,
        "persistent" => false,
    ]
);

// Cache arbitrary data
$cache->save("my-data", [1, 2, 3, 4, 5]);

// Get data
$data = $cache->get("my-data");

```

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Base64 constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Actually, does nothing

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (*mixed* \$data)

Serializes data before storing them

public **afterRetrieve** (*mixed* \$data)

Unserializes data after retrieval

Class Phalcon\Cache\Frontend\Msgpack

extends class Phalcon\Cache\Frontend\Data

implements Phalcon\Cache\FrontendInterface

Allows to cache native PHP data in a serialized form using msgpack extension This adapter uses a Msgpack frontend to store the cached content and requires msgpack extension.

```
<?php

use Phalcon\Cache\Backend\File;
use Phalcon\Cache\Frontend\Msgpack;

// Cache the files for 2 days using Msgpack frontend
$frontCache = new Msgpack(
    [
        "lifetime" => 172800,
    ]
);

// Create the component that will cache "Msgpack" to a "File" backend
// Set the cache file directory - important to keep the "/" at the end of
// of the value for the folder
$cache = new File(
    $frontCache,
    [
        "cacheDir" => "../app/cache/",
    ]
);

$cacheKey = "robots_order_id.cache";

// Try to get cached records
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // $robots is null due to cache expiration or data do not exist
    // Make the database call and populate the variable
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    // Store it in the cache
    $cache->save($cacheKey, $robots);
}

// Use $robots
foreach ($robots as $robot) {
```

```

    echo $robot->name, "\n";
}

```

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Msgpack constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Actually, does nothing

public **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (mixed \$data)

Serializes data before storing them

public **afterRetrieve** (mixed \$data)

Unserializes data after retrieval

Class Phalcon\Cache\Frontend\None

implements *Phalcon\Cache\FrontendInterface*

Discards any kind of frontend data input. This frontend does not have expiration time or any other options

```

<?php

<?php

//Create a None Cache
$frontCache = new \Phalcon\Cache\Frontend\None();

// Create the component that will cache "Data" to a "Memcached" backend
// Memcached connection settings
$cache = new \Phalcon\Cache\Backend\Memcache(
    $frontCache,
    [
        "host" => "localhost",
        "port" => "11211",
    ]
);

$cacheKey = "robots_order_id.cache";

```

```
// This Frontend always return the data as it's returned by the backend
$robots = $cache->get($cacheKey);

if ($robots === null) {
    // This cache doesn't perform any expiration checking, so the data is always_
    ↪expired
    // Make the database call and populate the variable
    $robots = Robots::find(
        [
            "order" => "id",
        ]
    );

    $cache->save($cacheKey, $robots);
}

// Use $robots :)
foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

Methods

public **getLifetime** ()

Returns cache lifetime, always one second expiring content

public **isBuffering** ()

Check whether if frontend is buffering output, always false

public **start** ()

Starts output frontend

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (*mixed* \$data)

Prepare data to be stored

public **afterRetrieve** (*mixed* \$data)

Prepares data to be retrieved to user

Class **Phalcon\Cache\Frontend\Output**

implements *Phalcon\Cache\FrontendInterface*

Allows to cache output fragments captured with ob_* functions

```

<?php

*
* use Phalcon\Tag;
* use Phalcon\Cache\Backend\File;
* use Phalcon\Cache\Frontend\Output;
*
* // Create an Output frontend. Cache the files for 2 days
* $frontCache = new Output(
*     [
*         "lifetime" => 172800,
*     ]
* );
*
* // Create the component that will cache from the "Output" to a "File" backend
* // Set the cache file directory - it's important to keep the "/" at the end of
* // the value for the folder
* $cache = new File(
*     $frontCache,
*     [
*         "cacheDir" => "../app/cache/",
*     ]
* );
*
* // Get/Set the cache file to ../app/cache/my-cache.html
* $content = $cache->start("my-cache.html");
*
* // If $content is null then the content will be generated for the cache
* if (null === $content) {
*     // Print date and time
*     echo date("r");
*
*     // Generate a link to the sign-up action
*     echo Tag::linkTo(
*         [
*             "user/signup",
*             "Sign Up",
*             "class" => "signup-button",
*         ]
*     );
*
*     // Store the output into the cache file
*     $cache->save();
* } else {
*     // Echo the cached output
*     echo $content;
* }

```

•

Methods

public **__construct** ([array \$frontendOptions])

Phalcon\Cache\Frontend\Output constructor

public **getLifetime** ()

Returns the cache lifetime

public **isBuffering** ()

Check whether if frontend is buffering output

public **start** ()

Starts output frontend. Currently, does nothing

public *string* **getContent** ()

Returns output cached content

public **stop** ()

Stops output frontend

public **beforeStore** (*mixed* \$data)

Serializes data before storing them

public **afterRetrieve** (*mixed* \$data)

Unserializes data after retrieval

Class Phalcon\Cache\Multiple

Allows to read to chained backend adapters writing to multiple backends

```
<?php

use Phalcon\Cache\Frontend\Data as DataFrontend;
use Phalcon\Cache\Multiple;
use Phalcon\Cache\Backend\Apc as ApcCache;
use Phalcon\Cache\Backend\Memcache as MemcacheCache;
use Phalcon\Cache\Backend\File as FileCache;

$ultraFastFrontend = new DataFrontend(
    [
        "lifetime" => 3600,
    ]
);

$fastFrontend = new DataFrontend(
    [
        "lifetime" => 86400,
    ]
);

$slowFrontend = new DataFrontend(
    [
        "lifetime" => 604800,
    ]
);

//Backends are registered from the fastest to the slower
$cache = new Multiple(
    [
        new ApcCache(
            $ultraFastFrontend,
            [
```

```

        "prefix" => "cache",
    ]
),
new MemcacheCache (
    $fastFrontend,
    [
        "prefix" => "cache",
        "host"    => "localhost",
        "port"    => "11211",
    ]
),
new FileCache (
    $slowFrontend,
    [
        "prefix"    => "cache",
        "cacheDir" => "../app/cache/",
    ]
),
];

//Save, saves in every backend
$cache->save("my-key", $data);

```

Methods

public **__construct** ([*Phalcon\Cache\BackendInterface*[] \$backends])

Phalcon\Cache\Multiple constructor

public **push** (*Phalcon\Cache\BackendInterface* \$backend)

Adds a backend

public *mixed* **get** (*string* | *int* \$keyName, [*int* \$lifetime])

Returns a cached content reading the internal backends

public **start** (*string* | *int* \$keyName, [*int* \$lifetime])

Starts every backend

public **save** ([*string* \$keyName], [*string* \$content], [*int* \$lifetime], [*boolean* \$stopBuffer])

Stores cached content into all backends and stops the frontend

public *boolean* **delete** (*string* | *int* \$keyName)

Deletes a value from each backend

public **exists** ([*string* | *int* \$keyName], [*int* \$lifetime])

Checks if cache exists in at least one backend

public **flush** ()

Flush all backend(s)

Class Phalcon\Cli\Console

extends abstract class *Phalcon\Application*

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Events\EventsAwareInterface*

This component allows to create CLI applications using Phalcon

Methods

public **addModules** (array \$modules)

Merge modules with the existing ones

```
<?php

$application->addModules (
    [
        "admin" => [
            "className" => "Multiple\\Admin\\Module",
            "path"       => "../apps/admin/Module.php",
        ],
    ]
);
```

public **handle** ([array \$arguments])

Handle the whole command-line tasks

public **setArgument** ([array \$arguments], [mixed \$str], [mixed \$shift])

Set an specific argument

public **__construct** ([*Phalcon\DiInterface* \$dependencyInjector]) inherited from *Phalcon\Application*

Phalcon\Application

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Application*

Sets the events manager

public **getEventManager** () inherited from *Phalcon\Application*

Returns the internal event manager

public **registerModules** (array \$modules, [mixed \$merge]) inherited from *Phalcon\Application*

Register an array of modules present in the application

```
<?php

$this->registerModules (
    [
        "frontend" => [
            "className" => "Multiple\\Frontend\\Module",
            "path"       => "../apps/frontend/Module.php",
        ],
        "backend" => [
            "className" => "Multiple\\Backend\\Module",
            "path"       => "../apps/backend/Module.php",
        ],
    ]
);
```

public **getModules** () inherited from *Phalcon\Application*

Return the modules registered in the application

public **getModule** (*mixed* \$name) inherited from *Phalcon\Application*

Gets the module definition registered in the application via module name

public **setDefaultModule** (*mixed* \$defaultModule) inherited from *Phalcon\Application*

Sets the module name to be used if the router doesn't return a valid module

public **getDefaultModule** () inherited from *Phalcon\Application*

Returns the default module name

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\DiInjectable*

Returns the internal dependency injector

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\DiInjectable*

Magic method __get

Class *Phalcon\Cli\ConsoleException*

extends class *Phalcon\ApplicationException*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public **Exception** **getTraceAsString** () inherited from **Exception**

Gets the stack trace as a string

public *string* **__toString** () inherited from **Exception**

String representation of the exception

Class Phalcon\Cli\Dispatcher

extends abstract class *Phalcon\Dispatcher*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\DispatcherInterface*, *Phalcon\Cli\DispatcherInterface*

Dispatching is the process of taking the command-line arguments, extracting the module name, task name, action name, and optional parameters contained in it, and then instantiating a task and calling an action on it.

```
<?php

$di = new \Phalcon\Di();

$dispatcher = new \Phalcon\Cli\Dispatcher();

$dispatcher->setDi($di);

$dispatcher->setTaskName("posts");
$dispatcher->setActionName("index");
$dispatcher->setParams([]);

$handle = $dispatcher->dispatch();
```

Constants

integer **EXCEPTION_NO_DI**

integer **EXCEPTION_CYCLIC_ROUTING**

integer **EXCEPTION_HANDLER_NOT_FOUND**

integer **EXCEPTION_INVALID_HANDLER**

integer **EXCEPTION_INVALID_PARAMS**

integer **EXCEPTION_ACTION_NOT_FOUND**

Methods

public **setTaskSuffix** (*mixed* \$taskSuffix)

Sets the default task suffix

public **setDefaultTask** (*mixed* \$taskName)

Sets the default task name

public **setTaskName** (*mixed* \$taskName)

Sets the task name to be dispatched

public **getTaskName** ()

Gets last dispatched task name

protected **_throwDispatchException** (*mixed* \$message, [*mixed* \$exceptionCode])

Throws an internal exception

protected **_handleException** ([Exception](#) \$exception)

Handles a user exception

public **getLastTask** ()

Returns the latest dispatched controller

public **getActiveTask** ()

Returns the active task in the dispatcher

public **setOptions** (*array* \$options)

Set the options to be dispatched

public **getOptions** ()

Get dispatched options

public **callActionMethod** (*mixed* \$handler, *mixed* \$actionMethod, [*array* \$params])

...

public **setDI** ([Phalcon\DiInterface](#) \$dependencyInjector) inherited from [Phalcon\Dispatcher](#)

Sets the dependency injector

public **getDI** () inherited from [Phalcon\Dispatcher](#)

Returns the internal dependency injector

public **setEventManager** ([Phalcon\Events\ManagerInterface](#) \$eventsManager) inherited from [Phalcon\Dispatcher](#)

Sets the events manager

public **getEventManager** () inherited from [Phalcon\Dispatcher](#)

Returns the internal event manager

public **setActionSuffix** (*mixed* \$actionSuffix) inherited from [Phalcon\Dispatcher](#)

Sets the default action suffix

public **getActionSuffix** () inherited from [Phalcon\Dispatcher](#)

Gets the default action suffix

public **setModuleName** (*mixed* \$moduleName) inherited from [Phalcon\Dispatcher](#)

Sets the module where the controller is (only informative)

public **getModuleName** () inherited from [Phalcon\Dispatcher](#)

Gets the module where the controller class is

public **setNamespaceName** (*mixed* \$namespaceName) inherited from [Phalcon\Dispatcher](#)

Sets the namespace where the controller class is

public **getNamespaceName** () inherited from [Phalcon\Dispatcher](#)

Gets a namespace to be prepended to the current handler name

public **setDefaultNamespace** (*mixed* \$namespaceName) inherited from *Phalcon\Dispatcher*

Sets the default namespace

public **getDefaultNamespace** () inherited from *Phalcon\Dispatcher*

Returns the default namespace

public **setDefaultAction** (*mixed* \$actionName) inherited from *Phalcon\Dispatcher*

Sets the default action name

public **setActionName** (*mixed* \$actionName) inherited from *Phalcon\Dispatcher*

Sets the action name to be dispatched

public **getActionName** () inherited from *Phalcon\Dispatcher*

Gets the latest dispatched action name

public **setParams** (*array* \$params) inherited from *Phalcon\Dispatcher*

Sets action params to be dispatched

public **getParams** () inherited from *Phalcon\Dispatcher*

Gets action params

public **setParam** (*mixed* \$param, *mixed* \$value) inherited from *Phalcon\Dispatcher*

Set a param by its name or numeric index

public *mixed* **getParam** (*mixed* \$param, [*string* | *array* \$filters], [*mixed* \$defaultValue]) inherited from *Phalcon\Dispatcher*

Gets a param by its name or numeric index

public *boolean* **hasParam** (*mixed* \$param) inherited from *Phalcon\Dispatcher*

Check if a param exists

public **getActiveMethod** () inherited from *Phalcon\Dispatcher*

Returns the current method to be/executed in the dispatcher

public **isFinished** () inherited from *Phalcon\Dispatcher*

Checks if the dispatch loop is finished or has more pendent controllers/tasks to dispatch

public **setReturnedValue** (*mixed* \$value) inherited from *Phalcon\Dispatcher*

Sets the latest returned value by an action manually

public *mixed* **getReturnedValue** () inherited from *Phalcon\Dispatcher*

Returns value returned by the latest dispatched action

public **setModelBinding** (*mixed* \$value, [*mixed* \$cache]) inherited from *Phalcon\Dispatcher*

Enable/Disable model binding during dispatch

```
<?php

$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinding(true, 'cache');
```

```

    return $dispatcher;
});

```

public **setModelBinder** (Phalcon\Mvc\Model\BinderInterface \$modelBinder, [*mixed* \$cache]) inherited from *Phalcon\Dispatcher*

Enable model binding during dispatch

```

<?php

$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinder(new Binder(), 'cache');
    return $dispatcher;
});

```

public **getModelBinder** () inherited from *Phalcon\Dispatcher*

Gets model binder

public *object* **dispatch** () inherited from *Phalcon\Dispatcher*

Dispatches a handle action taking into account the routing parameters

protected *object* **_dispatch** () inherited from *Phalcon\Dispatcher*

Dispatches a handle action taking into account the routing parameters

public **forward** (array \$forward) inherited from *Phalcon\Dispatcher*

Forwards the execution flow to another controller/action Dispatchers are unique per module. Forwarding between modules is not allowed

```

<?php

$this->dispatcher->forward(
    [
        "controller" => "posts",
        "action"      => "index",
    ]
);

```

public **wasForwarded** () inherited from *Phalcon\Dispatcher*

Check if the current executed action was forwarded by another one

public **getHandlerClass** () inherited from *Phalcon\Dispatcher*

Possible class name that will be located to dispatch the request

public **getBoundModels** () inherited from *Phalcon\Dispatcher*

Returns bound models from binder instance

```

<?php

class UserController extends Controller
{
    public function showAction(User $user)
    {
        $boundModels = $this->dispatcher->getBoundModels(); // return array with $user
    }
}

```

```
}  
}
```

protected **_resolveEmptyProperties** () inherited from *Phalcon\Dispatcher*

Set empty properties to their defaults (where defaults are available)

Class *Phalcon\Cli\Dispatcher\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Cli\Router

implements *Phalcon\Di\InjectionAwareInterface*

Phalcon\Cli\Router is the standard framework router. Routing is the process of taking a command-line arguments and decomposing it into parameters to determine which module, task, and action of that task should receive the request

```
<?php

$router = new \Phalcon\Cli\Router();

$router->handle(
    [
        "module" => "main",
        "task"    => "videos",
        "action" => "process",
    ]
);

echo $router->getTaskName();
```

Methods

public **__construct** ([*mixed* \$defaultRoutes])

Phalcon\Cli\Router constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setDefaultModule** (*mixed* \$moduleName)

Sets the name of the default module

public **setDefaultTask** (*mixed* \$taskName)

Sets the default controller name

public **setDefaultAction** (*mixed* \$actionName)

Sets the default action name

public **setDefaults** (*array* \$defaults)

Sets an array of default paths. If a route is missing a path the router will use the defined here This method must not be used to set a 404 route

```
<?php

$router->setDefaults(
    [
        "module" => "common",
        "action" => "index",
    ]
);
```

public **handle** ([array \$arguments])

Handles routing information received from command-line arguments

public *Phalcon\Cli\Router\Route* **add** (string \$pattern, [string/array \$paths])

Adds a route to the router

```
<?php
$router->add("/about", "About::main");
```

public **getModuleName** ()

Returns processed module name

public **getTaskName** ()

Returns processed task name

public **getActionName** ()

Returns processed action name

public array **getParams** ()

Returns processed extra params

public **getMatchedRoute** ()

Returns the route that matches the handled URI

public array **getMatches** ()

Returns the sub expressions in the regular expression matched

public **wasMatched** ()

Checks if the router matches any of the defined routes

public **getRoutes** ()

Returns all the routes defined in the router

public *Phalcon\Cli\Router\Route* **getRouteById** (int \$id)

Returns a route object by its id

public **getRouteByName** (mixed \$name)

Returns a route object by its name

Class *Phalcon\Cli\Router\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([string \$message], [int \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Cli\Router\Route](#)

This class represents every route added to the router

Constants

string **DEFAULT_DELIMITER**

Methods

public **__construct** (*string* \$pattern, [*array* \$paths])

[Phalcon\Cli\Router\Route](#) constructor

public **compilePattern** (*mixed* \$pattern)

Replaces placeholders from pattern returning a valid PCRE regular expression

public *array* | *boolean* **extractNamedParams** (*string* \$pattern)

Extracts parameters from a string

public **reConfigure** (*string* \$pattern, [*array* \$paths])

Reconfigure the route adding a new pattern and a set of paths

public **getName** ()

Returns the route's name

public **setName** (*mixed* \$name)

Sets the route's name

```
<?php
$router->add(
    "/about",
    [
        "controller" => "about",
    ]
)->setName("about");
```

public *Phalcon\CLI\Router\Route* **beforeMatch** (*callback* \$callback)

Sets a callback that is called if the route is matched. The developer can implement any arbitrary conditions here. If the callback returns false the route is treated as not matched.

public *mixed* **getBeforeMatch** ()

Returns the 'before match' callback if any

public **getRouteId** ()

Returns the route's id

public **getPattern** ()

Returns the route's pattern

public **getCompiledPattern** ()

Returns the route's compiled pattern

public **getPaths** ()

Returns the paths

public **getReversedPaths** ()

Returns the paths using positions as keys and names as values

public *Phalcon\CLI\Router\Route* **convert** (*string* \$name, *callable* \$converter)

Adds a converter to perform an additional transformation for certain parameter

public **getConverters** ()

Returns the router converter

public static **reset** ()

Resets the internal route id generator

public static **delimiter** ([*mixed* \$delimiter])

Set the routing delimiter

public static **getDelimiter** ()

Get routing delimiter

Class Phalcon\Cli\Task

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Cli\TaskInterface*

Every command-line task should extend this class that encapsulates all the task functionality

A task can be used to run “tasks” such as migrations, cronjobs, unit-tests, or anything that you want. The Task class should at least have a “mainAction” method

```
<?php

class HelloTask extends \Phalcon\Cli\Task
{
    // This action will be executed by default
    public function mainAction()
    {

    }

    public function findAction()
    {

    }
}
```

Methods

final public **__construct** ()

Phalcon\Cli\Task constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method __get

Class Phalcon\Config

implements *ArrayAccess*, *Countable*

Phalcon\Config is designed to simplify the access to, and the use of, configuration data within applications. It provides a nested object property based user interface for accessing this configuration data within application code.

```
<?php

$config = new \Phalcon\Config(
    [
        "database" => [
            "adapter" => "Mysql",
            "host"     => "localhost",
            "username" => "scott",
            "password" => "cheetah",
            "dbname"   => "test_db",
        ],
        "phalcon" => [
            "controllersDir" => "../app/controllers/",
            "modelsDir"      => "../app/models/",
            "viewsDir"       => "../app/views/",
        ],
    ],
);
```

Methods

public **__construct** ([array \$arrayConfig])

Phalcon\Config constructor

public **offsetExists** (mixed \$index)

Allows to check whether an attribute is defined using the array-syntax

```
<?php

var_dump(
    isset($config["database"])
);
```

public **get** (mixed \$index, [mixed \$defaultValue])

Gets an attribute from the configuration, if the attribute isn't defined returns null If the value is exactly null or is not defined the default value will be used instead

```
<?php

echo $config->get("controllersDir", "../app/controllers/");
```

public **offsetGet** (mixed \$index)

Gets an attribute using the array-syntax

```
<?php

print_r(
    $config["database"]
);
```

public **offsetSet** (mixed \$index, mixed \$value)

Sets an attribute using the array-syntax

```
<?php

$config["database"] = [
    "type" => "Sqlite",
];
```

public **offsetUnset** (*mixed* \$index)

Unsets an attribute using the array-syntax

```
<?php

unset($config["database"]);
```

public **merge** (*Phalcon\Config* \$config)

Merges a configuration into the current one

```
<?php

$appConfig = new \Phalcon\Config(
    [
        "database" => [
            "host" => "localhost",
        ],
    ]
);

$globalConfig->merge($appConfig);
```

public **toArray** ()

Converts recursively the object to an array

```
<?php

print_r(
    $config->toArray()
);
```

public **count** ()

Returns the count of properties set in the config

```
<?php

print count($config);
```

or

```
<?php

print $config->count();
```

public static **__set_state** (*array* \$data)

Restores the state of a *Phalcon\Config* object

final protected *Config merged config* **_merge** (*Config* \$config, [*mixed* \$instance])

Helper method for merge configs (forwarding nested config instance)

Class Phalcon\Config\Adapter\Ini

extends class *Phalcon\Config*

implements *Countable*, *ArrayAccess*

Reads ini files and converts them to Phalcon\Config objects.

Given the next configuration file:

```
<?php

[database]
adapter = Mysql
host = localhost
username = scott
password = cheetah
dbname = test_db

[phalcon]
controllersDir = "../app/controllers/"
modelsDir = "../app/models/"
viewsDir = "../app/views/"
```

You can read it as follows:

```
<?php

$config = new \Phalcon\Config\Adapter\Ini("path/config.ini");

echo $config->phalcon->controllersDir;
echo $config->database->username;
```

PHP constants may also be parsed in the ini file, so if you define a constant as an ini value before calling the constructor, the constant's value will be integrated into the results. To use it this way you must specify the optional second parameter as `INI_SCANNER_NORMAL` when calling the constructor:

```
<?php

$config = new \Phalcon\Config\Adapter\Ini(
    "path/config-with-constants.ini",
    INI_SCANNER_NORMAL
);
```

Methods

public **__construct** (*mixed* \$filePath, [*mixed* \$mode])

Phalcon\Config\Adapter\Ini constructor

protected **_parseIniString** (*mixed* \$path, *mixed* \$value)

Build multidimensional array from string

```
<?php

$this->_parseIniString("path.hello.world", "value for last key");
```

```
// result
[
    "path" => [
        "hello" => [
            "world" => "value for last key",
        ],
    ],
];
```

protected **_cast** (*mixed* \$ini)

We have to cast values manually because `parse_ini_file()` has a poor implementation.

public **offsetExists** (*mixed* \$index) inherited from *Phalcon\Config*

Allows to check whether an attribute is defined using the array-syntax

```
<?php
var_dump(
    isset($config["database"])
);
```

public **get** (*mixed* \$index, [*mixed* \$defaultValue]) inherited from *Phalcon\Config*

Gets an attribute from the configuration, if the attribute isn't defined returns null If the value is exactly null or is not defined the default value will be used instead

```
<?php
echo $config->get("controllersDir", "../app/controllers/");
```

public **offsetGet** (*mixed* \$index) inherited from *Phalcon\Config*

Gets an attribute using the array-syntax

```
<?php
print_r(
    $config["database"]
);
```

public **offsetSet** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Config*

Sets an attribute using the array-syntax

```
<?php
$config["database"] = [
    "type" => "Sqlite",
];
```

public **offsetUnset** (*mixed* \$index) inherited from *Phalcon\Config*

Unsets an attribute using the array-syntax

```
<?php
unset($config["database"]);
```

public **merge** (*Phalcon\Config* \$config) inherited from *Phalcon\Config*

Merges a configuration into the current one

```
<?php
$appConfig = new \Phalcon\Config(
    [
        "database" => [
            "host" => "localhost",
        ],
    ]
);

$globalConfig->merge($appConfig);
```

public **toArray** () inherited from *Phalcon\Config*

Converts recursively the object to an array

```
<?php
print_r(
    $config->toArray()
);
```

public **count** () inherited from *Phalcon\Config*

Returns the count of properties set in the config

```
<?php
print count($config);
```

or

```
<?php
print $config->count();
```

public static **__set_state** (array \$data) inherited from *Phalcon\Config*

Restores the state of a *Phalcon\Config* object

final protected *Config merged config* **_merge** (*Config* \$config, [*mixed* \$instance]) inherited from *Phalcon\Config*

Helper method for merge configs (forwarding nested config instance)

Class *Phalcon\Config\Adapter\Json*

extends class *Phalcon\Config*

implements *Countable*, *ArrayAccess*

Reads JSON files and converts them to *Phalcon\Config* objects.

Given the following configuration file:

```
<?php
{"phalcon":{"baseuri":"\\/phalcon\\/"},"models":{"metadata":"memory"}}
```


You can read it as follows:

```
<?php

$config = new Phalcon\Config\Adapter\Json("path/config.json");

echo $config->phalcon->baseuri;
echo $config->models->metadata;
```

Methods

public **__construct** (*mixed* \$filePath)

Phalcon\Config\Adapter\Json constructor

public **offsetExists** (*mixed* \$index) inherited from *Phalcon\Config*

Allows to check whether an attribute is defined using the array-syntax

```
<?php

var_dump(
    isset($config["database"])
);
```

public **get** (*mixed* \$index, [*mixed* \$defaultValue]) inherited from *Phalcon\Config*

Gets an attribute from the configuration, if the attribute isn't defined returns null If the value is exactly null or is not defined the default value will be used instead

```
<?php

echo $config->get("controllersDir", "../app/controllers/");
```

public **offsetGet** (*mixed* \$index) inherited from *Phalcon\Config*

Gets an attribute using the array-syntax

```
<?php

print_r(
    $config["database"]
);
```

public **offsetSet** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Config*

Sets an attribute using the array-syntax

```
<?php

$config["database"] = [
    "type" => "Sqlite",
];
```

public **offsetUnset** (*mixed* \$index) inherited from *Phalcon\Config*

Unsets an attribute using the array-syntax

```
<?php
unset ($config["database"]);
```

public **merge** (*Phalcon\Config* \$config) inherited from *Phalcon\Config*

Merges a configuration into the current one

```
<?php

$appConfig = new \Phalcon\Config(
    [
        "database" => [
            "host" => "localhost",
        ],
    ],
);

$globalConfig->merge($appConfig);
```

public **toArray** () inherited from *Phalcon\Config*

Converts recursively the object to an array

```
<?php

print_r(
    $config->toArray()
);
```

public **count** () inherited from *Phalcon\Config*

Returns the count of properties set in the config

```
<?php

print count($config);
```

or

```
<?php

print $config->count();
```

public static **__set_state** (array \$data) inherited from *Phalcon\Config*

Restores the state of a *Phalcon\Config* object

final protected *Config merged config* **_merge** (*Config* \$config, [*mixed* \$instance]) inherited from *Phalcon\Config*

Helper method for merge configs (forwarding nested config instance)

Class *Phalcon\Config\Adapter\Php*

extends class *Phalcon\Config*

implements *Countable*, *ArrayAccess*

Reads php files and converts them to *Phalcon\Config* objects.

Given the next configuration file:

```
<?php

<?php

return [
    "database" => [
        "adapter" => "Mysql",
        "host"     => "localhost",
        "username" => "scott",
        "password" => "cheetah",
        "dbname"  => "test_db",
    ],
    "phalcon" => [
        "controllersDir" => "../app/controllers/",
        "modelsDir"      => "../app/models/",
        "viewsDir"       => "../app/views/",
    ],
];
```

You can read it as follows:

```
<?php

$config = new \Phalcon\Config\Adapter\Php("path/config.php");

echo $config->phalcon->controllersDir;
echo $config->database->username;
```

Methods

public **__construct** (*mixed* \$filePath)

Phalcon\Config\Adapter\Php constructor

public **offsetExists** (*mixed* \$index) inherited from *Phalcon\Config*

Allows to check whether an attribute is defined using the array-syntax

```
<?php

var_dump(
    isset($config["database"])
);
```

public **get** (*mixed* \$index, [*mixed* \$defaultValue]) inherited from *Phalcon\Config*

Gets an attribute from the configuration, if the attribute isn't defined returns null If the value is exactly null or is not defined the default value will be used instead

```
<?php

echo $config->get("controllersDir", "../app/controllers/");
```

public **offsetGet** (*mixed* \$index) inherited from *Phalcon\Config*

Gets an attribute using the array-syntax

```
<?php

print_r(
    $config["database"]
);
```

public **offsetSet** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Config*

Sets an attribute using the array-syntax

```
<?php

$config["database"] = [
    "type" => "Sqlite",
];
```

public **offsetUnset** (*mixed* \$index) inherited from *Phalcon\Config*

Unsets an attribute using the array-syntax

```
<?php

unset($config["database"]);
```

public **merge** (*Phalcon\Config* \$config) inherited from *Phalcon\Config*

Merges a configuration into the current one

```
<?php

$appConfig = new \Phalcon\Config(
    [
        "database" => [
            "host" => "localhost",
        ],
    ]
);

$globalConfig->merge($appConfig);
```

public **toArray** () inherited from *Phalcon\Config*

Converts recursively the object to an array

```
<?php

print_r(
    $config->toArray()
);
```

public **count** () inherited from *Phalcon\Config*

Returns the count of properties set in the config

```
<?php

print count($config);
```

or

```
<?php
print $config->count();
```

public static **__set_state** (array \$data) inherited from *Phalcon\Config*

Restores the state of a Phalcon\Config object

final protected *Config merged config* **_merge** (Config \$config, [mixed \$instance]) inherited from *Phalcon\Config*

Helper method for merge configs (forwarding nested config instance)

Class Phalcon\Config\Adapter\Yaml

extends class *Phalcon\Config*

implements Countable, ArrayAccess

Reads YAML files and converts them to Phalcon\Config objects.

Given the following configuration file:

```
<?php

phalcon:
  baseuri:      /phalcon/
  controllersDir: !approot /app/controllers/
models:
  metadata: memory
```

You can read it as follows:

```
<?php

define(
    "APPROOT",
    dirname(__DIR__)
);

$config = new \Phalcon\Config\Adapter\Yaml(
    "path/config.yaml",
    [
        "!approot" => function($value) {
            return APPROOT . $value;
        },
    ],
);

echo $config->phalcon->controllersDir;
echo $config->phalcon->baseuri;
echo $config->models->metadata;
```

Methods

public **__construct** (mixed \$filePath, [array \$callbacks])

Phalcon\Config\Adapter\Yaml constructor

public **offsetExists** (*mixed* \$index) inherited from *Phalcon\Config*

Allows to check whether an attribute is defined using the array-syntax

```
<?php
var_dump(
    isset($config["database"])
);
```

public **get** (*mixed* \$index, [*mixed* \$defaultValue]) inherited from *Phalcon\Config*

Gets an attribute from the configuration, if the attribute isn't defined returns null If the value is exactly null or is not defined the default value will be used instead

```
<?php
echo $config->get("controllersDir", "../app/controllers/");
```

public **offsetGet** (*mixed* \$index) inherited from *Phalcon\Config*

Gets an attribute using the array-syntax

```
<?php
print_r(
    $config["database"]
);
```

public **offsetSet** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Config*

Sets an attribute using the array-syntax

```
<?php
$config["database"] = [
    "type" => "Sqlite",
];
```

public **offsetUnset** (*mixed* \$index) inherited from *Phalcon\Config*

Unsets an attribute using the array-syntax

```
<?php
unset($config["database"]);
```

public **merge** (*Phalcon\Config* \$config) inherited from *Phalcon\Config*

Merges a configuration into the current one

```
<?php
$appConfig = new \Phalcon\Config(
    [
        "database" => [
            "host" => "localhost",
        ],
    ]
);
```

```
$globalConfig->merge($appConfig);
```

public **toArray** () inherited from *Phalcon\Config*

Converts recursively the object to an array

```
<?php
print_r(
    $config->toArray()
);
```

public **count** () inherited from *Phalcon\Config*

Returns the count of properties set in the config

```
<?php
print count($config);
```

or

```
<?php
print $config->count();
```

public static **__set_state** (array \$data) inherited from *Phalcon\Config*

Restores the state of a Phalcon\Config object

final protected *Config merged config* **_merge** (*Config* \$config, [*mixed* \$instance]) inherited from *Phalcon\Config*

Helper method for merge configs (forwarding nested config instance)

Class *Phalcon\Config\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class Phalcon\Crypt

implements [Phalcon\CryptInterface](#)

Provides encryption facilities to phalcon applications

```
<?php

$crypt = new \Phalcon\Crypt();

$key   = "le password";
$text  = "This is a secret text";

$encrypted = $crypt->encrypt($text, $key);

echo $crypt->decrypt($encrypted, $key);
```

Constants

integer **PADDING_DEFAULT**

integer **PADDING_ANSI_X_923**

integer **PADDING_PKCS7**

integer **PADDING_ISO_10126**

integer **PADDING_ISO_IEC_7816_4**

integer **PADDING_ZERO**

integer **PADDING_SPACE**

Methods

public **setPadding** (*mixed* \$scheme)

Changes the padding scheme used

public **setCipher** (*mixed* \$cipher)

Sets the cipher algorithm

public **getCipher** ()

Returns the current cipher

public **setKey** (*mixed* \$key)

Sets the encryption key

public **getKey** ()

Returns the encryption key

protected **_cryptPadText** (*mixed* \$text, *mixed* \$mode, *mixed* \$blockSize, *mixed* \$paddingType)

Pads texts before encryption

protected **_cryptUnpadText** (*mixed* \$text, *mixed* \$mode, *mixed* \$blockSize, *mixed* \$paddingType)

If the function detects that the text was not padded, it will return it unmodified

public **encrypt** (*mixed* \$text, [*mixed* \$key])

Encrypts a text

```
<?php
$encrypted = $crypt->encrypt("Ultra-secret text", "encrypt password");
```

public **decrypt** (*mixed* \$text, [*mixed* \$key])

Decrypts an encrypted text

```
<?php
echo $crypt->decrypt($encrypted, "decrypt password");
```

public **encryptBase64** (*mixed* \$text, [*mixed* \$key], [*mixed* \$safe])

Encrypts a text returning the result as a base64 string

public **decryptBase64** (*mixed* \$text, [*mixed* \$key], [*mixed* \$safe])

Decrypt a text that is coded as a base64 string

public **getAvailableCiphers** ()

Returns a list of available ciphers

Class **Phalcon\Crypt\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Abstract class [Phalcon\Db](#)

[Phalcon\Db](#) and its related classes provide a simple SQL database interface for Phalcon Framework. The [Phalcon\Db](#) is the basic class you use to connect your PHP application to an RDBMS. There is a different adapter class for each brand of RDBMS.

This component is intended to lower level database operations. If you want to interact with databases using higher level of abstraction use [Phalcon\Mvc\Model](#).

[Phalcon\Db](#) is an abstract class. You only can use it with a database adapter like [Phalcon\Db\Adapter\Pdo](#)

```
<?php
use Phalcon\Db;
use Phalcon\Db\Exception;
use Phalcon\Db\Adapter\Pdo\Mysql as MySqlConnection;

try {
    $connection = new MySqlConnection(
```

```
[
    "host"      => "192.168.0.11",
    "username" => "sigma",
    "password" => "secret",
    "dbname"    => "blog",
    "port"      => "3306",
]

);

$result = $connection->query(
    "SELECT * FROM robots LIMIT 5"
);

$result->setFetchMode(Db::FETCH_NUM);

while ($robot = $result->fetch()) {
    print_r($robot);
}
} catch (Exception $e) {
    echo $e->getMessage(), PHP_EOL;
}
```

Constants

integer **FETCH_LAZY**

integer **FETCH_ASSOC**

integer **FETCH_NAMED**

integer **FETCH_NUM**

integer **FETCH_BOTH**

integer **FETCH_OBJ**

integer **FETCH_BOUND**

integer **FETCH_COLUMN**

integer **FETCH_CLASS**

integer **FETCH INTO**

integer **FETCH_FUNC**

integer **FETCH_GROUP**

integer **FETCH_UNIQUE**

integer **FETCH_KEY_PAIR**

integer **FETCH_CLASSTYPE**

integer **FETCH_SERIALIZE**

integer **FETCH_PROPS_LATE**

Methods

public static **setup** (*array* \$options)

Enables/disables options in the Database component

Abstract class Phalcon\Db\Adapter

implements Phalcon\Db\AdapterInterface, Phalcon\Events\EventsAwareInterface

Base class for Phalcon\Db adapters

Methods

public **getDialectType** ()

Name of the dialect used

public **getType** ()

Type of database system the adapter is used for

public **getSqlVariables** ()

Active SQL bound parameter variables

public **__construct** (array \$descriptor)

Phalcon\Db\Adapter constructor

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the event manager

public **getEventManager** ()

Returns the internal event manager

public **setDialect** (*Phalcon\Db\DialectInterface* \$dialect)

Sets the dialect used to produce the SQL

public **getDialect** ()

Returns internal dialect instance

public **fetchOne** (*mixed* \$sqlQuery, [*mixed* \$fetchMode], [*mixed* \$bindParams], [*mixed* \$bindTypes])

Returns the first row in a SQL query result

```
<?php

// Getting first robot
$robot = $connection->fetchOne("SELECT * FROM robots");
print_r($robot);

// Getting first robot with associative indexes only
$robot = $connection->fetchOne("SELECT * FROM robots", \Phalcon\Db::FETCH_ASSOC);
print_r($robot);
```

public array **fetchAll** (string \$sqlQuery, [int \$fetchMode], [array \$bindParams], [array \$bindTypes])

Dumps the complete result of a query into an array

```

<?php

// Getting all robots with associative indexes only
$robots = $connection->fetchAll(
    "SELECT * FROM robots",
    \Phalcon\Db::FETCH_ASSOC
);

foreach ($robots as $robot) {
    print_r($robot);
}

// Getting all robots that contains word "robot" withing the name
$robots = $connection->fetchAll(
    "SELECT * FROM robots WHERE name LIKE :name",
    \Phalcon\Db::FETCH_ASSOC,
    [
        "name" => "%robot%",
    ]
);
foreach($robots as $robot) {
    print_r($robot);
}

```

public *string* | **fetchColumn** (*string* \$sqlQuery, [*array* \$placeholders], [*int* | *string* \$column])

Returns the n'th field of first row in a SQL query result

```

<?php

// Getting count of robots
$robotsCount = $connection->fetchColumn("SELECT count(*) FROM robots");
print_r($robotsCount);

// Getting name of last edited robot
$robot = $connection->fetchColumn(
    "SELECT id, name FROM robots order by modified desc",
    1
);
print_r($robot);

```

public *boolean* **insert** (*string* | *array* \$table, *array* \$values, [*array* \$fields], [*array* \$dataTypes])

Inserts data into a table using custom RDBMS SQL syntax

```

<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    ["Astro Boy", 1952],
    ["name", "year"]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);

```

public *boolean* **insertAsDict** (*string* \$table, *array* \$data, [*array* \$dataTypes])

Inserts data into a table using custom RBDM SQL syntax

```
<?php

// Inserting a new robot
$success = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public boolean **update** (string | array \$table, array \$fields, array \$values, [string | array \$whereCondition], [array \$dataTypes])

Updates data on a table using custom RBDM SQL syntax

```
<?php

// Updating existing robot
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

// Updating existing robot with array condition and $dataTypes
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    [
        "conditions" => "id = ?",
        "bind"        => [$some_unsafe_id],
        "bindTypes"   => [PDO::PARAM_INT], // use only if you use $dataTypes param
    ],
    [
        PDO::PARAM_STR
    ]
);
```

Warning! If \$whereCondition is string it not escaped.

public boolean **updateAsDict** (string \$table, array \$data, [string \$whereCondition], [array \$dataTypes])

Updates data on a table using custom RBDM SQL syntax Another, more convenient syntax

```
<?php

// Updating existing robot
$success = $connection->updateAsDict(
    "robots",
```

```

        [
            "name" => "New Astro Boy",
        ],
        "id = 101"
    );

    // Next SQL sentence is sent to the database system
    UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

```

public **boolean delete** (string | array \$table, [string \$whereCondition], [array \$placeholders], [array \$dataTypes])

Deletes data from a table using custom RBDM SQL syntax

```

<?php

// Deleting existing robot
$success = $connection->delete(
    "robots",
    "id = 101"
);

// Next SQL sentence is generated
DELETE FROM `robots` WHERE `id` = 101

```

public **escapeIdentifier** (array | string \$identifier)

Escapes a column/table/schema name

```

<?php

$escapedTable = $connection->escapeIdentifier(
    "robots"
);

$escapedTable = $connection->escapeIdentifier(
    [
        "store",
        "robots",
    ]
);

```

public **string getColumnList** (array \$columnList)

Gets a list of columns

public **limit** (mixed \$sqlQuery, mixed \$number)

Appends a LIMIT clause to \$sqlQuery argument

```

<?php

echo $connection->limit("SELECT * FROM robots", 5);

```

public **tableExists** (mixed \$tableName, [mixed \$schemaName])

Generates SQL checking for the existence of a schema.table

```

<?php

var_dump(

```

```
$connection->tableExists("blog", "posts")
);
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.view

```
<?php
var_dump (
    $connection->viewExists("active_users", "posts")
);
```

public **forUpdate** (*mixed* \$sqlQuery)

Returns a SQL modified with a FOR UPDATE clause

public **sharedLock** (*mixed* \$sqlQuery)

Returns a SQL modified with a LOCK IN SHARE MODE clause

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition)

Creates a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Drops a table from a schema/database

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName])

Creates a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Drops a view

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column)

Adds a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

Modifies a table column based on a definition

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName)

Drops a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Adds an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName)

Drop an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Adds a primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName)

Drops a table's primary key

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference)

Adds a foreign key to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName)

Drops a foreign key from a table

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column)

Returns the SQL column definition from a column

public **listTables** ([*mixed* \$schemaName])

List all tables on a database

```
<?php

print_r(
    $connection->listTables("blog")
);
```

public **listViews** ([*mixed* \$schemaName])

List all views on a database

```
<?php

print_r(
    $connection->listViews("blog")
);
```

public *Phalcon\Db\Index*[] **describeIndexes** (*string* \$table, [*string* \$schema])

Lists table indexes

```
<?php

print_r(
    $connection->describeIndexes("robots_parts")
);
```

public **describeReferences** (*mixed* \$table, [*mixed* \$schema])

Lists table references

```
<?php

print_r(
    $connection->describeReferences("robots_parts")
);
```

public **tableOptions** (*mixed* \$tableName, [*mixed* \$schemaName])

Gets creation options from a table

```
<?php

print_r(
    $connection->tableOptions("robots")
);
```

public **createSavepoint** (*mixed* \$name)

Creates a new savepoint

public **releaseSavepoint** (*mixed* \$name)

Releases given savepoint

public **rollbackSavepoint** (*mixed* \$name)

Rollbacks given savepoint

public **setNestedTransactionsWithSavepoints** (*mixed* \$nestedTransactionsWithSavepoints)

Set if nested transactions should use savepoints

public **isNestedTransactionsWithSavepoints** ()

Returns if nested transactions should use savepoints

public **getNestedTransactionSavepointName** ()

Returns the savepoint name to use for nested transactions

public **getDefaultIdValue** ()

Returns the default identity value to be inserted in an identity column

```
<?php
// Inserting a new robot with a valid default value for the column 'id'
$success = $connection->insert(
    "robots",
    [
        $connection->getDefaultIdValue(),
        "Astro Boy",
        1952,
    ],
    [
        "id",
        "name",
        "year",
    ]
);
```

public **getDefaultValue** ()

Returns the default value to make the RDBM use the default value declared in the table definition

```
<?php
// Inserting a new robot with a valid default value for the column 'year'
$success = $connection->insert(
    "robots",
    [
        "Astro Boy",
        $connection->getDefaultValue(),
    ],
    [
        "name",
        "year",
    ]
);
```

public **supportSequences** ()

Check whether the database system requires a sequence to produce auto-numeric values

public **useExplicitIdValue** ()

Check whether the database system requires an explicit value for identity columns

public **getDescriptor** ()

Return descriptor used to connect to the active database

public *string* **getConnectionId** ()

Gets the active connection unique identifier

public **getSQLStatement** ()

Active SQL statement in the object

public **getRealSQLStatement** ()

Active SQL statement in the object without replace bound parameters

public *array* **getSQLBindTypes** ()

Active SQL statement in the object

abstract public **connect** ([*array* \$descriptor]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **query** (*mixed* \$sqlStatement, [*mixed* \$placeholders], [*mixed* \$dataTypes]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **execute** (*mixed* \$sqlStatement, [*mixed* \$placeholders], [*mixed* \$dataTypes]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **affectedRows** () inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **close** () inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **escapeString** (*mixed* \$str) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **lastInsertId** ([*mixed* \$sequenceName]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **begin** ([*mixed* \$nesting]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **rollback** ([*mixed* \$nesting]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **commit** ([*mixed* \$nesting]) inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **isUnderTransaction** () inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **getInternalHandler** () inherited from *Phalcon\Db\AdapterInterface*

...

abstract public **describeColumns** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\AdapterInterface*

...

Abstract class `Phalcon\Db\Adapter\Pdo`

extends abstract class *Phalcon\Db\Adapter*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Db\AdapterInterface*

`Phalcon\Db\Adapter\Pdo` is the `Phalcon\Db` that internally uses PDO to connect to a database

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql;

$config = [
    "host"      => "localhost",
    "dbname"    => "blog",
    "port"      => 3306,
    "username"  => "sigma",
    "password"  => "secret",
];

$connection = new Mysql($config);
```

Methods

public **__construct** (*array* \$descriptor)

Constructor for `Phalcon\Db\Adapter\Pdo`

public **connect** ([*array* \$descriptor])

This method is automatically called in `\Phalcon\Db\Adapter\Pdo` constructor. Call it when you need to restore a database connection.

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql;

// Make a connection
$connection = new Mysql(
    [
        "host"      => "localhost",
        "username"  => "sigma",
        "password"  => "secret",
        "dbname"    => "blog",
        "port"      => 3306,
    ]
);

// Reconnect
$connection->connect();
```

public **prepare** (*mixed* \$sqlStatement)

Returns a PDO prepared statement to be executed with 'executePrepared'

```
<?php
use Phalcon\Db\Column;

$stmt = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $stmt,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **PDOStatement executePrepared** (PDOStatement \$statement, array \$placeholders, array \$dataTypes)

Executes a prepared statement binding. This function uses integer indexes starting from zero

```
<?php
use Phalcon\Db\Column;

$stmt = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $stmt,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **query** (*mixed* \$sqlStatement, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server is returning rows

```
<?php

// Querying data
$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = 'mechanical'"
);

$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = ?",
    [
        "mechanical",
    ]
);
```

```
    ]  
);
```

public **execute** (*mixed* \$sqlStatement, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server doesn't return any rows

```
<?php  
  
// Inserting data  
$success = $connection->execute(  
    "INSERT INTO robots VALUES (1, 'Astro Boy')"  
);  
  
$success = $connection->execute(  
    "INSERT INTO robots VALUES (?, ?)",  
    [  
        1,  
        "Astro Boy",  
    ]  
);
```

public **affectedRows** ()

Returns the number of affected rows by the latest INSERT/UPDATE/DELETE executed in the database system

```
<?php  
  
$connection->execute(  
    "DELETE FROM robots"  
);  
  
echo $connection->affectedRows(), " were deleted";
```

public **close** ()

Closes the active connection returning success. Phalcon automatically closes and destroys active connections when the request ends

public **escapeString** (*mixed* \$str)

Escapes a value to avoid SQL injections according to the active charset in the connection

```
<?php  
  
$escapedStr = $connection->escapeString("some dangerous value");
```

public **convertBoundParams** (*mixed* \$sql, [*array* \$params])

Converts bound parameters such as :name: or ?1 into PDO bind params ?

```
<?php  
  
print_r(  
    $connection->convertBoundParams(  
        "SELECT * FROM robots WHERE name = :name:",  
        [  
            "Bender",  
        ]  
    )  
);
```

```

    )
);

```

public **int | boolean** **lastInsertId** ([string \$sequenceName])

Returns the insert id for the auto_increment/serial column inserted in the latest executed SQL statement

```

<?php

// Inserting a new robot
$success = $connection->insert (
    "robots",
    [
        "Astro Boy",
        1952,
    ],
    [
        "name",
        "year",
    ]
);

// Getting the generated id
$id = $connection->lastInsertId();

```

public **begin** ([mixed \$nesting])

Starts a transaction in the connection

public **rollback** ([mixed \$nesting])

Rollbacks the active transaction in the connection

public **commit** ([mixed \$nesting])

Commits the active transaction in the connection

public **getTransactionLevel** ()

Returns the current transaction nesting level

public **isUnderTransaction** ()

Checks whether the connection is under a transaction

```

<?php

$connection->begin();

// true
var_dump (
    $connection->isUnderTransaction()
);

```

public **getInternalHandler** ()

Return internal PDO handler

public **array** **getErrorInfo** ()

Return the error info, if any

public **getDialectType** () inherited from *Phalcon\Db\Adapter*

Name of the dialect used

public **getType** () inherited from *Phalcon\Db\Adapter*

Type of database system the adapter is used for

public **getSqlVariables** () inherited from *Phalcon\Db\Adapter*

Active SQL bound parameter variables

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Db\Adapter*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Db\Adapter*

Returns the internal event manager

public **setDialect** (*Phalcon\Db\DialectInterface* \$dialect) inherited from *Phalcon\Db\Adapter*

Sets the dialect used to produce the SQL

public **getDialect** () inherited from *Phalcon\Db\Adapter*

Returns internal dialect instance

public **fetchOne** (*mixed* \$sqlQuery, [*mixed* \$fetchMode], [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Returns the first row in a SQL query result

```
<?php

// Getting first robot
$robot = $connection->fetchOne("SELECT * FROM robots");
print_r($robot);

// Getting first robot with associative indexes only
$robot = $connection->fetchOne("SELECT * FROM robots", \Phalcon\Db::FETCH_ASSOC);
print_r($robot);
```

public array **fetchAll** (*string* \$sqlQuery, [*int* \$fetchMode], [*array* \$bindParam], [*array* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Dumps the complete result of a query into an array

```
<?php

// Getting all robots with associative indexes only
$robots = $connection->fetchAll(
    "SELECT * FROM robots",
    \Phalcon\Db::FETCH_ASSOC
);

foreach ($robots as $robot) {
    print_r($robot);
}

// Getting all robots that contains word "robot" within the name
$robots = $connection->fetchAll(
    "SELECT * FROM robots WHERE name LIKE :name",
    \Phalcon\Db::FETCH_ASSOC,
    [
        "name" => "%robot%",
    ]
);
```



```

    ]
);
foreach($robots as $robot) {
    print_r($robot);
}

```

public *string* | **fetchColumn** (*string* \$sqlQuery, [*array* \$placeholders], [*int* | *string* \$column]) inherited from *Phalcon\Db\Adapter*

Returns the n`th field of first row in a SQL query result

```

<?php

// Getting count of robots
$robotsCount = $connection->fetchColumn("SELECT count(*) FROM robots");
print_r($robotsCount);

// Getting name of last edited robot
$robot = $connection->fetchColumn(
    "SELECT id, name FROM robots order by modified desc",
    1
);
print_r($robot);

```

public *boolean* **insert** (*string* | *array* \$table, *array* \$values, [*array* \$fields], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RDBMS SQL syntax

```

<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    ["Astro Boy", 1952],
    ["name", "year"]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);

```

public *boolean* **insertAsDict** (*string* \$table, *array* \$data, [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RBDM SQL syntax

```

<?php

// Inserting a new robot
$success = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);

```

public *boolean* **update** (*string* | *array* \$table, *array* \$fields, *array* \$values, [*string* | *array* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax

```
<?php

// Updating existing robot
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

// Updating existing robot with array condition and $dataTypes
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    [
        "conditions" => "id = ?",
        "bind"        => [$some_unsafe_id],
        "bindTypes"   => [PDO::PARAM_INT], // use only if you use $dataTypes param
    ],
    [
        PDO::PARAM_STR
    ]
);
```

Warning! If \$whereCondition is string it not escaped.

public *boolean* **updateAsDict** (*string* \$table, *array* \$data, [*string* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax Another, more convenient syntax

```
<?php

// Updating existing robot
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
    ],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101
```

public *boolean* **delete** (*string* | *array* \$table, [*string* \$whereCondition], [*array* \$placeholders], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Deletes data from a table using custom RBDM SQL syntax

```
<?php

// Deleting existing robot
$success = $connection->delete(
    "robots",
    "id = 101"
);

// Next SQL sentence is generated
DELETE FROM `robots` WHERE `id` = 101
```

public **escapeIdentifier** (*array* | *string* \$identifier) inherited from *Phalcon\Db\Adapter*

Escapes a column/table/schema name

```
<?php

$escapedTable = $connection->escapeIdentifier(
    "robots"
);

$escapedTable = $connection->escapeIdentifier(
    [
        "store",
        "robots",
    ]
);
```

public **getColumnList** (*array* \$columnList) inherited from *Phalcon\Db\Adapter*

Gets a list of columns

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Adapter*

Appends a LIMIT clause to \$sqlQuery argument

```
<?php

echo $connection->limit("SELECT * FROM robots", 5);
```

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.table

```
<?php

var_dump(
    $connection->tableExists("blog", "posts")
);
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.view

```
<?php

var_dump(
    $connection->viewExists("active_users", "posts")
);
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a FOR UPDATE clause

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a LOCK IN SHARE MODE clause

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition) inherited from *Phalcon\Db\Adapter*

Creates a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a table from a schema/database

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Creates a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a view

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Adds a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn]) inherited from *Phalcon\Db\Adapter*

Modifies a table column based on a definition

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName) inherited from *Phalcon\Db\Adapter*

Drops a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName) inherited from *Phalcon\Db\Adapter*

Drop an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds a primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\Adapter*

Drops a table's primary key

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference) inherited from *Phalcon\Db\Adapter*

Adds a foreign key to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName) inherited from *Phalcon\Db\Adapter*

Drops a foreign key from a table

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Returns the SQL column definition from a column

public **listTables** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all tables on a database

```
<?php

print_r (
    $connection->listTables ("blog")
);
```

public **listViews** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all views on a database

```
<?php

print_r (
    $connection->listViews ("blog")
);
```

public *Phalcon\Db\Index*[] **describeIndexes** (*string* \$table, [*string* \$schema]) inherited from *Phalcon\Db\Adapter*

Lists table indexes

```
<?php

print_r (
    $connection->describeIndexes ("robots_parts")
);
```

public **describeReferences** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\Adapter*

Lists table references

```
<?php

print_r (
    $connection->describeReferences ("robots_parts")
);
```

public **tableOptions** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Gets creation options from a table

```
<?php

print_r (
    $connection->tableOptions ("robots")
);
```

public **createSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Creates a new savepoint

public **releaseSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Releases given savepoint

public **rollbackSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Rollbacks given savepoint

public **setNestedTransactionsWithSavepoints** (*mixed* \$nestedTransactionsWithSavepoints) inherited from *Phalcon\Db\Adapter*

Set if nested transactions should use savepoints

public **isNestedTransactionsWithSavepoints** () inherited from *Phalcon\Db\Adapter*

Returns if nested transactions should use savepoints

public **getNestedTransactionSavepointName** () inherited from *Phalcon\Db\Adapter*

Returns the savepoint name to use for nested transactions

public **getDefaultIdValue** () inherited from *Phalcon\Db\Adapter*

Returns the default identity value to be inserted in an identity column

```
<?php

// Inserting a new robot with a valid default value for the column 'id'
$success = $connection->insert(
    "robots",
    [
        $connection->getDefaultIdValue(),
        "Astro Boy",
        1952,
    ],
    [
        "id",
        "name",
        "year",
    ]
);
```

public **getDefaultValue** () inherited from *Phalcon\Db\Adapter*

Returns the default value to make the RDBM use the default value declared in the table definition

```
<?php

// Inserting a new robot with a valid default value for the column 'year'
$success = $connection->insert(
    "robots",
    [
        "Astro Boy",
        $connection->getDefaultValue(),
    ],
    [
        "name",
        "year",
    ]
);
```

public **supportSequences** () inherited from *Phalcon\Db\Adapter*

Check whether the database system requires a sequence to produce auto-numeric values

public **useExplicitIdValue** () inherited from *Phalcon\Db\Adapter*

Check whether the database system requires an explicit value for identity columns

public **getDescriptor** () inherited from *Phalcon\Db\Adapter*

Return descriptor used to connect to the active database

public **string** **getConnectionId** () inherited from *Phalcon\Db\Adapter*

Gets the active connection unique identifier

public **getSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

public **getRealSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object without replace bound parameters

public **array** **getSQLBindTypes** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

abstract public **describeColumns** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\AdapterInterface*

...

Class *Phalcon\Db\Adapter\Pdo\Mysql*

extends abstract class *Phalcon\Db\Adapter\Pdo*

implements *Phalcon\Db\AdapterInterface*, *Phalcon\Events\EventsAwareInterface*

Specific functions for the Mysql database system

```
<?php
use Phalcon\Db\Adapter\Pdo\Mysql;

$config = [
    "host"      => "localhost",
    "dbname"    => "blog",
    "port"      => 3306,
    "username"  => "sigma",
    "password"  => "secret",
];

$connection = new Mysql($config);
```

Methods

public **describeColumns** (*mixed* \$table, [*mixed* \$schema])

Returns an array of *Phalcon\Db\Column* objects describing a table

```
<?php
print_r(
    $connection->describeColumns("posts")
);
```

public *Phalcon\Db\IndexInterface*[] **describeIndexes** (*string* \$table, [*string* \$schema])

Lists table indexes

```
<?php

print_r(
    $connection->describeIndexes("robots_parts")
);
```

public **describeReferences** (*mixed* \$table, [*mixed* \$schema])

Lists table references

```
<?php

print_r(
    $connection->describeReferences("robots_parts")
);
```

public **__construct** (*array* \$descriptor) inherited from *Phalcon\Db\Adapter\Pdo*

Constructor for Phalcon\Db\Adapter\Pdo

public **connect** ([*array* \$descriptor]) inherited from *Phalcon\Db\Adapter\Pdo*

This method is automatically called in \Phalcon\Db\Adapter\Pdo constructor. Call it when you need to restore a database connection.

```
<?php

use Phalcon\Db\Adapter\Pdo\Mysql;

// Make a connection
$connection = new Mysql(
    [
        "host"      => "localhost",
        "username"  => "sigma",
        "password"  => "secret",
        "dbname"    => "blog",
        "port"      => 3306,
    ]
);

// Reconnect
$connection->connect();
```

public **prepare** (*mixed* \$sqlStatement) inherited from *Phalcon\Db\Adapter\Pdo*

Returns a PDO prepared statement to be executed with 'executePrepared'

```
<?php

use Phalcon\Db\Column;

$statement = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $statement,
    [
        "name" => "Voltron",
    ],
);
```



```
[
    "name" => Column::BIND_PARAM_INT,
]
);
```

public **PDOSStatement** **executePrepared** (PDOSStatement \$statement, array \$placeholders, array \$dataTypes) inherited from *Phalcon\Db\Adapter\Pdo*

Executes a prepared statement binding. This function uses integer indexes starting from zero

```
<?php

use Phalcon\Db\Column;

$statement = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $statement,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **query** (mixed \$sqlStatement, [mixed \$bindParam], [mixed \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server is returning rows

```
<?php

// Querying data
$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = 'mechanical'"
);

$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = ?",
    [
        "mechanical",
    ]
);
```

public **execute** (mixed \$sqlStatement, [mixed \$bindParam], [mixed \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server doesn't return any rows

```
<?php

// Inserting data
$success = $connection->execute(
    "INSERT INTO robots VALUES (1, 'Astro Boy')"
```

```
);

$success = $connection->execute(
    "INSERT INTO robots VALUES (?, ?)",
    [
        1,
        "Astro Boy",
    ]
);
```

public **affectedRows** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the number of affected rows by the latest INSERT/UPDATE/DELETE executed in the database system

```
<?php

$connection->execute(
    "DELETE FROM robots"
);

echo $connection->affectedRows(), " were deleted";
```

public **close** () inherited from *Phalcon\Db\Adapter\Pdo*

Closes the active connection returning success. Phalcon automatically closes and destroys active connections when the request ends

public **escapeString** (mixed \$str) inherited from *Phalcon\Db\Adapter\Pdo*

Escapes a value to avoid SQL injections according to the active charset in the connection

```
<?php

$escapedStr = $connection->escapeString("some dangerous value");
```

public **convertBoundParams** (mixed \$sql, [array \$params]) inherited from *Phalcon\Db\Adapter\Pdo*

Converts bound parameters such as :name: or ?1 into PDO bind params ?

```
<?php

print_r(
    $connection->convertBoundParams(
        "SELECT * FROM robots WHERE name = :name:",
        [
            "Bender",
        ]
    )
);
```

public **int | boolean lastInsertId** ([string \$sequenceName]) inherited from *Phalcon\Db\Adapter\Pdo*

Returns the insert id for the auto_increment/serial column inserted in the latest executed SQL statement

```
<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    [
```

```

        "Astro Boy",
        1952,
    ],
    [
        "name",
        "year",
    ]
);

// Getting the generated id
$id = $connection->lastInsertId();

```

public **begin** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Starts a transaction in the connection

public **rollback** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Rollbacks the active transaction in the connection

public **commit** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Commits the active transaction in the connection

public **getTransactionLevel** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the current transaction nesting level

public **isUnderTransaction** () inherited from *Phalcon\Db\Adapter\Pdo*

Checks whether the connection is under a transaction

```

<?php

$connection->begin();

// true
var_dump(
    $connection->isUnderTransaction()
);

```

public **getInternalHandler** () inherited from *Phalcon\Db\Adapter\Pdo*

Return internal PDO handler

public **getErrorInfo** () inherited from *Phalcon\Db\Adapter\Pdo*

Return the error info, if any

public **getDialectType** () inherited from *Phalcon\Db\Adapter*

Name of the dialect used

public **getType** () inherited from *Phalcon\Db\Adapter*

Type of database system the adapter is used for

public **getSqlVariables** () inherited from *Phalcon\Db\Adapter*

Active SQL bound parameter variables

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Db\Adapter*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Db\Adapter*

Returns the internal event manager

public **setDialect** (*Phalcon\Db\DialectInterface* \$dialect) inherited from *Phalcon\Db\Adapter*

Sets the dialect used to produce the SQL

public **getDialect** () inherited from *Phalcon\Db\Adapter*

Returns internal dialect instance

public **fetchOne** (*mixed* \$sqlQuery, [*mixed* \$fetchMode], [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Returns the first row in a SQL query result

```
<?php

// Getting first robot
$robot = $connection->fetchOne("SELECT * FROM robots");
print_r($robot);

// Getting first robot with associative indexes only
$robot = $connection->fetchOne("SELECT * FROM robots", \Phalcon\Db::FETCH_ASSOC);
print_r($robot);
```

public **fetchAll** (*string* \$sqlQuery, [*int* \$fetchMode], [*array* \$bindParam], [*array* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Dumps the complete result of a query into an array

```
<?php

// Getting all robots with associative indexes only
$robots = $connection->fetchAll(
    "SELECT * FROM robots",
    \Phalcon\Db::FETCH_ASSOC
);

foreach ($robots as $robot) {
    print_r($robot);
}

// Getting all robots that contains word "robot" within the name
$robots = $connection->fetchAll(
    "SELECT * FROM robots WHERE name LIKE :name",
    \Phalcon\Db::FETCH_ASSOC,
    [
        "name" => "%robot%",
    ]
);
foreach($robots as $robot) {
    print_r($robot);
}
```

public *string* **fetchColumn** (*string* \$sqlQuery, [*array* \$placeholders], [*int* | *string* \$column]) inherited from *Phalcon\Db\Adapter*

Returns the n'th field of first row in a SQL query result

```
<?php
```

```
// Getting count of robots
$robotsCount = $connection->fetchColumn("SELECT count(*) FROM robots");
print_r($robotsCount);

// Getting name of last edited robot
$robot = $connection->fetchColumn(
    "SELECT id, name FROM robots order by modified desc",
    1
);
print_r($robot);
```

public **boolean insert** (*string* | *array* \$table, *array* \$values, [*array* \$fields], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RDBMS SQL syntax

```
<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    ["Astro Boy", 1952],
    ["name", "year"]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public **boolean insertAsDict** (*string* \$table, *array* \$data, [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RBDM SQL syntax

```
<?php

// Inserting a new robot
$success = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public **boolean update** (*string* | *array* \$table, *array* \$fields, *array* \$values, [*string* | *array* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax

```
<?php

// Updating existing robot
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    "id = 101"
```

```
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

// Updating existing robot with array condition and $dataTypes
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    [
        "conditions" => "id = ?",
        "bind"        => [$some_unsafe_id],
        "bindTypes"   => [PDO::PARAM_INT], // use only if you use $dataTypes param
    ],
    [
        PDO::PARAM_STR
    ]
);
```

Warning! If \$whereCondition is string it not escaped.

public boolean **updateAsDict** (string \$table, array \$data, [string \$whereCondition], [array \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax Another, more convenient syntax

```
<?php

// Updating existing robot
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
    ],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101
```

public boolean **delete** (string | array \$table, [string \$whereCondition], [array \$placeholders], [array \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Deletes data from a table using custom RBDM SQL syntax

```
<?php

// Deleting existing robot
$success = $connection->delete(
    "robots",
    "id = 101"
);

// Next SQL sentence is generated
DELETE FROM `robots` WHERE `id` = 101
```

public **escapeIdentifier** (array | string \$identifier) inherited from *Phalcon\Db\Adapter*

Escapes a column/table/schema name

```
<?php

$escapedTable = $connection->escapeIdentifier(
    "robots"
);

$escapedTable = $connection->escapeIdentifier(
    [
        "store",
        "robots",
    ]
);
```

public **string** **getColumnList** (array \$columnList) inherited from *Phalcon\Db\Adapter*

Gets a list of columns

public **limit** (mixed \$sqlQuery, mixed \$number) inherited from *Phalcon\Db\Adapter*

Appends a LIMIT clause to \$sqlQuery argument

```
<?php

echo $connection->limit("SELECT * FROM robots", 5);
```

public **boolean** **tableExists** (mixed \$tableName, [mixed \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.table

```
<?php

var_dump(
    $connection->tableExists("blog", "posts")
);
```

public **boolean** **viewExists** (mixed \$viewName, [mixed \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.view

```
<?php

var_dump(
    $connection->viewExists("active_users", "posts")
);
```

public **string** **forUpdate** (mixed \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a FOR UPDATE clause

public **string** **sharedLock** (mixed \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a LOCK IN SHARE MODE clause

public **boolean** **createTable** (mixed \$tableName, mixed \$schemaName, array \$definition) inherited from *Phalcon\Db\Adapter*

Creates a table

public **boolean** **dropTable** (mixed \$tableName, [mixed \$schemaName], [mixed \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a table from a schema/database

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Creates a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a view

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Adds a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn]) inherited from *Phalcon\Db\Adapter*

Modifies a table column based on a definition

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName) inherited from *Phalcon\Db\Adapter*

Drops a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName) inherited from *Phalcon\Db\Adapter*

Drop an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds a primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\Adapter*

Drops a table's primary key

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference) inherited from *Phalcon\Db\Adapter*

Adds a foreign key to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName) inherited from *Phalcon\Db\Adapter*

Drops a foreign key from a table

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Returns the SQL column definition from a column

public **listTables** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all tables on a database

```
<?php
print_r(
    $connection->listTables("blog")
);
```


public **listViews** ([mixed \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all views on a database

```
<?php

print_r(
    $connection->listViews ("blog")
);
```

public **tableOptions** (mixed \$tableName, [mixed \$schemaName]) inherited from *Phalcon\Db\Adapter*

Gets creation options from a table

```
<?php

print_r(
    $connection->tableOptions ("robots")
);
```

public **createSavepoint** (mixed \$name) inherited from *Phalcon\Db\Adapter*

Creates a new savepoint

public **releaseSavepoint** (mixed \$name) inherited from *Phalcon\Db\Adapter*

Releases given savepoint

public **rollbackSavepoint** (mixed \$name) inherited from *Phalcon\Db\Adapter*

Rollbacks given savepoint

public **setNestedTransactionsWithSavepoints** (mixed \$nestedTransactionsWithSavepoints) inherited from *Phalcon\Db\Adapter*

Set if nested transactions should use savepoints

public **isNestedTransactionsWithSavepoints** () inherited from *Phalcon\Db\Adapter*

Returns if nested transactions should use savepoints

public **getNestedTransactionSavepointName** () inherited from *Phalcon\Db\Adapter*

Returns the savepoint name to use for nested transactions

public **getDefaultIdValue** () inherited from *Phalcon\Db\Adapter*

Returns the default identity value to be inserted in an identity column

```
<?php

// Inserting a new robot with a valid default value for the column 'id'
$success = $connection->insert(
    "robots",
    [
        $connection->getDefaultIdValue(),
        "Astro Boy",
        1952,
    ],
    [
        "id",
        "name",
        "year",
    ]
);
```

```
    ]  
);
```

public **getDefaultValue** () inherited from *Phalcon\Db\Adapter*

Returns the default value to make the RBDM use the default value declared in the table definition

```
<?php  
  
// Inserting a new robot with a valid default value for the column 'year'  
$success = $connection->insert(  
    "robots",  
    [  
        "Astro Boy",  
        $connection->getDefaultValue()  
    ],  
    [  
        "name",  
        "year",  
    ]  
);
```

public **supportSequences** () inherited from *Phalcon\Db\Adapter*

Check whether the database system requires a sequence to produce auto-numeric values

public **useExplicitIdValue** () inherited from *Phalcon\Db\Adapter*

Check whether the database system requires an explicit value for identity columns

public **getDescriptor** () inherited from *Phalcon\Db\Adapter*

Return descriptor used to connect to the active database

public *string* **getConnectionId** () inherited from *Phalcon\Db\Adapter*

Gets the active connection unique identifier

public **getSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

public **getRealSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object without replace bound parameters

public *array* **getSQLBindTypes** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

Class **Phalcon\Db\Adapter\Pdo\Postgresql**

extends abstract class *Phalcon\Db\Adapter\Pdo*

implements *Phalcon\Db\AdapterInterface*, *Phalcon\Events\EventsAwareInterface*

Specific functions for the Postgresql database system

```
<?php  
  
use Phalcon\Db\Adapter\Pdo\Postgresql;  
  
$config = [
```

```

    "host"      => "localhost",
    "dbname"    => "blog",
    "port"      => 5432,
    "username"  => "postgres",
    "password"  => "secret",
];

$connection = new Postgresql($config);

```

Methods

public **connect** ([array \$descriptor])

This method is automatically called in `Phalcon\Db\Adapter\Pdo` constructor. Call it when you need to restore a database connection.

public **describeColumns** (*mixed* \$table, [*mixed* \$schema])

Returns an array of `Phalcon\Db\Column` objects describing a table

```

<?php

print_r(
    $connection->describeColumns("posts")
);

```

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, array \$definition)

Creates a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

Modifies a table column based on a definition

public **useExplicitIdValue** ()

Check whether the database system requires an explicit value for identity columns

public **getDefaultIdValue** ()

Returns the default identity value to be inserted in an identity column

```

<?php

// Inserting a new robot with a valid default value for the column 'id'
$success = $connection->insert(
    "robots",
    [
        $connection->getDefaultIdValue(),
        "Astro Boy",
        1952,
    ],
    [
        "id",
        "name",
        "year",
    ]
);

```

public **supportSequences** ()

Check whether the database system requires a sequence to produce auto-numeric values

public **__construct** (array \$descriptor) inherited from *Phalcon\Db\Adapter\Pdo*

Constructor for Phalcon\Db\Adapter\Pdo

public **prepare** (mixed \$sqlStatement) inherited from *Phalcon\Db\Adapter\Pdo*

Returns a PDO prepared statement to be executed with 'executePrepared'

```
<?php
use Phalcon\Db\Column;

$stmt = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $stmt,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **PDOStatement executePrepared** (PDOStatement \$statement, array \$placeholders, array \$dataTypes) inherited from *Phalcon\Db\Adapter\Pdo*

Executes a prepared statement binding. This function uses integer indexes starting from zero

```
<?php
use Phalcon\Db\Column;

$stmt = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $stmt,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **query** (mixed \$sqlStatement, [mixed \$bindParams], [mixed \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server is returning rows

```
<?php
```

```
// Querying data
$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = 'mechanical'"
);

$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = ?",
    [
        "mechanical",
    ]
);
```

public **execute** (*mixed* \$sqlStatement, [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server doesn't return any rows

```
<?php

// Inserting data
$success = $connection->execute(
    "INSERT INTO robots VALUES (1, 'Astro Boy')"
);

$success = $connection->execute(
    "INSERT INTO robots VALUES (?, ?)",
    [
        1,
        "Astro Boy",
    ]
);
```

public **affectedRows** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the number of affected rows by the latest INSERT/UPDATE/DELETE executed in the database system

```
<?php

$connection->execute(
    "DELETE FROM robots"
);

echo $connection->affectedRows(), " were deleted";
```

public **close** () inherited from *Phalcon\Db\Adapter\Pdo*

Closes the active connection returning success. Phalcon automatically closes and destroys active connections when the request ends

public **escapeString** (*mixed* \$str) inherited from *Phalcon\Db\Adapter\Pdo*

Escapes a value to avoid SQL injections according to the active charset in the connection

```
<?php

$escapedStr = $connection->escapeString("some dangerous value");
```

public **convertBoundParams** (*mixed* \$sql, [*array* \$params]) inherited from *Phalcon\Db\Adapter\Pdo*

Converts bound parameters such as :name: or ?1 into PDO bind params ?

```
<?php

print_r(
    $connection->convertBoundParams(
        "SELECT * FROM robots WHERE name = :name:",
        [
            "Bender",
        ]
    )
);
```

public **int | boolean lastInsertId** ([string \$sequenceName]) inherited from *Phalcon\Db\Adapter\Pdo*

Returns the insert id for the auto_increment/serial column inserted in the latest executed SQL statement

```
<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    [
        "Astro Boy",
        1952,
    ],
    [
        "name",
        "year",
    ]
);

// Getting the generated id
$id = $connection->lastInsertId();
```

public **begin** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Starts a transaction in the connection

public **rollback** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Rollbacks the active transaction in the connection

public **commit** ([mixed \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Commits the active transaction in the connection

public **getTransactionLevel** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the current transaction nesting level

public **isUnderTransaction** () inherited from *Phalcon\Db\Adapter\Pdo*

Checks whether the connection is under a transaction

```
<?php

$connection->begin();

// true
var_dump(
```

```
$connection->isUnderTransaction()
);
```

public **getInternalHandler** () inherited from *Phalcon\Db\Adapter\Pdo*

Return internal PDO handler

public array **getErrorInfo** () inherited from *Phalcon\Db\Adapter\Pdo*

Return the error info, if any

public **getDialectType** () inherited from *Phalcon\Db\Adapter*

Name of the dialect used

public **getType** () inherited from *Phalcon\Db\Adapter*

Type of database system the adapter is used for

public **getSqlVariables** () inherited from *Phalcon\Db\Adapter*

Active SQL bound parameter variables

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Db\Adapter*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Db\Adapter*

Returns the internal event manager

public **setDialect** (*Phalcon\Db\DialectInterface* \$dialect) inherited from *Phalcon\Db\Adapter*

Sets the dialect used to produce the SQL

public **getDialect** () inherited from *Phalcon\Db\Adapter*

Returns internal dialect instance

public **fetchOne** (*mixed* \$sqlQuery, [*mixed* \$fetchMode], [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Returns the first row in a SQL query result

```
<?php

// Getting first robot
$robot = $connection->fetchOne("SELECT * FROM robots");
print_r($robot);

// Getting first robot with associative indexes only
$robot = $connection->fetchOne("SELECT * FROM robots", \Phalcon\Db::FETCH_ASSOC);
print_r($robot);
```

public array **fetchAll** (*string* \$sqlQuery, [*int* \$fetchMode], [*array* \$bindParam], [*array* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Dumps the complete result of a query into an array

```
<?php

// Getting all robots with associative indexes only
$robots = $connection->fetchAll(
    "SELECT * FROM robots",
    \Phalcon\Db::FETCH_ASSOC
```

```
);

foreach ($robots as $robot) {
    print_r($robot);
}

// Getting all robots that contains word "robot" withing the name
$robots = $connection->fetchAll(
    "SELECT * FROM robots WHERE name LIKE :name",
    \Phalcon\Db::FETCH_ASSOC,
    [
        "name" => "%robot%",
    ]
);
foreach($robots as $robot) {
    print_r($robot);
}
```

public *string* | **fetchColumn** (*string* \$sqlQuery, [*array* \$placeholders], [*int* | *string* \$column]) inherited from *Phalcon\Db\Adapter*

Returns the n'th field of first row in a SQL query result

```
<?php

// Getting count of robots
$robotsCount = $connection->fetchColumn("SELECT count(*) FROM robots");
print_r($robotsCount);

// Getting name of last edited robot
$robot = $connection->fetchColumn(
    "SELECT id, name FROM robots order by modified desc",
    1
);
print_r($robot);
```

public *boolean* **insert** (*string* | *array* \$table, *array* \$values, [*array* \$fields], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RDBMS SQL syntax

```
<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    ["Astro Boy", 1952],
    ["name", "year"]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public *boolean* **insertAsDict** (*string* \$table, *array* \$data, [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RBDM SQL syntax

```
<?php
```



```
// Inserting a new robot
$success = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public **boolean update** (*string* | *array* \$table, *array* \$fields, *array* \$values, [*string* | *array* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax

```
<?php

// Updating existing robot
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

// Updating existing robot with array condition and $dataTypes
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    [
        "conditions" => "id = ?",
        "bind"        => [$some_unsafe_id],
        "bindTypes"   => [PDO::PARAM_INT], // use only if you use $dataTypes param
    ],
    [
        PDO::PARAM_STR
    ]
);
```

Warning! If \$whereCondition is string it not escaped.

public **boolean updateAsDict** (*string* \$table, *array* \$data, [*string* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax Another, more convenient syntax

```
<?php

// Updating existing robot
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
```

```
    ],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101
```

public **boolean delete** (*string* | *array* \$table, [*string* \$whereCondition], [*array* \$placeholders], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Deletes data from a table using custom RBDM SQL syntax

```
<?php

// Deleting existing robot
$success = $connection->delete(
    "robots",
    "id = 101"
);

// Next SQL sentence is generated
DELETE FROM `robots` WHERE `id` = 101
```

public **escapeIdentifier** (*array* | *string* \$identifier) inherited from *Phalcon\Db\Adapter*

Escapes a column/table/schema name

```
<?php

$escapedTable = $connection->escapeIdentifier(
    "robots"
);

$escapedTable = $connection->escapeIdentifier(
    [
        "store",
        "robots",
    ]
);
```

public **string getColumnList** (*array* \$columnList) inherited from *Phalcon\Db\Adapter*

Gets a list of columns

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Adapter*

Appends a LIMIT clause to \$sqlQuery argument

```
<?php

echo $connection->limit("SELECT * FROM robots", 5);
```

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.table

```
<?php

var_dump(
```

```
$connection->tableExists("blog", "posts")
);
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.view

```
<?php

var_dump (
    $connection->viewExists("active_users", "posts")
);
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a FOR UPDATE clause

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a LOCK IN SHARE MODE clause

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a table from a schema/database

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Creates a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a view

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Adds a column to a table

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName) inherited from *Phalcon\Db\Adapter*

Drops a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName) inherited from *Phalcon\Db\Adapter*

Drop an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds a primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\Adapter*

Drops a table's primary key

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/ReferenceInterface* \$reference) inherited from *Phalcon\Db\Adapter*

Adds a foreign key to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName) inherited from *Phalcon\Db\Adapter*

Drops a foreign key from a table

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Returns the SQL column definition from a column

public **listTables** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all tables on a database

```
<?php
print_r(
    $connection->listTables("blog")
);
```

public **listViews** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all views on a database

```
<?php
print_r(
    $connection->listViews("blog")
);
```

public *Phalcon\Db\Index*[] **describeIndexes** (*string* \$table, [*string* \$schema]) inherited from *Phalcon\Db\Adapter*

Lists table indexes

```
<?php
print_r(
    $connection->describeIndexes("robots_parts")
);
```

public **describeReferences** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\Adapter*

Lists table references

```
<?php
print_r(
    $connection->describeReferences("robots_parts")
);
```

public **tableOptions** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Gets creation options from a table

```
<?php
print_r(
    $connection->tableOptions("robots")
);
```

public **createSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Creates a new savepoint

public **releaseSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Releases given savepoint

public **rollbackSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Rollbacks given savepoint

public **setNestedTransactionsWithSavepoints** (*mixed* \$nestedTransactionsWithSavepoints) inherited from *Phalcon\Db\Adapter*

Set if nested transactions should use savepoints

public **isNestedTransactionsWithSavepoints** () inherited from *Phalcon\Db\Adapter*

Returns if nested transactions should use savepoints

public **getNestedTransactionSavepointName** () inherited from *Phalcon\Db\Adapter*

Returns the savepoint name to use for nested transactions

public **getDefaultValue** () inherited from *Phalcon\Db\Adapter*

Returns the default value to make the RDBM use the default value declared in the table definition

```
<?php

// Inserting a new robot with a valid default value for the column 'year'
$success = $connection->insert (
    "robots",
    [
        "Astro Boy",
        $connection->getDefaultValue ()
    ],
    [
        "name",
        "year",
    ]
);
```

public **getDescriptor** () inherited from *Phalcon\Db\Adapter*

Return descriptor used to connect to the active database

public *string* **getConnectionId** () inherited from *Phalcon\Db\Adapter*

Gets the active connection unique identifier

public **getSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

public **getRealSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object without replace bound parameters

public *array* **getSQLBindTypes** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

Class *Phalcon\Db\Adapter\Pdo\Sqlite*

extends abstract class *Phalcon\Db\Adapter\Pdo*

implements *Phalcon\Db\AdapterInterface*, *Phalcon\Events\EventsAwareInterface*

Specific functions for the Sqlite database system

```
<?php

use Phalcon\Db\Adapter\Pdo\Sqlite;

$connection = new Sqlite(
    [
        "dbname" => "/tmp/test.sqlite",
    ]
);
```

Methods

public **connect** ([array \$descriptor])

This method is automatically called in Phalcon\Db\Adapter\Pdo constructor. Call it when you need to restore a database connection.

public **describeColumns** (mixed \$table, [mixed \$schema])

Returns an array of Phalcon\Db\Column objects describing a table

```
<?php

print_r(
    $connection->describeColumns("posts")
);
```

public *Phalcon\Db\IndexInterface*[] **describeIndexes** (string \$table, [string \$schema])

Lists table indexes

```
<?php

print_r(
    $connection->describeIndexes("robots_parts")
);
```

public *Phalcon\Db\ReferenceInterface*[] **describeReferences** (string \$table, [string \$schema])

Lists table references

public **useExplicitIdValue** ()

Check whether the database system requires an explicit value for identity columns

public **getDefaultValue** ()

Returns the default value to make the RDBM use the default value declared in the table definition

```
<?php

// Inserting a new robot with a valid default value for the column 'year'
$success = $connection->insert(
    "robots",
    [
        "Astro Boy",
        $connection->getDefaultValue(),
    ],
);
```

```
[
    "name",
    "year",
];
);
```

public **__construct** (array \$descriptor) inherited from *Phalcon\Db\Adapter\Pdo*

Constructor for Phalcon\Db\Adapter\Pdo

public **prepare** (mixed \$sqlStatement) inherited from *Phalcon\Db\Adapter\Pdo*

Returns a PDO prepared statement to be executed with 'executePrepared'

```
<?php
use Phalcon\Db\Column;

$statement = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $statement,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **PDOSTatement executePrepared** (PDOSTatement \$statement, array \$placeholders, array \$dataTypes) inherited from *Phalcon\Db\Adapter\Pdo*

Executes a prepared statement binding. This function uses integer indexes starting from zero

```
<?php
use Phalcon\Db\Column;

$statement = $db->prepare(
    "SELECT * FROM robots WHERE name = :name"
);

$result = $connection->executePrepared(
    $statement,
    [
        "name" => "Voltron",
    ],
    [
        "name" => Column::BIND_PARAM_INT,
    ]
);
```

public **query** (mixed \$sqlStatement, [mixed \$bindParam], [mixed \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server is returning rows

```
<?php

// Querying data
$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = 'mechanical'"
);

$resultset = $connection->query(
    "SELECT * FROM robots WHERE type = ?",
    [
        "mechanical",
    ]
);
```

public **execute** (*mixed* \$sqlStatement, [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter\Pdo*

Sends SQL statements to the database server returning the success state. Use this method only when the SQL statement sent to the server doesn't return any rows

```
<?php

// Inserting data
$success = $connection->execute(
    "INSERT INTO robots VALUES (1, 'Astro Boy')"
);

$success = $connection->execute(
    "INSERT INTO robots VALUES (?, ?)",
    [
        1,
        "Astro Boy",
    ]
);
```

public **affectedRows** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the number of affected rows by the latest INSERT/UPDATE/DELETE executed in the database system

```
<?php

$connection->execute(
    "DELETE FROM robots"
);

echo $connection->affectedRows(), " were deleted";
```

public **close** () inherited from *Phalcon\Db\Adapter\Pdo*

Closes the active connection returning success. Phalcon automatically closes and destroys active connections when the request ends

public **escapeString** (*mixed* \$str) inherited from *Phalcon\Db\Adapter\Pdo*

Escapes a value to avoid SQL injections according to the active charset in the connection

```
<?php

$escapedStr = $connection->escapeString("some dangerous value");
```


public **convertBoundParams** (*mixed* \$sql, [*array* \$params]) inherited from *Phalcon\Db\Adapter\Pdo*

Converts bound parameters such as :name: or ?1 into PDO bind params ?

```
<?php
print_r(
    $connection->convertBoundParams(
        "SELECT * FROM robots WHERE name = :name:",
        [
            "Bender",
        ]
    )
);
```

public *int | boolean* **lastInsertId** ([*string* \$sequenceName]) inherited from *Phalcon\Db\Adapter\Pdo*

Returns the insert id for the auto_increment/serial column inserted in the latest executed SQL statement

```
<?php
// Inserting a new robot
$success = $connection->insert(
    "robots",
    [
        "Astro Boy",
        1952,
    ],
    [
        "name",
        "year",
    ]
);

// Getting the generated id
$id = $connection->lastInsertId();
```

public **begin** ([*mixed* \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Starts a transaction in the connection

public **rollback** ([*mixed* \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Rollbacks the active transaction in the connection

public **commit** ([*mixed* \$nesting]) inherited from *Phalcon\Db\Adapter\Pdo*

Commits the active transaction in the connection

public **getTransactionLevel** () inherited from *Phalcon\Db\Adapter\Pdo*

Returns the current transaction nesting level

public **isUnderTransaction** () inherited from *Phalcon\Db\Adapter\Pdo*

Checks whether the connection is under a transaction

```
<?php
$connection->begin();

// true
var_dump(
```

```
$connection->isUnderTransaction()  
);
```

public **getInternalHandler** () inherited from *Phalcon\Db\Adapter\Pdo*

Return internal PDO handler

public array **getErrorInfo** () inherited from *Phalcon\Db\Adapter\Pdo*

Return the error info, if any

public **getDialectType** () inherited from *Phalcon\Db\Adapter*

Name of the dialect used

public **getType** () inherited from *Phalcon\Db\Adapter*

Type of database system the adapter is used for

public **getSqlVariables** () inherited from *Phalcon\Db\Adapter*

Active SQL bound parameter variables

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Db\Adapter*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Db\Adapter*

Returns the internal event manager

public **setDialect** (*Phalcon\Db\DialectInterface* \$dialect) inherited from *Phalcon\Db\Adapter*

Sets the dialect used to produce the SQL

public **getDialect** () inherited from *Phalcon\Db\Adapter*

Returns internal dialect instance

public **fetchOne** (*mixed* \$sqlQuery, [*mixed* \$fetchMode], [*mixed* \$bindParam], [*mixed* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Returns the first row in a SQL query result

```
<?php  
  
// Getting first robot  
$robot = $connection->fetchOne("SELECT * FROM robots");  
print_r($robot);  
  
// Getting first robot with associative indexes only  
$robot = $connection->fetchOne("SELECT * FROM robots", \Phalcon\Db::FETCH_ASSOC);  
print_r($robot);
```

public array **fetchAll** (*string* \$sqlQuery, [*int* \$fetchMode], [*array* \$bindParam], [*array* \$bindTypes]) inherited from *Phalcon\Db\Adapter*

Dumps the complete result of a query into an array

```
<?php  
  
// Getting all robots with associative indexes only  
$robots = $connection->fetchAll(  
    "SELECT * FROM robots",  
    \Phalcon\Db::FETCH_ASSOC
```

```
);

foreach ($robots as $robot) {
    print_r($robot);
}

// Getting all robots that contains word "robot" within the name
$robots = $connection->fetchAll(
    "SELECT * FROM robots WHERE name LIKE :name",
    \Phalcon\Db::FETCH_ASSOC,
    [
        "name" => "%robot%",
    ]
);
foreach($robots as $robot) {
    print_r($robot);
}
```

public *string* | **fetchColumn** (*string* \$sqlQuery, [*array* \$placeholders], [*int* | *string* \$column]) inherited from *Phalcon\Db\Adapter*

Returns the n'th field of first row in a SQL query result

```
<?php

// Getting count of robots
$robotsCount = $connection->fetchColumn("SELECT count(*) FROM robots");
print_r($robotsCount);

// Getting name of last edited robot
$robot = $connection->fetchColumn(
    "SELECT id, name FROM robots order by modified desc",
    1
);
print_r($robot);
```

public *boolean* **insert** (*string* | *array* \$table, *array* \$values, [*array* \$fields], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RDBMS SQL syntax

```
<?php

// Inserting a new robot
$success = $connection->insert(
    "robots",
    ["Astro Boy", 1952],
    ["name", "year"]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public *boolean* **insertAsDict** (*string* \$table, *array* \$data, [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Inserts data into a table using custom RBDM SQL syntax

```
<?php
```

```
// Inserting a new robot
$success = $connection->insertAsDict(
    "robots",
    [
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Next SQL sentence is sent to the database system
INSERT INTO `robots` (`name`, `year`) VALUES ("Astro boy", 1952);
```

public **boolean update** (*string* | *array* \$table, *array* \$fields, *array* \$values, [*string* | *array* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax

```
<?php

// Updating existing robot
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    "id = 101"
);

// Next SQL sentence is sent to the database system
UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

// Updating existing robot with array condition and $dataTypes
$success = $connection->update(
    "robots",
    ["name"],
    ["New Astro Boy"],
    [
        "conditions" => "id = ?",
        "bind"        => [$some_unsafe_id],
        "bindTypes"   => [PDO::PARAM_INT], // use only if you use $dataTypes param
    ],
    [
        PDO::PARAM_STR
    ]
);
```

Warning! If \$whereCondition is string it not escaped.

public **boolean updateAsDict** (*string* \$table, *array* \$data, [*string* \$whereCondition], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Updates data on a table using custom RBDM SQL syntax Another, more convenient syntax

```
<?php

// Updating existing robot
$success = $connection->updateAsDict(
    "robots",
    [
        "name" => "New Astro Boy",
```

```

        ],
        "id = 101"
    );

    // Next SQL sentence is sent to the database system
    UPDATE `robots` SET `name` = "Astro boy" WHERE id = 101

```

public **boolean delete** (*string* | *array* \$table, [*string* \$whereCondition], [*array* \$placeholders], [*array* \$dataTypes]) inherited from *Phalcon\Db\Adapter*

Deletes data from a table using custom RBDM SQL syntax

```

<?php

// Deleting existing robot
$success = $connection->delete(
    "robots",
    "id = 101"
);

// Next SQL sentence is generated
DELETE FROM `robots` WHERE `id` = 101

```

public **escapeIdentifier** (*array* | *string* \$identifier) inherited from *Phalcon\Db\Adapter*

Escapes a column/table/schema name

```

<?php

$escapedTable = $connection->escapeIdentifier(
    "robots"
);

$escapedTable = $connection->escapeIdentifier(
    [
        "store",
        "robots",
    ]
);

```

public **string getColumnList** (*array* \$columnList) inherited from *Phalcon\Db\Adapter*

Gets a list of columns

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Adapter*

Appends a LIMIT clause to \$sqlQuery argument

```

<?php

echo $connection->limit("SELECT * FROM robots", 5);

```

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.table

```

<?php

var_dump(

```

```
$connection->tableExists("blog", "posts")
);
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Generates SQL checking for the existence of a schema.view

```
<?php

var_dump (
    $connection->viewExists("active_users", "posts")
);
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a FOR UPDATE clause

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Adapter*

Returns a SQL modified with a LOCK IN SHARE MODE clause

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition) inherited from *Phalcon\Db\Adapter*

Creates a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a table from a schema/database

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Creates a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\Adapter*

Drops a view

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Adds a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn]) inherited from *Phalcon\Db\Adapter*

Modifies a table column based on a definition

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName) inherited from *Phalcon\Db\Adapter*

Drops a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName) inherited from *Phalcon\Db\Adapter*

Drop an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index) inherited from *Phalcon\Db\Adapter*

Adds a primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\Adapter*

Drops a table's primary key

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference) inherited from *Phalcon\Db\Adapter*

Adds a foreign key to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName) inherited from *Phalcon\Db\Adapter*

Drops a foreign key from a table

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\Adapter*

Returns the SQL column definition from a column

public **listTables** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all tables on a database

```
<?php
print_r(
    $connection->listTables("blog")
);
```

public **listViews** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

List all views on a database

```
<?php
print_r(
    $connection->listViews("blog")
);
```

public **tableOptions** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\Adapter*

Gets creation options from a table

```
<?php
print_r(
    $connection->tableOptions("robots")
);
```

public **createSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Creates a new savepoint

public **releaseSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Releases given savepoint

public **rollbackSavepoint** (*mixed* \$name) inherited from *Phalcon\Db\Adapter*

Rollbacks given savepoint

public **setNestedTransactionsWithSavepoints** (*mixed* \$nestedTransactionsWithSavepoints) inherited from *Phalcon\Db\Adapter*

Set if nested transactions should use savepoints

public **isNestedTransactionsWithSavepoints** () inherited from *Phalcon\Db\Adapter*

Returns if nested transactions should use savepoints

public **getNestedTransactionSavepointName** () inherited from *Phalcon\Db\Adapter*

Returns the savepoint name to use for nested transactions

public **getDefaultIdValue** () inherited from *Phalcon\Db\Adapter*

Returns the default identity value to be inserted in an identity column

```
<?php

// Inserting a new robot with a valid default value for the column 'id'
$success = $connection->insert(
    "robots",
    [
        $connection->getDefaultIdValue(),
        "Astro Boy",
        1952,
    ],
    [
        "id",
        "name",
        "year",
    ]
);
```

public **supportSequences** () inherited from *Phalcon\Db\Adapter*

Check whether the database system requires a sequence to produce auto-numeric values

public **getDescriptor** () inherited from *Phalcon\Db\Adapter*

Return descriptor used to connect to the active database

public *string* **getConnectionId** () inherited from *Phalcon\Db\Adapter*

Gets the active connection unique identifier

public **getSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

public **getRealSQLStatement** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object without replace bound parameters

public *array* **getSQLBindTypes** () inherited from *Phalcon\Db\Adapter*

Active SQL statement in the object

Class Phalcon\Db\Column

implements Phalcon\Db\ColumnInterface

Allows to define columns to be used on create or alter table operations

```
<?php

use Phalcon\Db\Column as Column;

// Column definition
```



```
$column = new Column(
    "id",
    [
        "type"           => Column::TYPE_INTEGER,
        "size"           => 10,
        "unsigned"       => true,
        "notNull"        => true,
        "autoIncrement"  => true,
        "first"          => true,
    ]
);

// Add column to existing table
$connection->addColumn("robots", null, $column);
```

Constants

integer **TYPE_INTEGER**

integer **TYPE_DATE**

integer **TYPE_VARCHAR**

integer **TYPE_DECIMAL**

integer **TYPE_DATETIME**

integer **TYPE_CHAR**

integer **TYPE_TEXT**

integer **TYPE_FLOAT**

integer **TYPE_BOOLEAN**

integer **TYPE_DOUBLE**

integer **TYPE_TINYBLOB**

integer **TYPE_BLOB**

integer **TYPE_MEDIUMBLOB**

integer **TYPE_LONGBLOB**

integer **TYPE_BIGINTEGER**

integer **TYPE_JSON**

integer **TYPE_JSONB**

integer **TYPE_TIMESTAMP**

integer **BIND_PARAM_NULL**

integer **BIND_PARAM_INT**

integer **BIND_PARAM_STR**

integer **BIND_PARAM_BLOB**

integer **BIND_PARAM_BOOL**

integer **BIND_PARAM_DECIMAL**

integer **BIND_SKIP**

Methods

public **getName** ()

Column's name

public **getSchemaName** ()

Schema which table related is

public **getType** ()

Column data type

public **getTypeReference** ()

Column data type reference

public **getTypeValues** ()

Column data type values

public **getSize** ()

Integer column size

public **getScale** ()

Integer column number scale

public **getDefault** ()

Default column value

public **__construct** (*mixed* \$name, *array* \$definition)

Phalcon\Db\Column constructor

public **isUnsigned** ()

Returns true if number column is unsigned

public **isNotNull** ()

Not null

public **isPrimary** ()

Column is part of the primary key?

public **isAutoIncrement** ()

Auto-Increment

public **isNumeric** ()

Check whether column have an numeric type

public **isFirst** ()

Check whether column have first position in table

public *string* **getAfterPosition** ()

Check whether field absolute to position in table

public **getBindType** ()

Returns the type of bind handling

public static **__set_state** (*array* \$data)

Restores the internal state of a Phalcon\Db\Column object

public **hasDefault** ()

Check whether column has default value

Abstract class Phalcon\Db\Dialect

implements Phalcon\Db\DialectInterface

This is the base class to each database dialect. This implements common methods to transform intermediate code into its RDBMS related syntax

Methods

public **registerCustomFunction** (*mixed* \$name, *mixed* \$customFunction)

Registers custom SQL functions

public **getCustomFunctions** ()

Returns registered functions

final public **escapeSchema** (*mixed* \$str, [*mixed* \$escapeChar])

Escape Schema

final public **escape** (*mixed* \$str, [*mixed* \$escapeChar])

Escape identifiers

public **limit** (*mixed* \$sqlQuery, *mixed* \$number)

Generates the SQL for LIMIT clause

```
<?php
$sql = $dialect->limit("SELECT * FROM robots", 10);
echo $sql; // SELECT * FROM robots LIMIT 10

$sql = $dialect->limit("SELECT * FROM robots", [10, 50]);
echo $sql; // SELECT * FROM robots LIMIT 10 OFFSET 50
```

public **forUpdate** (*mixed* \$sqlQuery)

Returns a SQL modified with a FOR UPDATE clause

```
<?php
$sql = $dialect->forUpdate("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots FOR UPDATE
```

public **sharedLock** (*mixed* \$sqlQuery)

Returns a SQL modified with a LOCK IN SHARE MODE clause

```
<?php

$sql = $dialect->sharedLock("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots LOCK IN SHARE MODE
```

final public **getColumnList** (array \$columnList, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Gets a list of columns with escaped identifiers

```
<?php

echo $dialect->getColumnList (
    [
        "column1",
        "column",
    ]
);
```

final public **getSqlColumn** (*mixed* \$column, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve Column expressions

public **getSqlExpression** (array \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Transforms an intermediate representation for an expression into a database system valid expression

final public **getSqlTable** (*mixed* \$table, [*mixed* \$escapeChar])

Transform an intermediate representation of a schema/table into a database system valid expression

public **select** (array \$definition)

Builds a SELECT statement

public **supportsSavepoints** ()

Checks whether the platform supports savepoints

public **supportsReleaseSavepoints** ()

Checks whether the platform supports releasing savepoints.

public **createSavepoint** (*mixed* \$name)

Generate SQL to create a new savepoint

public **releaseSavepoint** (*mixed* \$name)

Generate SQL to release a savepoint

public **rollbackSavepoint** (*mixed* \$name)

Generate SQL to rollback a savepoint

final protected **getSqlExpressionScalar** (array \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve Column expressions

final protected **getSqlExpressionObject** (array \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve object expressions

final protected **getSqlExpressionQualified** (array \$expression, [*mixed* \$escapeChar])

Resolve qualified expressions

final protected **getSqlExpressionBinaryOperations** (array \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve binary operations expressions

final protected **getSqlExpressionUnaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve unary operations expressions

final protected **getSqlExpressionFunctionCall** (*array* \$expression, *mixed* \$escapeChar, [*mixed* \$bindCounts])

Resolve function calls

final protected **getSqlExpressionList** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve Lists

final protected **getSqlExpressionAll** (*array* \$expression, [*mixed* \$escapeChar])

Resolve *

final protected **getSqlExpressionCastValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve CAST of values

final protected **getSqlExpressionConvertValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve CONVERT of values encodings

final protected **getSqlExpressionCase** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve CASE expressions

final protected **getSqlExpressionFrom** (*mixed* \$expression, [*mixed* \$escapeChar])

Resolve a FROM clause

final protected **getSqlExpressionJoins** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve a JOINS clause

final protected **getSqlExpressionWhere** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve a WHERE clause

final protected **getSqlExpressionGroupBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve a GROUP BY clause

final protected **getSqlExpressionHaving** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve a HAVING clause

final protected **getSqlExpressionOrderBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve an ORDER BY clause

final protected **getSqlExpressionLimit** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])

Resolve a LIMIT clause

protected **prepareColumnAlias** (*mixed* \$qualified, [*mixed* \$alias], [*mixed* \$escapeChar])

Prepares column for this RDBMS

protected **prepareTable** (*mixed* \$table, [*mixed* \$schema], [*mixed* \$alias], [*mixed* \$escapeChar])

Prepares table for this RDBMS

protected **prepareQualified** (*mixed* \$column, [*mixed* \$domain], [*mixed* \$escapeChar])

Prepares qualified for this RDBMS

abstract public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/ReferenceInterface* \$reference) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropTable** (*mixed* \$tableName, *mixed* \$schemaName) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **describeColumns** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **listTables** ([*mixed* \$schemaName]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **describeIndexes** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **describeReferences** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\DialectInterface*

...

abstract public **tableOptions** (*mixed* \$table, [*mixed* \$schema]) inherited from *Phalcon\Db\DialectInterface*

...

Class *Phalcon\Db\Dialect\Mysql*

extends abstract class *Phalcon\Db\Dialect*

implements *Phalcon\Db\DialectInterface*

Generates database specific SQL for the MySQL RDBMS

Methods

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column)

Gets the column name in MySQL

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column)

Generates SQL to add a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

Generates SQL to modify a column in a table

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName)

Generates SQL to delete a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Generates SQL to add an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName)

Generates SQL to delete an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Generates SQL to add the primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to delete primary key from a table

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference)

Generates SQL to add an index to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName)

Generates SQL to delete a foreign key from a table

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition)

Generates SQL to create a table

public **truncateTable** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to truncate a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a table

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName])

Generates SQL to create a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a view

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.table

```
<?php
echo $dialect->tableExists("posts", "blog");
echo $dialect->tableExists("posts");
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.view

public **describeColumns** (*mixed* \$table, [*mixed* \$schema])

Generates SQL describing a table

```
<?php
print_r(
    $dialect->describeColumns("posts")
);
```

public **listTables** ([*mixed* \$schemaName])

List all tables in database

```
<?php
print_r(
    $dialect->listTables("blog")
);
```


public **listViews** ([*mixed* \$schemaName])

Generates the SQL to list all views of a schema or user

public **describeIndexes** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query indexes on a table

public **describeReferences** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query foreign keys on a table

public **tableOptions** (*mixed* \$table, [*mixed* \$schema])

Generates the SQL to describe the table creation options

protected **_getTableOptions** (*array* \$definition)

Generates SQL to add the table creation options

public **registerCustomFunction** (*mixed* \$name, *mixed* \$customFunction) inherited from *Phalcon\Db\Dialect*

Registers custom SQL functions

public **getCustomFunctions** () inherited from *Phalcon\Db\Dialect*

Returns registered functions

final public **escapeSchema** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape Schema

final public **escape** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape identifiers

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Dialect*

Generates the SQL for LIMIT clause

```
<?php

$sql = $dialect->limit("SELECT * FROM robots", 10);
echo $sql; // SELECT * FROM robots LIMIT 10

$sql = $dialect->limit("SELECT * FROM robots", [10, 50]);
echo $sql; // SELECT * FROM robots LIMIT 10 OFFSET 50
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a FOR UPDATE clause

```
<?php

$sql = $dialect->forUpdate("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots FOR UPDATE
```

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a LOCK IN SHARE MODE clause

```
<?php

$sql = $dialect->sharedLock("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots LOCK IN SHARE MODE
```

final public **getColumnList** (array \$columnList, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Gets a list of columns with escaped identifiers

```
<?php

echo $dialect->getColumnList (
    [
        "column1",
        "column",
    ]
);
```

final public **getSqlColumn** (mixed \$column, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

public **getSqlExpression** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Transforms an intermediate representation for an expression into a database system valid expression

final public **getSqlTable** (mixed \$table, [mixed \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Transform an intermediate representation of a schema/table into a database system valid expression

public **select** (array \$definition) inherited from *Phalcon\Db\Dialect*

Builds a SELECT statement

public **supportsSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports savepoints

public **supportsReleaseSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports releasing savepoints.

public **createSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to create a new savepoint

public **releaseSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to release a savepoint

public **rollbackSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to rollback a savepoint

final protected **getSqlExpressionScalar** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

final protected **getSqlExpressionObject** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve object expressions

final protected **getSqlExpressionQualified** (array \$expression, [mixed \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve qualified expressions

final protected **getSqlExpressionBinaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve binary operations expressions

final protected **getSqlExpressionUnaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve unary operations expressions

final protected **getSqlExpressionFunctionCall** (*array* \$expression, *mixed* \$escapeChar, [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve function calls

final protected **getSqlExpressionList** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Lists

final protected **getSqlExpressionAll** (*array* \$expression, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve *

final protected **getSqlExpressionCastValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CAST of values

final protected **getSqlExpressionConvertValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CONVERT of values encodings

final protected **getSqlExpressionCase** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CASE expressions

final protected **getSqlExpressionFrom** (*mixed* \$expression, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve a FROM clause

final protected **getSqlExpressionJoins** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a JOINS clause

final protected **getSqlExpressionWhere** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a WHERE clause

final protected **getSqlExpressionGroupBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a GROUP BY clause

final protected **getSqlExpressionHaving** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a HAVING clause

final protected **getSqlExpressionOrderBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve an ORDER BY clause

final protected **getSqlExpressionLimit** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a LIMIT clause

protected **prepareColumnAlias** (*mixed* \$qualified, [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares column for this RDBMS

protected **prepareTable** (*mixed* \$table, [*mixed* \$schema], [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares table for this RDBMS

protected **prepareQualified** (*mixed* \$column, [*mixed* \$domain], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares qualified for this RDBMS

Class *Phalcon\Db\Dialect\Postgresql*

extends abstract class *Phalcon\Db\Dialect*

implements *Phalcon\Db\DialectInterface*

Generates database specific SQL for the PostgreSQL RDBMS

Methods

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column)

Gets the column name in PostgreSQL

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column)

Generates SQL to add a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

Generates SQL to modify a column in a table

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName)

Generates SQL to delete a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Generates SQL to add an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName)

Generates SQL to delete an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

Generates SQL to add the primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to delete primary key from a table

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference)

Generates SQL to add an index to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName)

Generates SQL to delete a foreign key from a table

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition)

Generates SQL to create a table

public **truncateTable** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to truncate a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a table

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName])

Generates SQL to create a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a view

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.table

```
<?php
echo $dialect->tableExists("posts", "blog");

echo $dialect->tableExists("posts");
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.view

public **describeColumns** (*mixed* \$table, [*mixed* \$schema])

Generates SQL describing a table

```
<?php
print_r(
    $dialect->describeColumns("posts")
);
```

public **listTables** ([*mixed* \$schemaName])

List all tables in database

```
<?php
print_r(
    $dialect->listTables("blog")
);
```

public *string* **listViews** ([*string* \$schemaName])

Generates the SQL to list all views of a schema or user

public **describeIndexes** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query indexes on a table

public **describeReferences** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query foreign keys on a table

public **tableOptions** (*mixed* \$table, [*mixed* \$schema])

Generates the SQL to describe the table creation options

protected **_castDefault** (*Phalcon\Db\ColumnInterface* \$column)

...

protected **_getTableOptions** (*array* \$definition)

...

public **registerCustomFunction** (*mixed* \$name, *mixed* \$customFunction) inherited from *Phalcon\Db\Dialect*

Registers custom SQL functions

public **getCustomFunctions** () inherited from *Phalcon\Db\Dialect*

Returns registered functions

final public **escapeSchema** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape Schema

final public **escape** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape identifiers

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Dialect*

Generates the SQL for LIMIT clause

```
<?php
$sql = $dialect->limit("SELECT * FROM robots", 10);
echo $sql; // SELECT * FROM robots LIMIT 10

$sql = $dialect->limit("SELECT * FROM robots", [10, 50]);
echo $sql; // SELECT * FROM robots LIMIT 10 OFFSET 50
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a FOR UPDATE clause

```
<?php
$sql = $dialect->forUpdate("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots FOR UPDATE
```

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a LOCK IN SHARE MODE clause

```
<?php
$sql = $dialect->sharedLock("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots LOCK IN SHARE MODE
```

final public **getColumnList** (array \$columnList, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Gets a list of columns with escaped identifiers

```
<?php
echo $dialect->getColumnList (
    [
        "column1",
        "column",
    ]
);
```

final public **getSqlColumn** (mixed \$column, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

public **getSqlExpression** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Transforms an intermediate representation for an expression into a database system valid expression

final public **getSqlTable** (mixed \$table, [mixed \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Transform an intermediate representation of a schema/table into a database system valid expression

public **select** (array \$definition) inherited from *Phalcon\Db\Dialect*

Builds a SELECT statement

public **supportsSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports savepoints

public **supportsReleaseSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports releasing savepoints.

public **createSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to create a new savepoint

public **releaseSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to release a savepoint

public **rollbackSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to rollback a savepoint

final protected **getSqlExpressionScalar** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

final protected **getSqlExpressionObject** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve object expressions

final protected **getSqlExpressionQualified** (array \$expression, [mixed \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve qualified expressions

final protected **getSqlExpressionBinaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve binary operations expressions

final protected **getSqlExpressionUnaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve unary operations expressions

final protected **getSqlExpressionFunctionCall** (*array* \$expression, *mixed* \$escapeChar, [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve function calls

final protected **getSqlExpressionList** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve Lists

final protected **getSqlExpressionAll** (*array* \$expression, [*mixed* \$escapeChar])
inherited from *Phalcon\Db\Dialect*

Resolve *

final protected **getSqlExpressionCastValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve CAST of values

final protected **getSqlExpressionConvertValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve CONVERT of values encodings

final protected **getSqlExpressionCase** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve CASE expressions

final protected **getSqlExpressionFrom** (*mixed* \$expression, [*mixed* \$escapeChar])
inherited from *Phalcon\Db\Dialect*

Resolve a FROM clause

final protected **getSqlExpressionJoins** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve a JOINS clause

final protected **getSqlExpressionWhere** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve a WHERE clause

final protected **getSqlExpressionGroupBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve a GROUP BY clause

final protected **getSqlExpressionHaving** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve a HAVING clause

final protected **getSqlExpressionOrderBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts])
inherited from *Phalcon\Db\Dialect*

Resolve an ORDER BY clause

final protected **getSqlExpressionLimit** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a LIMIT clause

protected **prepareColumnAlias** (*mixed* \$qualified, [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares column for this RDBMS

protected **prepareTable** (*mixed* \$table, [*mixed* \$schema], [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares table for this RDBMS

protected **prepareQualified** (*mixed* \$column, [*mixed* \$domain], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares qualified for this RDBMS

Class *Phalcon\Db\Dialect\Sqlite*

extends abstract class *Phalcon\Db\Dialect*

implements *Phalcon\Db\DialectInterface*

Generates database specific SQL for the Sqlite RDBMS

Methods

public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column)

Gets the column name in SQLite

public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column)

Generates SQL to add a column to a table

public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

Generates SQL to modify a column in a table

public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName)

Generates SQL to delete a column from a table

public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index)

Generates SQL to add an index to a table

public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName)

Generates SQL to delete an index from a table

public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\IndexInterface* \$index)

Generates SQL to add the primary key to a table

public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to delete primary key from a table

public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference)

Generates SQL to add an index to a table

public **dropForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$referenceName)

Generates SQL to delete a foreign key from a table

public **createTable** (*mixed* \$tableName, *mixed* \$schemaName, *array* \$definition)

Generates SQL to create a table

public **truncateTable** (*mixed* \$tableName, *mixed* \$schemaName)

Generates SQL to truncate a table

public **dropTable** (*mixed* \$tableName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a table

public **createView** (*mixed* \$viewName, *array* \$definition, [*mixed* \$schemaName])

Generates SQL to create a view

public **dropView** (*mixed* \$viewName, [*mixed* \$schemaName], [*mixed* \$ifExists])

Generates SQL to drop a view

public **tableExists** (*mixed* \$tableName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.table

```
<?php
echo $dialect->tableExists("posts", "blog");
echo $dialect->tableExists("posts");
```

public **viewExists** (*mixed* \$viewName, [*mixed* \$schemaName])

Generates SQL checking for the existence of a schema.view

public **describeColumns** (*mixed* \$table, [*mixed* \$schema])

Generates SQL describing a table

```
<?php
print_r(
    $dialect->describeColumns("posts")
);
```

public **listTables** ([*mixed* \$schemaName])

List all tables in database

```
<?php
print_r(
    $dialect->listTables("blog")
);
```

public **listViews** ([*mixed* \$schemaName])

Generates the SQL to list all views of a schema or user

public **listIndexesSql** (*mixed* \$table, [*mixed* \$schema], [*mixed* \$keyName])

Generates the SQL to get query list of indexes

```
<?php

print_r(
    $dialect->listIndexesSql("blog")
);
```

public **describeIndexes** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query indexes on a table

public **describeIndex** (*mixed* \$index)

Generates SQL to query indexes detail on a table

public **describeReferences** (*mixed* \$table, [*mixed* \$schema])

Generates SQL to query foreign keys on a table

public **tableOptions** (*mixed* \$table, [*mixed* \$schema])

Generates the SQL to describe the table creation options

public **registerCustomFunction** (*mixed* \$name, *mixed* \$customFunction) inherited from *Phalcon\Db\Dialect*

Registers custom SQL functions

public **getCustomFunctions** () inherited from *Phalcon\Db\Dialect*

Returns registered functions

final public **escapeSchema** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape Schema

final public **escape** (*mixed* \$str, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Escape identifiers

public **limit** (*mixed* \$sqlQuery, *mixed* \$number) inherited from *Phalcon\Db\Dialect*

Generates the SQL for LIMIT clause

```
<?php

$sql = $dialect->limit("SELECT * FROM robots", 10);
echo $sql; // SELECT * FROM robots LIMIT 10

$sql = $dialect->limit("SELECT * FROM robots", [10, 50]);
echo $sql; // SELECT * FROM robots LIMIT 10 OFFSET 50
```

public **forUpdate** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a FOR UPDATE clause

```
<?php

$sql = $dialect->forUpdate("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots FOR UPDATE
```

public **sharedLock** (*mixed* \$sqlQuery) inherited from *Phalcon\Db\Dialect*

Returns a SQL modified with a LOCK IN SHARE MODE clause

```
<?php

$sql = $dialect->sharedLock("SELECT * FROM robots");
echo $sql; // SELECT * FROM robots LOCK IN SHARE MODE
```

final public **getColumnList** (array \$columnList, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Gets a list of columns with escaped identifiers

```
<?php

echo $dialect->getColumnList (
    [
        "column1",
        "column",
    ]
);
```

final public **getSqlColumn** (mixed \$column, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

public **getSqlExpression** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Transforms an intermediate representation for an expression into a database system valid expression

final public **getSqlTable** (mixed \$table, [mixed \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Transform an intermediate representation of a schema/table into a database system valid expression

public **select** (array \$definition) inherited from *Phalcon\Db\Dialect*

Builds a SELECT statement

public **supportsSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports savepoints

public **supportsReleaseSavepoints** () inherited from *Phalcon\Db\Dialect*

Checks whether the platform supports releasing savepoints.

public **createSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to create a new savepoint

public **releaseSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to release a savepoint

public **rollbackSavepoint** (mixed \$name) inherited from *Phalcon\Db\Dialect*

Generate SQL to rollback a savepoint

final protected **getSqlExpressionScalar** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Column expressions

final protected **getSqlExpressionObject** (array \$expression, [mixed \$escapeChar], [mixed \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve object expressions

final protected **getSqlExpressionQualified** (*array* \$expression, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve qualified expressions

final protected **getSqlExpressionBinaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve binary operations expressions

final protected **getSqlExpressionUnaryOperations** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve unary operations expressions

final protected **getSqlExpressionFunctionCall** (*array* \$expression, *mixed* \$escapeChar, [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve function calls

final protected **getSqlExpressionList** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve Lists

final protected **getSqlExpressionAll** (*array* \$expression, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve *

final protected **getSqlExpressionCastValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CAST of values

final protected **getSqlExpressionConvertValue** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CONVERT of values encodings

final protected **getSqlExpressionCase** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve CASE expressions

final protected **getSqlExpressionFrom** (*mixed* \$expression, [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Resolve a FROM clause

final protected **getSqlExpressionJoins** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a JOINS clause

final protected **getSqlExpressionWhere** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a WHERE clause

final protected **getSqlExpressionGroupBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a GROUP BY clause

final protected **getSqlExpressionHaving** (*array* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a HAVING clause

final protected **getSqlExpressionOrderBy** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve an ORDER BY clause

final protected **getSqlExpressionLimit** (*mixed* \$expression, [*mixed* \$escapeChar], [*mixed* \$bindCounts]) inherited from *Phalcon\Db\Dialect*

Resolve a LIMIT clause

protected **prepareColumnAlias** (*mixed* \$qualified, [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares column for this RDBMS

protected **prepareTable** (*mixed* \$table, [*mixed* \$schema], [*mixed* \$alias], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares table for this RDBMS

protected **prepareQualified** (*mixed* \$column, [*mixed* \$domain], [*mixed* \$escapeChar]) inherited from *Phalcon\Db\Dialect*

Prepares qualified for this RDBMS

Class *Phalcon\Db\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Db\Index](#)

implements [Phalcon\Db\IndexInterface](#)

Allows to define indexes to be used on tables. Indexes are a common way to enhance database performance. An index allows the database server to find and retrieve specific rows much faster than it could do without an index

```
<?php

// Define new unique index
$index_unique = new \Phalcon\Db\Index(
    'column_UNIQUE',
    [
        'column',
        'column'
    ],
    'UNIQUE'
);

// Define new primary index
$index_primary = new \Phalcon\Db\Index(
    'PRIMARY',
    [
        'column'
    ]
);

// Add index to existing table
$connection->addIndex("robots", null, $index_unique);
$connection->addIndex("robots", null, $index_primary);
```

Methods

public **getName** ()

Index name

public **getColumns** ()

Index columns

public **getType** ()

Index type

public **__construct** (*mixed* \$name, *array* \$columns, [*mixed* \$type])

[Phalcon\Db\Index](#) constructor

```
public static __set_state (array $data)
```

Restore a Phalcon\Db\Index object from export

Class Phalcon\Db\Profiler

Instances of Phalcon\Db can generate execution profiles on SQL statements sent to the relational database. Profiled information includes execution time in milliseconds. This helps you to identify bottlenecks in your applications.

```
<?php

$profiler = new \Phalcon\Db\Profiler();

// Set the connection profiler
$connection->setProfiler($profiler);

$sql = "SELECT buyer_name, quantity, product_name
FROM buyers LEFT JOIN products ON
buyers.pid=products.id";

// Execute a SQL statement
$connection->query($sql);

// Get the last profile in the profiler
$profile = $profiler->getLastProfile();

echo "SQL Statement: ", $profile->getSQLStatement(), "\n";
echo "Start Time: ", $profile->getInitialTime(), "\n";
echo "Final Time: ", $profile->getFinalTime(), "\n";
echo "Total Elapsed Time: ", $profile->getTotalElapsedSeconds(), "\n";
```

Methods

```
public Phalcon\Db\Profiler startProfile (string $sqlStatement, [mixed $sqlVariables], [mixed $sqlBindTypes])
```

Starts the profile of a SQL sentence

```
public stopProfile ()
```

Stops the active profile

```
public getNumberTotalStatements ()
```

Returns the total number of SQL statements processed

```
public getTotalElapsedSeconds ()
```

Returns the total time in seconds spent by the profiles

```
public getProfiles ()
```

Returns all the processed profiles

```
public reset ()
```

Resets the profiler, cleaning up all the profiles

```
public getLastProfile ()
```

Returns the last profile executed in the profiler

Class Phalcon\Db\Profiler\Item

This class identifies each profile in a Phalcon\Db\Profiler

Methods

public **setSqlStatement** (*mixed* \$sqlStatement)

SQL statement related to the profile

public **getSqlStatement** ()

SQL statement related to the profile

public **setSqlVariables** (*array* \$sqlVariables)

SQL variables related to the profile

public **getSqlVariables** ()

SQL variables related to the profile

public **setSqlBindTypes** (*array* \$sqlBindTypes)

SQL bind types related to the profile

public **getSqlBindTypes** ()

SQL bind types related to the profile

public **setInitialTime** (*mixed* \$initialTime)

Timestamp when the profile started

public **getInitialTime** ()

Timestamp when the profile started

public **setFinalTime** (*mixed* \$finalTime)

Timestamp when the profile ended

public **getFinalTime** ()

Timestamp when the profile ended

public **getTotalElapsedSeconds** ()

Returns the total time in seconds spent by the profile

Class Phalcon\Db\RawValue

This class allows to insert/update raw data without quoting or formatting.

The next example shows how to use the MySQL now() function as a field value.

```
<?php
$subscriber = new Subscribers();

$subscriber->email      = "andres@phalconphp.com";
$subscriber->createdAt = new \Phalcon\Db\RawValue("now()");

$subscriber->save();
```

Methods

public **getValue** ()

Raw value without quoting or formatting

public **__toString** ()

Raw value without quoting or formatting

public **__construct** (*mixed* \$value)

Phalcon\Db\RawValue constructor

Class Phalcon\Db\Reference

implements *Phalcon\Db\ReferenceInterface*

Allows to define reference constraints on tables

```
<?php

$reference = new \Phalcon\Db\Reference (
    "field_fk",
    [
        "referencedSchema" => "invoicing",
        "referencedTable"  => "products",
        "columns"           => [
            "product_type",
            "product_code",
        ],
        "referencedColumns" => [
            "type",
            "code",
        ],
    ],
);
```

Methods

public **getName** ()

Constraint name

public **getSchemaName** ()

...

public **getReferencedSchema** ()

...

public **getReferencedTable** ()

Referenced Table

public **getColumns** ()

Local reference columns

public **getReferencedColumns** ()

Referenced Columns

public **getOnDelete** ()

ON DELETE

public **getOnUpdate** ()

ON UPDATE

public **__construct** (*mixed* \$name, *array* \$definition)

Phalcon\Db\Reference constructor

public static **__set_state** (*array* \$data)

Restore a Phalcon\Db\Reference object from export

Class Phalcon\Db\Result\Pdo

implements *Phalcon\Db\ResultInterface*

Encapsulates the resultset internals

```
<?php

$result = $connection->query("SELECT * FROM robots ORDER BY name");

$result->setFetchMode(
    \Phalcon\Db::FETCH_NUM
);

while ($robot = $result->fetchArray()) {
    print_r($robot);
}
```

Methods

public **__construct** (*Phalcon\Db\AdapterInterface* \$connection, *PDOStatement* \$result, [*string* \$sqlStatement], [*array* \$bindParams], [*array* \$bindTypes])

Phalcon\Db\Result\Pdo constructor

public **execute** ()

Allows to execute the statement again. Some database systems don't support scrollable cursors, So, as cursors are forward only, we need to execute the cursor again to fetch rows from the beginning

public **fetch** ([*mixed* \$fetchStyle], [*mixed* \$cursorOrientation], [*mixed* \$cursorOffset])

Fetches an array/object of strings that corresponds to the fetched row, or FALSE if there are no more rows. This method is affected by the active fetch flag set using Phalcon\Db\Result\Pdo::setFetchMode

```
<?php

$result = $connection->query("SELECT * FROM robots ORDER BY name");

$result->setFetchMode(
    \Phalcon\Db::FETCH_OBJ
);
```

```
while ($robot = $result->fetch()) {  
    echo $robot->name;  
}
```

public **fetchArray** ()

Returns an array of strings that corresponds to the fetched row, or FALSE if there are no more rows. This method is affected by the active fetch flag set using `Phalcon\Db\Result\Pdo::setFetchMode`

```
<?php  
  
$result = $connection->query("SELECT * FROM robots ORDER BY name");  
  
$result->setFetchMode(  
    \Phalcon\Db::FETCH_NUM  
);  
  
while ($robot = result->fetchArray()) {  
    print_r($robot);  
}
```

public **fetchAll** ([*mixed* \$fetchStyle], [*mixed* \$fetchArgument], [*mixed* \$ctorArgs])

Returns an array of arrays containing all the records in the result This method is affected by the active fetch flag set using `Phalcon\Db\Result\Pdo::setFetchMode`

```
<?php  
  
$result = $connection->query(  
    "SELECT * FROM robots ORDER BY name"  
);  
  
$robots = $result->fetchAll();
```

public **numRows** ()

Gets number of rows returned by a resultset

```
<?php  
  
$result = $connection->query(  
    "SELECT * FROM robots ORDER BY name"  
);  
  
echo "There are ", $result->numRows(), " rows in the resultset";
```

public **dataSeek** (*mixed* \$number)

Moves internal resultset cursor to another position letting us to fetch a certain row

```
<?php  
  
$result = $connection->query(  
    "SELECT * FROM robots ORDER BY name"  
);  
  
// Move to third row on result  
$result->dataSeek(2);
```

```
// Fetch third row
$row = $result->fetch();
```

public **setFetchMode** (*mixed* \$fetchMode, [*mixed* \$colNoOrClassNameOrObject], [*mixed* \$torargs])

Changes the fetching mode affecting `Phalcon\Db\Result\Pdo::fetch()`

```
<?php

// Return array with integer indexes
$result->setFetchMode(
    \Phalcon\Db::FETCH_NUM
);

// Return associative array without integer indexes
$result->setFetchMode(
    \Phalcon\Db::FETCH_ASSOC
);

// Return associative array together with integer indexes
$result->setFetchMode(
    \Phalcon\Db::FETCH_BOTH
);

// Return an object
$result->setFetchMode(
    \Phalcon\Db::FETCH_OBJ
);
```

public **getInternalResult** ()

Gets the internal PDO result object

Class `Phalcon\Debug`

Provides debug capabilities to Phalcon applications

Methods

public **setUri** (*mixed* \$uri)

Change the base URI for static resources

public **setShowBackTrace** (*mixed* \$showBackTrace)

Sets if files the exception's backtrace must be showed

public **setShowFiles** (*mixed* \$showFiles)

Set if files part of the backtrace must be shown in the output

public **setShowFileFragment** (*mixed* \$showFileFragment)

Sets if files must be completely opened and showed in the output or just the fragment related to the exception

public **listen** ([*mixed* \$exceptions], [*mixed* \$lowSeverity])

Listen for uncaught exceptions and unsilent notices or warnings

public **listenExceptions** ()

Listen for uncaught exceptions

public **listenLowSeverity** ()

Listen for unsilent notices or warnings

public **halt** ()

Halts the request showing a backtrace

public **debugVar** (*mixed* \$varz, [*mixed* \$key])

Adds a variable to the debug output

public **clearVars** ()

Clears are variables added previously

protected **_escapeString** (*mixed* \$value)

Escapes a string with htmlentities

protected **_getArrayDump** (*array* \$argument, [*mixed* \$n])

Produces a recursive representation of an array

protected **_getVarDump** (*mixed* \$variable)

Produces an string representation of a variable

public **getMajorVersion** ()

Returns the major framework's version

public **getVersion** ()

Generates a link to the current version documentation

public **getCssSources** ()

Returns the css sources

public **getJsSources** ()

Returns the javascript sources

final protected **showTraceItem** (*mixed* \$n, *array* \$trace)

Shows a backtrace item

public **onUncaughtLowSeverity** (*mixed* \$severity, *mixed* \$message, *mixed* \$file, *mixed* \$line, *mixed* \$context)

Throws an exception when a notice or warning is raised

public **onUncaughtException** (*Exception* \$exception)

Handles uncaught exceptions

Class Phalcon\Debug\Dump

Dumps information about a variable(s)

```
<?php
$foo = 123;
```

```
echo (new \Phalcon\Debug\Dump())->variable($foo, "foo");
```

```
<?php
$foo = "string";
$bar = ["key" => "value"];
$baz = new stdClass();

echo (new \Phalcon\Debug\Dump())->variables($foo, $bar, $baz);
```

Methods

public **getDetailed** ()

...

public **setDetailed** (*mixed* \$detailed)

...

public **__construct** ([*array* \$styles], [*mixed* \$detailed])

Phalcon\Debug\Dump constructor

public **all** ()

Alias of variables() method

protected **getStyle** (*mixed* \$type)

Get style for type

public **setStyles** ([*array* \$styles])

Set styles for vars type

public **one** (*mixed* \$variable, [*mixed* \$name])

Alias of variable() method

protected **output** (*mixed* \$variable, [*mixed* \$name], [*mixed* \$tab])

Prepare an HTML string of information about a single variable.

public **variable** (*mixed* \$variable, [*mixed* \$name])

Returns an HTML string of information about a single variable.

```
<?php
echo (new \Phalcon\Debug\Dump())->variable($foo, "foo");
```

public **variables** ()

Returns an HTML string of debugging information about any number of variables, each wrapped in a “pre” tag.

```
<?php
$foo = "string";
$bar = ["key" => "value"];
$baz = new stdClass();
```

```
echo (new \Phalcon\Debug\Dump())->variables($foo, $bar, $baz);
```

public **toJson** (*mixed* \$variable)

Returns an JSON string of information about a single variable.

```
<?php

$foo = [
    "key" => "value",
];

echo (new \Phalcon\Debug\Dump())->toJson($foo);

$foo = new stdClass();
$foo->bar = "buz";

echo (new \Phalcon\Debug\Dump())->toJson($foo);
```

Class **Phalcon\Debug\Exception**

extends class *Phalcon\Exception*

implements **Throwable**

Methods

final private **Exception** **__clone** () inherited from **Exception**

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [**Exception** \$previous]) inherited from **Exception**

Exception constructor

public **__wakeup** () inherited from **Exception**

...

final public *string* **getMessage** () inherited from **Exception**

Gets the Exception message

final public *int* **getCode** () inherited from **Exception**

Gets the Exception code

final public *string* **getFile** () inherited from **Exception**

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from **Exception**

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from **Exception**

Gets the stack trace

final public **Exception** **getPrevious** () inherited from **Exception**

Returns previous Exception

final public **Exception** **getTraceAsString** () inherited from **Exception**

Gets the stack trace as a string

public *string* **__toString** () inherited from **Exception**

String representation of the exception

Class Phalcon\Di

implements *Phalcon\DiInterface*, *ArrayAccess*

Phalcon\Di is a component that implements Dependency Injection/Service Location of services and it's itself a container for them.

Since Phalcon is highly decoupled, Phalcon\Di is essential to integrate the different components of the framework. The developer can also use this component to inject dependencies and manage global instances of the different classes used in the application.

Basically, this component implements the *Inversion of Control* pattern. Applying this, the objects do not receive their dependencies using setters or constructors, but requesting a service dependency injector. This reduces the overall complexity, since there is only one way to get the required dependencies within a component.

Additionally, this pattern increases testability in the code, thus making it less prone to errors.

```
<?php

use Phalcon\Di;
use Phalcon\Http\Request;

$di = new Di();

// Using a string definition
$di->set("request", Request::class, true);

// Using an anonymous function
$di->setShared(
    "request",
    function () {
        return new Request();
    }
);

$request = $di->getRequest();
```

Methods

public **__construct** ()

Phalcon\Di constructor

public **setInternalEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the internal event manager

public **getInternalEventManager** ()

Returns the internal event manager

public **set** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared])

Registers a service in the services container

public **setShared** (*mixed* \$name, *mixed* \$definition)

Registers an “always shared” service in the services container

public **remove** (*mixed* \$name)

Removes a service in the services container It also removes any shared instance created for the service

public **attempt** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared])

Attempts to register a service in the services container Only is successful if a service hasn’t been registered previously with the same name

public **setRaw** (*mixed* \$name, *Phalcon\Di\ServiceInterface* \$rawDefinition)

Sets a service using a raw *Phalcon\Di\Service* definition

public **getRaw** (*mixed* \$name)

Returns a service definition without resolving

public **getService** (*mixed* \$name)

Returns a *Phalcon\Di\Service* instance

public **get** (*mixed* \$name, [*mixed* \$parameters])

Resolves the service based on its configuration

public *mixed* **getShared** (*string* \$name, [*array* \$parameters])

Resolves a service, the resolved service is stored in the DI, subsequent requests for this service will return the same instance

public **has** (*mixed* \$name)

Check whether the DI contains a service by a name

public **wasFreshInstance** ()

Check whether the last service obtained via *getShared* produced a fresh instance or an existing one

public **getServices** ()

Return the services registered in the DI

public **offsetExists** (*mixed* \$name)

Check if a service is registered using the array syntax

public **offsetSet** (*mixed* \$name, *mixed* \$definition)

Allows to register a shared service using the array syntax

```
<?php
$di["request"] = new \Phalcon\Http\Request();
```

public **offsetGet** (*mixed* \$name)

Allows to obtain a shared service using the array syntax

```
<?php
var_dump($di["request"]);
```

public **offsetUnset** (*mixed* \$name)

Removes a service from the services container using the array syntax

public **__call** (*mixed* \$method, [*mixed* \$arguments])

Magic method to get or set services using setters/getters

public static **setDefault** (*Phalcon\DiInterface* \$dependencyInjector)

Set a default dependency injection container to be obtained into static methods

public static **getDefault** ()

Return the latest DI created

public static **reset** ()

Resets the internal default DI

Class **Phalcon\Di\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Di\FactoryDefault](#)

extends class [Phalcon\Di](#)

implements [ArrayAccess](#), [Phalcon\DiInterface](#)

This is a variant of the standard [Phalcon\Di](#). By default it automatically registers all the services provided by the framework. Thanks to this, the developer does not need to register each service individually providing a full stack framework

Methods

public **__construct** ()

[Phalcon\Di\FactoryDefault](#) constructor

public **setInternalEventManager** ([Phalcon\Events\ManagerInterface](#) \$eventsManager) inherited from [Phalcon\Di](#)

Sets the internal event manager

public **getInternalEventManager** () inherited from [Phalcon\Di](#)

Returns the internal event manager

public **set** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared]) inherited from [Phalcon\Di](#)

Registers a service in the services container

public **setShared** (*mixed* \$name, *mixed* \$definition) inherited from [Phalcon\Di](#)

Registers an “always shared” service in the services container

public **remove** (*mixed* \$name) inherited from [Phalcon\Di](#)

Removes a service in the services container It also removes any shared instance created for the service

public **attempt** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared]) inherited from [Phalcon\Di](#)

Attempts to register a service in the services container Only is successful if a service hasn’t been registered previously with the same name

public **setRaw** (*mixed* \$name, [Phalcon\Di\ServiceInterface](#) \$rawDefinition) inherited from [Phalcon\Di](#)

Sets a service using a raw [Phalcon\Di\Service](#) definition

public **getRaw** (*mixed* \$name) inherited from [Phalcon\Di](#)

Returns a service definition without resolving

public **getService** (*mixed* \$name) inherited from [Phalcon\Di](#)

Returns a [Phalcon\Di\Service](#) instance

public **get** (*mixed* \$name, [*mixed* \$parameters]) inherited from [Phalcon\Di](#)

Resolves the service based on its configuration

public *mixed* **getShared** (*string* \$name, [*array* \$parameters]) inherited from [Phalcon\Di](#)

Resolves a service, the resolved service is stored in the DI, subsequent requests for this service will return the same instance

public **has** (*mixed* \$name) inherited from *Phalcon\Di*

Check whether the DI contains a service by a name

public **wasFreshInstance** () inherited from *Phalcon\Di*

Check whether the last service obtained via `getShared` produced a fresh instance or an existing one

public **getServices** () inherited from *Phalcon\Di*

Return the services registered in the DI

public **offsetExists** (*mixed* \$name) inherited from *Phalcon\Di*

Check if a service is registered using the array syntax

public **offsetSet** (*mixed* \$name, *mixed* \$definition) inherited from *Phalcon\Di*

Allows to register a shared service using the array syntax

```
<?php
$di["request"] = new \Phalcon\Http\Request();
```

public **offsetGet** (*mixed* \$name) inherited from *Phalcon\Di*

Allows to obtain a shared service using the array syntax

```
<?php
var_dump($di["request"]);
```

public **offsetUnset** (*mixed* \$name) inherited from *Phalcon\Di*

Removes a service from the services container using the array syntax

public **__call** (*mixed* \$method, [*mixed* \$arguments]) inherited from *Phalcon\Di*

Magic method to get or set services using setters/getters

public static **setDefault** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di*

Set a default dependency injection container to be obtained into static methods

public static **getDefault** () inherited from *Phalcon\Di*

Return the latest DI created

public static **reset** () inherited from *Phalcon\Di*

Resets the internal default DI

Class *Phalcon\Di\FactoryDefault\Cli*

extends class *Phalcon\Di\FactoryDefault*

implements *Phalcon\DiInterface*, *ArrayAccess*

This is a variant of the standard *Phalcon\Di*. By default it automatically registers all the services provided by the framework. Thanks to this, the developer does not need to register each service individually. This class is specially suitable for CLI applications

Methods

public **__construct** ()

Phalcon\Di\FactoryDefault\Cli constructor

public **setInternalEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di*

Sets the internal event manager

public **getInternalEventManager** () inherited from *Phalcon\Di*

Returns the internal event manager

public **set** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared]) inherited from *Phalcon\Di*

Registers a service in the services container

public **setShared** (*mixed* \$name, *mixed* \$definition) inherited from *Phalcon\Di*

Registers an “always shared” service in the services container

public **remove** (*mixed* \$name) inherited from *Phalcon\Di*

Removes a service in the services container It also removes any shared instance created for the service

public **attempt** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared]) inherited from *Phalcon\Di*

Attempts to register a service in the services container Only is successful if a service hasn’t been registered previously with the same name

public **setRaw** (*mixed* \$name, *Phalcon\Di\ServiceInterface* \$rawDefinition) inherited from *Phalcon\Di*

Sets a service using a raw Phalcon\Di\Service definition

public **getRaw** (*mixed* \$name) inherited from *Phalcon\Di*

Returns a service definition without resolving

public **getService** (*mixed* \$name) inherited from *Phalcon\Di*

Returns a Phalcon\Di\Service instance

public **get** (*mixed* \$name, [*mixed* \$parameters]) inherited from *Phalcon\Di*

Resolves the service based on its configuration

public *mixed* **getShared** (*string* \$name, [*array* \$parameters]) inherited from *Phalcon\Di*

Resolves a service, the resolved service is stored in the DI, subsequent requests for this service will return the same instance

public **has** (*mixed* \$name) inherited from *Phalcon\Di*

Check whether the DI contains a service by a name

public **wasFreshInstance** () inherited from *Phalcon\Di*

Check whether the last service obtained via getShared produced a fresh instance or an existing one

public **getServices** () inherited from *Phalcon\Di*

Return the services registered in the DI

public **offsetExists** (*mixed* \$name) inherited from *Phalcon\Di*

Check if a service is registered using the array syntax

public **offsetSet** (*mixed* \$name, *mixed* \$definition) inherited from *Phalcon\Di*

Allows to register a shared service using the array syntax

```
<?php
$di["request"] = new \Phalcon\Http\Request();
```

public **offsetGet** (*mixed* \$name) inherited from *Phalcon\Di*

Allows to obtain a shared service using the array syntax

```
<?php
var_dump($di["request"]);
```

public **offsetUnset** (*mixed* \$name) inherited from *Phalcon\Di*

Removes a service from the services container using the array syntax

public **__call** (*mixed* \$method, [*mixed* \$arguments]) inherited from *Phalcon\Di*

Magic method to get or set services using setters/getters

public static **setDefault** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di*

Set a default dependency injection container to be obtained into static methods

public static **getDefault** () inherited from *Phalcon\Di*

Return the latest DI created

public static **reset** () inherited from *Phalcon\Di*

Resets the internal default DI

Abstract class *Phalcon\Di\Injectable*

implements Phalcon\Di\InjectionAwareInterface, Phalcon\Events\EventsAwareInterface

This class allows to access services in the services container by just only accessing a public property with the same name of a registered service

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the event manager

public **getEventManager** ()

Returns the internal event manager

public **__get** (*mixed* \$propertyName)

Magic method **__get**

Class Phalcon\Di\Service

implements *Phalcon\Di\ServiceInterface*

Represents individually a service in the services container

```
<?php

$service = new \Phalcon\Di\Service(
    "request",
    "Phalcon\Http\Request"
);

$request = service->resolve();
```

```
<?php
```

Methods

final public **__construct** (*string* \$name, *mixed* \$definition, [*boolean* \$shared])

public **getName** ()

Returns the service's name

public **setShared** (*mixed* \$shared)

Sets if the service is shared or not

public **isShared** ()

Check whether the service is shared or not

public **setSharedInstance** (*mixed* \$sharedInstance)

Sets/Resets the shared instance related to the service

public **setDefinition** (*mixed* \$definition)

Set the service definition

public *mixed* **getDefinition** ()

Returns the service definition

public *mixed* **resolve** ([*array* \$parameters], [*Phalcon\DiInterface* \$dependencyInjector])

Resolves the service

public **setParameter** (*mixed* \$position, *array* \$parameter)

Changes a parameter in the definition without resolve the service

public *array* **getParameter** (*int* \$position)

Returns a parameter in a specific position

public **isResolved** ()

Returns true if the service was resolved

public static **__set_state** (*array* \$attributes)

Restore the internal state of a service

Class Phalcon\Di\Service\Builder

This class builds instances based on complex definitions

Methods

private *mixed* **_buildParameter** (*Phalcon\DiInterface* \$dependencyInjector, *int* \$position, *array* \$argument)

Resolves a constructor/call parameter

private **_buildParameters** (*Phalcon\DiInterface* \$dependencyInjector, *array* \$arguments)

Resolves an array of parameters

public *mixed* **build** (*Phalcon\DiInterface* \$dependencyInjector, *array* \$definition, [*array* \$parameters])

Builds a service using a complex service definition

Abstract class Phalcon\Dispatcher

implements *Phalcon\DispatcherInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Events\EventsAwareInterface*

This is the base class for Phalcon\Mvc\Dispatcher and Phalcon\Cli\Dispatcher. This class can't be instantiated directly, you can use it to create your own dispatchers.

Constants

integer **EXCEPTION_NO_DI**

integer **EXCEPTION_CYCLIC_ROUTING**

integer **EXCEPTION_HANDLER_NOT_FOUND**

integer **EXCEPTION_INVALID_HANDLER**

integer **EXCEPTION_INVALID_PARAMS**

integer **EXCEPTION_ACTION_NOT_FOUND**

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the events manager

public **getEventManager** ()

Returns the internal event manager

public **setActionSuffix** (*mixed* \$actionSuffix)

Sets the default action suffix

public **getActionSuffix** ()

Gets the default action suffix

public **setModuleName** (*mixed* \$moduleName)

Sets the module where the controller is (only informative)

public **getModuleName** ()

Gets the module where the controller class is

public **setNamespaceName** (*mixed* \$namespaceName)

Sets the namespace where the controller class is

public **getNamespaceName** ()

Gets a namespace to be prepended to the current handler name

public **setDefaultNamespace** (*mixed* \$namespaceName)

Sets the default namespace

public **getDefaultNamespace** ()

Returns the default namespace

public **setDefaultAction** (*mixed* \$actionName)

Sets the default action name

public **setActionName** (*mixed* \$actionName)

Sets the action name to be dispatched

public **getActionName** ()

Gets the latest dispatched action name

public **setParams** (*array* \$params)

Sets action params to be dispatched

public **getParams** ()

Gets action params

public **setParam** (*mixed* \$param, *mixed* \$value)

Set a param by its name or numeric index

public *mixed* **getParam** (*mixed* \$param, [*string* | *array* \$filters], [*mixed* \$defaultValue])

Gets a param by its name or numeric index

public *boolean* **hasParam** (*mixed* \$param)

Check if a param exists

public **getActiveMethod** ()

Returns the current method to be/executed in the dispatcher

public **isFinished** ()

Checks if the dispatch loop is finished or has more pendent controllers/tasks to dispatch

public **setReturnedValue** (*mixed* \$value)

Sets the latest returned value by an action manually

public *mixed* **getReturnedValue** ()

Returns value returned by the latest dispatched action

public **setModelBinding** (*mixed* \$value, [*mixed* \$cache])

Enable/Disable model binding during dispatch

```
<?php

$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinding(true, 'cache');
    return $dispatcher;
});
```

public **setModelBinder** (Phalcon\Mvc\Model\BinderInterface \$modelBinder, [*mixed* \$cache])

Enable model binding during dispatch

```
<?php

$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinder(new Binder(), 'cache');
    return $dispatcher;
});
```

public **getModelBinder** ()

Gets model binder

public *object* **dispatch** ()

Dispatches a handle action taking into account the routing parameters

protected *object* **_dispatch** ()

Dispatches a handle action taking into account the routing parameters

public **forward** (array \$forward)

Forwards the execution flow to another controller/action Dispatchers are unique per module. Forwarding between modules is not allowed

```
<?php

$this->dispatcher->forward(
    [
        "controller" => "posts",
        "action"      => "index",
    ]
);
```

public **wasForwarded** ()

Check if the current executed action was forwarded by another one

public **getHandlerClass** ()

Possible class name that will be located to dispatch the request

public **callActionMethod** (*mixed* \$handler, *mixed* \$actionMethod, [array \$params])

...

public **getBoundModels** ()

Returns bound models from binder instance

```
<?php

class UserController extends Controller
{
    public function showAction(User $user)
    {
        $boundModels = $this->dispatcher->getBoundModels(); // return array with $user
    }
}
```

protected **_resolveEmptyProperties** ()

Set empty properties to their defaults (where defaults are available)

Class **Phalcon\Escaper**

*implements **Phalcon\EscaperInterface***

Escapes different kinds of text securing them. By using this component you may prevent XSS attacks.

This component only works with UTF-8. The PREG extension needs to be compiled with UTF-8 support.

```
<?php

$escaper = new \Phalcon\Escaper();

$escaped = $escaper->escapeCss("font-family: <Verdana>");

echo $escaped; // font\2D family\3A \20 \3C Verdana\3E
```

Methods

public **setEncoding** (*mixed* \$encoding)

Sets the encoding to be used by the escaper

```
<?php

$escaper->setEncoding("utf-8");
```

public **getEncoding** ()

Returns the internal encoding used by the escaper

public **setHtmlQuoteType** (*mixed* \$quoteType)

Sets the HTML quoting type for htmlspecialchars

```
<?php
$escaper->setHtmlQuoteType (ENT_XHTML) ;
```

public **setDoubleEncode** (*mixed* \$doubleEncode)

Sets the double_encode to be used by the escaper

```
<?php
$escaper->setDoubleEncode (false) ;
```

final public **detectEncoding** (*mixed* \$str)

Detect the character encoding of a string to be handled by an encoder Special-handling for chr(172) and chr(128) to chr(159) which fail to be detected by mb_detect_encoding()

final public **normalizeEncoding** (*mixed* \$str)

Utility to normalize a string's encoding to UTF-32.

public **escapeHtml** (*mixed* \$text)

Escapes a HTML string. Internally uses htmlspecialchars

public **escapeHtmlAttr** (*mixed* \$attribute)

Escapes a HTML attribute string

public **escapeCss** (*mixed* \$css)

Escape CSS strings by replacing non-alphanumeric chars by their hexadecimal escaped representation

public **escapeJs** (*mixed* \$js)

Escape javascript strings by replacing non-alphanumeric chars by their hexadecimal escaped representation

public **escapeUrl** (*mixed* \$url)

Escapes a URL. Internally uses rawurlencode

Class **Phalcon\Escaper\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Events\Event](#)

implements [Phalcon\Events\EventInterface](#)

This class offers contextual information of a fired event in the [EventsManager](#)

Methods

public **getType** ()

Event type

public **getSource** ()

Event source

public **getData** ()

Event data

public **__construct** (*string* \$type, *object* \$source, [*mixed* \$data], [*boolean* \$cancelable])

[Phalcon\Events\Event](#) constructor

public **setData** ([*mixed* \$data])

Sets event data.

public **setType** (*mixed* \$type)

Sets event type.

public **stop** ()

Stops the event preventing propagation.

```
<?php

if ($event->isCancelable()) {
    $event->stop();
}
```

public **isStopped** ()

Check whether the event is currently stopped.

public **isCancelable** ()

Check whether the event is cancelable.

```
<?php

if ($event->isCancelable()) {
    $event->stop();
}
```

Class Phalcon\Events\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Events\Manager](#)

implements [Phalcon\Events\ManagerInterface](#)

Phalcon Events Manager, offers an easy way to intercept and manipulate, if needed, the normal flow of operation. With the EventsManager the developer can create hooks or plugins that will offer monitoring of data, manipulation, conditional execution and much more.

Methods

public **attach** (*string* \$eventType, *object* | *callable* \$handler, [*int* \$priority])

Attach a listener to the events manager

public **detach** (*string* \$eventType, *object* \$handler)

Detach the listener from the events manager

public **enablePriorities** (*mixed* \$enablePriorities)

Set if priorities are enabled in the EventsManager

public **arePrioritiesEnabled** ()

Returns if priorities are enabled

public **collectResponses** (*mixed* \$collect)

Tells the event manager if it needs to collect all the responses returned by every registered listener in a single fire

public **isCollecting** ()

Check if the events manager is collecting all all the responses returned by every registered listener in a single fire

public *array* **getResponses** ()

Returns all the responses returned by every handler executed by the last 'fire' executed

public **detachAll** ([*mixed* \$type])

Removes all events from the EventsManager

final public *mixed* **fireQueue** ([SplPriorityQueue](#) | *array* \$queue, [Phalcon\Events\Event](#) \$event)

Internal handler to call a queue of events

public *mixed* **fire** (*string* \$eventType, *object* \$source, [*mixed* \$data], [*boolean* \$cancelable])

Fires an event in the events manager causing the active listeners to be notified about it

```
<?php
$eventsManager->fire("db", $connection);
```


public **hasListeners** (*mixed* \$type)

Check whether certain type of event has listeners

public *array* **getListeners** (*string* \$type)

Returns all the attached listeners of a certain type

Class Phalcon\Exception

extends class [Exception](#)

implements [Throwable](#)

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class Phalcon\Filter

implements *Phalcon\FilterInterface*

The Phalcon\Filter component provides a set of commonly needed data filters. It provides object oriented wrappers to the php filter extension. Also allows the developer to define his/her own filters

```
<?php

$filter = new \Phalcon\Filter();

$filter->sanitize("some(one)@exa\mple.com", "email"); // returns "someone@example.com"
↳ ""
$filter->sanitize("hello<<", "string"); // returns "hello"
$filter->sanitize("!100a019", "int"); // returns "100019"
$filter->sanitize("!100a019.01a", "float"); // returns "100019.01"
```

Constants

string **FILTER_EMAIL**

string **FILTER_ABSINT**

string **FILTER_INT**

string **FILTER_INT_CAST**

string **FILTER_STRING**

string **FILTER_FLOAT**

string **FILTER_FLOAT_CAST**

string **FILTER_ALPHANUM**

string **FILTER_TRIM**

string **FILTER_STRIPTAGS**

string **FILTER_LOWER**

string **FILTER_UPPER**

Methods

public **add** (*mixed* \$name, *mixed* \$handler)

Adds a user-defined filter

public **sanitize** (*mixed* \$value, *mixed* \$filters, [*mixed* \$noRecursive])

Sanitizes a value with a specified single or set of filters

protected **_sanitize** (*mixed* \$value, *mixed* \$filter)

Internal sanitize wrapper to filter_var

public **getFilters** ()

Return the user-defined filters in the instance

Class Phalcon\Filter\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Abstract class Phalcon\Flash

implements *Phalcon\FlashInterface*, *Phalcon\DI\InjectionAwareInterface*

Shows HTML notifications related to different circumstances. Classes can be stylized using CSS

```
<?php
$flash->success("The record was successfully deleted");
$flash->error("Cannot open the file");
```

Methods

public **__construct** ([*mixed* \$cssClasses])

Phalcon\Flash constructor

public **getAutoescape** ()

Returns the autoescape mode in generated html

public **setAutoescape** (*mixed* \$autoescape)

Set the autoescape mode in generated html

public **getEscaperService** ()

Returns the Escaper Service

public **setEscaperService** (*Phalcon\EscaperInterface* \$escaperService)

Sets the Escaper Service

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setImplicitFlush** (*mixed* \$implicitFlush)

Set whether the output must be implicitly flushed to the output or returned as string

public **setAutomaticHtml** (*mixed* \$automaticHtml)

Set if the output must be implicitly formatted with HTML

public **setCssClasses** (*array* \$cssClasses)

Set an array with CSS classes to format the messages

public **error** (*mixed* \$message)

Shows a HTML error message

```
<?php
$flash->error("This is an error");
```

public **notice** (*mixed* \$message)

Shows a HTML notice/information message

```
<?php
$flash->notice("This is an information");
```

public **success** (*mixed* \$message)

Shows a HTML success message

```
<?php
$flash->success("The process was finished successfully");
```

public **warning** (*mixed* \$message)

Shows a HTML warning message

```
<?php
$flash->warning("Hey, this is important");
```

public *string* | void **outputMessage** (*mixed* \$type, *string* | *array* \$message)

Outputs a message formatting it with HTML

```
<?php
$flash->outputMessage("error", $message);
```

public **clear** ()

Clears accumulated messages when implicit flush is disabled

abstract public **message** (*mixed* \$type, *mixed* \$message) inherited from *Phalcon\FlashInterface*

...

Class *Phalcon\Flash\Direct*

extends abstract class *Phalcon\Flash*

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\FlashInterface*

This is a variant of the *Phalcon\Flash* that immediately outputs any message passed to it

Methods

public **message** (*mixed* \$type, *mixed* \$message)

Outputs a message

public **output** ([*mixed* \$remove])

Prints the messages accumulated in the flasher

public **__construct** ([*mixed* \$cssClasses]) inherited from *Phalcon\Flash*

Phalcon\Flash constructor

public **getAutoescape** () inherited from *Phalcon\Flash*

Returns the autoescape mode in generated html

public **setAutoescape** (*mixed* \$autoescape) inherited from *Phalcon\Flash*

Set the autoescape mode in generated html

public **getEscaperService** () inherited from *Phalcon\Flash*

Returns the Escaper Service

public **setEscaperService** (*Phalcon\EscaperInterface* \$escaperService) inherited from *Phalcon\Flash*

Sets the Escaper Service

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Flash*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Flash*

Returns the internal dependency injector

public **setImplicitFlush** (*mixed* \$implicitFlush) inherited from *Phalcon\Flash*

Set whether the output must be implicitly flushed to the output or returned as string

public **setAutomaticHtml** (*mixed* \$automaticHtml) inherited from *Phalcon\Flash*

Set if the output must be implicitly formatted with HTML

public **setCssClasses** (*array* \$cssClasses) inherited from *Phalcon\Flash*

Set an array with CSS classes to format the messages

public **error** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML error message

```
<?php
$flash->error("This is an error");
```

public **notice** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML notice/information message

```
<?php
$flash->notice("This is an information");
```

public **success** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML success message

```
<?php
$flash->success("The process was finished successfully");
```

public **warning** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML warning message

```
<?php
$flash->warning("Hey, this is important");
```

public *string* | *void* **outputMessage** (*mixed* \$type, *string* | *array* \$message) inherited from *Phalcon\Flash*

Outputs a message formatting it with HTML

```
<?php
$flash->outputMessage("error", $message);
```

public **clear** () inherited from *Phalcon\Flash*

Clears accumulated messages when implicit flush is disabled

Class Phalcon\Flash\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Flash\Session

extends abstract class *Phalcon\Flash*

implements *Phalcon\DI\InjectionAwareInterface*, *Phalcon\FlashInterface*

Temporarily stores the messages in session, then messages can be printed in the next request

Methods

protected **_getSessionMessages** (*mixed* \$remove, [*mixed* \$type])

Returns the messages stored in session

protected **_setSessionMessages** (*array* \$messages)

Stores the messages in session

public **message** (*mixed* \$type, *mixed* \$message)

Adds a message to the session flasher

public **has** ([*mixed* \$type])

Checks whether there are messages

public **getMessages** ([*mixed* \$type], [*mixed* \$remove])

Returns the messages in the session flasher

public **output** ([*mixed* \$remove])

Prints the messages in the session flasher

public **clear** ()

Clear messages in the session messenger

public **__construct** ([*mixed* \$cssClasses]) inherited from *Phalcon\Flash*

Phalcon\Flash constructor

public **getAutoescape** () inherited from *Phalcon\Flash*

Returns the autoescape mode in generated html

public **setAutoescape** (*mixed* \$autoescape) inherited from *Phalcon\Flash*

Set the autoescape mode in generated html

public **getEscaperService** () inherited from *Phalcon\Flash*

Returns the Escaper Service

public **setEscaperService** (*Phalcon\EscaperInterface* \$escaperService) inherited from *Phalcon\Flash*

Sets the Escaper Service

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Flash*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Flash*

Returns the internal dependency injector

public **setImplicitFlush** (*mixed* \$implicitFlush) inherited from *Phalcon\Flash*

Set whether the output must be implicitly flushed to the output or returned as string

public **setAutomaticHtml** (*mixed* \$automaticHtml) inherited from *Phalcon\Flash*

Set if the output must be implicitly formatted with HTML

public **setCssClasses** (*array* \$cssClasses) inherited from *Phalcon\Flash*

Set an array with CSS classes to format the messages

public **error** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML error message

```
<?php
$flash->error("This is an error");
```

public **notice** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML notice/information message

```
<?php
$flash->notice("This is an information");
```

public **success** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML success message

```
<?php
$flash->success("The process was finished successfully");
```

public **warning** (*mixed* \$message) inherited from *Phalcon\Flash*

Shows a HTML warning message

```
<?php
$flash->warning("Hey, this is important");
```

public *string* | void **outputMessage** (*mixed* \$type, *string* | *array* \$message) inherited from *Phalcon\Flash*

Outputs a message formatting it with HTML

```
<?php
$flash->outputMessage("error", $message);
```

Abstract class **Phalcon\Forms\Element**

implements *Phalcon\Forms\ElementInterface*

This is a base class for form elements

Methods

public **__construct** (*string* \$name, [*array* \$attributes])

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form)

Sets the parent form to the element

public **getForm** ()

Returns the parent form to the element

public **setName** (*mixed* \$name)

Sets the element name

public **getName** ()

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (*array* | *string* \$filters)

Sets the element filters

public **addFilter** (*mixed* \$filter)

Adds a filter to current list of filters

public *mixed* **getFilters** ()

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (*array* \$validators, [*mixed* \$merge])

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator)

Adds a validator to the element

public **getValidators** ()

Returns the validators registered for the element

public **prepareAttributes** ([*array* \$attributes], [*mixed* \$useChecked])

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value)

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue])

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes)

Sets default attributes for the element

public **getAttributes** ()

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value)

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue])

Returns the value of an option if present

public **setUserOptions** (*array* \$options)

Sets options for the element

public **getUserOptions** ()

Returns the options for the element

public **setLabel** (*mixed* \$label)

Sets the element label

public **getLabel** ()

Returns the element label

public **label** ([array \$attributes])

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (mixed \$value)

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** ()

Returns the default value assigned to the element

public **getValue** ()

Returns the element value

public **getMessages** ()

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** ()

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group)

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message)

Appends a message to the internal message list

public **clear** ()

Clears every element in the form to its default value

public **__toString** ()

Magic method `__toString` renders the widget without attributes

abstract public **render** ([mixed \$attributes]) inherited from *Phalcon\Forms\ElementInterface*

...

Class *Phalcon\Forms\Element\Check*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component `INPUT[type=check]` for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (*mixed* \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (*array* | *string* \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (*mixed* \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public *mixed* **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (*array* \$validators, [*mixed* \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([*array* \$attributes], [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class *Phalcon\Forms\Element\Date*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component `INPUT[type=date]` for forms

Methods

public **render** ([*array* \$attributes])

Renders the element widget returning html

public **__construct** (*string* \$name, [*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (*mixed* \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (*array* | *string* \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (*mixed* \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public *mixed* **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (*array* \$validators, [*mixed* \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([*array* \$attributes], [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (array \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (mixed \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([array \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (mixed \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class *Phalcon\Forms\Element\Email*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component `INPUT[type=email]` for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (mixed \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | string \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (mixed \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public mixed **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [mixed \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (string \$attribute, mixed \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public mixed **getAttribute** (string \$attribute, [mixed \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (array \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class `Phalcon\Forms\Element\File`

extends abstract class `Phalcon\Forms\Element`

implements `Phalcon\Forms\ElementInterface`

Component INPUT[type=file] for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from `Phalcon\Forms\Element`

Phalcon\Forms\Element constructor

public **setForm** (`Phalcon\Forms\Form` \$form) inherited from `Phalcon\Forms\Element`

Sets the parent form to the element

public **getForm** () inherited from `Phalcon\Forms\Element`

Returns the parent form to the element

public **setName** (mixed \$name) inherited from `Phalcon\Forms\Element`

Sets the element name

public **getName** () inherited from `Phalcon\Forms\Element`

Returns the element name

public `Phalcon\Forms\ElementInterface` **setFilters** (array | string \$filters) inherited from `Phalcon\Forms\Element`

Sets the element filters

public **addFilter** (mixed \$filter) inherited from `Phalcon\Forms\Element`

Adds a filter to current list of filters

public mixed **getFilters** () inherited from `Phalcon\Forms\Element`

Returns the element filters

public `Phalcon\Forms\ElementInterface` **addValidators** (array \$validators, [mixed \$merge]) inherited from `Phalcon\Forms\Element`

Adds a group of validators

public **addValidator** (`Phalcon\Validation\ValidatorInterface` \$validator) inherited from `Phalcon\Forms\Element`

Adds a validator to the element

public **getValidators** () inherited from `Phalcon\Forms\Element`

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from `Phalcon\Forms\Element`

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public `Phalcon\Forms\ElementInterface` **setAttribute** (string \$attribute, mixed \$value) inherited from `Phalcon\Forms\Element`

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method **__toString** renders the widget without attributes

Class *Phalcon\Forms\Element\Hidden*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component INPUT[type=hidden] for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (mixed \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | string \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (mixed \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public mixed **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [mixed \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in _POST

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method **__toString** renders the widget without attributes

Class *Phalcon\Forms\Element\Numeric*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component INPUT[type=number] for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (mixed \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | string \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (mixed \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public mixed **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [mixed \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (string \$attribute, mixed \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public mixed **getAttribute** (string \$attribute, [mixed \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (array \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (string \$option, mixed \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public mixed **getUserOption** (string \$option, [mixed \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (array \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (mixed \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([array \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (mixed \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in _POST

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method **__toString** renders the widget without attributes

Class *Phalcon\Forms\Element\Password*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component INPUT[type=password] for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (mixed \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | string \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (mixed \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public mixed **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [mixed \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (string \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (string \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (array \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (string \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (string \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (array \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([array \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in _POST

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method __toString renders the widget without attributes

Class *Phalcon\Forms\Element\Radio*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component INPUT[type=radio] for forms

Methods

public **render** ([array \$attributes])

Renders the element widget returning html

public **__construct** (*string* \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (*mixed* \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | *string* \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (*mixed* \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public *mixed* **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [*mixed* \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (string \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (string \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (array \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (string \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (string \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (array \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([array \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in _POST

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method **__toString** renders the widget without attributes

Class *Phalcon\Forms\Element\Select*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component SELECT (choice) for forms

Methods

public **__construct** (*string* \$name, [*object* | *array* \$options], [*array* \$attributes])

Phalcon\Forms\Element constructor

public *Phalcon\Forms\Element* **setOptions** (*array* | *object* \$options)

Set the choice's options

public *array* | *object* **getOptions** ()

Returns the choices' options

public *this* **addOption** (*array* \$option)

Adds an option to the current options

public **render** ([*array* \$attributes])

Renders the element widget returning html

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (*mixed* \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (*array* | *string* \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (*mixed* \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public *mixed* **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (*array* \$validators, [*mixed* \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([*array* \$attributes], [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class *Phalcon\Forms\Element\Submit*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component `INPUT[type=submit]` for forms

Methods

public **render** ([*array* \$attributes])

Renders the element widget

public **__construct** (*string* \$name, [*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (*mixed* \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (*array* | *string* \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (*mixed* \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public *mixed* **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (*array* \$validators, [*mixed* \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** (*array* \$attributes, [*mixed* \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (*string* \$attribute, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class *Phalcon\Forms\Element\Text*

extends abstract class *Phalcon\Forms\Element*

implements *Phalcon\Forms\ElementInterface*

Component `INPUT[type=text]` for forms

Methods

public **render** ([array \$attributes])

Renders the element widget

public **__construct** (string \$name, [array \$attributes]) inherited from *Phalcon\Forms\Element*

Phalcon\Forms\Element constructor

public **setForm** (*Phalcon\Forms\Form* \$form) inherited from *Phalcon\Forms\Element*

Sets the parent form to the element

public **getForm** () inherited from *Phalcon\Forms\Element*

Returns the parent form to the element

public **setName** (mixed \$name) inherited from *Phalcon\Forms\Element*

Sets the element name

public **getName** () inherited from *Phalcon\Forms\Element*

Returns the element name

public *Phalcon\Forms\ElementInterface* **setFilters** (array | string \$filters) inherited from *Phalcon\Forms\Element*

Sets the element filters

public **addFilter** (mixed \$filter) inherited from *Phalcon\Forms\Element*

Adds a filter to current list of filters

public mixed **getFilters** () inherited from *Phalcon\Forms\Element*

Returns the element filters

public *Phalcon\Forms\ElementInterface* **addValidators** (array \$validators, [mixed \$merge]) inherited from *Phalcon\Forms\Element*

Adds a group of validators

public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator) inherited from *Phalcon\Forms\Element*

Adds a validator to the element

public **getValidators** () inherited from *Phalcon\Forms\Element*

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from *Phalcon\Forms\Element*

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public *Phalcon\Forms\ElementInterface* **setAttribute** (string \$attribute, mixed \$value) inherited from *Phalcon\Forms\Element*

Sets a default attribute for the element

public mixed **getAttribute** (string \$attribute, [mixed \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (array \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method `__toString` renders the widget without attributes

Class `Phalcon\Forms\Element\TextArea`

extends abstract class `Phalcon\Forms\Element`

implements `Phalcon\Forms\ElementInterface`

Component TEXTAREA for forms

Methods

public **render** ([array \$attributes])

Renders the element widget

public **__construct** (string \$name, [array \$attributes]) inherited from `Phalcon\Forms\Element`

Phalcon\Forms\Element constructor

public **setForm** (`Phalcon\Forms\Form` \$form) inherited from `Phalcon\Forms\Element`

Sets the parent form to the element

public **getForm** () inherited from `Phalcon\Forms\Element`

Returns the parent form to the element

public **setName** (mixed \$name) inherited from `Phalcon\Forms\Element`

Sets the element name

public **getName** () inherited from `Phalcon\Forms\Element`

Returns the element name

public `Phalcon\Forms\ElementInterface` **setFilters** (array | string \$filters) inherited from `Phalcon\Forms\Element`

Sets the element filters

public **addFilter** (mixed \$filter) inherited from `Phalcon\Forms\Element`

Adds a filter to current list of filters

public mixed **getFilters** () inherited from `Phalcon\Forms\Element`

Returns the element filters

public `Phalcon\Forms\ElementInterface` **addValidators** (array \$validators, [mixed \$merge]) inherited from `Phalcon\Forms\Element`

Adds a group of validators

public **addValidator** (`Phalcon\Validation\ValidatorInterface` \$validator) inherited from `Phalcon\Forms\Element`

Adds a validator to the element

public **getValidators** () inherited from `Phalcon\Forms\Element`

Returns the validators registered for the element

public **prepareAttributes** ([array \$attributes], [mixed \$useChecked]) inherited from `Phalcon\Forms\Element`

Returns an array of prepared attributes for Phalcon\Tag helpers according to the element parameters

public `Phalcon\Forms\ElementInterface` **setAttribute** (string \$attribute, mixed \$value) inherited from `Phalcon\Forms\Element`

Sets a default attribute for the element

public *mixed* **getAttribute** (*string* \$attribute, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an attribute if present

public **setAttributes** (*array* \$attributes) inherited from *Phalcon\Forms\Element*

Sets default attributes for the element

public **getAttributes** () inherited from *Phalcon\Forms\Element*

Returns the default attributes for the element

public *Phalcon\Forms\ElementInterface* **setUserOption** (*string* \$option, *mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets an option for the element

public *mixed* **getUserOption** (*string* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Forms\Element*

Returns the value of an option if present

public **setUserOptions** (*array* \$options) inherited from *Phalcon\Forms\Element*

Sets options for the element

public **getUserOptions** () inherited from *Phalcon\Forms\Element*

Returns the options for the element

public **setLabel** (*mixed* \$label) inherited from *Phalcon\Forms\Element*

Sets the element label

public **getLabel** () inherited from *Phalcon\Forms\Element*

Returns the element label

public **label** ([*array* \$attributes]) inherited from *Phalcon\Forms\Element*

Generate the HTML to label the element

public *Phalcon\Forms\ElementInterface* **setDefault** (*mixed* \$value) inherited from *Phalcon\Forms\Element*

Sets a default value in case the form does not use an entity or there is no value available for the element in `_POST`

public **getDefault** () inherited from *Phalcon\Forms\Element*

Returns the default value assigned to the element

public **getValue** () inherited from *Phalcon\Forms\Element*

Returns the element value

public **getMessages** () inherited from *Phalcon\Forms\Element*

Returns the messages that belongs to the element The element needs to be attached to a form

public **hasMessages** () inherited from *Phalcon\Forms\Element*

Checks whether there are messages attached to the element

public **setMessages** (*Phalcon\Validation\Message\Group* \$group) inherited from *Phalcon\Forms\Element*

Sets the validation messages related to the element

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message) inherited from *Phalcon\Forms\Element*

Appends a message to the internal message list

public **clear** () inherited from *Phalcon\Forms\Element*

Clears every element in the form to its default value

public **__toString** () inherited from *Phalcon\Forms\Element*

Magic method **__toString** renders the widget without attributes

Class **Phalcon\Forms\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Forms\Form

extends abstract class *Phalcon\DI\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\DI\InjectionAwareInterface*, *Countable*, *Iterator*, *Traversable*

This component allows to build forms using an object-oriented interface

Methods

public **setValidation** (*mixed* \$validation)

...

public **getValidation** ()

...

public **__construct** ([*object* \$entity], [*array* \$userOptions])

Phalcon\Forms\Form constructor

public **setAction** (*mixed* \$action)

Sets the form's action

public **getAction** ()

Returns the form's action

public **setUserOption** (*string* \$option, *mixed* \$value)

Sets an option for the form

public **getUserOption** (*string* \$option, [*mixed* \$defaultValue])

Returns the value of an option if present

public **setUserOptions** (*array* \$options)

Sets options for the element

public **getUserOptions** ()

Returns the options for the element

public **setEntity** (*object* \$entity)

Sets the entity related to the model

public *object* **getEntity** ()

Returns the entity related to the model

public **getElements** ()

Returns the form elements added to the form

public **bind** (*array* \$data, *object* \$entity, [*array* \$whitelist])

Binds data to the entity

public **isValid** ([*array* \$data], [*object* \$entity])

Validates the form

public **getMessages** ([*mixed* \$byItemName])

Returns the messages generated in the validation

public **getMessagesFor** (*mixed* \$name)

Returns the messages generated for a specific element

public **hasMessagesFor** (*mixed* \$name)

Check if messages were generated for a specific element

public **add** (*Phalcon\Forms\ElementInterface* \$element, [*mixed* \$position], [*mixed* \$type])

Adds an element to the form

public **render** (*string* \$name, [*array* \$attributes])

Renders a specific item in the form

public **get** (*mixed* \$name)

Returns an element added to the form by its name

public **label** (*mixed* \$name, [*array* \$attributes])

Generate the label of an element added to the form including HTML

public **getLabel** (*mixed* \$name)

Returns a label for an element

public **getValue** (*mixed* \$name)

Gets a value from the internal related entity or from the default value

public **has** (*mixed* \$name)

Check if the form contains an element

public **remove** (*mixed* \$name)

Removes an element from the form

public **clear** ([*array* \$fields])

Clears every element in the form to its default value

public **count** ()

Returns the number of elements in the form

public **rewind** ()

Rewinds the internal iterator

public **current** ()

Returns the current element in the iterator

public **key** ()

Returns the current position/key in the iterator

public **next** ()

Moves the internal iteration pointer to the next position

public **valid** ()

Check if the current element in the iterator is valid

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventsManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventsManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class *Phalcon\Forms\Manager*

Methods

public **create** (*string* \$name, [*object* \$entity])

Creates a form registering it in the forms manager

public **get** (*mixed* \$name)

Returns a form by its name

public **has** (*mixed* \$name)

Checks if a form is registered in the forms manager

public **set** (*mixed* \$name, *Phalcon\Forms\Form* \$form)

Registers a form in the Forms Manager

Class *Phalcon\Http\Cookie*

implements *Phalcon\Http\CookieInterface*, *Phalcon\Di\InjectionAwareInterface*

Provide OO wrappers to manage a HTTP cookie

Methods

public **__construct** (*string* \$name, [*mixed* \$value], [*int* \$expire], [*string* \$path], [*boolean* \$secure], [*string* \$domain], [*boolean* \$httpOnly])

Phalcon\Http\Cookie constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public *Phalcon\Http\Cookie* **setValue** (*string* \$value)

Sets the cookie's value

public *mixed* **getValue** ([*string* | *array* \$filters], [*string* \$defaultValue])

Returns the cookie's value

public **send** ()

Sends the cookie to the HTTP client Stores the cookie definition in session

public **restore** ()

Reads the cookie-related info from the SESSION to restore the cookie as it was set This method is automatically called internally so normally you don't need to call it

public **delete** ()

Deletes the cookie by setting an expire time in the past

public **useEncryption** (*mixed* \$useEncryption)

Sets if the cookie must be encrypted/decrypted automatically

public **isUsingEncryption** ()

Check if the cookie is using implicit encryption

public **setExpiration** (*mixed* \$expire)

Sets the cookie's expiration time

public **getExpiration** ()

Returns the current expiration time

public **setPath** (*mixed* \$path)

Sets the cookie's expiration time

public **getName** ()

Returns the current cookie's name

public **getPath** ()

Returns the current cookie's path

public **setDomain** (*mixed* \$domain)

Sets the domain that the cookie is available to

public **getDomain** ()

Returns the domain that the cookie is available to

public **setSecure** (*mixed* \$secure)

Sets if the cookie must only be sent when the connection is secure (HTTPS)

public **getSecure** ()

Returns whether the cookie must only be sent when the connection is secure (HTTPS)

public **setHttpOnly** (*mixed* \$httpOnly)

Sets if the cookie is accessible only through the HTTP protocol

public **getHttpOnly** ()

Returns if the cookie is accessible only through the HTTP protocol

public **__toString** ()

Magic `__toString` method converts the cookie's value to string

Class `Phalcon\Http\Cookie\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private `Exception __clone ()` inherited from `Exception`

Clone the exception

public `__construct ([string $message], [int $code], [Exception $previous])` inherited from `Exception`

Exception constructor

public `__wakeup ()` inherited from `Exception`

...

final public `string getMessage ()` inherited from `Exception`

Gets the Exception message

final public `int getCode ()` inherited from `Exception`

Gets the Exception code

final public `string getFile ()` inherited from `Exception`

Gets the file in which the exception occurred

final public `int getLine ()` inherited from `Exception`

Gets the line in which the exception occurred

final public `array getTrace ()` inherited from `Exception`

Gets the stack trace

final public `Exception getPrevious ()` inherited from `Exception`

Returns previous Exception

final public `Exception getTraceAsString ()` inherited from `Exception`

Gets the stack trace as a string

public `string __toString ()` inherited from `Exception`

String representation of the exception

Class `Phalcon\Http\Request`

implements `Phalcon\Http\RequestInterface`, `Phalcon\Di\InjectionAwareInterface`

Encapsulates request information for easy and secure access from application controllers.

The request object is a simple value object that is passed between the dispatcher and controller classes. It packages the HTTP request environment.

```

<?php

use Phalcon\Http\Request;

$request = new Request();

if ($request->isPost() && $request->isAjax()) {
    echo "Request was made using POST and AJAX";
}

$request->getServer("HTTP_HOST"); // Retrieve SERVER variables
$request->getMethod();           // GET, POST, PUT, DELETE, HEAD, OPTIONS, PATCH, PURGE, TRACE, CONNECT
$request->getLanguages();         // An array of languages the client accepts

```

Methods

public **getHttpRequestMethodParameterOverride** ()

...

public **setHttpRequestMethodParameterOverride** (*mixed* \$httpMethodParameterOverride)

...

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **get** (*mixed* \$name), (*mixed* \$filters), (*mixed* \$defaultValue), (*mixed* \$notAllowEmpty), (*mixed* \$noRecursive)

Gets a variable from the \$_REQUEST superglobal applying filters if needed. If no parameters are given the \$_REQUEST superglobal is returned

```

<?php

// Returns value from $_REQUEST["user_email"] without sanitizing
$userEmail = $request->get("user_email");

// Returns value from $_REQUEST["user_email"] with sanitizing
$userEmail = $request->get("user_email", "email");

```

public **getPost** (*mixed* \$name), (*mixed* \$filters), (*mixed* \$defaultValue), (*mixed* \$notAllowEmpty), (*mixed* \$noRecursive)

Gets a variable from the \$_POST superglobal applying filters if needed. If no parameters are given the \$_POST superglobal is returned

```

<?php

// Returns value from $_POST["user_email"] without sanitizing
$userEmail = $request->getPost("user_email");

// Returns value from $_POST["user_email"] with sanitizing
$userEmail = $request->getPost("user_email", "email");

```

public **getPut** ([mixed \$name], [mixed \$filters], [mixed \$defaultValue], [mixed \$notAllowEmpty], [mixed \$noRecursive])

Gets a variable from put request

```
<?php

// Returns value from $_PUT["user_email"] without sanitizing
$userEmail = $request->getPut("user_email");

// Returns value from $_PUT["user_email"] with sanitizing
$userEmail = $request->getPut("user_email", "email");
```

public **getQuery** ([mixed \$name], [mixed \$filters], [mixed \$defaultValue], [mixed \$notAllowEmpty], [mixed \$noRecursive])

Gets variable from \$_GET superglobal applying filters if needed If no parameters are given the \$_GET superglobal is returned

```
<?php

// Returns value from $_GET["id"] without sanitizing
$id = $request->getQuery("id");

// Returns value from $_GET["id"] with sanitizing
$id = $request->getQuery("id", "int");

// Returns value from $_GET["id"] with a default value
$id = $request->getQuery("id", null, 150);
```

final protected **getHelper** (array \$source, [mixed \$name], [mixed \$filters], [mixed \$defaultValue], [mixed \$notAllowEmpty], [mixed \$noRecursive])

Helper to get data from superglobals, applying filters if needed. If no parameters are given the superglobal is returned.

public **getServer** (mixed \$name)

Gets variable from \$_SERVER superglobal

public **has** (mixed \$name)

Checks whether \$_REQUEST superglobal has certain index

public **hasPost** (mixed \$name)

Checks whether \$_POST superglobal has certain index

public **hasPut** (mixed \$name)

Checks whether the PUT data has certain index

public **hasQuery** (mixed \$name)

Checks whether \$_GET superglobal has certain index

final public **hasServer** (mixed \$name)

Checks whether \$_SERVER superglobal has certain index

final public **getHeader** (mixed \$header)

Gets HTTP header from request data

public **getScheme** ()

Gets HTTP schema (http/https)

public **isAjax** ()

Checks whether request has been made using ajax

public **isSoap** ()

Checks whether request has been made using SOAP

public **isSoapRequested** ()

Alias of isSoap(). It will be deprecated in future versions

public **isSecure** ()

Checks whether request has been made using any secure layer

public **isSecureRequest** ()

Alias of isSecure(). It will be deprecated in future versions

public **getRawBody** ()

Gets HTTP raw request body

public **getJsonRawBody** ([mixed \$associative])

Gets decoded JSON HTTP raw request body

public **getServerAddress** ()

Gets active server address IP

public **getServerName** ()

Gets active server name

public **getHttpRequest** ()

Gets host name used by the request. *Request::getHttpRequest* trying to find host name in following order: - `$_SERVER["HTTP_HOST"]` - `$_SERVER["SERVER_NAME"]` - `$_SERVER["SERVER_ADDR"]` Optionally *Request::getHttpRequest* validates and clean host name. The *Request::\$strictHostCheck* can be used to validate host name. Note: validation and cleaning have a negative performance impact because they use regular expressions.

```
<?php

use Phalcon\Http\Request;

$request = new Request;

$_SERVER["HTTP_HOST"] = "example.com";
$request->getHttpRequest(); // example.com

$_SERVER["HTTP_HOST"] = "example.com:8080";
$request->getHttpRequest(); // example.com:8080

$request->setStrictHostCheck(true);
$_SERVER["HTTP_HOST"] = "ex=am~ple.com";
$request->getHttpRequest(); // UnexpectedValueException

$_SERVER["HTTP_HOST"] = "ExAmPlE.com";
$request->getHttpRequest(); // example.com
```

public **setStrictHostCheck** ([*mixed* \$flag])

Sets if the *Request::getHttpHost* method must be use strict validation of host name or not

public **isStrictHostCheck** ()

Checks if the *Request::getHttpHost* method will be use strict validation of host name or not

public **getPort** ()

Gets information about the port on which the request is made.

final public **getURI** ()

Gets HTTP URI which request has been made

public **getClientAddress** ([*mixed* \$trustForwardedHeader])

Gets most possible client IPv4 Address. This method searches in \$_SERVER["REMOTE_ADDR"] and optionally in \$_SERVER["HTTP_X_FORWARDED_FOR"]

final public **getMethod** ()

Gets HTTP method which request has been made If the X-HTTP-Method-Override header is set, and if the method is a POST, then it is used to determine the “real” intended HTTP method. The *_method* request parameter can also be used to determine the HTTP method, but only if *setHttpMethodParameterOverride(true)* has been called. The method is always an uppercased string.

public **getUserAgent** ()

Gets HTTP user agent used to made the request

public **isValidHttpMethod** (*mixed* \$method)

Checks if a method is a valid HTTP method

public **isMethod** (*mixed* \$methods, [*mixed* \$strict])

Check if HTTP method match any of the passed methods When strict is true it checks if validated methods are real HTTP methods

public **isPost** ()

Checks whether HTTP method is POST. if \$_SERVER["REQUEST_METHOD"]==="POST"

public **isGet** ()

Checks whether HTTP method is GET. if \$_SERVER["REQUEST_METHOD"]==="GET"

public **isPut** ()

Checks whether HTTP method is PUT. if \$_SERVER["REQUEST_METHOD"]==="PUT"

public **isPatch** ()

Checks whether HTTP method is PATCH. if \$_SERVER["REQUEST_METHOD"]==="PATCH"

public **isHead** ()

Checks whether HTTP method is HEAD. if \$_SERVER["REQUEST_METHOD"]==="HEAD"

public **isDelete** ()

Checks whether HTTP method is DELETE. if \$_SERVER["REQUEST_METHOD"]==="DELETE"

public **isOptions** ()

Checks whether HTTP method is OPTIONS. if \$_SERVER["REQUEST_METHOD"]==="OPTIONS"

public **isPurge** ()

Checks whether HTTP method is PURGE (Squid and Varnish support). if
`_SERVER["REQUEST_METHOD"]=="PURGE"`

public **isTrace** ()

Checks whether HTTP method is TRACE. if `_SERVER["REQUEST_METHOD"]=="TRACE"`

public **isConnect** ()

Checks whether HTTP method is CONNECT. if `_SERVER["REQUEST_METHOD"]=="CONNECT"`

public **hasFiles** ([*mixed* \$onlySuccessful])

Checks whether request include attached files

final protected **hasFileHelper** (*mixed* \$data, *mixed* \$onlySuccessful)

Recursively counts file in an array of files

public **getUploadedFiles** ([*mixed* \$onlySuccessful])

Gets attached files as Phalcon\Http\Request\File instances

final protected **smoothFiles** (*array* \$names, *array* \$types, *array* \$tmp_names, *array* \$sizes, *array* \$errors, *mixed* \$prefix)

Smooth out \$_FILES to have plain array with all files uploaded

public **getHeaders** ()

Returns the available headers in the request

```
<?php

$_SERVER = [
    "PHP_AUTH_USER" => "phalcon",
    "PHP_AUTH_PW"   => "secret",
];

$headers = $request->getHeaders();

echo $headers["Authorization"]; // Basic cGhhbGNvbjpwZWNYZXQ=
```

public **getHTTPReferer** ()

Gets web page that refers active request. ie: <http://www.google.com>

final protected **_getBestQuality** (*array* \$qualityParts, *mixed* \$name)

Process a request header and return the one with best quality

public **getContentType** ()

Gets content type which request has been made

public **getAcceptableContent** ()

Gets an array with mime/types and their quality accepted by the browser/client from `_SERVER["HTTP_ACCEPT"]`

public **getBestAccept** ()

Gets best mime/type accepted by the browser/client from `_SERVER["HTTP_ACCEPT"]`

public **getClientCharsets** ()

Gets a charsets array and their quality accepted by the browser/client from `_SERVER["HTTP_ACCEPT_CHARSET"]`

public **getBestCharset** ()

Gets best charset accepted by the browser/client from `_SERVER["HTTP_ACCEPT_CHARSET"]`

public **getLanguages** ()

Gets languages array and their quality accepted by the browser/client from `_SERVER["HTTP_ACCEPT_LANGUAGE"]`

public **getBestLanguage** ()

Gets best language accepted by the browser/client from `_SERVER["HTTP_ACCEPT_LANGUAGE"]`

public **getBasicAuth** ()

Gets auth info accepted by the browser/client from `$_SERVER["PHP_AUTH_USER"]`

public **getDigestAuth** ()

Gets auth info accepted by the browser/client from `$_SERVER["PHP_AUTH_DIGEST"]`

final protected **__getQualityHeader** (*mixed* \$serverIndex, *mixed* \$name)

Process a request header and return an array of values with their qualities

Class `Phalcon\Http\Request\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private `Exception` **__clone** () inherited from `Exception`

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [`Exception` \$previous]) inherited from `Exception`

Exception constructor

public **__wakeup** () inherited from `Exception`

...

final public *string* **getMessage** () inherited from `Exception`

Gets the Exception message

final public *int* **getCode** () inherited from `Exception`

Gets the Exception code

final public *string* **getFile** () inherited from `Exception`

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from `Exception`

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from `Exception`

Gets the stack trace

final public `Exception` **getPrevious** () inherited from `Exception`

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Http\Request\File](#)

implements [Phalcon\Http\Request\FileInterface](#)

Provides OO wrappers to the \$_FILES superglobal

```
<?php

use Phalcon\Mvc\Controller;

class PostsController extends Controller
{
    public function uploadAction()
    {
        // Check if the user has uploaded files
        if ($this->request->hasFiles() == true) {
            // Print the real file names and their sizes
            foreach ($this->request->getUploadedFiles() as $file) {
                echo $file->getName(), " ", $file->getSize(), "\n";
            }
        }
    }
}
```

Methods

public **getError** ()

public **getKey** ()

public **getExtension** ()

public **__construct** (array \$file, [mixed \$key])

[Phalcon\Http\Request\File](#) constructor

public **getSize** ()

Returns the file size of the uploaded file

public **getName** ()

Returns the real name of the uploaded file

public **getTempName** ()

Returns the temporary name of the uploaded file

public **getType** ()

Returns the mime type reported by the browser This mime type is not completely secure, use [getRealType\(\)](#) instead

public **getRealType** ()

Gets the real mime type of the upload file using finfo

public **isUploadedFile** ()

Checks whether the file has been uploaded via Post.

public **moveTo** (*mixed* \$destination)

Moves the temporary file to a destination within the application

Class **Phalcon\Http\Response**

*implements **Phalcon\Http\ResponseInterface**, **Phalcon\Di\InjectionAwareInterface***

Part of the HTTP cycle is return responses to the clients. **Phalcon\HTTP\Response** is the Phalcon component responsible to achieve this task. HTTP responses are usually composed by headers and body.

```
<?php

$response = new \Phalcon\Http\Response();

$response->setStatusCode(200, "OK");
$response->setContent("<html><body>Hello</body></html>");

$response->send();
```

Methods

public **__construct** ([*mixed* \$content], [*mixed* \$code], [*mixed* \$status])

Phalcon\Http\Response constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setStatusCode** (*mixed* \$code, [*mixed* \$message])

Sets the HTTP response code

```
<?php

$response->setStatusCode(404, "Not Found");
```

public **getStatusCode** ()

Returns the status code

```
<?php

print_r(
    $response->getStatusCode()
);
```

public **setHeaders** (*Phalcon\Http\Response\HeadersInterface* \$headers)

Sets a headers bag for the response externally

public **getHeaders** ()

Returns headers set by the user

public **setCookies** (*Phalcon\Http\Response\CookiesInterface* \$cookies)

Sets a cookies bag for the response externally

public *Phalcon\Http\Response\CookiesInterface* **getCookies** ()

Returns cookies set by the user

public **setHeader** (*mixed* \$name, *mixed* \$value)

Overwrites a header in the response

```
<?php
$response->setHeader("Content-Type", "text/plain");
```

public **setRawHeader** (*mixed* \$header)

Send a raw header to the response

```
<?php
$response->setRawHeader("HTTP/1.1 404 Not Found");
```

public **resetHeaders** ()

Resets all the established headers

public **setExpires** (*DateTime* \$datetime)

Sets an Expires header in the response that allows to use the HTTP cache

```
<?php
$this->response->setExpires (
    new DateTime ()
);
```

public **setLastModified** (*DateTime* \$datetime)

Sets Last-Modified header

```
<?php
$this->response->setLastModified (
    new DateTime ()
);
```

public **setCache** (*mixed* \$minutes)

Sets Cache headers to use HTTP cache

```
<?php
$this->response->setCache (60);
```

public **setNotModified** ()

Sends a Not-Modified response

public **setContentType** (*mixed* \$contentType, [*mixed* \$charset])

Sets the response content-type mime, optionally the charset

```
<?php
$response->setContentType("application/pdf");
$response->setContentType("text/plain", "UTF-8");
```

public **setContentLength** (*mixed* \$contentLength)

Sets the response content-length

```
<?php
$response->setContentLength(2048);
```

public **setEtag** (*mixed* \$etag)

Set a custom ETag

```
<?php
$response->setEtag(md5(time()));
```

public **redirect** ([*mixed* \$location], [*mixed* \$externalRedirect], [*mixed* \$statusCode])

Redirect by HTTP to another action or URL

```
<?php
// Using a string redirect (internal/external)
$response->redirect("posts/index");
$response->redirect("http://en.wikipedia.org", true);
$response->redirect("http://www.example.com/new-location", true, 301);

// Making a redirection based on a named route
$response->redirect(
    [
        "for"          => "index-lang",
        "lang"         => "jp",
        "controller" => "index",
    ]
);
```

public **setContent** (*mixed* \$content)

Sets HTTP response body

```
<?php
$response->setContent("<h1>Hello!</h1>");
```

public **setJsonContent** (*mixed* \$content, [*mixed* \$jsonOptions], [*mixed* \$depth])

Sets HTTP response body. The parameter is automatically converted to JSON and also sets default header: Content-Type: “application/json; charset=UTF-8”

```
<?php
$response->setJsonContent (
    [
        "status" => "OK",
    ]
);
```

public **appendContent** (*mixed* \$content)

Appends a string to the HTTP response body

public **getContent** ()

Gets the HTTP response body

public **isSent** ()

Check if the response is already sent

public **sendHeaders** ()

Sends headers to the client

public **sendCookies** ()

Sends cookies to the client

public **send** ()

Prints out HTTP response to the client

public **setFileToSend** (*mixed* \$filePath, [*mixed* \$attachmentName], [*mixed* \$attachment])

Sets an attached file to be sent at the end of the request

Class **Phalcon\Http\Response\Cookies**

*implements **Phalcon\Http\Response\CookiesInterface**, **Phalcon\Di\InjectionAwareInterface***

This class is a bag to manage the cookies A cookies bag is automatically registered as part of the ‘response’ service in the DI

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **useEncryption** (*mixed* \$useEncryption)

Set if cookies in the bag must be automatically encrypted/decrypted

public **isUsingEncryption** ()

Returns if the bag is automatically encrypting/decrypting cookies

public **set** (*mixed* \$name, [*mixed* \$value], [*mixed* \$expire], [*mixed* \$path], [*mixed* \$secure], [*mixed* \$domain], [*mixed* \$httpOnly])

Sets a cookie to be sent at the end of the request This method overrides any cookie set before with the same name

public **get** (*mixed* \$name)

Gets a cookie from the bag

public **has** (*mixed* \$name)

Check if a cookie is defined in the bag or exists in the `_COOKIE` superglobal

public **delete** (*mixed* \$name)

Deletes a cookie by its name This method does not removes cookies from the `_COOKIE` superglobal

public **send** ()

Sends the cookies to the client Cookies aren't sent if headers are sent in the current request

public **reset** ()

Reset set cookies

Class `Phalcon\Http\Response\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private `Exception` **__clone** () inherited from `Exception`

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [`Exception` \$previous]) inherited from `Exception`

Exception constructor

public **__wakeup** () inherited from `Exception`

...

final public *string* **getMessage** () inherited from `Exception`

Gets the Exception message

final public *int* **getCode** () inherited from `Exception`

Gets the Exception code

final public *string* **getFile** () inherited from `Exception`

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from `Exception`

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from `Exception`

Gets the stack trace

final public `Exception` **getPrevious** () inherited from `Exception`

Returns previous Exception

final public `Exception` **getTraceAsString** () inherited from `Exception`

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Http\Response\Headers](#)

implements [Phalcon\Http\Response\HeadersInterface](#)

This class is a bag to manage the response headers

Methods

public **set** (*mixed* \$name, *mixed* \$value)

Sets a header to be sent at the end of the request

public **get** (*mixed* \$name)

Gets a header value from the internal bag

public **setRaw** (*mixed* \$header)

Sets a raw header to be sent at the end of the request

public **remove** (*mixed* \$header)

Removes a header to be sent at the end of the request

public **send** ()

Sends the headers to the client

public **reset** ()

Reset set headers

public **toArray** ()

Returns the current headers as an array

public static **__set_state** (*array* \$data)

Restore a [\Phalcon\Http\Response\Headers](#) object

Class [Phalcon\Image](#)

Constants

integer **NONE**

integer **WIDTH**

integer **HEIGHT**

integer **AUTO**

integer **INVERSE**

integer **PRECISE**

integer **TENSILE**

integer **HORIZONTAL**

integer **VERTICAL**

Abstract class **Phalcon\Image\Adapter**

implements **Phalcon\Image\AdapterInterface**

All image adapters must use this class

Methods

public **getImage** ()

...

public **getRealpath** ()

...

public **getWidth** ()

Image width

public **getHeight** ()

Image height

public **getType** ()

Image type Driver dependent

public **getMime** ()

Image mime type

public **resize** ([*mixed* \$width], [*mixed* \$height], [*mixed* \$master])

Resize the image to the given size

public **liquidRescale** (*mixed* \$width, *mixed* \$height, [*mixed* \$deltaX], [*mixed* \$rigidity])

This method scales the images using liquid rescaling method. Only support Imagick

public **crop** (*mixed* \$width, *mixed* \$height, [*mixed* \$offsetX], [*mixed* \$offsetY])

Crop an image to the given size

public **rotate** (*mixed* \$degrees)

Rotate the image by a given amount

public **flip** (*mixed* \$direction)

Flip the image along the horizontal or vertical axis

public **sharpen** (*mixed* \$amount)

Sharpen the image by a given amount

public **reflection** (*mixed* \$height, [*mixed* \$opacity], [*mixed* \$fadeIn])

Add a reflection to an image

public **watermark** (**Phalcon\Image\Adapter** \$watermark, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity])

Add a watermark to an image with the specified opacity

public **text** (*mixed* \$text, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity], [*mixed* \$color], [*mixed* \$size], [*mixed* \$fontfile])

Add a text to an image with a specified opacity

public **mask** (*Phalcon\Image\Adapter* \$watermark)

Composite one image onto another

public **background** (*mixed* \$color, [*mixed* \$opacity])

Set the background color of an image

public **blur** (*mixed* \$radius)

Blur image

public **pixelate** (*mixed* \$amount)

Pixelate image

public **save** ([*mixed* \$file], [*mixed* \$quality])

Save the image

public **render** ([*mixed* \$ext], [*mixed* \$quality])

Render the image and return the binary string

Class *Phalcon\Image\Adapter\Gd*

extends abstract class *Phalcon\Image\Adapter*

implements *Phalcon\Image\AdapterInterface*

Methods

public static **check** ()

...

public **__construct** (*mixed* \$file, [*mixed* \$width], [*mixed* \$height])

...

protected **_resize** (*mixed* \$width, *mixed* \$height)

...

protected **_crop** (*mixed* \$width, *mixed* \$height, *mixed* \$offsetX, *mixed* \$offsetY)

...

protected **_rotate** (*mixed* \$degrees)

...

protected **_flip** (*mixed* \$direction)

...

protected **_sharpen** (*mixed* \$amount)

...

protected **_reflection** (*mixed* \$height, *mixed* \$opacity, *mixed* \$fadeIn)

...

protected **_watermark** (*Phalcon\Image\Adapter* \$watermark, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity)

...

protected **_text** (*mixed* \$text, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity, *mixed* \$r, *mixed* \$g, *mixed* \$b, *mixed* \$size, *mixed* \$fontfile)

...

protected **_mask** (*Phalcon\Image\Adapter* \$mask)

...

protected **_background** (*mixed* \$r, *mixed* \$g, *mixed* \$b, *mixed* \$opacity)

...

protected **_blur** (*mixed* \$radius)

...

protected **_pixelate** (*mixed* \$amount)

...

protected **_save** (*mixed* \$file, *mixed* \$quality)

...

protected **_render** (*mixed* \$ext, *mixed* \$quality)

...

protected **_create** (*mixed* \$width, *mixed* \$height)

...

public **__destruct** ()

...

public **getImage** () inherited from *Phalcon\Image\Adapter*

...

public **getRealpath** () inherited from *Phalcon\Image\Adapter*

...

public **getWidth** () inherited from *Phalcon\Image\Adapter*
Image width

public **getHeight** () inherited from *Phalcon\Image\Adapter*
Image height

public **getType** () inherited from *Phalcon\Image\Adapter*
Image type Driver dependent

public **getMime** () inherited from *Phalcon\Image\Adapter*
Image mime type

public **resize** ([*mixed* \$width], [*mixed* \$height], [*mixed* \$master]) inherited from *Phalcon\Image\Adapter*
Resize the image to the given size

public **liquidRescale** (*mixed* \$width, *mixed* \$height, [*mixed* \$deltaX], [*mixed* \$rigidity]) inherited from *Phalcon\Image\Adapter*

This method scales the images using liquid rescaling method. Only support Imagick

public **crop** (*mixed* \$width, *mixed* \$height, [*mixed* \$offsetX], [*mixed* \$offsetY]) inherited from *Phalcon\Image\Adapter*

Crop an image to the given size

public **rotate** (*mixed* \$degrees) inherited from *Phalcon\Image\Adapter*

Rotate the image by a given amount

public **flip** (*mixed* \$direction) inherited from *Phalcon\Image\Adapter*

Flip the image along the horizontal or vertical axis

public **sharpen** (*mixed* \$amount) inherited from *Phalcon\Image\Adapter*

Sharpen the image by a given amount

public **reflection** (*mixed* \$height, [*mixed* \$opacity], [*mixed* \$fadeIn]) inherited from *Phalcon\Image\Adapter*

Add a reflection to an image

public **watermark** (*Phalcon\Image\Adapter* \$watermark, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity]) inherited from *Phalcon\Image\Adapter*

Add a watermark to an image with the specified opacity

public **text** (*mixed* \$text, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity], [*mixed* \$color], [*mixed* \$size], [*mixed* \$fontfile]) inherited from *Phalcon\Image\Adapter*

Add a text to an image with a specified opacity

public **mask** (*Phalcon\Image\Adapter* \$watermark) inherited from *Phalcon\Image\Adapter*

Composite one image onto another

public **background** (*mixed* \$color, [*mixed* \$opacity]) inherited from *Phalcon\Image\Adapter*

Set the background color of an image

public **blur** (*mixed* \$radius) inherited from *Phalcon\Image\Adapter*

Blur image

public **pixelate** (*mixed* \$amount) inherited from *Phalcon\Image\Adapter*

Pixelate image

public **save** ([*mixed* \$file], [*mixed* \$quality]) inherited from *Phalcon\Image\Adapter*

Save the image

public **render** ([*mixed* \$ext], [*mixed* \$quality]) inherited from *Phalcon\Image\Adapter*

Render the image and return the binary string

Class *Phalcon\Image\Adapter\Imagick*

extends abstract class *Phalcon\Image\Adapter*

implements *Phalcon\Image\AdapterInterface*

Image manipulation support. Allows images to be resized, cropped, etc.

```
<?php

$image = new \Phalcon\Image\Adapter\Imagick("upload/test.jpg");

$image->resize(200, 200)->rotate(90)->crop(100, 100);

if ($image->save()) {
    echo "success";
}
```

Methods

public static **check** ()

Checks if Imagick is enabled

public **__construct** (*mixed* \$file, [*mixed* \$width], [*mixed* \$height])

\Phalcon\Image\Adapter\Imagick constructor

protected **_resize** (*mixed* \$width, *mixed* \$height)

Execute a resize.

protected **_liquidRescale** (*mixed* \$width, *mixed* \$height, *mixed* \$deltaX, *mixed* \$rigidity)

This method scales the images using liquid rescaling method. Only support Imagick

protected **_crop** (*mixed* \$width, *mixed* \$height, *mixed* \$offsetX, *mixed* \$offsetY)

Execute a crop.

protected **_rotate** (*mixed* \$degrees)

Execute a rotation.

protected **_flip** (*mixed* \$direction)

Execute a flip.

protected **_sharpen** (*mixed* \$amount)

Execute a sharpen.

protected **_reflection** (*mixed* \$height, *mixed* \$opacity, *mixed* \$fadeIn)

Execute a reflection.

protected **_watermark** (*Phalcon\Image\Adapter* \$image, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity)

Execute a watermarking.

protected **_text** (*mixed* \$text, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity, *mixed* \$r, *mixed* \$g, *mixed* \$b, *mixed* \$size, *mixed* \$fontfile)

Execute a text

protected **_mask** (*Phalcon\Image\Adapter* \$image)

Composite one image onto another

protected **_background** (*mixed* \$r, *mixed* \$g, *mixed* \$b, *mixed* \$opacity)

Execute a background.

protected **_blur** (*mixed* \$radius)

Blur image

protected **_pixelate** (*mixed* \$amount)

Pixelate image

protected **_save** (*mixed* \$file, *mixed* \$quality)

Execute a save.

protected **_render** (*mixed* \$extension, *mixed* \$quality)

Execute a render.

public **__destruct** ()

Destroys the loaded image to free up resources.

public **getInternalImInstance** ()

Get instance

public **setResourceLimit** (*mixed* \$type, *mixed* \$limit)

Sets the limit for a particular resource in megabytes

public **getImage** () inherited from *Phalcon\Image\Adapter*

...

public **getRealpath** () inherited from *Phalcon\Image\Adapter*

...

public **getWidth** () inherited from *Phalcon\Image\Adapter*

Image width

public **getHeight** () inherited from *Phalcon\Image\Adapter*

Image height

public **getType** () inherited from *Phalcon\Image\Adapter*

Image type Driver dependent

public **getMime** () inherited from *Phalcon\Image\Adapter*

Image mime type

public **resize** ([*mixed* \$width], [*mixed* \$height], [*mixed* \$master]) inherited from *Phalcon\Image\Adapter*

Resize the image to the given size

public **liquidRescale** (*mixed* \$width, *mixed* \$height, [*mixed* \$deltaX], [*mixed* \$rigidity]) inherited from *Phalcon\Image\Adapter*

This method scales the images using liquid rescaling method. Only support Imagick

public **crop** (*mixed* \$width, *mixed* \$height, [*mixed* \$offsetX], [*mixed* \$offsetY]) inherited from *Phalcon\Image\Adapter*

Crop an image to the given size

public **rotate** (*mixed* \$degrees) inherited from *Phalcon\Image\Adapter*

Rotate the image by a given amount

public **flip** (*mixed* \$direction) inherited from *Phalcon\Image\Adapter*

Flip the image along the horizontal or vertical axis

public **sharpen** (*mixed* \$amount) inherited from *Phalcon\Image\Adapter*

Sharpen the image by a given amount

public **reflection** (*mixed* \$height, [*mixed* \$opacity], [*mixed* \$fadeIn]) inherited from *Phalcon\Image\Adapter*

Add a reflection to an image

public **watermark** (*Phalcon\Image\Adapter* \$watermark, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity]) inherited from *Phalcon\Image\Adapter*

Add a watermark to an image with the specified opacity

public **text** (*mixed* \$text, [*mixed* \$offsetX], [*mixed* \$offsetY], [*mixed* \$opacity], [*mixed* \$color], [*mixed* \$size], [*mixed* \$fontfile]) inherited from *Phalcon\Image\Adapter*

Add a text to an image with a specified opacity

public **mask** (*Phalcon\Image\Adapter* \$watermark) inherited from *Phalcon\Image\Adapter*

Composite one image onto another

public **background** (*mixed* \$color, [*mixed* \$opacity]) inherited from *Phalcon\Image\Adapter*

Set the background color of an image

public **blur** (*mixed* \$radius) inherited from *Phalcon\Image\Adapter*

Blur image

public **pixelate** (*mixed* \$amount) inherited from *Phalcon\Image\Adapter*

Pixelate image

public **save** ([*mixed* \$file], [*mixed* \$quality]) inherited from *Phalcon\Image\Adapter*

Save the image

public **render** ([*mixed* \$ext], [*mixed* \$quality]) inherited from *Phalcon\Image\Adapter*

Render the image and return the binary string

Class *Phalcon\Image\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class Phalcon\Kernel

Methods

public static **preComputeHashKey** (*mixed* \$key)

...

Class Phalcon\Loader

implements [Phalcon\Events\EventsAwareInterface](#)

This component helps to load your project classes automatically based on some conventions

```
<?php

use Phalcon\Loader;

// Creates the autoloader
$loader = new Loader();

// Register some namespaces
$loader->registerNamespaces(
    [
        "Example\\Base"      => "vendor/example/base/",
        "Example\\Adapter"   => "vendor/example/adapter/",
        "Example"            => "vendor/example/",
    ]
);

// Register autoloader
$loader->register();
```

```
// Requiring this class will automatically include file vendor/example/adapter/Some.  
↪php  
$adapter = new \Example\Adapter\Some();
```

Methods

public **setEventsManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the events manager

public **getEventsManager** ()

Returns the internal event manager

public **setExtensions** (array \$extensions)

Sets an array of file extensions that the loader must try in each attempt to locate the file

public **getExtensions** ()

Returns the file extensions registered in the loader

public **registerNamespaces** (array \$namespaces, [*mixed* \$merge])

Register namespaces and their related directories

protected **prepareNamespace** (array \$namespace)

...

public **getNamespaces** ()

Returns the namespaces currently registered in the autoloader

public **registerDirs** (array \$directories, [*mixed* \$merge])

Register directories in which “not found” classes could be found

public **getDirs** ()

Returns the directories currently registered in the autoloader

public **registerFiles** (array \$files, [*mixed* \$merge])

Registers files that are “non-classes” hence need a “require”. This is very useful for including files that only have functions

public **getFiles** ()

Returns the files currently registered in the autoloader

public **registerClasses** (array \$classes, [*mixed* \$merge])

Register classes and their locations

public **getClasses** ()

Returns the class-map currently registered in the autoloader

public **register** ([*mixed* \$prepend])

Register the autoload method

public **unregister** ()

Unregister the autoload method

public **loadFiles** ()

Checks if a file exists and then adds the file by doing virtual require

public **autoLoad** (*mixed* \$className)

Autoloads the registered classes

public **getFoundPath** ()

Get the path when a class was found

public **getCheckedPath** ()

Get the path the loader is checking for a path

Class **Phalcon\Loader\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Abstract class `Phalcon\Logger`

Constants

integer **SPECIAL**
integer **CUSTOM**
integer **DEBUG**
integer **INFO**
integer **NOTICE**
integer **WARNING**
integer **ERROR**
integer **ALERT**
integer **CRITICAL**
integer **EMERGENCE**
integer **EMERGENCY**

Abstract class `Phalcon\Logger\Adapter`

implements `Phalcon\Logger\AdapterInterface`

Base class for Phalcon\Logger adapters

Methods

public **setLogLevel** (*mixed* \$level)

Filters the logs sent to the handlers that are less or equal than a specific level

public **getLogLevel** ()

Returns the current log level

public **setFormatter** (`Phalcon\Logger\FormatterInterface` \$formatter)

Sets the message formatter

public **begin** ()

Starts a transaction

public **commit** ()

Commits the internal transaction

public **rollback** ()

Rollbacks the internal transaction

public **isTransaction** ()

Returns the whether the logger is currently in an active transaction or not

public **critical** (*mixed* \$message, [*array* \$context])

Sends/Writes a critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context])
Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context])
Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context])
Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context])
Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context])
Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context])
Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context])
Sends/Writes an alert message to the log

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context])
Logs messages to the internal logger. Appends logs to the logger

abstract public **getFormatter** () inherited from *Phalcon\Logger\AdapterInterface*

...

abstract public **close** () inherited from *Phalcon\Logger\AdapterInterface*

...

Class **Phalcon\Logger\Adapter\File**

extends abstract class *Phalcon\Logger\Adapter*

implements *Phalcon\Logger\AdapterInterface*

Adapter to store logs in plain text files

```
<?php

$logger = new \Phalcon\Logger\Adapter\File("app/logs/test.log");

$logger->log("This is a message");
$logger->log(\Phalcon\Logger::ERROR, "This is an error");
$logger->error("This is another error");

$logger->close();
```

Methods

public **getPath** ()

File Path

public **__construct** (*string* \$name, [*array* \$options])

Phalcon\Logger\Adapter\File constructor

public **getFormatter** ()

Returns the internal formatter

public **logInternal** (*mixed* \$message, *mixed* \$type, *mixed* \$time, *array* \$context)

Writes the log to the file itself

public **close** ()

Closes the logger

public **__wakeup** ()

Opens the internal file handler after unserialization

public **setLogLevel** (*mixed* \$level) inherited from *Phalcon\Logger\Adapter*

Filters the logs sent to the handlers that are less or equal than a specific level

public **getLogLevel** () inherited from *Phalcon\Logger\Adapter*

Returns the current log level

public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter) inherited from *Phalcon\Logger\Adapter*

Sets the message formatter

public **begin** () inherited from *Phalcon\Logger\Adapter*

Starts a transaction

public **commit** () inherited from *Phalcon\Logger\Adapter*

Commits the internal transaction

public **rollback** () inherited from *Phalcon\Logger\Adapter*

Rollbacks the internal transaction

public **isTransaction** () inherited from *Phalcon\Logger\Adapter*

Returns the whether the logger is currently in an active transaction or not

public **critical** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an alert message to the log

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Logs messages to the internal logger. Appends logs to the logger

Class **Phalcon\Logger\Adapter\Firephp**

extends abstract class *Phalcon\Logger\Adapter*

implements *Phalcon\Logger\AdapterInterface*

Sends logs to FirePHP

```
<?php

use Phalcon\Logger\Adapter\Firephp;
use Phalcon\Logger;

$logger = new Firephp();

$logger->log(Logger::ERROR, "This is an error");
$logger->error("This is another error");
```

Methods

public **getFormatter** ()

Returns the internal formatter

public **logInternal** (*mixed* \$message, *mixed* \$type, *mixed* \$time, *array* \$context)

Writes the log to the stream itself

public **close** ()

Closes the logger

public **setLogLevel** (*mixed* \$level) inherited from *Phalcon\Logger\Adapter*

Filters the logs sent to the handlers that are less or equal than a specific level

public **getLogLevel** () inherited from *Phalcon\Logger\Adapter*

Returns the current log level

public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter) inherited from *Phalcon\Logger\Adapter*

Sets the message formatter

public **begin** () inherited from *Phalcon\Logger\Adapter*

Starts a transaction

public **commit** () inherited from *Phalcon\Logger\Adapter*

Commits the internal transaction

public **rollback** () inherited from *Phalcon\Logger\Adapter*

Rollbacks the internal transaction

public **isTransaction** () inherited from *Phalcon\Logger\Adapter*

Returns the whether the logger is currently in an active transaction or not

public **critical** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an alert message to the log

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Logs messages to the internal logger. Appends logs to the logger

Class *Phalcon\Logger\Adapter\Stream*

extends abstract class *Phalcon\Logger\Adapter*

implements *Phalcon\Logger\AdapterInterface*

Sends logs to a valid PHP stream

```
<?php

use Phalcon\Logger;
use Phalcon\Logger\Adapter\Stream;

$logger = new Stream("php://stderr");

$logger->log("This is a message");
$logger->log(Logger::ERROR, "This is an error");
$logger->error("This is another error");
```

Methods

public **__construct** (*string* \$name, [*array* \$options])

Phalcon\Logger\Adapter\Stream constructor

public **getFormatter** ()

Returns the internal formatter

public **logInternal** (*mixed* \$message, *mixed* \$type, *mixed* \$time, *array* \$context)

Writes the log to the stream itself

public **close** ()

Closes the logger

public **setLogLevel** (*mixed* \$level) inherited from *Phalcon\Logger\Adapter*

Filters the logs sent to the handlers that are less or equal than a specific level

public **getLogLevel** () inherited from *Phalcon\Logger\Adapter*

Returns the current log level

public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter) inherited from *Phalcon\Logger\Adapter*

Sets the message formatter

public **begin** () inherited from *Phalcon\Logger\Adapter*

Starts a transaction

public **commit** () inherited from *Phalcon\Logger\Adapter*

Commits the internal transaction

public **rollback** () inherited from *Phalcon\Logger\Adapter*

Rollbacks the internal transaction

public **isTransaction** () inherited from *Phalcon\Logger\Adapter*

Returns the whether the logger is currently in an active transaction or not

public **critical** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an alert message to the log

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Logs messages to the internal logger. Appends logs to the logger

Class Phalcon\Logger\Adapter\Syslog

extends abstract class *Phalcon\Logger\Adapter*

implements *Phalcon\Logger\AdapterInterface*

Sends logs to the system logger

```
<?php

use Phalcon\Logger;
use Phalcon\Logger\Adapter\Syslog;

// LOG_USER is the only valid log type under Windows operating systems
$logger = new Syslog(
    "ident",
    [
        "option" => LOG_CONS | LOG_NDELAY | LOG_PID,
        "facility" => LOG_USER,
    ]
);

$logger->log("This is a message");
$logger->log(Logger::ERROR, "This is an error");
$logger->error("This is another error");
```

Methods

public **__construct** (*string* \$name, [*array* \$options])

Phalcon\Logger\Adapter\Syslog constructor

public **getFormatter** ()

Returns the internal formatter

public **logInternal** (*mixed* \$message, *mixed* \$type, *mixed* \$time, *array* \$context)

Writes the log to the stream itself

public **close** ()

Closes the logger

public **setLogLevel** (*mixed* \$level) inherited from *Phalcon\Logger\Adapter*

Filters the logs sent to the handlers that are less or equal than a specific level

public **getLogLevel** () inherited from *Phalcon\Logger\Adapter*

Returns the current log level

public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter) inherited from *Phalcon\Logger\Adapter*

Sets the message formatter

public **begin** () inherited from *Phalcon\Logger\Adapter*

Starts a transaction

public **commit** () inherited from *Phalcon\Logger\Adapter*

Commits the internal transaction

public **rollback** () inherited from *Phalcon\Logger\Adapter*

Rollbacks the internal transaction

public **isTransaction** () inherited from *Phalcon\Logger\Adapter*

Returns the whether the logger is currently in an active transaction or not

public **critical** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Sends/Writes an alert message to the log

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context]) inherited from *Phalcon\Logger\Adapter*

Logs messages to the internal logger. Appends logs to the logger

Class **Phalcon\Logger\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Abstract class [Phalcon\Logger\Formatter](#)

implements [Phalcon\Logger\FormatterInterface](#)

This is a base class for logger formatters

Methods

public **getTypeString** (*mixed* \$type)

Returns the string meaning of a logger constant

public **interpolate** (*string* \$message, [*array* \$context])

Interpolates context values into the message placeholders

abstract public **format** (*mixed* \$message, *mixed* \$type, *mixed* \$timestamp, [*mixed* \$context]) inherited from *[Phalcon\Logger\FormatterInterface](#)*

...

Class `Phalcon\Logger\Formatter\Firephp`

extends abstract class `Phalcon\Logger\Formatter`

implements `Phalcon\Logger\FormatterInterface`

Formats messages so that they can be sent to FirePHP

Methods

public **getTypeString** (*mixed* \$type)

Returns the string meaning of a logger constant

public **setShowBacktrace** ([*mixed* \$isShow])

Returns the string meaning of a logger constant

public **getShowBacktrace** ()

Returns the string meaning of a logger constant

public **enableLabels** ([*mixed* \$isEnabled])

Returns the string meaning of a logger constant

public **labelsEnabled** ()

Returns the labels enabled

public *string* **format** (*string* \$message, *int* \$type, *int* \$timestamp, [*array* \$context])

Applies a format to a message before sending it to the log

public **interpolate** (*string* \$message, [*array* \$context]) inherited from `Phalcon\Logger\Formatter`

Interpolates context values into the message placeholders

Class `Phalcon\Logger\Formatter\Json`

extends abstract class `Phalcon\Logger\Formatter`

implements `Phalcon\Logger\FormatterInterface`

Formats messages using JSON encoding

Methods

public *string* **format** (*string* \$message, *int* \$type, *int* \$timestamp, [*array* \$context])

Applies a format to a message before sent it to the internal log

public **getTypeString** (*mixed* \$type) inherited from `Phalcon\Logger\Formatter`

Returns the string meaning of a logger constant

public **interpolate** (*string* \$message, [*array* \$context]) inherited from `Phalcon\Logger\Formatter`

Interpolates context values into the message placeholders

Class Phalcon\Logger\Formatter\Line

extends abstract class *Phalcon\Logger\Formatter*

implements *Phalcon\Logger\FormatterInterface*

Formats messages using an one-line string

Methods

public **getDateFormat** ()

Default date format

public **setDateFormat** (*mixed* \$dateFormat)

Default date format

public **getFormat** ()

Format applied to each message

public **setFormat** (*mixed* \$format)

Format applied to each message

public **__construct** ([*string* \$format], [*string* \$dateFormat])

Phalcon\Logger\Formatter\Line construct

public *string* **format** (*string* \$message, *int* \$type, *int* \$timestamp, [*array* \$context])

Applies a format to a message before sent it to the internal log

public **getTypeString** (*mixed* \$type) inherited from *Phalcon\Logger\Formatter*

Returns the string meaning of a logger constant

public **interpolate** (*string* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Formatter*

Interpolates context values into the message placeholders

Class Phalcon\Logger\Formatter\Syslog

extends abstract class *Phalcon\Logger\Formatter*

implements *Phalcon\Logger\FormatterInterface*

Prepares a message to be used in a Syslog backend

Methods

public *array* **format** (*string* \$message, *int* \$type, *int* \$timestamp, [*array* \$context])

Applies a format to a message before sent it to the internal log

public **getTypeString** (*mixed* \$type) inherited from *Phalcon\Logger\Formatter*

Returns the string meaning of a logger constant

public **interpolate** (*string* \$message, [*array* \$context]) inherited from *Phalcon\Logger\Formatter*

Interpolates context values into the message placeholders

Class Phalcon\Logger\Item

Represents each item in a logging transaction

Methods

public **getType** ()

Log type

public **getMessage** ()

Log message

public **getTime** ()

Log timestamp

public **getContext** ()

...

public **__construct** (*string* \$message, *integer* \$type, [*integer* \$time], [*array* \$context])

Phalcon\Logger\Item constructor

Class Phalcon\Logger\Multiple

Handles multiples logger handlers

Methods

public **getLoggers** ()

...

public **getFormatter** ()

...

public **getLogLevel** ()

...

public **push** (*Phalcon\Logger\AdapterInterface* \$logger)

Pushes a logger to the logger tail

public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter)

Sets a global formatter

public **setLogLevel** (*mixed* \$level)

Sets a global level

public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context])

Sends a message to each registered logger

public **critical** (*mixed* \$message, [*array* \$context])

Sends/Writes an critical message to the log

public **emergency** (*mixed* \$message, [*array* \$context])

Sends/Writes an emergency message to the log

public **debug** (*mixed* \$message, [*array* \$context])

Sends/Writes a debug message to the log

public **error** (*mixed* \$message, [*array* \$context])

Sends/Writes an error message to the log

public **info** (*mixed* \$message, [*array* \$context])

Sends/Writes an info message to the log

public **notice** (*mixed* \$message, [*array* \$context])

Sends/Writes a notice message to the log

public **warning** (*mixed* \$message, [*array* \$context])

Sends/Writes a warning message to the log

public **alert** (*mixed* \$message, [*array* \$context])

Sends/Writes an alert message to the log

Class Phalcon\Mvc\Application

extends abstract class *Phalcon\Application*

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Events\EventsAwareInterface*

This component encapsulates all the complex operations behind instantiating every component needed and integrating it with the rest to allow the MVC pattern to operate as desired.

```
<?php

use Phalcon\Mvc\Application;

class MyApp extends Application
{
    /**
     * Register the services here to make them general or register
     * in the ModuleDefinition to make them module-specific
     */
    protected function registerServices()
    {

    }

    /**
     * This method registers all the modules in the application
     */
    public function main()
    {
        $this->registerModules(
            [
                "frontend" => [
                    "className" => "Multiple\\Frontend\\Module",
                    "path"      => "../apps/frontend/Module.php",
                ],
            ],
        );
    }
}
```

```

        "backend" => [
            "className" => "Multiple\\Backend\\Module",
            "path"      => "../apps/backend/Module.php",
        ],
    ],
);
}
}

$application = new MyApp();

$application->main();

```

Methods

public **useImplicitView** (*mixed* \$implicitView)

By default. The view is implicitly buffering all the output You can full disable the view component using this method
public **handle** (*mixed* \$uri)

Handles a MVC request

public **__construct** ([*Phalcon\DiInterface* \$dependencyInjector]) inherited from *Phalcon\Application*

Phalcon\Application

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Application*

Sets the events manager

public **getEventManager** () inherited from *Phalcon\Application*

Returns the internal event manager

public **registerModules** (array \$modules, [*mixed* \$merge]) inherited from *Phalcon\Application*

Register an array of modules present in the application

```

<?php

$this->registerModules(
    [
        "frontend" => [
            "className" => "Multiple\\Frontend\\Module",
            "path"      => "../apps/frontend/Module.php",
        ],
        "backend" => [
            "className" => "Multiple\\Backend\\Module",
            "path"      => "../apps/backend/Module.php",
        ],
    ],
);

```

public **getModules** () inherited from *Phalcon\Application*

Return the modules registered in the application

public **getModule** (*mixed* \$name) inherited from *Phalcon\Application*

Gets the module definition registered in the application via module name

public **setDefaultModule** (*mixed* \$defaultModule) inherited from *Phalcon\Application*

Sets the module name to be used if the router doesn't return a valid module

public **getDefaultModule** () inherited from *Phalcon\Application*

Returns the default module name

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method __get

Class *Phalcon\Mvc\Application\Exception*

extends class *Phalcon\Application\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Abstract class **Phalcon\Mvc\Collection**

implements [Phalcon\Mvc\EntityInterface](#), [Phalcon\Mvc\CollectionInterface](#), [Phalcon\Di\InjectionAwareInterface](#), [Serializable](#)

This component implements a high level abstraction for NoSQL databases which works with documents

Constants

integer **OP_NONE**

integer **OP_CREATE**

integer **OP_UPDATE**

integer **OP_DELETE**

integer **DIRTY_STATE_PERSISTENT**

integer **DIRTY_STATE_TRANSIENT**

integer **DIRTY_STATE_DETACHED**

Methods

final public **__construct** ([[Phalcon\DiInterface](#) \$dependencyInjector], [[Phalcon\Mvc\Collection\ManagerInterface](#) \$modelsManager])

Phalcon\Mvc\Collection constructor

public **setId** (*mixed* \$id)

Sets a value for the `_id` property, creates a `MongoId` object if needed

public *MongoId* **getId** ()

Returns the value of the `_id` property

public **setDI** ([Phalcon\DiInterface](#) \$dependencyInjector)

Sets the dependency injection container

public **getDI** ()

Returns the dependency injection container

protected **setEventManager** ([Phalcon\Mvc\Collection\ManagerInterface](#) \$eventsManager)

Sets a custom events manager

protected **getEventManager** ()

Returns the custom events manager

public **getCollectionManager** ()

Returns the models manager related to the entity instance

public **getReservedAttributes** ()

Returns an array with reserved properties that cannot be part of the insert/update

protected **useImplicitObjectIds** (*mixed* \$useImplicitObjectIds)

Sets if a model must use implicit objects ids

protected **setSource** (*mixed* \$source)

Sets collection name which model should be mapped

public **getSource** ()

Returns collection name mapped in the model

public **setConnectionService** (*mixed* \$connectionService)

Sets the DependencyInjection connection service name

public **getConnectionService** ()

Returns DependencyInjection connection service

public *MongoDb* **getConnection** ()

Retrieves a database connection

public *mixed* **readAttribute** (*string* \$attribute)

Reads an attribute value by its name

```
<?php
echo $robot->readAttribute ("name") ;
```

public **writeAttribute** (*string* \$attribute, *mixed* \$value)

Writes an attribute value by its name

```
<?php
$robot->writeAttribute ("name", "Rosey") ;
```

public static **cloneResult** (*Phalcon\Mvc\CollectionInterface* \$collection, *array* \$document)

Returns a cloned collection

protected static *array* **getResultset** (*array* \$params, *Phalcon\Mvc\Collection* \$collection, *MongoDb* \$connection, *boolean* \$unique)

Returns a collection resultset

protected static *int* **getGroupResultset** (*array* \$params, *Phalcon\Mvc\Collection* \$collection, *MongoDb* \$connection)

Perform a count over a resultset

final protected *boolean* **_preSave** (*Phalcon\DiInterface* \$dependencyInjector, *boolean* \$disableEvents, *boolean* \$exists)

Executes internal hooks before save a document

final protected **_postSave** (*mixed* \$disableEvents, *mixed* \$success, *mixed* \$exists)

Executes internal events after save a document

protected **validate** (*mixed* \$validator)

Executes validators on every validation call

```

<?php

use Phalcon\Mvc\Model\Validator\ExclusionIn as ExclusionIn;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        // Old, deprecated syntax, use new one below
        $this->validate(
            new ExclusionIn(
                [
                    "field" => "status",
                    "domain" => ["A", "I"],
                ]
            )
        );

        if ($this->validationHasFailed() == true) {
            return false;
        }
    }
}

```

```

<?php

use Phalcon\Validation\Validator\ExclusionIn as ExclusionIn;
use Phalcon\Validation;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $validator = new Validation();
        $validator->add("status",
            new ExclusionIn(
                [
                    "domain" => ["A", "I"]
                ]
            )
        );

        return $this->validate($validator);
    }
}

```

public validationHasFailed ()

Check whether validation process has generated any messages

```

<?php

use Phalcon\Mvc\Model\Validator\ExclusionIn as ExclusionIn;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {

```

```
        $this->validate(
            new ExclusionIn(
                [
                    "field" => "status",
                    "domain" => ["A", "I"],
                ]
            )
        );

        if ($this->validationHasFailed() == true) {
            return false;
        }
    }
}
```

public **fireEvent** (*mixed* \$eventName)

Fires an internal event

public **fireEventCancel** (*mixed* \$eventName)

Fires an internal event that cancels the operation

protected **_cancelOperation** (*mixed* \$disableEvents)

Cancel the current operation

protected *boolean* **_exists** (*MongoCollection* \$collection)

Checks if the document exists in the collection

public **getMessages** ()

Returns all the validation messages

```
<?php

$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

if ($robot->save() === false) {
    echo "Umh, We can't store robots right now ";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo $message;
    }
} else {
    echo "Great, a new robot was saved successfully!";
}
```

public **appendMessage** (*Phalcon\Mvc\Model\MessageInterface* \$message)

Appends a customized message on the validation process

```
<?php
```

```

use \Phalcon\Mvc\Model\Message as Message;

class Robots extends \Phalcon\Mvc\Model
{
    public function beforeSave()
    {
        if ($this->name === "Peter") {
            $message = new Message(
                "Sorry, but a robot cannot be named Peter"
            );

            $this->appendMessage($message);
        }
    }
}

```

protected **prepareCU** ()

Shared Code for CU Operations Prepares Collection

public **save** ()

Creates/Updates a collection based on the values in the attributes

public **create** ()

Creates a collection based on the values in the attributes

public **createIfNotExist** (array \$criteria)

Creates a document based on the values in the attributes, if not found by criteria Preferred way to avoid duplication is to create index on attribute

```

<?php

$robot = new Robot();

$robot->name = "MyRobot";
$robot->type = "Droid";

// Create only if robot with same name and type does not exist
$robot->createIfNotExist(
    [
        "name",
        "type",
    ]
);

```

public **update** ()

Creates/Updates a collection based on the values in the attributes

public static **findById** (mixed \$id)

Find a document by its id (_id)

```

<?php

// Find user by using \MongoId object
$user = Users::findById(
    new \MongoId("545eb081631d16153a293a66")
);

```

```
);

// Find user by using id as sting
$user = Users::findById("45cbc4a0e4123f6920000002");

// Validate input
if ($user = Users::findById($_POST["id"])) {
    // ...
}
```

public static **findFirst** ([array \$parameters])

Allows to query the first record that match the specified conditions

```
<?php

// What's the first robot in the robots table?
$robot = Robots::findFirst();

echo "The robot name is ", $robot->name, "\n";

// What's the first mechanical robot in robots table?
$robot = Robots::findFirst(
    [
        [
            "type" => "mechanical",
        ]
    ]
);

echo "The first mechanical robot name is ", $robot->name, "\n";

// Get first virtual robot ordered by name
$robot = Robots::findFirst(
    [
        [
            "type" => "mechanical",
        ],
        "order" => [
            "name" => 1,
        ],
    ]
);

echo "The first virtual robot name is ", $robot->name, "\n";

// Get first robot by id (_id)
$robot = Robots::findFirst(
    [
        [
            "_id" => new \MongoId("45cbc4a0e4123f6920000002"),
        ]
    ]
);

echo "The robot id is ", $robot->_id, "\n";
```

public static **find** ([array \$parameters])

Allows to query a set of records that match the specified conditions

```
<?php

// How many robots are there?
$robots = Robots::find();

echo "There are ", count($robots), "\n";

// How many mechanical robots are there?
$robots = Robots::find(
    [
        [
            "type" => "mechanical",
        ]
    ]
);

echo "There are ", count($robots), "\n";

// Get and print virtual robots ordered by name
$robots = Robots::findFirst(
    [
        [
            "type" => "virtual"
        ],
        "order" => [
            "name" => 1,
        ]
    ]
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}

// Get first 100 virtual robots ordered by name
$robots = Robots::find(
    [
        [
            "type" => "virtual",
        ],
        "order" => [
            "name" => 1,
        ],
        "limit" => 100,
    ]
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

public static **count** ([array \$parameters])

Perform a count over a collection

```
<?php
```

```
echo "There are ", Robots::count(), " robots";
```

public static **aggregate** ([array \$parameters])

Perform an aggregation using the Mongo aggregation framework

public static **summatory** (*mixed* \$field, [*mixed* \$conditions], [*mixed* \$finalize])

Allows to perform a summatory group for a column in the collection

public **delete** ()

Deletes a model instance. Returning true on success or false otherwise.

```
<?php

$robot = Robots::findFirst();

$robot->delete();

$robots = Robots::find();

foreach ($robots as $robot) {
    $robot->delete();
}
```

public **setDirtyState** (*mixed* \$dirtyState)

Sets the dirty state of the object using one of the DIRTY_STATE_* constants

public **getDirtyState** ()

Returns one of the DIRTY_STATE_* constants telling if the document exists in the collection or not

protected **addBehavior** (*Phalcon\Mvc\Collection\BehaviorInterface* \$behavior)

Sets up a behavior in a collection

public **skipOperation** (*mixed* \$skip)

Skips the current operation forcing a success state

public **toArray** ()

Returns the instance as an array representation

```
<?php

print_r(
    $robot->toArray()
);
```

public **serialize** ()

Serializes the object ignoring connections or protected properties

public **unserialize** (*mixed* \$data)

Unserializes the object from a serialized string

Abstract class **Phalcon\Mvc\Collection\Behavior**

implements *Phalcon\Mvc\Collection\BehaviorInterface*

This is an optional base class for ORM behaviors

Methods

public **__construct** ([array \$options])

protected **mustTakeAction** (mixed \$eventName)

Checks whether the behavior must take action on certain event

protected array **getOptions** ([string \$eventName])

Returns the behavior options related to an event

public **notify** (mixed \$type, *Phalcon\Mvc\CollectionInterface* \$model)

This method receives the notifications from the EventsManager

public **missingMethod** (*Phalcon\Mvc\CollectionInterface* \$model, mixed \$method, [mixed \$arguments])

Acts as fallbacks when a missing method is called on the collection

Class *Phalcon\Mvc\Collection\Behavior\SoftDelete*

extends abstract class *Phalcon\Mvc\Collection\Behavior*

implements *Phalcon\Mvc\Collection\BehaviorInterface*

Instead of permanently delete a record it marks the record as deleted changing the value of a flag column

Methods

public **notify** (mixed \$type, *Phalcon\Mvc\CollectionInterface* \$model)

Listens for notifications from the models manager

public **__construct** ([array \$options]) inherited from *Phalcon\Mvc\Collection\Behavior*

Phalcon\Mvc\Collection\Behavior

protected **mustTakeAction** (mixed \$eventName) inherited from *Phalcon\Mvc\Collection\Behavior*

Checks whether the behavior must take action on certain event

protected array **getOptions** ([string \$eventName]) inherited from *Phalcon\Mvc\Collection\Behavior*

Returns the behavior options related to an event

public **missingMethod** (*Phalcon\Mvc\CollectionInterface* \$model, mixed \$method, [mixed \$arguments]) inherited from *Phalcon\Mvc\Collection\Behavior*

Acts as fallbacks when a missing method is called on the collection

Class *Phalcon\Mvc\Collection\Behavior\Timestampable*

extends abstract class *Phalcon\Mvc\Collection\Behavior*

implements *Phalcon\Mvc\Collection\BehaviorInterface*

Allows to automatically update a model's attribute saving the datetime when a record is created or updated

Methods

public **notify** (*mixed* \$type, *Phalcon\Mvc\CollectionInterface* \$model)

Listens for notifications from the models manager

public **__construct** ([*array* \$options]) inherited from *Phalcon\Mvc\Collection\Behavior*

Phalcon\Mvc\Collection\Behavior

protected **mustTakeAction** (*mixed* \$eventName) inherited from *Phalcon\Mvc\Collection\Behavior*

Checks whether the behavior must take action on certain event

protected *array* **getOptions** ([*string* \$eventName]) inherited from *Phalcon\Mvc\Collection\Behavior*

Returns the behavior options related to an event

public **missingMethod** (*Phalcon\Mvc\CollectionInterface* \$model, *mixed* \$method, [*mixed* \$arguments]) inherited from *Phalcon\Mvc\Collection\Behavior*

Acts as fallbacks when a missing method is called on the collection

Class *Phalcon\Mvc\Collection\Document*

implements *Phalcon\Mvc\EntityInterface*, *ArrayAccess*

This component allows *Phalcon\Mvc\Collection* to return rows without an associated entity. This objects implements the *ArrayAccess* interface to allow access the object as `object->x` or `array[x]`.

Methods

public *boolean* **offsetExists** (*int* \$index)

Checks whether an offset exists in the document

public **offsetGet** (*mixed* \$index)

Returns the value of a field using the *ArrayAccess* interface

public **offsetSet** (*mixed* \$index, *mixed* \$value)

Change a value using the *ArrayAccess* interface

public **offsetUnset** (*string* \$offset)

Rows cannot be changed. It has only been implemented to meet the definition of the *ArrayAccess* interface

public *mixed* **readAttribute** (*string* \$attribute)

Reads an attribute value by its name

```
<?php
echo $robot->readAttribute("name");
```

public **writeAttribute** (*string* \$attribute, *mixed* \$value)

Writes an attribute value by its name

```
<?php
$robot->writeAttribute("name", "Rosey");
```

public array **toArray** ()

Returns the instance as an array representation

Class **Phalcon\Mvc\Collection\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Mvc\Collection\Manager

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Events\EventsAwareInterface*

This components controls the initialization of models, keeping record of relations between the different models of the application.

A CollectionManager is injected to a model via a Dependency Injector Container such as Phalcon\Di.

```
<?php

$di = new \Phalcon\Di();

$di->set(
    "collectionManager",
    function () {
        return new \Phalcon\Mvc\Collection\Manager();
    }
);

$robot = new Robots($di);
```

Methods

public **getServiceName** ()

...

public **setServiceName** (*mixed* \$serviceName)

...

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **setEventsManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the event manager

public **getEventsManager** ()

Returns the internal event manager

public **setCustomEventsManager** (*Phalcon\Mvc\CollectionInterface* \$model, *Phalcon\Events\ManagerInterface* \$eventsManager)

Sets a custom events manager for a specific model

public **getCustomEventsManager** (*Phalcon\Mvc\CollectionInterface* \$model)

Returns a custom events manager related to a model

public **initialize** (*Phalcon\Mvc\CollectionInterface* \$model)

Initializes a model in the models manager

public **isInitialized** (*mixed* \$modelName)

Check whether a model is already initialized

public **getLastInitialized** ()

Get the latest initialized model

public **setConnectionService** (*Phalcon\Mvc\CollectionInterface* \$model, *mixed* \$connectionService)

Sets a connection service for a specific model

public **getConnectionService** (*Phalcon\Mvc\CollectionInterface* \$model)

Gets a connection service for a specific model

public **useImplicitObjectIds** (*Phalcon\Mvc\CollectionInterface* \$model, *mixed* \$useImplicitObjectIds)

Sets whether a model must use implicit objects ids

public **isUsingImplicitObjectIds** (*Phalcon\Mvc\CollectionInterface* \$model)

Checks if a model is using implicit object ids

public *Mongo* **getConnection** (*Phalcon\Mvc\CollectionInterface* \$model)

Returns the connection related to a model

public **notifyEvent** (*mixed* \$eventName, *Phalcon\Mvc\CollectionInterface* \$model)

Receives events generated in the models and dispatches them to an events-manager if available Notify the behaviors that are listening in the model

public **missingMethod** (*Phalcon\Mvc\CollectionInterface* \$model, *mixed* \$eventName, *mixed* \$data)

Dispatch an event to the listeners and behaviors This method expects that the endpoint listeners/behaviors returns true meaning that at least one was implemented

public **addBehavior** (*Phalcon\Mvc\CollectionInterface* \$model, *Phalcon\Mvc\Collection\BehaviorInterface* \$behavior)

Binds a behavior to a model

Abstract class **Phalcon\Mvc\Controller**

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Mvc\ControllerInterface*

Every application controller should extend this class that encapsulates all the controller functionality

The controllers provide the “flow” between models and views. Controllers are responsible for processing the incoming requests from the web browser, interrogating the models for data, and passing that data on to the views for presentation.

```
<?php
<?php

class PeopleController extends \Phalcon\Mvc\Controller
{
    // This action will be executed by default
    public function indexAction()
    {

    }

    public function findAction()
```

```
{  
  
}  
  
public function saveAction()  
{  
    // Forwards flow to the index action  
    return $this->dispatcher->forward(  
        [  
            "controller" => "people",  
            "action"      => "index",  
        ]  
    );  
}  
}
```

Methods

final public **__construct** ()

Phalcon\Mvc\Controller constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\DiInjectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\DiInjectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\DiInjectable*

Returns the internal event manager

public **__get** (mixed \$propertyName) inherited from *Phalcon\DiInjectable*

Magic method __get

Class Phalcon\Mvc\Dispatcher

extends abstract class *Phalcon\Dispatcher*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\DiInjectionAwareInterface*, *Phalcon\DispatcherInterface*, *Phalcon\Mvc\DispatcherInterface*

Dispatching is the process of taking the request object, extracting the module name, controller name, action name, and optional parameters contained in it, and then instantiating a controller and calling an action of that controller.

```
<?php  
  
$di = new \Phalcon\Di();  
  
$dispatcher = new \Phalcon\Mvc\Dispatcher();
```

```
$dispatcher->setDI ($di);

$dispatcher->setControllerName ("posts");
$dispatcher->setActionName ("index");
$dispatcher->setParams ( [] );

$controller = $dispatcher->dispatch ();
```

Constants

integer **EXCEPTION_NO_DI**

integer **EXCEPTION_CYCLIC_ROUTING**

integer **EXCEPTION_HANDLER_NOT_FOUND**

integer **EXCEPTION_INVALID_HANDLER**

integer **EXCEPTION_INVALID_PARAMS**

integer **EXCEPTION_ACTION_NOT_FOUND**

Methods

public **setControllerSuffix** (*mixed* \$controllerSuffix)

Sets the default controller suffix

public **setDefaultController** (*mixed* \$controllerName)

Sets the default controller name

public **setControllerName** (*mixed* \$controllerName)

Sets the controller name to be dispatched

public **getControllerName** ()

Gets last dispatched controller name

public **getPreviousNamespaceName** ()

Gets previous dispatched namespace name

public **getPreviousControllerName** ()

Gets previous dispatched controller name

public **getPreviousActionName** ()

Gets previous dispatched action name

protected **_throwDispatchException** (*mixed* \$message, [*mixed* \$exceptionCode])

Throws an internal exception

protected **_handleException** ([Exception](#) \$exception)

Handles a user exception

public **getControllerClass** ()

Possible controller class name that will be located to dispatch the request

public **getLastController** ()

Returns the latest dispatched controller

public **getActiveController** ()

Returns the active controller in the dispatcher

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Dispatcher*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Dispatcher*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Dispatcher*

Sets the events manager

public **getEventManager** () inherited from *Phalcon\Dispatcher*

Returns the internal event manager

public **setActionSuffix** (*mixed* \$actionSuffix) inherited from *Phalcon\Dispatcher*

Sets the default action suffix

public **getActionSuffix** () inherited from *Phalcon\Dispatcher*

Gets the default action suffix

public **setModuleName** (*mixed* \$moduleName) inherited from *Phalcon\Dispatcher*

Sets the module where the controller is (only informative)

public **getModuleName** () inherited from *Phalcon\Dispatcher*

Gets the module where the controller class is

public **setNamespaceName** (*mixed* \$namespaceName) inherited from *Phalcon\Dispatcher*

Sets the namespace where the controller class is

public **getNamespaceName** () inherited from *Phalcon\Dispatcher*

Gets a namespace to be prepended to the current handler name

public **setDefaultNamespace** (*mixed* \$namespaceName) inherited from *Phalcon\Dispatcher*

Sets the default namespace

public **getDefaultNamespace** () inherited from *Phalcon\Dispatcher*

Returns the default namespace

public **setDefaultAction** (*mixed* \$actionName) inherited from *Phalcon\Dispatcher*

Sets the default action name

public **setActionName** (*mixed* \$actionName) inherited from *Phalcon\Dispatcher*

Sets the action name to be dispatched

public **getActionName** () inherited from *Phalcon\Dispatcher*

Gets the latest dispatched action name

public **setParams** (*array* \$params) inherited from *Phalcon\Dispatcher*

Sets action params to be dispatched

public **getParams** () inherited from *Phalcon\Dispatcher*

Gets action params

public **setParam** (*mixed* \$param, *mixed* \$value) inherited from *Phalcon\Dispatcher*

Set a param by its name or numeric index

public *mixed* **getParam** (*mixed* \$param, [*string* | *array* \$filters], [*mixed* \$defaultValue]) inherited from *Phalcon\Dispatcher*

Gets a param by its name or numeric index

public *boolean* **hasParam** (*mixed* \$param) inherited from *Phalcon\Dispatcher*

Check if a param exists

public **getActiveMethod** () inherited from *Phalcon\Dispatcher*

Returns the current method to be/executed in the dispatcher

public **isFinished** () inherited from *Phalcon\Dispatcher*

Checks if the dispatch loop is finished or has more pendent controllers/tasks to dispatch

public **setReturnedValue** (*mixed* \$value) inherited from *Phalcon\Dispatcher*

Sets the latest returned value by an action manually

public *mixed* **getReturnedValue** () inherited from *Phalcon\Dispatcher*

Returns value returned by the latest dispatched action

public **setModelBinding** (*mixed* \$value, [*mixed* \$cache]) inherited from *Phalcon\Dispatcher*

Enable/Disable model binding during dispatch

```
<?php
$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinding(true, 'cache');
    return $dispatcher;
});
```

public **setModelBinder** (Phalcon\Mvc\Model\BinderInterface \$modelBinder, [*mixed* \$cache]) inherited from *Phalcon\Dispatcher*

Enable model binding during dispatch

```
<?php
$di->set('dispatcher', function() {
    $dispatcher = new Dispatcher();

    $dispatcher->setModelBinder(new Binder(), 'cache');
    return $dispatcher;
});
```

public **getModelBinder** () inherited from *Phalcon\Dispatcher*

Gets model binder

public *object* **dispatch** () inherited from *Phalcon\Dispatcher*

Dispatches a handle action taking into account the routing parameters

protected *object* **_dispatch** () inherited from *Phalcon\Dispatcher*

Dispatches a handle action taking into account the routing parameters

public **forward** (*array* \$forward) inherited from *Phalcon\Dispatcher*

Forwards the execution flow to another controller/action Dispatchers are unique per module. Forwarding between modules is not allowed

```
<?php

$this->dispatcher->forward(
    [
        "controller" => "posts",
        "action"      => "index",
    ]
);
```

public **wasForwarded** () inherited from *Phalcon\Dispatcher*

Check if the current executed action was forwarded by another one

public **getHandlerClass** () inherited from *Phalcon\Dispatcher*

Possible class name that will be located to dispatch the request

public **callActionMethod** (*mixed* \$handler, *mixed* \$actionMethod, [*array* \$params]) inherited from *Phalcon\Dispatcher*

...

public **getBoundModels** () inherited from *Phalcon\Dispatcher*

Returns bound models from binder instance

```
<?php

class UserController extends Controller
{
    public function showAction(User $user)
    {
        $boundModels = $this->dispatcher->getBoundModels(); // return array with $user
    }
}
```

protected **_resolveEmptyProperties** () inherited from *Phalcon\Dispatcher*

Set empty properties to their defaults (where defaults are available)

Class *Phalcon\Mvc\Dispatcher\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class *Phalcon\Mvc\Micro*

extends abstract class *Phalcon\DI\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\DI\InjectionAwareInterface*, *ArrayAccess*

With Phalcon you can create “Micro-Framework like” applications. By doing this, you only need to write a minimal amount of code to create a PHP application. Micro applications are suitable to small applications, APIs and prototypes in a practical way.

```
<?php

$app = new \Phalcon\Mvc\Micro();

$app->get (
    "/say/welcome/{name}",
    function ($name) {
        echo "<h1>Welcome $name!</h1>";
    }
);

$app->handle();
```

Methods

public **__construct** ([*Phalcon\DiInterface* \$dependencyInjector])

Phalcon\Mvc\Micro constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public *Phalcon\Mvc\Router\RouteInterface* **map** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler without any HTTP method constraint

public *Phalcon\Mvc\Router\RouteInterface* **get** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is GET

public *Phalcon\Mvc\Router\RouteInterface* **post** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is POST

public *Phalcon\Mvc\Router\RouteInterface* **put** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is PUT

public *Phalcon\Mvc\Router\RouteInterface* **patch** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is PATCH

public *Phalcon\Mvc\Router\RouteInterface* **head** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is HEAD

public *Phalcon\Mvc\Router\RouteInterface* **delete** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is DELETE

public *Phalcon\Mvc\Router\RouteInterface* **options** (*string* \$routePattern, *callable* \$handler)

Maps a route to a handler that only matches if the HTTP method is OPTIONS

public **mount** (*Phalcon\Mvc\Micro\CollectionInterface* \$collection)

Mounts a collection of handlers

public *Phalcon\Mvc\Micro* **notFound** (*callable* \$handler)

Sets a handler that will be called when the router doesn't match any of the defined routes

public *Phalcon\Mvc\Micro* **error** (*callable* \$handler)

Sets a handler that will be called when an exception is thrown handling the route

public **getRouter** ()

Returns the internal router used by the application

public *Phalcon\DI\ServiceInterface* **setService** (*string* \$serviceName, *mixed* \$definition, [*boolean* \$shared])

Sets a service from the DI

public **hasService** (*mixed* \$serviceName)

Checks if a service is registered in the DI

public *object* **getService** (*string* \$serviceName)

Obtains a service from the DI

public *mixed* **getSharedService** (*string* \$serviceName)

Obtains a shared service from the DI

public *mixed* **handle** ([*string* \$uri])

Handle the whole request

public **stop** ()

Stops the middleware execution avoiding than other middlewares be executed

public **setActiveHandler** (*callable* \$activeHandler)

Sets externally the handler that must be called by the matched route

public *callable* **getActiveHandler** ()

Return the handler that will be called for the matched route

public *mixed* **getReturnedValue** ()

Returns the value returned by the executed handler

public *boolean* **offsetExists** (*string* \$alias)

Check if a service is registered in the internal services container using the array syntax

public **offsetSet** (*string* \$alias, *mixed* \$definition)

Allows to register a shared service in the internal services container using the array syntax

```
<?php
$app["request"] = new \Phalcon\Http\Request();
```

public *mixed* **offsetGet** (*string* \$alias)

Allows to obtain a shared service in the internal services container using the array syntax

```
<?php
var_dump(
    $app["request"]
);
```

public **offsetUnset** (*string* \$alias)

Removes a service from the internal services container using the array syntax

public *Phalcon\Mvc\Micro* **before** (*callable* \$handler)

Appends a before middleware to be called before execute the route

public *Phalcon\Mvc\Micro* **afterBinding** (*callable* \$handler)

Appends a afterBinding middleware to be called after model binding

public *Phalcon\Mvc\Micro* **after** (*callable* \$handler)

Appends an ‘after’ middleware to be called after execute the route

public *Phalcon\Mvc\Micro* **finish** (*callable* \$handler)

Appends a ‘finish’ middleware to be called when the request is finished

public **getHandlers** ()

Returns the internal handlers attached to the application

public **getModelBinder** ()

Gets model binder

public **setModelBinder** (Phalcon\Mvc\Model\BinderInterface \$modelBinder, [*mixed* \$cache])

Sets model binder

```
<?php
$micro = new Micro($di);
$micro->setModelBinder(new Binder(), 'cache');
```

public **getBoundModels** ()

Returns bound models from binder instance

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (Phalcon\Events\ManagerInterface \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method __get

Class Phalcon\Mvc\Micro\Collection

implements *Phalcon\Mvc\Micro\CollectionInterface*

Groups Micro-Mvc handlers as controllers

```
<?php
$app = new \Phalcon\Mvc\Micro();

$collection = new Collection();

$collection->setHandler(
    new PostsController()
);

$collection->get("/posts/edit/{id}", "edit");

$app->mount($collection);
```

Methods

protected **_addMap** (*string* | *array* \$method, *string* \$routePattern, *mixed* \$handler, *string* \$name)

Internal function to add a handler to the group

public **setPrefix** (*mixed* \$prefix)

Sets a prefix for all routes added to the collection

public **getPrefix** ()

Returns the collection prefix if any

public *array* **getHandlers** ()

Returns the registered handlers

public *Phalcon\Mvc\Micro\Collection* **setHandler** (*mixed* \$handler, [*boolean* \$lazy])

Sets the main handler

public **setLazy** (*mixed* \$lazy)

Sets if the main handler must be lazy loaded

public **isLazy** ()

Returns if the main handler must be lazy loaded

public *mixed* **getHandler** ()

Returns the main handler

public *Phalcon\Mvc\Micro\Collection* **map** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler

public *Phalcon\Mvc\Micro\Collection* **get** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is GET

public *Phalcon\Mvc\Micro\Collection* **post** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is POST

public *Phalcon\Mvc\Micro\Collection* **put** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is PUT

public *Phalcon\Mvc\Micro\Collection* **patch** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is PATCH

public *Phalcon\Mvc\Micro\Collection* **head** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is HEAD

public *Phalcon\Mvc\Micro\Collection* **delete** (*string* \$routePattern, *callable* \$handler, [*string* \$name])

Maps a route to a handler that only matches if the HTTP method is DELETE

public *Phalcon\Mvc\Micro\Collection* **options** (*string* \$routePattern, *callable* \$handler, [*mixed* \$name])

Maps a route to a handler that only matches if the HTTP method is OPTIONS

Class *Phalcon\Mvc\Micro\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Mvc\Micro\LazyLoader](#)

Lazy-Load of handlers for Mvc\Micro using auto-loading

Methods

public **getDefinition** ()

...

public **__construct** (*mixed* \$definition)

[Phalcon\Mvc\Micro\LazyLoader](#) constructor

public *mixed* **__call** (*string* \$method, *array* \$arguments)

Initializes the internal handler, calling functions on it

public *mixed* **callMethod** (*string* \$method, *array* \$arguments, [[Phalcon\Mvc\Model\BinderInterface](#) \$modelBinder])

Calling `__call` method

Abstract class `Phalcon\Mvc\Model`

implements `Phalcon\Mvc\EntityInterface`, `Phalcon\Mvc\ModelInterface`, `Phalcon\Mvc\Model\ResultInterface`, `Phalcon\Di\InjectionAwareInterface`, `Serializable`, `JsonSerializable`

`Phalcon\Mvc\Model` connects business objects and database tables to create a persistable domain model where logic and data are presented in one wrapping. It's an implementation of the object-relational mapping (ORM).

A model represents the information (data) of the application and the rules to manipulate that data. Models are primarily used for managing the rules of interaction with a corresponding database table. In most cases, each table in your database will correspond to one model in your application. The bulk of your application's business logic will be concentrated in the models.

`Phalcon\Mvc\Model` is the first ORM written in Zephir/C languages for PHP, giving to developers high performance when interacting with databases while is also easy to use.

```
<?php

$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

if ($robot->save() === false) {
    echo "Umh, We can store robots: ";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo message;
    }
} else {
    echo "Great, a new robot was saved successfully!";
}
```

Constants

integer `OP_NONE`

integer `OP_CREATE`

integer `OP_UPDATE`

integer `OP_DELETE`

integer `DIRTY_STATE_PERSISTENT`

integer `DIRTY_STATE_TRANSIENT`

integer `DIRTY_STATE_DETACHED`

Methods

final public **__construct** ([mixed \$data], [Phalcon\DiInterface \$dependencyInjector], [Phalcon\Mvc\Model\ManagerInterface \$modelsManager])

Phalcon\Mvc\Model constructor

public **setDI** (Phalcon\DiInterface \$dependencyInjector)

Sets the dependency injection container

public **getDI** ()

Returns the dependency injection container

protected **setEventsManager** (Phalcon\Events\ManagerInterface \$eventsManager)

Sets a custom events manager

protected **getEventsManager** ()

Returns the custom events manager

public **getModelsMetaData** ()

Returns the models meta-data service related to the entity instance

public **getModelsManager** ()

Returns the models manager related to the entity instance

public **setTransaction** (Phalcon\Mvc\Model\TransactionInterface \$transaction)

Sets a transaction related to the Model instance

```
<?php

use Phalcon\Mvc\Model\Transaction\Manager as TxManager;
use Phalcon\Mvc\Model\Transaction\Failed as TxFailed;

try {
    $txManager = new TxManager();

    $transaction = $txManager->get();

    $robot = new Robots();

    $robot->setTransaction($transaction);

    $robot->name          = "WALL·E";
    $robot->created_at    = date("Y-m-d");

    if ($robot->save() === false) {
        $transaction->rollback("Can't save robot");
    }

    $robotPart = new RobotParts();

    $robotPart->setTransaction($transaction);

    $robotPart->type = "head";

    if ($robotPart->save() === false) {
```

```

        $transaction->rollback("Robot part cannot be saved");
    }

    $transaction->commit();
} catch (TxFailed $e) {
    echo "Failed, reason: ", $e->getMessage();
}

```

protected **setSource** (*mixed* \$source)

Sets the table name to which model should be mapped

public **getSource** ()

Returns the table name mapped in the model

protected **setSchema** (*mixed* \$schema)

Sets schema name where the mapped table is located

public **getSchema** ()

Returns schema name where the mapped table is located

public **setConnectionService** (*mixed* \$connectionService)

Sets the DependencyInjection connection service name

public **setReadConnectionService** (*mixed* \$connectionService)

Sets the DependencyInjection connection service name used to read data

public **setWriteConnectionService** (*mixed* \$connectionService)

Sets the DependencyInjection connection service name used to write data

public **getReadConnectionService** ()

Returns the DependencyInjection connection service name used to read data related the model

public **getWriteConnectionService** ()

Returns the DependencyInjection connection service name used to write data related to the model

public **setDirtyState** (*mixed* \$dirtyState)

Sets the dirty state of the object using one of the DIRTY_STATE_* constants

public **getDirtyState** ()

Returns one of the DIRTY_STATE_* constants telling if the record exists in the database or not

public **getReadConnection** ()

Gets the connection used to read data for the model

public **getWriteConnection** ()

Gets the connection used to write data to the model

public *Phalcon\Mvc\Model* **assign** (array \$data, [*mixed* \$dataColumnMap], [array \$whiteList])

Assigns values to a model from an array

```

<?php
$robot->assign(
    [

```

```
        "type" => "mechanical",
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);

// Assign by db row, column map needed
$robot->assign(
    $dbRow,
    [
        "db_type" => "type",
        "db_name" => "name",
        "db_year" => "year",
    ]
);

// Allow assign only name and year
$robot->assign(
    $_POST,
    null,
    [
        "name",
        "year",
    ]
);
```

public static **cloneResultMap** (*Phalcon\Mvc\ModelInterface* | *Phalcon\Mvc\Model\Row* \$base, array \$data, array \$columnMap, [int \$dirtyState], [boolean \$keepSnapshots])

Assigns values to a model from an array, returning a new model.

```
<?php

$robot = \Phalcon\Mvc\Model::cloneResultMap(
    new Robots(),
    [
        "type" => "mechanical",
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);
```

public static *mixed* **cloneResultMapHydrate** (array \$data, array \$columnMap, int \$hydrationMode)

Returns an hydrated result based on the data and the column map

public static *Phalcon\Mvc\ModelInterface* **cloneResult** (*Phalcon\Mvc\ModelInterface* \$base, array \$data, [int \$dirtyState])

Assigns values to a model from an array returning a new model

```
<?php

$robot = Phalcon\Mvc\Model::cloneResult(
    new Robots(),
    [
        "type" => "mechanical",
        "name" => "Astro Boy",
        "year" => 1952,
```

```
    ]
);
```

public static **find** ([mixed \$parameters])

Query for a set of records that match the specified conditions

```
<?php

// How many robots are there?
$robots = Robots::find();

echo "There are ", count($robots), "\n";

// How many mechanical robots are there?
$robots = Robots::find(
    "type = 'mechanical'"
);

echo "There are ", count($robots), "\n";

// Get and print virtual robots ordered by name
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
    ]
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}

// Get first 100 virtual robots ordered by name
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
        "limit" => 100,
    ]
);

foreach ($robots as $robot) {
    echo $robot->name, "\n";
}
```

public static *static* **findFirst** ([string | array \$parameters])

Query the first record that matches the specified conditions

```
<?php

// What's the first robot in robots table?
$robot = Robots::findFirst();

echo "The robot name is ", $robot->name;

// What's the first mechanical robot in robots table?
$robot = Robots::findFirst(
```

```
        "type = 'mechanical'"
    );

    echo "The first mechanical robot name is ", $robot->name;

    // Get first virtual robot ordered by name
    $robot = Robots::findFirst(
        [
            "type = 'virtual'",
            "order" => "name",
        ]
    );

    echo "The first virtual robot name is ", $robot->name;
```

public static **query** ([*Phalcon\DiInterface* \$dependencyInjector])

Create a criteria for a specific model

protected *boolean* **_exists** (*Phalcon\Mvc\Model\MetaDataInterface* \$metaData, *Phalcon\Db\AdapterInterface* \$connection, [*string* | *array* \$table])

Checks whether the current record already exists

protected static *Phalcon\Mvc\Model\ResultSetInterface* **_groupResult** (*mixed* \$functionName, *string* \$alias, *array* \$parameters)

Generate a PHQL SELECT statement for an aggregate

public static *mixed* **count** ([*array* \$parameters])

Counts how many records match the specified conditions

```
<?php

// How many robots are there?
$number = Robots::count();

echo "There are ", $number, "\n";

// How many mechanical robots are there?
$number = Robots::count("type = 'mechanical'");

echo "There are ", $number, " mechanical robots\n";
```

public static *mixed* **sum** ([*array* \$parameters])

Calculates the sum on a column for a result-set of rows that match the specified conditions

```
<?php

// How much are all robots?
$sum = Robots::sum(
    [
        "column" => "price",
    ]
);

echo "The total price of robots is ", $sum, "\n";

// How much are mechanical robots?
```

```

$sum = Robots::sum(
    [
        "type = 'mechanical'",
        "column" => "price",
    ]
);

echo "The total price of mechanical robots is ", $sum, "\n";

```

public static *mixed* **maximum** ([array \$parameters])

Returns the maximum value of a column for a result-set of rows that match the specified conditions

```

<?php

// What is the maximum robot id?
$id = Robots::maximum(
    [
        "column" => "id",
    ]
);

echo "The maximum robot id is: ", $id, "\n";

// What is the maximum id of mechanical robots?
$sum = Robots::maximum(
    [
        "type = 'mechanical'",
        "column" => "id",
    ]
);

echo "The maximum robot id of mechanical robots is ", $id, "\n";

```

public static *mixed* **minimum** ([array \$parameters])

Returns the minimum value of a column for a result-set of rows that match the specified conditions

```

<?php

// What is the minimum robot id?
$id = Robots::minimum(
    [
        "column" => "id",
    ]
);

echo "The minimum robot id is: ", $id;

// What is the minimum id of mechanical robots?
$sum = Robots::minimum(
    [
        "type = 'mechanical'",
        "column" => "id",
    ]
);

echo "The minimum robot id of mechanical robots is ", $id;

```

public static *double* **average** ([array \$parameters])

Returns the average value on a column for a result-set of rows matching the specified conditions

```
<?php

// What's the average price of robots?
$average = Robots::average(
    [
        "column" => "price",
    ]
);

echo "The average price is ", $average, "\n";

// What's the average price of mechanical robots?
$average = Robots::average(
    [
        "type = 'mechanical'",
        "column" => "price",
    ]
);

echo "The average price of mechanical robots is ", $average, "\n";
```

public **fireEvent** (*mixed* \$eventName)

Fires an event, implicitly calls behaviors and listeners in the events manager are notified

public **fireEventCancel** (*mixed* \$eventName)

Fires an event, implicitly calls behaviors and listeners in the events manager are notified This method stops if one of the callbacks/listeners returns boolean false

protected **_cancelOperation** ()

Cancel the current operation

public **appendMessage** (*Phalcon\Mvc\Model\MessageInterface* \$message)

Appends a customized message on the validation process

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Message as Message;

class Robots extends Model
{
    public function beforeSave()
    {
        if ($this->name === "Peter") {
            $message = new Message(
                "Sorry, but a robot cannot be named Peter"
            );

            $this->appendMessage($message);
        }
    }
}
```


protected **validate** (*Phalcon\ValidationInterface* \$validator)

Executes validators on every validation call

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Validation;
use Phalcon\Validation\Validator\ExclusionIn;

class Subscriptors extends Model
{
    public function validation()
    {
        $validator = new Validation();

        $validator->add(
            "status",
            new ExclusionIn(
                [
                    "domain" => [
                        "A",
                        "I",
                    ],
                ]
            )
        );

        return $this->validate($validator);
    }
}
```

public **validationHasFailed** ()

Check whether validation process has generated any messages

```
<?php

use Phalcon\Mvc\Model;
use Phalcon\Validation;
use Phalcon\Validation\Validator\ExclusionIn;

class Subscriptors extends Model
{
    public function validation()
    {
        $validator = new Validation();

        $validator->validate(
            "status",
            new ExclusionIn(
                [
                    "domain" => [
                        "A",
                        "I",
                    ],
                ]
            )
        );
    }
}
```

```
        return $this->validate($validator);
    }
}
```

public **getMessages** ([mixed \$filter])

Returns array of validation messages

```
<?php

$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

if ($robot->save() === false) {
    echo "Umh, We can't store robots right now ";

    $messages = $robot->getMessages();

    foreach ($messages as $message) {
        echo $message;
    }
} else {
    echo "Great, a new robot was saved successfully!";
}
```

final protected **_checkForeignKeysRestrict** ()

Reads “belongs to” relations and check the virtual foreign keys when inserting or updating records to verify that inserted/updated values are present in the related entity

final protected **_checkForeignKeysReverseCascade** ()

Reads both “hasMany” and “hasOne” relations and checks the virtual foreign keys (cascade) when deleting records

final protected **_checkForeignKeysReverseRestrict** ()

Reads both “hasMany” and “hasOne” relations and checks the virtual foreign keys (restrict) when deleting records

protected **_preSave** (*Phalcon\Mvc\Model\MetaDataInterface* \$metaData, *mixed* \$exists, *mixed* \$identityField)

Executes internal hooks before save a record

protected **_postSave** (*mixed* \$success, *mixed* \$exists)

Executes internal events after save a record

protected *boolean* **_doLowInsert** (*Phalcon\Mvc\Model\MetaDataInterface* \$metaData, *Phalcon\Db\AdapterInterface* \$connection, *string* | *array* \$table, *boolean* | *string* \$identityField)

Sends a pre-build INSERT SQL statement to the relational database system

protected *boolean* **_doLowUpdate** (*Phalcon\Mvc\Model\MetaDataInterface* \$metaData, *Phalcon\Db\AdapterInterface* \$connection, *string* | *array* \$table)

Sends a pre-build UPDATE SQL statement to the relational database system

protected *boolean* **_preSaveRelatedRecords** (*Phalcon\Db\AdapterInterface* \$connection, *Phalcon\Mvc\ModelInterface*[] \$related)

Saves related records that must be stored prior to save the master record

protected *boolean* **_postSaveRelatedRecords** (*Phalcon\Db\AdapterInterface* \$connection, *Phalcon\Mvc\ModelInterface[]* \$related)

Save the related records assigned in the has-one/has-many relations

public *boolean* **save** ([*array* \$data], [*array* \$whiteList])

Inserts or updates a model instance. Returning true on success or false otherwise.

```
<?php

// Creating a new robot
$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

$robot->save();

// Updating a robot name
$robot = Robots::findFirst("id = 100");

$robot->name = "Biomass";

$robot->save();
```

public **create** ([*mixed* \$data], [*mixed* \$whiteList])

Inserts a model instance. If the instance already exists in the persistence it will throw an exception Returning true on success or false otherwise.

```
<?php

// Creating a new robot
$robot = new Robots();

$robot->type = "mechanical";
$robot->name = "Astro Boy";
$robot->year = 1952;

$robot->create();

// Passing an array to create
$robot = new Robots();

$robot->create(
    [
        "type" => "mechanical",
        "name" => "Astro Boy",
        "year" => 1952,
    ]
);
```

public **update** ([*mixed* \$data], [*mixed* \$whiteList])

Updates a model instance. If the instance doesn't exist in the persistence it will throw an exception Returning true on success or false otherwise.

```
<?php

// Updating a robot name
$robot = Robots::findFirst("id = 100");

$robot->name = "Biomass";

$robot->update();
```

public **delete** ()

Deletes a model instance. Returning true on success or false otherwise.

```
<?php

$robot = Robots::findFirst("id=100");

$robot->delete();

$robots = Robots::find("type = 'mechanical'");

foreach ($robots as $robot) {
    $robot->delete();
}
```

public **getOperationMade** ()

Returns the type of the latest operation performed by the ORM Returns one of the OP_* class constants

public **refresh** ()

Refreshes the model attributes re-querying the record from the database

public **skipOperation** (*mixed* \$skip)

Skips the current operation forcing a success state

public **readAttribute** (*mixed* \$attribute)

Reads an attribute value by its name

```
<?php

echo $robot->readAttribute("name");
```

public **writeAttribute** (*mixed* \$attribute, *mixed* \$value)

Writes an attribute value by its name

```
<?php

$robot->writeAttribute("name", "Rosey");
```

protected **skipAttributes** (*array* \$attributes)

Sets a list of attributes that must be skipped from the generated INSERT/UPDATE statement

```
<?php

<?php
```

```

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->skipAttributes(
            [
                "price",
            ]
        );
    }
}

```

protected **skipAttributesOnCreate** (array \$attributes)

Sets a list of attributes that must be skipped from the generated INSERT statement

```

<?php

<?php

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->skipAttributesOnCreate(
            [
                "created_at",
            ]
        );
    }
}

```

protected **skipAttributesOnUpdate** (array \$attributes)

Sets a list of attributes that must be skipped from the generated UPDATE statement

```

<?php

<?php

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->skipAttributesOnUpdate(
            [
                "modified_in",
            ]
        );
    }
}

```

protected **allowEmptyStringValue** (array \$attributes)

Sets a list of attributes that must be skipped from the generated UPDATE statement

```

<?php

<?php

```

```
class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->allowEmptyStringValue(
            [
                "name",
            ]
        );
    }
}
```

protected **hasOne** (*mixed* \$fields, *mixed* \$referenceModel, *mixed* \$referencedFields, [*mixed* \$options])

Setup a 1-1 relation between two models

```
<?php

<?php

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->hasOne("id", "RobotsDescription", "robots_id");
    }
}
```

protected **belongsTo** (*mixed* \$fields, *mixed* \$referenceModel, *mixed* \$referencedFields, [*mixed* \$options])

Setup a reverse 1-1 or n-1 relation between two models

```
<?php

<?php

class RobotsParts extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->belongsTo("robots_id", "Robots", "id");
    }
}
```

protected **hasMany** (*mixed* \$fields, *mixed* \$referenceModel, *mixed* \$referencedFields, [*mixed* \$options])

Setup a 1-n relation between two models

```
<?php

<?php

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        $this->hasMany("id", "RobotsParts", "robots_id");
    }
}
```

```
}
}
```

protected *Phalcon\Mvc\Model\Relation* **hasManyToMany** (*string* | *array* \$fields, *string* \$intermediateModel, *string* | *array* \$intermediateFields, *string* | *array* \$intermediateReferencedFields, *mixed* \$referenceModel, *string* | *array* \$referencedFields, [*array* \$options])

Setup an n-n relation between two models, through an intermediate relation

```
<?php

<?php

class Robots extends \Phalcon\Mvc\Model
{
    public function initialize()
    {
        // Setup a many-to-many relation to Parts through RobotsParts
        $this->hasManyToMany(
            "id",
            "RobotsParts",
            "robots_id",
            "parts_id",
            "Parts",
            "id",
        );
    }
}
```

public **addBehavior** (*Phalcon\Mvc\Model\BehaviorInterface* \$behavior)

Setups a behavior in a model

```
<?php

<?php

use Phalcon\Mvc\Model;
use Phalcon\Mvc\Model\Behavior\Timestampable;

class Robots extends Model
{
    public function initialize()
    {
        $this->addBehavior(
            new Timestampable(
                [
                    "onCreate" => [
                        "field" => "created_at",
                        "format" => "Y-m-d",
                    ],
                ]
            )
        );
    }
}
```

protected **keepSnapshots** (*mixed* \$keepSnapshot)

Sets if the model must keep the original record snapshot in memory

```
<?php

<?php

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->keepSnapshots(true);
    }
}
```

public **setSnapshotData** (array \$data, [array \$columnMap])

Sets the record's snapshot data. This method is used internally to set snapshot data when the model was set up to keep snapshot data

public **hasSnapshotData** ()

Checks if the object has internal snapshot data

public **getSnapshotData** ()

Returns the internal snapshot data

public **hasChanged** ([string | array \$fieldName])

Check if a specific attribute has changed This only works if the model is keeping data snapshots

public **getChangedFields** ()

Returns a list of changed values.

```
<?php

$robots = Robots::findFirst();
print_r($robots->getChangedFields()); // []

$robots->deleted = 'Y';

$robots->getChangedFields();
print_r($robots->getChangedFields()); // ["deleted"]
```

protected **useDynamicUpdate** (mixed \$dynamicUpdate)

Sets if a model must use dynamic update instead of the all-field update

```
<?php

<?php

use Phalcon\Mvc\Model;

class Robots extends Model
{
    public function initialize()
    {
        $this->useDynamicUpdate(true);
    }
}
```



```
}
}
```

public *Phalcon\Mvc\Model\ResultsetInterface* **getRelated** (*string* \$alias, [*array* \$arguments])

Returns related records based on defined relations

protected *mixed* **__getRelatedRecords** (*string* \$modelName, *string* \$method, *array* \$arguments)

Returns related records defined relations depending on the method name

final protected static *Phalcon\Mvc\ModelInterface*[] | *Phalcon\Mvc\ModelInterface* | *boolean* **__invokeFinder** (*string* \$method, *array* \$arguments)

Try to check if the query must invoke a finder

public *mixed* **__call** (*string* \$method, *array* \$arguments)

Handles method calls when a method is not implemented

public static *mixed* **__callStatic** (*string* \$method, *array* \$arguments)

Handles method calls when a static method is not implemented

public **__set** (*string* \$property, *mixed* \$value)

Magic method to assign values to the the model

final protected *string* **__possibleSetter** (*string* \$property, *mixed* \$value)

Check for, and attempt to use, possible setter.

public *Phalcon\Mvc\Model\Resultset* | *Phalcon\Mvc\Model* **__get** (*string* \$property)

Magic method to get related records using the relation alias as a property

public **__isset** (*mixed* \$property)

Magic method to check if a property is a valid relation

public **serialize** ()

Serializes the object ignoring connections, services, related objects or static properties

public **unserialize** (*mixed* \$data)

Unserializes the object from a serialized string

public **dump** ()

Returns a simple representation of the object that can be used with var_dump

```
<?php
var_dump (
    $robot->dump ()
);
```

public *array* **toArray** ([*array* \$columns])

Returns the instance as an array representation

```
<?php
print_r (
    $robot->toArray ()
);
```

```
public array jsonSerialize ()
```

Serializes the object for json_encode

```
<?php  
  
echo json_encode ($robot) ;
```

```
public static setup (array $options)
```

Enables/disables options in the ORM

```
public reset ()
```

Reset a model instance data

Abstract class `Phalcon\Mvc\Model\Behavior`

implements `Phalcon\Mvc\Model\BehaviorInterface`

This is an optional base class for ORM behaviors

Methods

```
public __construct ([array $options])
```

```
protected mustTakeAction (mixed $eventName)
```

Checks whether the behavior must take action on certain event

```
protected array getOptions ([string $eventName])
```

Returns the behavior options related to an event

```
public notify (mixed $type, Phalcon\Mvc\ModelInterface $model)
```

This method receives the notifications from the EventsManager

```
public missingMethod (Phalcon\Mvc\ModelInterface $model, string $method, [array $arguments])
```

Acts as fallbacks when a missing method is called on the model

Class `Phalcon\Mvc\Model\Behavior\SoftDelete`

extends abstract class `Phalcon\Mvc\Model\Behavior`

implements `Phalcon\Mvc\Model\BehaviorInterface`

Instead of permanently delete a record it marks the record as deleted changing the value of a flag column

Methods

```
public notify (mixed $type, Phalcon\Mvc\ModelInterface $model)
```

Listens for notifications from the models manager

```
public __construct ([array $options]) inherited from Phalcon\Mvc\Model\Behavior
```

Phalcon\Mvc\Model\Behavior

protected **mustTakeAction** (*mixed* \$eventName) inherited from *Phalcon\Mvc\Model\Behavior*

Checks whether the behavior must take action on certain event

protected array **getOptions** ([*string* \$eventName]) inherited from *Phalcon\Mvc\Model\Behavior*

Returns the behavior options related to an event

public **missingMethod** (*Phalcon\Mvc\ModelInterface* \$model, *string* \$method, [*array* \$arguments]) inherited from *Phalcon\Mvc\Model\Behavior*

Acts as fallbacks when a missing method is called on the model

Class Phalcon\Mvc\Model\Behavior\Timestampable

extends abstract class *Phalcon\Mvc\Model\Behavior*

implements *Phalcon\Mvc\Model\BehaviorInterface*

Allows to automatically update a model's attribute saving the datetime when a record is created or updated

Methods

public **notify** (*mixed* \$type, *Phalcon\Mvc\ModelInterface* \$model)

Listens for notifications from the models manager

public **__construct** ([*array* \$options]) inherited from *Phalcon\Mvc\Model\Behavior*

Phalcon\Mvc\Model\Behavior

protected **mustTakeAction** (*mixed* \$eventName) inherited from *Phalcon\Mvc\Model\Behavior*

Checks whether the behavior must take action on certain event

protected array **getOptions** ([*string* \$eventName]) inherited from *Phalcon\Mvc\Model\Behavior*

Returns the behavior options related to an event

public **missingMethod** (*Phalcon\Mvc\ModelInterface* \$model, *string* \$method, [*array* \$arguments]) inherited from *Phalcon\Mvc\Model\Behavior*

Acts as fallbacks when a missing method is called on the model

Class Phalcon\Mvc\Model\Criteria

implements *Phalcon\Mvc\Model\CriteriaInterface*, *Phalcon\DI\InjectionAwareInterface*

This class is used to build the array parameter required by *Phalcon\Mvc\Model::find()* and *Phalcon\Mvc\Model::findFirst()* using an object-oriented interface.

```
<?php
$robots = Robots::query()
    ->where("type = :type:")
    ->andWhere("year < 2000")
    ->bind(["type" => "mechanical"])
    ->limit(5, 10)
```

```
->orderBy("name")
->execute();
```

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **setModelName** (*mixed* \$modelName)

Set a model on which the query will be executed

public **getModelName** ()

Returns an internal model name on which the criteria will be applied

public **bind** (*array* \$bindParam, [*mixed* \$merge])

Sets the bound parameters in the criteria This method replaces all previously set bound parameters

public **bindTypes** (*array* \$bindTypes)

Sets the bind types in the criteria This method replaces all previously set bound parameters

public **distinct** (*mixed* \$distinct)

Sets SELECT DISTINCT / SELECT ALL flag

public *Phalcon\Mvc\Model\Criteria* **columns** (*string* | *array* \$columns)

Sets the columns to be queried

```
<?php
$criteria->columns (
    [
        "id",
        "name",
    ]
);
```

public **join** (*mixed* \$model, [*mixed* \$conditions], [*mixed* \$alias], [*mixed* \$type])

Adds an INNER join to the query

```
<?php
$criteria->join("Robots");
$criteria->join("Robots", "r.id = RobotsParts.robots_id");
$criteria->join("Robots", "r.id = RobotsParts.robots_id", "r");
$criteria->join("Robots", "r.id = RobotsParts.robots_id", "r", "LEFT");
```

public **innerJoin** (*mixed* \$model, [*mixed* \$conditions], [*mixed* \$alias])

Adds an INNER join to the query

```
<?php

$criteria->innerJoin("Robots");
$criteria->innerJoin("Robots", "r.id = RobotsParts.robots_id");
$criteria->innerJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```

public **leftJoin** (*mixed* \$model, [*mixed* \$conditions], [*mixed* \$alias])

Adds a LEFT join to the query

```
<?php

$criteria->leftJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```

public **rightJoin** (*mixed* \$model, [*mixed* \$conditions], [*mixed* \$alias])

Adds a RIGHT join to the query

```
<?php

$criteria->rightJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```

public **where** (*mixed* \$conditions, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Sets the conditions parameter in the criteria

public **addWhere** (*mixed* \$conditions, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Appends a condition to the current conditions using an AND operator (deprecated)

public **andWhere** (*mixed* \$conditions, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Appends a condition to the current conditions using an AND operator

public **orWhere** (*mixed* \$conditions, [*mixed* \$bindParam], [*mixed* \$bindTypes])

Appends a condition to the current conditions using an OR operator

public **betweenWhere** (*mixed* \$expr, *mixed* \$minimum, *mixed* \$maximum)

Appends a BETWEEN condition to the current conditions

```
<?php

$criteria->betweenWhere("price", 100.25, 200.50);
```

public **notBetweenWhere** (*mixed* \$expr, *mixed* \$minimum, *mixed* \$maximum)

Appends a NOT BETWEEN condition to the current conditions

```
<?php

$criteria->notBetweenWhere("price", 100.25, 200.50);
```

public **inWhere** (*mixed* \$expr, array \$values)

Appends an IN condition to the current conditions

```
<?php

$criteria->inWhere("id", [1, 2, 3]);
```

public **notInWhere** (*mixed* \$expr, *array* \$values)

Appends a NOT IN condition to the current conditions

```
<?php
$criteria->notInWhere("id", [1, 2, 3]);
```

public **conditions** (*mixed* \$conditions)

Adds the conditions parameter to the criteria

public **order** (*mixed* \$orderColumns)

Adds the order-by parameter to the criteria (deprecated)

public **orderBy** (*mixed* \$orderColumns)

Adds the order-by clause to the criteria

public **groupBy** (*mixed* \$group)

Adds the group-by clause to the criteria

public **having** (*mixed* \$having)

Adds the having clause to the criteria

public **limit** (*mixed* \$limit, [*mixed* \$offset])

Adds the limit parameter to the criteria.

```
<?php
$criteria->limit(100);
$criteria->limit(100, 200);
$criteria->limit("100", "200");
```

public **forUpdate** ([*mixed* \$forUpdate])

Adds the “for_update” parameter to the criteria

public **sharedLock** ([*mixed* \$sharedLock])

Adds the “shared_lock” parameter to the criteria

public **cache** (*array* \$cache)

Sets the cache options in the criteria This method replaces all previously set cache options

public **getWhere** ()

Returns the conditions parameter in the criteria

public *string* | *array* | *null* **getColumns** ()

Returns the columns to be queried

public **getConditions** ()

Returns the conditions parameter in the criteria

public *int* | *array* | *null* **getLimit** ()

Returns the limit parameter in the criteria, which will be an integer if limit was set without an offset, an array with ‘number’ and ‘offset’ keys if an offset was set with the limit, or null if limit has not been set.

public **getOrderBy** ()

Returns the order clause in the criteria

public **getGroupBy** ()

Returns the group clause in the criteria

public **getHaving** ()

Returns the having clause in the criteria

public *array* **getParams** ()

Returns all the parameters defined in the criteria

public static **fromInput** (*Phalcon\DiInterface* \$dependencyInjector, *mixed* \$modelName, *array* \$data, [*mixed* \$operator])

Builds a Phalcon\Mvc\Model\Criteria based on an input array like _POST

public **execute** ()

Executes a find using the parameters built with the criteria

Class Phalcon\Mvc\Model\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Mvc\Model\Manager](#)

implements [Phalcon\Mvc\Model\ManagerInterface](#), [Phalcon\Di\InjectionAwareInterface](#), [Phalcon\Events\EventsAwareInterface](#)

This components controls the initialization of models, keeping record of relations between the different models of the application.

A ModelsManager is injected to a model via a Dependency Injector/Services Container such as [Phalcon\Di](#).

```
<?php

use Phalcon\Di;
use Phalcon\Mvc\Model\Manager as ModelsManager;

$di = new Di();

$di->set(
    "modelsManager",
    function() {
        return new ModelsManager();
    }
);

$robot = new Robots($di);
```

Methods

public **setDI** ([Phalcon\DiInterface](#) \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **setEventsManager** ([Phalcon\Events\ManagerInterface](#) \$eventsManager)

Sets a global events manager

public **getEventsManager** ()

Returns the internal event manager

public **setCustomEventsManager** ([Phalcon\Mvc\ModelInterface](#) \$model, [Phalcon\Events\ManagerInterface](#) \$eventsManager)

Sets a custom events manager for a specific model

public **getCustomEventsManager** ([Phalcon\Mvc\ModelInterface](#) \$model)

Returns a custom events manager related to a model

public **initialize** ([Phalcon\Mvc\ModelInterface](#) \$model)

Initializes a model in the model manager

public **isInitialized** (*mixed* \$modelName)

Check whether a model is already initialized

public **getLastInitialized** ()

Get last initialized model

public **load** (*mixed* \$modelName, [*mixed* \$newInstance])

Loads a model throwing an exception if it doesn't exist

public **setModelSource** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$source)

Sets the mapped source for a model

final public **isVisibleModelProperty** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$property)

Check whether a model property is declared as public.

```
<?php

$isPublic = $manager->isVisibleModelProperty(
    new Robots(),
    "name"
);
```

public **getModelSource** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the mapped source for a model

public **setModelSchema** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$schema)

Sets the mapped schema for a model

public **getModelSchema** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the mapped schema for a model

public **setConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

Sets both write and read connection service for a model

public **setWriteConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

Sets write connection service for a model

public **setReadConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

Sets read connection service for a model

public **getReadConnection** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the connection to read data related to a model

public **getWriteConnection** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the connection to write data related to a model

protected **_getConnection** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionServices)

Returns the connection to read or write data related to a model depending on the connection services.

public **getReadConnectionService** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the connection service name used to read data related to a model

public **getWriteConnectionService** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the connection service name used to write data related to a model

public **_getConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionServices)

Returns the connection service name used to read or write data related to a model depending on the connection services

public **notifyEvent** (*mixed* \$eventName, *Phalcon\Mvc\ModelInterface* \$model)

Receives events generated in the models and dispatches them to an events-manager if available Notify the behaviors that are listening in the model

public **missingMethod** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$eventName, *mixed* \$data)

Dispatch an event to the listeners and behaviors This method expects that the endpoint listeners/behaviors returns true meaning that a least one was implemented

public **addBehavior** (*Phalcon\Mvc\ModelInterface* \$model, *Phalcon\Mvc\Model\BehaviorInterface* \$behavior)

Binds a behavior to a model

public **keepSnapshots** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$keepSnapshots)

Sets if a model must keep snapshots

public **isKeepingSnapshots** (*Phalcon\Mvc\ModelInterface* \$model)

Checks if a model is keeping snapshots for the queried records

public **useDynamicUpdate** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$dynamicUpdate)

Sets if a model must use dynamic update instead of the all-field update

public **isUsingDynamicUpdate** (*Phalcon\Mvc\ModelInterface* \$model)

Checks if a model is using dynamic update instead of all-field update

public *Phalcon\Mvc\Model\Relation* **addHasOne** (*Phalcon\Mvc\Model* \$model, *mixed* \$fields, *string* \$referencedModel, *mixed* \$referencedFields, [*array* \$options])

Setup a 1-1 relation between two models

public *Phalcon\Mvc\Model\Relation* **addBelongsTo** (*Phalcon\Mvc\Model* \$model, *mixed* \$fields, *string* \$referencedModel, *mixed* \$referencedFields, [*array* \$options])

Setup a relation reverse many to one between two models

public **addHasMany** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$fields, *string* \$referencedModel, *mixed* \$referencedFields, [*array* \$options])

Setup a relation 1-n between two models

public *Phalcon\Mvc\Model\Relation* **addHasManyToMany** (*Phalcon\Mvc\ModelInterface* \$model, *string* \$fields, *string* \$intermediateModel, *string* \$intermediateFields, *string* \$intermediateReferencedFields, *string* \$referencedModel, *string* \$referencedFields, [*array* \$options])

Setups a relation n-m between two models

public **existsBelongsTo** (*mixed* \$modelName, *mixed* \$modelRelation)

Checks whether a model has a belongsTo relation with another model

public **existsHasMany** (*mixed* \$modelName, *mixed* \$modelRelation)

Checks whether a model has a hasMany relation with another model

public **existsHasOne** (*mixed* \$modelName, *mixed* \$modelRelation)

Checks whether a model has a hasOne relation with another model

public **existsHasManyToMany** (*mixed* \$modelName, *mixed* \$modelRelation)

Checks whether a model has a hasManyToMany relation with another model

public **getRelationByAlias** (*mixed* \$modelName, *mixed* \$alias)

Returns a relation by its alias

final protected **_mergeFindParameters** (*mixed* \$findParamsOne, *mixed* \$findParamsTwo)

Merge two arrays of find parameters

public *Phalcon\Mvc\Model\Resultset\Simple* | *Phalcon\Mvc\Model\Resultset\Simple* | *int* | *false* **getRelationRecords** (*Phalcon\Mvc\Model\RelationInterface* \$relation, *mixed* \$method, *Phalcon\Mvc\ModelInterface* \$record, [*mixed* \$parameters])

Helper method to query records based on a relation definition

public **getReusableRecords** (*mixed* \$modelName, *mixed* \$key)

Returns a reusable object from the internal list

public **setReusableRecords** (*mixed* \$modelName, *mixed* \$key, *mixed* \$records)

Stores a reusable record in the internal list

public **clearReusableObjects** ()

Clears the internal reusable list

public **getBelongsToManyRecords** (*mixed* \$method, *mixed* \$modelName, *mixed* \$modelRelation, *Phalcon\Mvc\ModelInterface* \$record, [*mixed* \$parameters])

Gets belongsToMany related records from a model

public **getHasManyRecords** (*mixed* \$method, *mixed* \$modelName, *mixed* \$modelRelation, *Phalcon\Mvc\ModelInterface* \$record, [*mixed* \$parameters])

Gets hasMany related records from a model

public **getHasOneRecords** (*mixed* \$method, *mixed* \$modelName, *mixed* \$modelRelation, *Phalcon\Mvc\ModelInterface* \$record, [*mixed* \$parameters])

Gets belongsToMany related records from a model

public **getBelongsToMany** (*Phalcon\Mvc\ModelInterface* \$model)

Gets all the belongsToMany relations defined in a model

```
<?php
$relations = $modelsManager->getBelongsToMany(
    new Robots ()
);
```

public **getHasMany** (*Phalcon\Mvc\ModelInterface* \$model)

Gets hasMany relations defined on a model

public **getHasOne** (*Phalcon\Mvc\ModelInterface* \$model)

Gets hasOne relations defined on a model

public **getHasManyToMany** (*Phalcon\Mvc\ModelInterface* \$model)

Gets hasManyToMany relations defined on a model

public **getHasOneAndHasMany** (*Phalcon\Mvc\ModelInterface* \$model)

Gets hasOne relations defined on a model

public **getRelations** (*mixed* \$modelName)

Query all the relationships defined on a model

public **getRelationsBetween** (*mixed* \$first, *mixed* \$second)

Query the first relationship defined between two models

public **createQuery** (*mixed* \$phql)

Creates a Phalcon\Mvc\Model\Query without execute it

public **executeQuery** (*mixed* \$phql, [*mixed* \$placeholders], [*mixed* \$types])

Creates a Phalcon\Mvc\Model\Query and execute it

public **createBuilder** ([*mixed* \$params])

Creates a Phalcon\Mvc\Model\Query\Builder

public **getLastQuery** ()

Returns the last query created or executed in the models manager

public **registerNamespaceAlias** (*mixed* \$alias, *mixed* \$namespaceName)

Registers shorter aliases for namespaces in PHQL statements

public **getNamespaceAlias** (*mixed* \$alias)

Returns a real namespace from its alias

public **getNamespaceAliases** ()

Returns all the registered namespace aliases

public **__destruct** ()

Destroys the current PHQL cache

Class Phalcon\Mvc\Model\Message

implements Phalcon\Mvc\Model\MessageInterface

Encapsulates validation info generated before save/delete records fails

```
<?php

use Phalcon\Mvc\Model\Message as Message;

class Robots extends \Phalcon\Mvc\Model
{
    public function beforeSave()
    {
        if ($this->name === "Peter") {
            $text = "A robot cannot be named Peter";
            $field = "name";
            $type = "InvalidValue";

            $message = new Message($text, $field, $type);

            $this->appendMessage($message);
        }
    }
}
```

```
}  
}
```

Methods

public **__construct** (*string* \$message, [*string* | *array* \$field], [*string* \$type], [*Phalcon\Mvc\ModelInterface* \$model], [*int* | *null* \$code])

Phalcon\Mvc\Model\Message constructor

public **setType** (*mixed* \$type)

Sets message type

public **getType** ()

Returns message type

public **setMessage** (*mixed* \$message)

Sets verbose message

public **getMessage** ()

Returns verbose message

public **setField** (*mixed* \$field)

Sets field name related to message

public **getField** ()

Returns field name related to message

public **setModel** (*Phalcon\Mvc\ModelInterface* \$model)

Set the model who generates the message

public **setCode** (*mixed* \$code)

Sets code for the message

public **getModel** ()

Returns the model that produced the message

public **getCode** ()

Returns the message code

public **__toString** ()

Magic __toString method returns verbose message

public static **__set_state** (*array* \$message)

Magic __set_state helps to re-build messages variable exporting

Abstract class Phalcon\Mvc\Model\MetaData

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Mvc\Model\MetaDataInterface*

Because Phalcon\Mvc\Model requires meta-data like field names, data types, primary keys, etc. this component collect them and store for further querying by Phalcon\Mvc\Model. Phalcon\Mvc\Model\MetaData can also use adapters to store temporarily or permanently the meta-data.

A standard Phalcon\Mvc\Model\MetaData can be used to query model attributes:

```
<?php

$metaData = new \Phalcon\Mvc\Model\MetaData\Memory();

$attributes = $metaData->getAttributes(
    new Robots()
);

print_r($attributes);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema)

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy)

Set the meta-data extraction strategy

public **getStrategy** ()

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model)

Reads the complete meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index)

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data)

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model)

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, mixed \$index)

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```


public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes (
        new Robots ()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric (
        new Robots ()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField (
        new Robots ()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes (
        new Robots ()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes)

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes)

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes)

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes allow empty strings

```
<?php

print_r(
    $metaData->getEmptyStringAttributes (
        new Robots ()
    )
);
```

```

    )
);

```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model)

Returns attributes (which have default values) and their default values

```

<?php

print_r (
    $metaData->getDefaultValues (
        new Robots ()
    )
);

```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the column map if any

```

<?php

print_r (
    $metaData->getColumnMap (
        new Robots ()
    )
);

```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model)

Returns the reverse column map if any

```

<?php

print_r (
    $metaData->getReverseColumnMap (
        new Robots ()
    )
);

```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute)

Check if a model has certain attribute

```

<?php

var_dump (
    $metaData->hasAttribute (
        new Robots (),
        "name"
    )
);

```

public **isEmpty** ()

Checks if the internal meta-data container is empty

```

<?php

var_dump (

```

```
$metaData->isEmpty()  
);
```

public **reset** ()

Resets internal meta-data in order to regenerate it

```
<?php  
  
$metaData->reset();
```

abstract public **read** (*mixed* \$key) inherited from *Phalcon\Mvc\Model\MetaDataInterface*

...

abstract public **write** (*mixed* \$key, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaDataInterface*

...

Class *Phalcon\Mvc\Model\MetaData\Apc*

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\DI\InjectionAwareInterface*

Stores model meta-data in the APC cache. Data will erased if the web server is restarted

By default meta-data is stored for 48 hours (172800 seconds)

You can query the meta-data by printing `apc_fetch('PMM$')` or `apc_fetch('PMM$my-app-id')`

```
<?php  
  
$metaData = new \Phalcon\Mvc\Model\Metadatas\Apc(  
    [  
        "prefix" => "my-app-id",  
        "lifetime" => 86400,  
    ]  
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Apc constructor

public **read** (*mixed* \$key)

Reads meta-data from APC

public **write** (*mixed* \$key, *mixed* \$data)

Writes the meta-data to APC

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php
print_r (
    $metaData->readMetaData (
        new Robots ()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```
<?php

print_r(
```

```

        $metaData->getAttributes (
            new Robots ()
        )
    );

```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```

<?php

print_r (
    $metaData->getPrimaryKeyAttributes (
        new Robots ()
    )
);

```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```

<?php

print_r (
    $metaData->getNonPrimaryKeyAttributes (
        new Robots ()
    )
);

```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```

<?php

print_r (
    $metaData->getNotNullAttributes (
        new Robots ()
    )
);

```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```

<?php

print_r (
    $metaData->getDataTypes (
        new Robots ()
    )
);

```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public **string** **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes(
        new Robots()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes(
        new Robots()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes(
        new Robots()
    )
);
```


public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r (
    $metaData->getEmptyStringAttributes (
        new Robots ()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r(
    $metaData->getDefaultValue(
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r(
    $metaData->getColumnMap(
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php

var_dump(
    $metaData->isEmpty()
);
```

public **reset** () inherited from *Phalcon\Mvc\Model\MetaData*

Resets internal meta-data in order to regenerate it

```
<?php  
$metaData->reset();
```

Class `Phalcon\Mvc\Model\MetaData\Files`

extends abstract class `Phalcon\Mvc\Model\MetaData`

implements `Phalcon\Mvc\Model\MetaDataInterface`, `Phalcon\DI\InjectionAwareInterface`

Stores model meta-data in PHP files.

```
<?php  
  
$metaData = new \Phalcon\Mvc\Model\MetaData\Files(  
    [  
        "metaDataDir" => "app/cache/metadatas/",  
    ]  
);
```

Constants

integer `MODELS_ATTRIBUTES`

integer `MODELS_PRIMARY_KEY`

integer `MODELS_NON_PRIMARY_KEY`

integer `MODELS_NOT_NULL`

integer `MODELS_DATA_TYPES`

integer `MODELS_DATA_TYPES_NUMERIC`

integer `MODELS_DATE_AT`

integer `MODELS_DATE_IN`

integer `MODELS_IDENTITY_COLUMN`

integer `MODELS_DATA_TYPES_BIND`

integer `MODELS_AUTOMATIC_DEFAULT_INSERT`

integer `MODELS_AUTOMATIC_DEFAULT_UPDATE`

integer `MODELS_DEFAULT_VALUES`

integer `MODELS_EMPTY_STRING_VALUES`

integer `MODELS_COLUMN_MAP`

integer `MODELS_REVERSE_COLUMN_MAP`

Methods

public `__construct` ([array \$options])

Phalcon\Mvc\Model\MetaData\Files constructor

public *mixed* **read** (*string* \$key)

Reads meta-data from files

public **write** (*string* \$key, *array* \$data)

Writes the meta-data to files

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php
print_r(
```

```

        $metaData->writeColumnMapIndex(
            new Robots(),
            MetaData::MODELS_REVERSE_COLUMN_MAP,
            [
                "leName" => "name",
            ]
        )
    );

```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
 Reads the ordered/reversed column map for certain model

```

<?php
print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);

```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```

<?php
print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);

```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
 Returns table attributes names (fields)

```

<?php
print_r(
    $metaData->getAttributes(
        new Robots()
    )
);

```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```

<?php
print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);

```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes(
        new Robots()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their bind data types

```
<?php
print_r(
    $metaData->getBindTypes (
        new Robots ()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php
print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php
print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php
$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php
$metaData->setAutomaticUpdateAttributes (
```

```
new Robots(),
[
    "modified_at" => true,
]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes(
    new Robots(),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r(
    $metaData->getEmptyStringAttributes(
        new Robots()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r(
    $metaData->getDefaultValues(
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r(
    $metaData->getColumnMap(
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php

var_dump(
    $metaData->isEmpty()
);
```

public **reset** () inherited from *Phalcon\Mvc\Model\MetaData*

Resets internal meta-data in order to regenerate it

```
<?php

$metaData->reset();
```

Class *Phalcon\Mvc\Model\MetaData\Libmemcached*

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\Di\InjectionAwareInterface*

Stores model meta-data in the Memcache.

By default meta-data is stored for 48 hours (172800 seconds)

```
<?php

$metaData = new Phalcon\Mvc\Model\Metaadta\Libmemcached(
    [
        "servers" => [
            [
                "host" => "localhost",
```

```
        "port"    => 11211,
        "weight" => 1,
    ],
],
"client" => [
    Memcached::OPT_HASH => Memcached::HASH_MD5,
    Memcached::OPT_PREFIX_KEY => "prefix.",
],
"lifetime" => 3600,
"prefix"    => "my_",
]
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Libmemcached constructor

public **read** (mixed \$key)

Reads metadata from Memcache

public **write** (mixed \$key, mixed \$data)

Writes the metadata to Memcache

public **reset** ()

Flush Memcache data and resets internal meta-data in order to regenerate it

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

```
        ]
    )
};
```

final public readColumnMap (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public readColumnMapIndex (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public getAttributes (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public getPrimaryKeyAttributes (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public getNonPrimaryKeyAttributes (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes(
        new Robots()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes (
        new Robots ()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

```
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r (
    $metaData->getEmptyStringAttributes (
        new Robots ()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r (
    $metaData->getDefaultValues (
        new Robots ()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r (
    $metaData->getColumnMap (
        new Robots ()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php

var_dump(
    $metaData->isEmpty()
);
```

Class *Phalcon\Mvc\Model\MetaData\Memcache*

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\Di\InjectionAwareInterface*

Stores model meta-data in the Memcache.

By default meta-data is stored for 48 hours (172800 seconds)

```
<?php

$metaData = new Phalcon\Mvc\Model\Metadata\Memcache(
    [
        "prefix"      => "my-app-id",
        "lifetime"     => 86400,
        "host"         => "localhost",
        "port"         => 11211,
        "persistent"   => false,
    ]
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**
integer **MODELS_NON_PRIMARY_KEY**
integer **MODELS_NOT_NULL**
integer **MODELS_DATA_TYPES**
integer **MODELS_DATA_TYPES_NUMERIC**
integer **MODELS_DATE_AT**
integer **MODELS_DATE_IN**
integer **MODELS_IDENTITY_COLUMN**
integer **MODELS_DATA_TYPES_BIND**
integer **MODELS_AUTOMATIC_DEFAULT_INSERT**
integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**
integer **MODELS_DEFAULT_VALUES**
integer **MODELS_EMPTY_STRING_VALUES**
integer **MODELS_COLUMN_MAP**
integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Memcache constructor

public **read** (*mixed* \$key)

Reads metadata from Memcache

public **write** (*mixed* \$key, *mixed* \$data)

Writes the metadata to Memcache

public **reset** ()

Flush Memcache data and resets internal meta-data in order to regenerate it

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes (
        new Robots ()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric (
        new Robots ()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField (
        new Robots ()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes (
        new Robots ()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r(
    $metaData->getEmptyStringAttributes(
        new Robots()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes (which have default values) and their default values

```
<?php

print_r(
    $metaData->getDefaultValues(
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns the column map if any

```
<?php

print_r(
    $metaData->getColumnMap(
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php
var_dump (
    $metaData->isEmpty ()
);
```

Class **Phalcon\Mvc\Model\MetaData\Memory**

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\DI\InjectionAwareInterface*

Stores model meta-data in memory. Data will be erased when the request finishes

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Memory constructor

public array **read** (string \$key)

Reads the meta-data from temporal memory

public **write** (*string* \$key, *array* \$data)

Writes the meta-data to temporal memory

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php
print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
```



```

        "leName" => "name",
    ]
)
);

```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```

<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);

```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```

<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);

```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```

<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);

```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```

<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);

```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes(
        new Robots()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes(
        new Robots()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes(
        new Robots()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes(
        new Robots()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes(
    new Robots(),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes(
    new Robots(),
    [
        "modified_at" => true,
    ]
);
```

```
]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r (
    $metaData->getEmptyStringAttributes (
        new Robots ()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r (
    $metaData->getDefaultValues (
        new Robots ()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r (
    $metaData->getColumnMap (
        new Robots ()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php

var_dump(
    $metaData->isEmpty()
);
```

public **reset** () inherited from *Phalcon\Mvc\Model\MetaData*

Resets internal meta-data in order to regenerate it

```
<?php

$metaData->reset();
```

Class *Phalcon\Mvc\Model\MetaData\Redis*

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\DI\InjectionAwareInterface*

Stores model meta-data in the Redis.

By default meta-data is stored for 48 hours (172800 seconds)

```
<?php

use Phalcon\Mvc\Model\Metadatas\Redis;

$metaData = new Redis(
    [
        "host"      => "127.0.0.1",
        "port"      => 6379,
```

```
"persistent" => 0,
"statsKey"   => "_PHCM_MM",
"lifetime"   => 172800,
"index"      => 2,
    ]
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Redis constructor

public **read** (*mixed* \$key)

Reads metadata from Redis

public **write** (*mixed* \$key, *mixed* \$data)

Writes the metadata to Redis

public **reset** ()

Flush Redis data and resets internal meta-data in order to regenerate it

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php
print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```


public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes(
        new Robots()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes(
        new Robots()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots(),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r (
    $metaData->getEmptyStringAttributes (
        new Robots()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r (
    $metaData->getDefaultValues (
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r (
    $metaData->getColumnMap (
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r (
    $metaData->getReverseColumnMap (
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php
var_dump (
    $metaData->hasAttribute (
        new Robots (),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php
var_dump (
    $metaData->isEmpty ()
);
```

Class *Phalcon\Mvc\Model\MetaData\Session*

extends abstract class *Phalcon\Mvc\Model\MetaData*

implements *Phalcon\Mvc\Model\MetaDataInterface*, *Phalcon\DI\InjectionAwareInterface*

Stores model meta-data in session. Data will erased when the session finishes. Meta-data are permanent while the session is active.

You can query the meta-data by printing `$_SESSION['$PMM$']`

```
<?php
$metaData = new \Phalcon\Mvc\Model\Metadatas\Session (
    [
        "prefix" => "my-app-id",
    ]
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Session constructor

public array **read** (string \$key)

Reads meta-data from \$_SESSION

public **write** (string \$key, array \$data)

Writes the meta-data to \$_SESSION

final protected **_initialize** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$key, *mixed* \$table, *mixed* \$schema) inherited from *Phalcon\Mvc\Model\MetaData*

Initialize the metadata for certain table

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Model\MetaData*

Sets the DependencyInjector container

public **getDI** () inherited from *Phalcon\Mvc\Model\MetaData*

Returns the DependencyInjector container

public **setStrategy** (*Phalcon\Mvc\Model\MetaData\StrategyInterface* \$strategy) inherited from *Phalcon\Mvc\Model\MetaData*

Set the meta-data extraction strategy

public **getStrategy** () inherited from *Phalcon\Mvc\Model\MetaData*

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php
print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```
<?php

print_r(
    $metaData->getDataTypes(
        new Robots()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php

print_r(
    $metaData->getDataTypesNumeric(
        new Robots()
    )
);
```

public **string** **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the name of identity field (if one is present)

```
<?php

print_r(
    $metaData->getIdentityField(
        new Robots()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their bind data types

```
<?php

print_r(
    $metaData->getBindTypes(
        new Robots()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php

print_r(
    $metaData->getAutomaticCreateAttributes(
        new Robots()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes(
        new Robots()
    )
);
```


public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings

```
<?php

print_r (
    $metaData->getEmptyStringAttributes (
        new Robots ()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes (which have default values) and their default values

```
<?php

print_r(
    $metaData->getDefaultValue(
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the column map if any

```
<?php

print_r(
    $metaData->getColumnMap(
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php

var_dump(
    $metaData->isEmpty()
);
```

public **reset** () inherited from *Phalcon\Mvc\Model\MetaData*

Resets internal meta-data in order to regenerate it

```
<?php
$metadata->reset();
```

Class `Phalcon\Mvc\Model\MetaData\Strategy\Annotations`

implements `Phalcon\Mvc\Model\MetaData\StrategyInterface`

Methods

final public **getMetaData** (*Phalcon\Mvc\ModelInterface* \$model, *Phalcon\DiInterface* \$dependencyInjector)

The meta-data is obtained by reading the column descriptions from the database information schema

final public **getColumnMaps** (*Phalcon\Mvc\ModelInterface* \$model, *Phalcon\DiInterface* \$dependencyInjector)

Read the model's column map, this can't be inferred

Class `Phalcon\Mvc\Model\MetaData\Strategy\Introspection`

implements `Phalcon\Mvc\Model\MetaData\StrategyInterface`

Queries the table meta-data in order to introspect the model's metadata

Methods

final public **getMetaData** (*Phalcon\Mvc\ModelInterface* \$model, *Phalcon\DiInterface* \$dependencyInjector)

The meta-data is obtained by reading the column descriptions from the database information schema

final public **getColumnMaps** (*Phalcon\Mvc\ModelInterface* \$model, *Phalcon\DiInterface* \$dependencyInjector)

Read the model's column map, this can't be inferred

Class `Phalcon\Mvc\Model\MetaData\Xcache`

extends abstract class `Phalcon\Mvc\Model\MetaData`

implements `Phalcon\Mvc\Model\MetaDataInterface`, `Phalcon\Di\InjectionAwareInterface`

Stores model meta-data in the XCache cache. Data will be erased if the web server is restarted

By default meta-data is stored for 48 hours (172800 seconds)

You can query the meta-data by printing `xcache_get('PMM')` or `xcache_get('PMMmy-app-id')`

```
<?php
$metadata = new Phalcon\Mvc\Model\MetaData\Xcache (
    [
        "prefix"    => "my-app-id",
        "lifetime"   => 86400,
    ]
);
```

Constants

integer **MODELS_ATTRIBUTES**

integer **MODELS_PRIMARY_KEY**

integer **MODELS_NON_PRIMARY_KEY**

integer **MODELS_NOT_NULL**

integer **MODELS_DATA_TYPES**

integer **MODELS_DATA_TYPES_NUMERIC**

integer **MODELS_DATE_AT**

integer **MODELS_DATE_IN**

integer **MODELS_IDENTITY_COLUMN**

integer **MODELS_DATA_TYPES_BIND**

integer **MODELS_AUTOMATIC_DEFAULT_INSERT**

integer **MODELS_AUTOMATIC_DEFAULT_UPDATE**

integer **MODELS_DEFAULT_VALUES**

integer **MODELS_EMPTY_STRING_VALUES**

integer **MODELS_COLUMN_MAP**

integer **MODELS_REVERSE_COLUMN_MAP**

Methods

public **__construct** ([array \$options])

Phalcon\Mvc\Model\MetaData\Xcache constructor

public array **read** (string \$key)

Reads metadata from XCache

public **write** (string \$key, array \$data)

Writes the metadata to XCache

final protected **_initialize** (Phalcon\Mvc\ModelInterface \$model, mixed \$key, mixed \$table, mixed \$schema) inherited from [Phalcon\Mvc\Model\MetaData](#)

Initialize the metadata for certain table

public **setDI** (Phalcon\DiInterface \$dependencyInjector) inherited from [Phalcon\Mvc\Model\MetaData](#)

Sets the DependencyInjector container

public **getDI** () inherited from [Phalcon\Mvc\Model\MetaData](#)

Returns the DependencyInjector container

public **setStrategy** (Phalcon\Mvc\Model\MetaData\StrategyInterface \$strategy) inherited from [Phalcon\Mvc\Model\MetaData](#)

Set the meta-data extraction strategy

public **getStrategy** () inherited from [Phalcon\Mvc\Model\MetaData](#)

Return the strategy to obtain the meta-data

final public **readMetaData** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the complete meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaData(
        new Robots()
    )
);
```

final public **readMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads meta-data for certain model

```
<?php

print_r(
    $metaData->readMetaDataIndex(
        new Robots(),
        0
    )
);
```

final public **writeMetaDataIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index, *mixed* \$data) inherited from *Phalcon\Mvc\Model\MetaData*

Writes meta-data for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->writeColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP,
        [
            "leName" => "name",
        ]
    )
);
```

final public **readColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Reads the ordered/reversed column map for certain model

```
<?php

print_r(
    $metaData->readColumnMap(
        new Robots()
    )
);
```

final public **readColumnMapIndex** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$index) inherited from *Phalcon\Mvc\Model\MetaData*

Reads column-map information for certain model using a MODEL_* constant

```
<?php

print_r(
    $metaData->readColumnMapIndex(
        new Robots(),
        MetaData::MODELS_REVERSE_COLUMN_MAP
    )
);
```

public **getAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns table attributes names (fields)

```
<?php

print_r(
    $metaData->getAttributes(
        new Robots()
    )
);
```

public **getPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are part of the primary key

```
<?php

print_r(
    $metaData->getPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNonPrimaryKeyAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of fields which are not part of the primary key

```
<?php

print_r(
    $metaData->getNonPrimaryKeyAttributes(
        new Robots()
    )
);
```

public **getNotNullAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns an array of not null attributes

```
<?php

print_r(
    $metaData->getNotNullAttributes(
        new Robots()
    )
);
```

public **getDataTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their data types

```
<?php
print_r(
    $metaData->getDataTypes (
        new Robots ()
    )
);
```

public **getDataTypesNumeric** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes which types are numerical

```
<?php
print_r(
    $metaData->getDataTypesNumeric (
        new Robots ()
    )
);
```

public *string* **getIdentityField** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the name of identity field (if one is present)

```
<?php
print_r(
    $metaData->getIdentityField (
        new Robots ()
    )
);
```

public **getBindTypes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes and their bind data types

```
<?php
print_r(
    $metaData->getBindTypes (
        new Robots ()
    )
);
```

public **getAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the INSERT SQL generation

```
<?php
print_r(
    $metaData->getAutomaticCreateAttributes (
        new Robots ()
    )
);
```

public **getAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes that must be ignored from the UPDATE SQL generation

```
<?php

print_r(
    $metaData->getAutomaticUpdateAttributes (
        new Robots ()
    )
);
```

public **setAutomaticCreateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the INSERT SQL generation

```
<?php

$metaData->setAutomaticCreateAttributes (
    new Robots (),
    [
        "created_at" => true,
    ]
);
```

public **setAutomaticUpdateAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that must be ignored from the UPDATE SQL generation

```
<?php

$metaData->setAutomaticUpdateAttributes (
    new Robots (),
    [
        "modified_at" => true,
    ]
);
```

public **setEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model, array \$attributes) inherited from *Phalcon\Mvc\Model\MetaData*

Set the attributes that allow empty string values

```
<?php

$metaData->setEmptyStringAttributes (
    new Robots (),
    [
        "name" => true,
    ]
);
```

public **getEmptyStringAttributes** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns attributes allow empty strings


```
<?php

print_r(
    $metaData->getEmptyStringAttributes(
        new Robots()
    )
);
```

public **getDefaultValues** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns attributes (which have default values) and their default values

```
<?php

print_r(
    $metaData->getDefaultValues(
        new Robots()
    )
);
```

public **getColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*
Returns the column map if any

```
<?php

print_r(
    $metaData->getColumnMap(
        new Robots()
    )
);
```

public **getReverseColumnMap** (*Phalcon\Mvc\ModelInterface* \$model) inherited from *Phalcon\Mvc\Model\MetaData*

Returns the reverse column map if any

```
<?php

print_r(
    $metaData->getReverseColumnMap(
        new Robots()
    )
);
```

public **hasAttribute** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$attribute) inherited from *Phalcon\Mvc\Model\MetaData*

Check if a model has certain attribute

```
<?php

var_dump(
    $metaData->hasAttribute(
        new Robots(),
        "name"
    )
);
```

public **isEmpty** () inherited from *Phalcon\Mvc\Model\MetaData*

Checks if the internal meta-data container is empty

```
<?php
var_dump (
    $metaData->isEmpty ()
);
```

public **reset** () inherited from *Phalcon\Mvc\Model\MetaData*

Resets internal meta-data in order to regenerate it

```
<?php
$metaData->reset ();
```

Class **Phalcon\Mvc\Model\Query**

implements *Phalcon\Mvc\Model\QueryInterface*, *Phalcon\Di\InjectionAwareInterface*

This class takes a PSQL intermediate representation and executes it.

```
<?php
$sql = "SELECT c.price*0.16 AS taxes, c.* FROM Cars AS c JOIN Brands AS b
        WHERE b.name = :name: ORDER BY c.name";

$result = $manager->executeQuery (
    $sql,
    [
        "name" => "Lamborghini",
    ]
);

foreach ($result as $row) {
    echo "Name: ", $row->cars->name, "\n";
    echo "Price: ", $row->cars->price, "\n";
    echo "Taxes: ", $row->taxes, "\n";
}
```

Constants

integer **TYPE_SELECT**

integer **TYPE_INSERT**

integer **TYPE_UPDATE**

integer **TYPE_DELETE**

Methods

public **__construct** ([*string* \$sql], [*Phalcon\DiInterface* \$dependencyInjector], [*mixed* \$options])

Phalcon\Mvc\Model\Query constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injection container

public **getDI** ()

Returns the dependency injection container

public **setUniqueRow** (*mixed* \$uniqueRow)

Tells to the query if only the first row in the resultset must be returned

public **getUniqueRow** ()

Check if the query is programmed to get only the first row in the resultset

final protected **_getQualified** (*array* \$expr)

Replaces the model's name to its source name in a qualified-name expression

final protected **_getCallArgument** (*array* \$argument)

Resolves an expression in a single call argument

final protected **_getCaseExpression** (*array* \$expr)

Resolves an expression in a single call argument

final protected **_getFunctionCall** (*array* \$expr)

Resolves an expression in a single call argument

final protected *string* **_getExpression** (*array* \$expr, [*boolean* \$quoting])

Resolves an expression from its intermediate code into a string

final protected **_getSelectColumn** (*array* \$column)

Resolves a column from its intermediate representation into an array used to determine if the resultset produced is simple or complex

final protected *string* **_getTable** (*Phalcon\Mvc\ModelManagerInterface* \$manager, *array* \$qualifiedName)

Resolves a table in a SELECT statement checking if the model exists

final protected **_getJoin** (*Phalcon\Mvc\ModelManagerInterface* \$manager, *mixed* \$join)

Resolves a JOIN clause checking if the associated models exist

final protected *string* **_getJoinType** (*array* \$join)

Resolves a JOIN type

final protected *array* **_getSingleJoin** (*string* \$joinType, *string* \$joinSource, *string* \$modelAlias, *string* \$joinAlias, *Phalcon\Mvc\Model\RelationInterface* \$relation)

Resolves joins involving has-one/belongs-to/has-many relations

final protected *array* **_getMultiJoin** (*string* \$joinType, *string* \$joinSource, *string* \$modelAlias, *string* \$joinAlias, *Phalcon\Mvc\Model\RelationInterface* \$relation)

Resolves joins involving many-to-many relations

final protected *array* **_getJoins** (*array* \$select)

Processes the JOINS in the query returning an internal representation for the database dialect

final protected *array* **_getOrderClause** (*array* | *string* \$order)

Returns a processed order clause for a SELECT statement

final protected **_getGroupClause** (*array* \$group)

Returns a processed group clause for a SELECT statement

final protected **_getLimitClause** (*array* \$limitClause)

Returns a processed limit clause for a SELECT statement

final protected **_prepareSelect** (*[mixed]* \$ast, *[mixed]* \$merge)

Analyzes a SELECT intermediate code and produces an array to be executed later

final protected **_prepareInsert** ()

Analyzes an INSERT intermediate code and produces an array to be executed later

final protected **_prepareUpdate** ()

Analyzes an UPDATE intermediate code and produces an array to be executed later

final protected **_prepareDelete** ()

Analyzes a DELETE intermediate code and produces an array to be executed later

public **parse** ()

Parses the intermediate code produced by `Phalcon\Mvc\Model\Query\Lang` generating another intermediate representation that could be executed by `Phalcon\Mvc\Model\Query`

public **getCache** ()

Returns the current cache backend instance

final protected **_executeSelect** (*mixed* \$intermediate, *mixed* \$bindParam, *mixed* \$bindTypes, *[mixed]* \$simulate)

Executes the SELECT intermediate representation producing a `Phalcon\Mvc\Model\Resultset`

final protected *Phalcon\Mvc\Model\Query\StatusInterface* **_executeInsert** (*array* \$intermediate, *array* \$bindParam, *array* \$bindTypes)

Executes the INSERT intermediate representation producing a `Phalcon\Mvc\Model\Query\Status`

final protected *Phalcon\Mvc\Model\Query\StatusInterface* **_executeUpdate** (*array* \$intermediate, *array* \$bindParam, *array* \$bindTypes)

Executes the UPDATE intermediate representation producing a `Phalcon\Mvc\Model\Query\Status`

final protected *Phalcon\Mvc\Model\Query\StatusInterface* **_executeDelete** (*array* \$intermediate, *array* \$bindParam, *array* \$bindTypes)

Executes the DELETE intermediate representation producing a `Phalcon\Mvc\Model\Query\Status`

final protected *Phalcon\Mvc\Model\ResultsetInterface* **_getRelatedRecords** (*Phalcon\Mvc\ModelInterface* \$model, *array* \$intermediate, *array* \$bindParam, *array* \$bindTypes)

Query the records on which the UPDATE/DELETE operation will be done

public *mixed* **execute** (*[array]* \$bindParam, *[array]* \$bindTypes)

Executes a parsed PHQL statement

public *Phalcon\Mvc\ModelInterface* **getSingleResult** (*[array]* \$bindParam, *[array]* \$bindTypes)

Executes the query returning the first result

public **setType** (*mixed* \$type)

Sets the type of PHQL statement to be executed

public **getType** ()

Gets the type of PHQL statement executed

public **setBindParams** (array \$bindParams, [mixed \$merge])

Set default bind parameters

public array **getBindParams** ()

Returns default bind params

public **setBindTypes** (array \$bindTypes, [mixed \$merge])

Set default bind parameters

public **setSharedLock** ([mixed \$sharedLock])

Set SHARED LOCK clause

public array **getBindTypes** ()

Returns default bind types

public **setIntermediate** (array \$intermediate)

Allows to set the IR to be executed

public array **getIntermediate** ()

Returns the intermediate representation of the PHQL statement

public **cache** (mixed \$cacheOptions)

Sets the cache parameters of the query

public **getCacheOptions** ()

Returns the current cache options

public **getSql** ()

Returns the SQL to be generated by the internal PHQL (only works in SELECT statements)

public static **clean** ()

Destroys the internal PHQL cache

Class **Phalcon\Mvc\Model\Query\Builder**

*implements **Phalcon\Mvc\Model\Query\BuilderInterface**, **Phalcon\DI\InjectionAwareInterface***

Helps to create PHQL queries using an OO interface

```
<?php
$params = [
    "models"      => ["Users"],
    "columns"     => ["id", "name", "status"],
    "conditions" => [
        [
            "created > :min: AND created < :max:",
            [
                "min" => "2013-01-01",
                "max" => "2014-01-01",
            ],
        ],
    ],
];
```

```
        [
            "min" => PDO::PARAM_STR,
            "max" => PDO::PARAM_STR,
        ],
    ],
],
// or "conditions" => "created > '2013-01-01' AND created < '2014-01-01'",
"group"      => ["id", "name"],
"having"     => "name = 'Kamil'",
"order"      => ["name", "id"],
"limit"      => 20,
"offset"     => 20,
// or "limit" => [20, 20],
];

$queryBuilder = new \Phalcon\Mvc\Model\Query\Builder($params);
```

Constants

string **OPERATOR_OR**

string **OPERATOR_AND**

Methods

public **__construct** ([*mixed* \$params], [*Phalcon\DiInterface* \$dependencyInjector])

Phalcon\Mvc\Model\Query\Builder constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **distinct** (*mixed* \$distinct)

Sets SELECT DISTINCT / SELECT ALL flag

```
<?php
$builder->distinct("status");
$builder->distinct(null);
```

public **getDistinct** ()

Returns SELECT DISTINCT / SELECT ALL flag

public **columns** (*mixed* \$columns)

Sets the columns to be queried

```
<?php
$builder->columns("id, name");

$builder->columns(
```

```

        [
            "id",
            "name",
        ]
    );

    $builder->columns(
        [
            "name",
            "number" => "COUNT(*)",
        ]
    );

```

public *string* | *array* **getColumns** ()

Return the columns to be queried

public **from** (*mixed* \$models)

Sets the models who makes part of the query

```

<?php

$builder->from("Robots");

$builder->from(
    [
        "Robots",
        "RobotsParts",
    ]
);

$builder->from(
    [
        "r"  => "Robots",
        "rp" => "RobotsParts",
    ]
);

```

public **addFrom** (*mixed* \$model, [*mixed* \$alias], [*mixed* \$with])

Add a model to take part of the query

```

<?php

// Load data from models Robots
$builder->addFrom("Robots");

// Load data from model 'Robots' using 'r' as alias in PHQL
$builder->addFrom("Robots", "r");

// Load data from model 'Robots' using 'r' as alias in PHQL
// and eager load model 'RobotsParts'
$builder->addFrom("Robots", "r", "RobotsParts");

// Load data from model 'Robots' using 'r' as alias in PHQL
// and eager load models 'RobotsParts' and 'Parts'
$builder->addFrom(
    "Robots",

```

```
        "r",
        [
            "RobotsParts",
            "Parts",
        ]
    );
```

public *string* | *array* **getFrom** ()

Return the models who makes part of the query

public *Phalcon\Mvc\Model\Query\Builder* **join** (*string* \$model, [*string* \$conditions], [*string* \$alias], [*string* \$type])

Adds an INNER join to the query

```
<?php

// Inner Join model 'Robots' with automatic conditions and alias
$builder->join("Robots");

// Inner Join model 'Robots' specifying conditions
$builder->join("Robots", "Robots.id = RobotsParts.robots_id");

// Inner Join model 'Robots' specifying conditions and alias
$builder->join("Robots", "r.id = RobotsParts.robots_id", "r");

// Left Join model 'Robots' specifying conditions, alias and type of join
$builder->join("Robots", "r.id = RobotsParts.robots_id", "r", "LEFT");
```

public *Phalcon\Mvc\Model\Query\Builder* **innerJoin** (*string* \$model, [*string* \$conditions], [*string* \$alias])

Adds an INNER join to the query

```
<?php

// Inner Join model 'Robots' with automatic conditions and alias
$builder->innerJoin("Robots");

// Inner Join model 'Robots' specifying conditions
$builder->innerJoin("Robots", "Robots.id = RobotsParts.robots_id");

// Inner Join model 'Robots' specifying conditions and alias
$builder->innerJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```

public *Phalcon\Mvc\Model\Query\Builder* **leftJoin** (*string* \$model, [*string* \$conditions], [*string* \$alias])

Adds a LEFT join to the query

```
<?php

$builder->leftJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```

public *Phalcon\Mvc\Model\Query\Builder* **rightJoin** (*string* \$model, [*string* \$conditions], [*string* \$alias])

Adds a RIGHT join to the query

```
<?php

$builder->rightJoin("Robots", "r.id = RobotsParts.robots_id", "r");
```


public array **getJoins** ()

Return join parts of the query

public *Phalcon\Mvc\Model\Query\Builder* **where** (*mixed* \$conditions, [*array* \$bindParam], [*array* \$bindTypes])

Sets the query conditions

```
<?php
$builder->where(100);

$builder->where("name = 'Peter'");

$builder->where(
    "name = :name: AND id > :id:",
    [
        "name" => "Peter",
        "id"    => 100,
    ]
);
```

public *Phalcon\Mvc\Model\Query\Builder* **andWhere** (*string* \$conditions, [*array* \$bindParam], [*array* \$bindTypes])

Appends a condition to the current conditions using a AND operator

```
<?php
$builder->andWhere("name = 'Peter'");

$builder->andWhere(
    "name = :name: AND id > :id:",
    [
        "name" => "Peter",
        "id"    => 100,
    ]
);
```

public *Phalcon\Mvc\Model\Query\Builder* **orWhere** (*string* \$conditions, [*array* \$bindParam], [*array* \$bindTypes])

Appends a condition to the current conditions using an OR operator

```
<?php
$builder->orWhere("name = 'Peter'");

$builder->orWhere(
    "name = :name: AND id > :id:",
    [
        "name" => "Peter",
        "id"    => 100,
    ]
);
```

public **betweenWhere** (*mixed* \$expr, *mixed* \$minimum, *mixed* \$maximum, [*mixed* \$operator])

Appends a BETWEEN condition to the current conditions

```
<?php
$builder->betweenWhere("price", 100.25, 200.50);
```

public **notBetweenWhere** (*mixed* \$expr, *mixed* \$minimum, *mixed* \$maximum, [*mixed* \$operator])

Appends a NOT BETWEEN condition to the current conditions

```
<?php
$builder->notBetweenWhere("price", 100.25, 200.50);
```

public **inWhere** (*mixed* \$expr, *array* \$values, [*mixed* \$operator])

Appends an IN condition to the current conditions

```
<?php
$builder->inWhere("id", [1, 2, 3]);
```

public **notInWhere** (*mixed* \$expr, *array* \$values, [*mixed* \$operator])

Appends a NOT IN condition to the current conditions

```
<?php
$builder->notInWhere("id", [1, 2, 3]);
```

public *string* | *array* **getWhere** ()

Return the conditions for the query

public *Phalcon\Mvc\Model\Query\Builder* **orderBy** (*string* | *array* \$orderBy)

Sets an ORDER BY condition clause

```
<?php
$builder->orderBy("Robots.name");
$builder->orderBy(["1", "Robots.name"]);
```

public *string* | *array* **getOrderBy** ()

Returns the set ORDER BY clause

public **having** (*mixed* \$having)

Sets a HAVING condition clause. You need to escape PHQL reserved words using [and] delimiters

```
<?php
$builder->having("SUM(Robots.price) > 0");
```

public **forUpdate** (*mixed* \$forUpdate)

Sets a FOR UPDATE clause

```
<?php
$builder->forUpdate(true);
```

public *string* | *array* **getHaving** ()

Return the current having clause

public **limit** (*mixed* \$limit, [*mixed* \$offset])

Sets a LIMIT clause, optionally an offset clause

```
<?php
$builder->limit(100);
$builder->limit(100, 20);
$builder->limit("100", "20");
```

public *string* | *array* **getLimit** ()

Returns the current LIMIT clause

public **offset** (*mixed* \$offset)

Sets an OFFSET clause

```
<?php
$builder->offset(30);
```

public *string* | *array* **getOffset** ()

Returns the current OFFSET clause

public *Phalcon\Mvc\Model\Query\Builder* **groupBy** (*string* | *array* \$group)

Sets a GROUP BY clause

```
<?php
$builder->groupBy(
    [
        "Robots.name",
    ]
);
```

public *string* **getGroupBy** ()

Returns the GROUP BY clause

final public *string* **getPhql** ()

Returns a PHQL statement built based on the builder parameters

public **getQuery** ()

Returns the query built

final public **autoescape** (*mixed* \$identifier)

Automatically escapes identifiers but only if they need to be escaped.

Abstract class *Phalcon\Mvc\Model\Query\Lang*

PHQL is implemented as a parser (written in C) that translates syntax in that of the target RDBMS. It allows Phalcon to offer a unified SQL language to the developer, while internally doing all the work of translating PHQL instructions to the most optimal SQL instructions depending on the RDBMS type associated with a model.

To achieve the highest performance possible, we wrote a parser that uses the same technology as SQLite. This technology provides a small in-memory parser with a very low memory footprint that is also thread-safe.

```
<?php

$intermediate = Phalcon\Mvc\Model\Query\Lang::parsePHQL("SELECT r.* FROM Robots r_
↪LIMIT 10");
```

Methods

public static *string* **parsePHQL** (*string* \$phql)

Parses a PHQL statement returning an intermediate representation (IR)

Class Phalcon\Mvc\Model\Query\Status

implements *Phalcon\Mvc\Model\Query\StatusInterface*

This class represents the status returned by a PHQL statement like INSERT, UPDATE or DELETE. It offers context information and the related messages produced by the model which finally executes the operations when it fails

```
<?php

$phql = "UPDATE Robots SET name = :name:, type = :type:, year = :year: WHERE id = :id:
↪";

$status = $app->modelsManager->executeQuery(
    $phql,
    [
        "id"    => 100,
        "name"  => "Astroy Boy",
        "type"  => "mechanical",
        "year"  => 1959,
    ]
);

// Check if the update was successful
if ($status->success() === true) {
    echo "OK";
}
```

Methods

public **__construct** (*mixed* \$success, [*Phalcon\Mvc\ModelInterface* \$model])

public **getModel** ()

Returns the model that executed the action

public **getMessages** ()

Returns the messages produced because of a failed operation

public **success** ()

Allows to check if the executed operation was successful

Class Phalcon\Mvc\Model\Relation

implements [Phalcon\Mvc\Model\RelationInterface](#)

This class represents a relationship between two models

Constants

integer **BELONGS_TO**

integer **HAS_ONE**

integer **HAS_MANY**

integer **HAS_ONE_THROUGH**

integer **HAS_MANY_THROUGH**

integer **NO_ACTION**

integer **ACTION_RESTRICT**

integer **ACTION_CASCADE**

Methods

public **__construct** (*int* \$type, *string* \$referencedModel, *string* | *array* \$fields, *string* | *array* \$referencedFields, [*array* \$options])

Phalcon\Mvc\Model\Relation constructor

public **setIntermediateRelation** (*string* | *array* \$intermediateFields, *string* \$intermediateModel, *string* \$intermediateReferencedFields)

Sets the intermediate model data for has-*^{*}-through relations

public **getType** ()

Returns the relation type

public **getReferencedModel** ()

Returns the referenced model

public *string* | *array* **getFields** ()

Returns the fields

public *string* | *array* **getReferencedFields** ()

Returns the referenced fields

public *string* | *array* **getOptions** ()

Returns the options

public **getOption** (*mixed* \$name)

Returns an option by the specified name If the option doesn't exist null is returned

public **isForeignKey** ()

Check whether the relation act as a foreign key

public *string* | *array* **getForeignKey** ()

Returns the foreign key configuration

public array **getParams** ()

Returns parameters that must be always used when the related records are obtained

public **isThrough** ()

Check whether the relation is a 'many-to-many' relation or not

public **isReusable** ()

Check if records returned by getting belongs-to/has-many are implicitly cached during the current request

public string | array **getIntermediateFields** ()

Gets the intermediate fields for has-***-through relations

public **getIntermediateModel** ()

Gets the intermediate model for has-***-through relations

public string | array **getIntermediateReferencedFields** ()

Gets the intermediate referenced fields for has-***-through relations

Abstract class **Phalcon\Mvc\Model\Resultset**

implements *Phalcon\Mvc\Model\ResultsetInterface*, *Iterator*, *Traversable*, *SeekableIterator*, *Countable*, *ArrayAccess*, *Serializable*, *JsonSerializable*

This component allows to **Phalcon\Mvc\Model** returns large resultsets with the minimum memory consumption. Resultsets can be traversed using a standard `foreach` or a `while` statement. If a resultset is serialized it will dump all the rows into a big array. Then unserialize will retrieve the rows as they were before serializing.

```
<?php

// Using a standard foreach
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
    ]
);

foreach ($robots as robot) {
    echo robot->name, "\n";
}

// Using a while
$robots = Robots::find(
    [
        "type = 'virtual'",
        "order" => "name",
    ]
);

$robots->rewind();

while ($robots->valid()) {
    $robot = $robots->current();
}
```

```
echo $robot->name, "\n";

$robots->next();
}
```

Constants

integer **TYPE_RESULT_FULL**

integer **TYPE_RESULT_PARTIAL**

integer **HYDRATE_RECORDS**

integer **HYDRATE_OBJECTS**

integer **HYDRATE_ARRAYS**

Methods

public **__construct** (*Phalcon\Db\ResultInterface* | *false* \$result, [*Phalcon\Cache\BackendInterface* \$cache])

Phalcon\Mvc\Model\Resultset constructor

public **next** ()

Moves cursor to next row in the resultset

public **valid** ()

Check whether internal resource has rows to fetch

public **key** ()

Gets pointer number of active row in the resultset

final public **rewind** ()

Rewinds resultset to its beginning

final public **seek** (*mixed* \$position)

Changes internal pointer to a specific position in the resultset Set new position if required and set this->_row

final public **count** ()

Counts how many rows are in the resultset

public **offsetExists** (*mixed* \$index)

Checks whether offset exists in the resultset

public **offsetGet** (*mixed* \$index)

Gets row in a specific position of the resultset

public **offsetSet** (*int* \$index, *Phalcon\Mvc\ModelInterface* \$value)

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **offsetUnset** (*mixed* \$offset)

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **getType** ()

Returns the internal type of data retrieval that the resultset is using

public **getFirst** ()

Get first row in the resultset

public **getLast** ()

Get last row in the resultset

public **setIsFresh** (*mixed* \$isFresh)

Set if the resultset is fresh or an old one cached

public **isFresh** ()

Tell if the resultset if fresh or an old one cached

public **setHydrateMode** (*mixed* \$hydrateMode)

Sets the hydration mode in the resultset

public **getHydrateMode** ()

Returns the current hydration mode

public **getCache** ()

Returns the associated cache for the resultset

public **getMessages** ()

Returns the error messages produced by a batch operation

public *boolean* **update** (*array* \$data, [*Closure* \$conditionCallback])

Updates every record in the resultset

public **delete** ([*Closure* \$conditionCallback])

Deletes every record in the resultset

public *Phalcon\Mvc\Model*[] **filter** (*callback* \$filter)

Filters a resultset returning only those the developer requires

```
<?php

$filtered = $robots->filter(
    function ($robot) {
        if ($robot->id < 3) {
            return $robot;
        }
    }
);
```

public *array* **jsonSerialize** ()

Returns serialised model objects as array for json_encode. Calls jsonSerialize on each object if present

```
<?php

$robots = Robots::find();
echo json_encode($robots);
```


abstract public **toArray** () inherited from *Phalcon\Mvc\Model\ResultsetInterface*

...

abstract public **current** () inherited from *Iterator*

...

abstract public **serialize** () inherited from *Serializable*

...

abstract public **unserialize** (*mixed* \$serialized) inherited from *Serializable*

...

Class *Phalcon\Mvc\Model\Resultset\Complex*

extends abstract class *Phalcon\Mvc\Model\Resultset*

implements *JsonSerializable*, *Serializable*, *ArrayAccess*, *Countable*, *SeekableIterator*, *Traversable*, *Iterator*, *Phalcon\Mvc\Model\ResultsetInterface*

Complex resultsets may include complete objects and scalar values. This class builds every complex row as it is required

Constants

integer **TYPE_RESULT_FULL**

integer **TYPE_RESULT_PARTIAL**

integer **HYDRATE_RECORDS**

integer **HYDRATE_OBJECTS**

integer **HYDRATE_ARRAYS**

Methods

public **__construct** (*array* \$columnTypes, [*Phalcon\Db\ResultInterface* \$result], [*Phalcon\Cache\BackendInterface* \$cache])

Phalcon\Mvc\Model\Resultset\Complex constructor

final public **current** ()

Returns current row in the resultset

public **toArray** ()

Returns a complete resultset as an array, if the resultset has a big number of rows it could consume more memory than currently it does.

public **serialize** ()

Serializing a resultset will dump all related rows into a big array

public **unserialize** (*mixed* \$data)

Unserializing a resultset will allow to only works on the rows present in the saved state

public **next** () inherited from *Phalcon\Mvc\Model\Resultset*

Moves cursor to next row in the resultset

public **valid** () inherited from *Phalcon\Mvc\Model\Resultset*

Check whether internal resource has rows to fetch

public **key** () inherited from *Phalcon\Mvc\Model\Resultset*

Gets pointer number of active row in the resultset

final public **rewind** () inherited from *Phalcon\Mvc\Model\Resultset*

Rewinds resultset to its beginning

final public **seek** (*mixed* \$position) inherited from *Phalcon\Mvc\Model\Resultset*

Changes internal pointer to a specific position in the resultset Set new position if required and set this->_row

final public **count** () inherited from *Phalcon\Mvc\Model\Resultset*

Counts how many rows are in the resultset

public **offsetExists** (*mixed* \$index) inherited from *Phalcon\Mvc\Model\Resultset*

Checks whether offset exists in the resultset

public **offsetGet** (*mixed* \$index) inherited from *Phalcon\Mvc\Model\Resultset*

Gets row in a specific position of the resultset

public **offsetSet** (*int* \$index, *Phalcon\Mvc\ModelInterface* \$value) inherited from *Phalcon\Mvc\Model\Resultset*

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **offsetUnset** (*mixed* \$offset) inherited from *Phalcon\Mvc\Model\Resultset*

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **getType** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the internal type of data retrieval that the resultset is using

public **getFirst** () inherited from *Phalcon\Mvc\Model\Resultset*

Get first row in the resultset

public **getLast** () inherited from *Phalcon\Mvc\Model\Resultset*

Get last row in the resultset

public **setIsFresh** (*mixed* \$isFresh) inherited from *Phalcon\Mvc\Model\Resultset*

Set if the resultset is fresh or an old one cached

public **isFresh** () inherited from *Phalcon\Mvc\Model\Resultset*

Tell if the resultset if fresh or an old one cached

public **setHydrateMode** (*mixed* \$hydrateMode) inherited from *Phalcon\Mvc\Model\Resultset*

Sets the hydration mode in the resultset

public **getHydrateMode** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the current hydration mode

public **getCache** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the associated cache for the resultset

public **getMessages** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the error messages produced by a batch operation

public *boolean* **update** (*array* \$data, [*Closure* \$conditionCallback]) inherited from *Phalcon\Mvc\Model\Resultset*

Updates every record in the resultset

public **delete** ([*Closure* \$conditionCallback]) inherited from *Phalcon\Mvc\Model\Resultset*

Deletes every record in the resultset

public *Phalcon\Mvc\Model*[] **filter** (*callback* \$filter) inherited from *Phalcon\Mvc\Model\Resultset*

Filters a resultset returning only those the developer requires

```
<?php

$filtered = $robots->filter(
    function ($robot) {
        if ($robot->id < 3) {
            return $robot;
        }
    }
);
```

public *array* **jsonSerialize** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns serialised model objects as array for json_encode. Calls jsonSerialize on each object if present

```
<?php

$robots = Robots::find();
echo json_encode($robots);
```

Class *Phalcon\Mvc\Model\Resultset\Simple*

extends abstract class *Phalcon\Mvc\Model\Resultset*

implements *JsonSerializable*, *Serializable*, *ArrayAccess*, *Countable*, *SeekableIterator*, *Traversable*, *Iterator*, *Phalcon\Mvc\Model\ResultsetInterface*

Simple resultsets only contains a complete objects This class builds every complete object as it is required

Constants

integer **TYPE_RESULT_FULL**

integer **TYPE_RESULT_PARTIAL**

integer **HYDRATE_RECORDS**

integer **HYDRATE_OBJECTS**

integer **HYDRATE_ARRAYS**

Methods

public **__construct** (*array* \$columnMap, *Phalcon\Mvc\ModelInterface* | *Phalcon\Mvc\Model\Row* \$model, *Phalcon\Db\Result\Pdo* | *null* \$result, [*Phalcon\Cache\BackendInterface* \$cache], [*boolean* \$keepSnapshots])

Phalcon\Mvc\Model\Resultset\Simple constructor

final public **current** ()

Returns current row in the resultset

public **toArray** ([mixed \$renameColumns])

Returns a complete resultset as an array, if the resultset has a big number of rows it could consume more memory than currently it does. Export the resultset to an array couldn't be faster with a large number of records

public **serialize** ()

Serializing a resultset will dump all related rows into a big array

public **unserialize** (mixed \$data)

Unserializing a resultset will allow to only works on the rows present in the saved state

public **next** () inherited from *Phalcon\Mvc\Model\Resultset*

Moves cursor to next row in the resultset

public **valid** () inherited from *Phalcon\Mvc\Model\Resultset*

Check whether internal resource has rows to fetch

public **key** () inherited from *Phalcon\Mvc\Model\Resultset*

Gets pointer number of active row in the resultset

final public **rewind** () inherited from *Phalcon\Mvc\Model\Resultset*

Rewinds resultset to its beginning

final public **seek** (mixed \$position) inherited from *Phalcon\Mvc\Model\Resultset*

Changes internal pointer to a specific position in the resultset Set new position if required and set this->_row

final public **count** () inherited from *Phalcon\Mvc\Model\Resultset*

Counts how many rows are in the resultset

public **offsetExists** (mixed \$index) inherited from *Phalcon\Mvc\Model\Resultset*

Checks whether offset exists in the resultset

public **offsetGet** (mixed \$index) inherited from *Phalcon\Mvc\Model\Resultset*

Gets row in a specific position of the resultset

public **offsetSet** (int \$index, *Phalcon\Mvc\ModelInterface* \$value) inherited from *Phalcon\Mvc\Model\Resultset*

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **offsetUnset** (mixed \$offset) inherited from *Phalcon\Mvc\Model\Resultset*

Resultsets cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **getType** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the internal type of data retrieval that the resultset is using

public **getFirst** () inherited from *Phalcon\Mvc\Model\Resultset*

Get first row in the resultset

public **getLast** () inherited from *Phalcon\Mvc\Model\Resultset*

Get last row in the resultset

public **setIsFresh** (*mixed* \$isFresh) inherited from *Phalcon\Mvc\Model\Resultset*

Set if the resultset is fresh or an old one cached

public **isFresh** () inherited from *Phalcon\Mvc\Model\Resultset*

Tell if the resultset if fresh or an old one cached

public **setHydrateMode** (*mixed* \$hydrateMode) inherited from *Phalcon\Mvc\Model\Resultset*

Sets the hydration mode in the resultset

public **getHydrateMode** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the current hydration mode

public **getCache** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the associated cache for the resultset

public **getMessages** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns the error messages produced by a batch operation

public *boolean* **update** (array \$data, [*Closure* \$conditionCallback]) inherited from *Phalcon\Mvc\Model\Resultset*

Updates every record in the resultset

public **delete** ([*Closure* \$conditionCallback]) inherited from *Phalcon\Mvc\Model\Resultset*

Deletes every record in the resultset

public *Phalcon\Mvc\Model*[] **filter** (*callback* \$filter) inherited from *Phalcon\Mvc\Model\Resultset*

Filters a resultset returning only those the developer requires

```
<?php
$filterred = $robots->filter(
    function ($robot) {
        if ($robot->id < 3) {
            return $robot;
        }
    }
);
```

public array **jsonSerialize** () inherited from *Phalcon\Mvc\Model\Resultset*

Returns serialised model objects as array for json_encode. Calls jsonSerialize on each object if present

```
<?php
$robots = Robots::find();
echo json_encode($robots);
```

Class *Phalcon\Mvc\Model\Row*

implements *Phalcon\Mvc\EntityInterface*, *Phalcon\Mvc\Model\ResultInterface*, *ArrayAccess*, *JsonSerializable*

This component allows *Phalcon\Mvc\Model* to return rows without an associated entity. This objects implements the *ArrayAccess* interface to allow access the object as *object->x* or *array[x]*.

Methods

public **setDirtyState** (*mixed* \$dirtyState)

Set the current object's state

public *boolean* **offsetExists** (*string* | *int* \$index)

Checks whether offset exists in the row

public *string* | *Phalcon\Mvc\ModelInterface* **offsetGet** (*string* | *int* \$index)

Gets a record in a specific position of the row

public **offsetSet** (*string* | *int* \$index, *Phalcon\Mvc\ModelInterface* \$value)

Rows cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public **offsetUnset** (*string* | *int* \$offset)

Rows cannot be changed. It has only been implemented to meet the definition of the ArrayAccess interface

public *mixed* **readAttribute** (*string* \$attribute)

Reads an attribute value by its name

```
<?php
echo $robot->readAttribute("name");
```

public **writeAttribute** (*string* \$attribute, *mixed* \$value)

Writes an attribute value by its name

```
<?php
$robot->writeAttribute("name", "Rosey");
```

public *array* **toArray** ()

Returns the instance as an array representation

public *array* **jsonSerialize** ()

Serializes the object for json_encode

Class *Phalcon\Mvc\Model\Transaction*

implements *Phalcon\Mvc\Model\TransactionInterface*

Transactions are protective blocks where SQL statements are only permanent if they can all succeed as one atomic action. *Phalcon\Transaction* is intended to be used with *Phalcon_Model_Base*. *Phalcon Transactions* should be created using *Phalcon\Transaction\Manager*.

```
<?php

try {
    $manager = new \Phalcon\Mvc\Model\Transaction\Manager();

    $transaction = $manager->get();

    $robot = new Robots();
```

```

$robot->setTransaction($transaction);

$robot->name          = "WALL·E";
$robot->created_at    = date("Y-m-d");

if ($robot->save() === false) {
    $transaction->rollback("Can't save robot");
}

$robotPart = new RobotParts();

$robotPart->setTransaction($transaction);

$robotPart->type = "head";

if ($robotPart->save() === false) {
    $transaction->rollback("Can't save robot part");
}

$transaction->commit();
} catch (Phalcon\Mvc\Model\Transaction\Failed $e) {
    echo "Failed, reason: ", $e->getMessage();
}

```

Methods

public **__construct** (*Phalcon\DiInterface* \$dependencyInjector, [*boolean* \$autoBegin], [*string* \$service])

Phalcon\Mvc\Model\Transaction constructor

public **setTransactionManager** (*Phalcon\Mvc\Model\Transaction\ManagerInterface* \$manager)

Sets transaction manager related to the transaction

public **begin** ()

Starts the transaction

public **commit** ()

Commits the transaction

public *boolean* **rollback** ([*string* \$rollbackMessage], [*Phalcon\Mvc\ModelInterface* \$rollbackRecord])

Rollbacks the transaction

public **getConnection** ()

Returns the connection related to transaction

public **setIsNewTransaction** (*mixed* \$isNew)

Sets if is a reused transaction or new once

public **setRollbackOnAbort** (*mixed* \$rollbackOnAbort)

Sets flag to rollback on abort the HTTP connection

public **isManaged** ()

Checks whether transaction is managed by a transaction manager

public **getMessages** ()

Returns validations messages from last save try

public **isValid** ()

Checks whether internal connection is under an active transaction

public **setRollbackedRecord** (*Phalcon\Mvc\ModelInterface* \$record)

Sets object which generates rollback action

Class **Phalcon\Mvc\Model\Transaction\Exception**

extends class *Phalcon\Mvc\Model\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class `Phalcon\Mvc\Model\Transaction\Failed`

extends class `Phalcon\Mvc\Model\Transaction\Exception`

implements `Throwable`

This class will be thrown to exit a try/catch block for isolated transactions

Methods

public **__construct** (*mixed* \$message, [*Phalcon\Mvc\ModelInterface* \$record])

`Phalcon\Mvc\Model\Transaction\Failed` constructor

public **getRecordMessages** ()

Returns validation record messages which stop the transaction

public **getRecord** ()

Returns validation record messages which stop the transaction

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Mvc\Model\Transaction\Manager

implements *Phalcon\Mvc\Model\Transaction\ManagerInterface*, *Phalcon\Di\InjectionAwareInterface*

A transaction acts on a single database connection. If you have multiple class-specific databases, the transaction will not protect interaction among them.

This class manages the objects that compose a transaction. A transaction produces a unique connection that is passed to every object part of the transaction.

```
<?php

try {
    use Phalcon\Mvc\Model\Transaction\Manager as TransactionManager;

    $transactionManager = new TransactionManager();

    $transaction = $transactionManager->get();

    $robot = new Robots();

    $robot->setTransaction($transaction);

    $robot->name          = "WALL·E";
    $robot->created_at    = date("Y-m-d");

    if ($robot->save() === false) {
        $transaction->rollback("Can't save robot");
    }

    $robotPart = new RobotParts();

    $robotPart->setTransaction($transaction);

    $robotPart->type = "head";

    if ($robotPart->save() === false) {
        $transaction->rollback("Can't save robot part");
    }

    $transaction->commit();
} catch (Phalcon\Mvc\Model\Transaction\Failed $e) {
    echo "Failed, reason: ", $e->getMessage();
}
```

Methods

public **__construct** ([*Phalcon\DiInterface* \$dependencyInjector])

Phalcon\Mvc\Model\Transaction\Manager constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injection container

public **getDI** ()

Returns the dependency injection container

public **setDbService** (*mixed* \$service)

Sets the database service used to run the isolated transactions

public *string* **getDbService** ()

Returns the database service used to isolate the transaction

public **setRollbackPendent** (*mixed* \$rollbackPendent)

Set if the transaction manager must register a shutdown function to clean up pendent transactions

public **getRollbackPendent** ()

Check if the transaction manager is registering a shutdown function to clean up pendent transactions

public **has** ()

Checks whether the manager has an active transaction

public **get** (*mixed* \$autoBegin)

Returns a new \Phalcon\Mvc\Model\Transaction or an already created once This method registers a shutdown function to rollback active connections

public **getOrCreateTransaction** (*mixed* \$autoBegin)

Create/Returns a new transaction or an existing one

public **rollbackPendent** ()

Rollbacks active transactions within the manager

public **commit** ()

Commits active transactions within the manager

public **rollback** (*boolean* \$collect)

Rollbacks active transactions within the manager Collect will remove the transaction from the manager

public **notifyRollback** (*Phalcon\Mvc\Model\TransactionInterface* \$transaction)

Notifies the manager about a rollbacked transaction

public **notifyCommit** (*Phalcon\Mvc\Model\TransactionInterface* \$transaction)

Notifies the manager about a committed transaction

protected **_collectTransaction** (*Phalcon\Mvc\Model\TransactionInterface* \$transaction)

Removes transactions from the TransactionManager

public **collectTransactions** ()

Remove all the transactions from the manager

Class Phalcon\Mvc\Model\ValidationFailed

extends class *Phalcon\Mvc\Model\Exception*

implements *Throwable*

This exception is generated when a model fails to save a record Phalcon\Mvc\Model must be set up to have this behavior

Methods

public **__construct** (*Model* \$model, *Message*[] \$validationMessages)

Phalcon\Mvc\Model\ValidationFailed constructor

public **getModel** ()

Returns the model that generated the messages

public **getMessages** ()

Returns the complete group of messages produced in the validation

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Abstract class Phalcon\Mvc\Model\Validator

implements *Phalcon\Mvc\Model\ValidatorInterface*

This is a base class for Phalcon\Mvc\Model validators

This class is only for backward compatibility reasons to use with Phalcon\Mvc\Collection. Otherwise please use the validators provided by Phalcon\Validation.

Methods

public **__construct** (*array* \$options)

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type])

Appends a message to the validator

public **getMessages** ()

Returns messages generated by the validator

public *array* **getOptions** ()

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue])

Returns an option

public **isSetOption** (*mixed* \$option)

Check whether an option has been defined in the validator options

abstract public **validate** (*Phalcon\Mvc\EntityInterface* \$record) inherited from *Phalcon\Mvc\Model\ValidatorInterface*

...

Class Phalcon\Mvc\Model\Validator\Email

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Allows to validate if email fields has correct values

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php

use Phalcon\Mvc\Model\Validator\Email as EmailValidator;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new EmailValidator(
                [
                    "field" => "electronic_mail",
                ]
            )
        );

        if ($this->validationHasFailed() === true) {
            return false;
        }
    }
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\ExclusionIn

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Phalcon\Mvc\Model\Validator\ExclusionIn

Check if a value is not included into a list of values

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php
use Phalcon\Mvc\Model\Validator\ExclusionIn as ExclusionInValidator;

class Subscribers extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new ExclusionInValidator(
                [
                    "field" => "status",
                    "domain" => ["A", "I"],
                ]
            )
        );

        if ($this->validationHasFailed() === true) {
            return false;
        }
    }
}
```

```

    }
}

```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (array \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (string \$message, [string | array \$field], [string \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public array **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (mixed \$option, [mixed \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (mixed \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\InclusionIn

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Phalcon\Mvc\Model\Validator\InclusionIn

Check if a value is included into a list of values

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```

<?php

use Phalcon\Mvc\Model\Validator\InclusionIn as InclusionInValidator;

class Subscribers extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new InclusionInValidator(
                [
                    "field" => "status",
                    "domain" => ["A", "I"],
                ]
            )
        );
    }
}

```

```
        ]
    )
);

if ($this->validationHasFailed() === true) {
    return false;
}
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\Ip

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Phalcon\Mvc\Model\Validator\IP

Validates that a value is ipv4 address in valid range

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php
use Phalcon\Mvc\Model\Validator\Ip;

class Data extends \Phalcon\Mvc\Collection
{
    public function validation()
```



```

{
    // Any public IP
    $this->validate(
        new IP(
            [
                "field"      => "server_ip",
                "version"    => IP::VERSION_4 | IP::VERSION_6, // v6 and v4.
↪The same if not specified
                "allowReserved" => false,    // False if not specified. Ignored
↪for v6
                "allowPrivate" => false,    // False if not specified
                "message"    => "IP address has to be correct",
            ]
        )
    );

    // Any public v4 address
    $this->validate(
        new IP(
            [
                "field"      => "ip_4",
                "version"    => IP::VERSION_4,
                "message"    => "IP address has to be correct",
            ]
        )
    );

    // Any v6 address
    $this->validate(
        new IP(
            [
                "field"      => "ip6",
                "version"    => IP::VERSION_6,
                "allowPrivate" => true,
                "message"    => "IP address has to be correct",
            ]
        )
    );

    if ($this->validationHasFailed() === true) {
        return false;
    }
}
}

```

Constants

integer **VERSION_4**

integer **VERSION_6**

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\Numericality

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Allows to validate if a field has a valid numeric format

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php
use Phalcon\Mvc\Model\Validator\Numericality as NumericalityValidator;

class Products extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new NumericalityValidator(
                [
                    "field" => "price",
                ]
            )
        );

        if ($this->validationHasFailed() === true) {
            return false;
        }
    }
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (array \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (string \$message, [string | array \$field], [string \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public array **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (mixed \$option, [mixed \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (mixed \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\PresenceOf

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Allows to validate if a field have a value different of null and empty string ("")

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php

use Phalcon\Mvc\Model\Validator\PresenceOf;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new PresenceOf(
                [
                    "field" => "name",
                    "message" => "The name is required",
                ]
            )
        );

        if ($this->validationHasFailed() === true) {
            return false;
        }
    }
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class *Phalcon\Mvc\Model\Validator\Regex*

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Allows validate if the value of a field matches a regular expression

This validator is only for use with *Phalcon\Mvc\Collection*. If you are using *Phalcon\Mvc\Model*, please use the validators provided by *Phalcon\Validation*.

```
<?php

use Phalcon\Mvc\Model\Validator\Regex as RegexValidator;

class Subscriptors extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new RegexValidator(
                [
                    "field"    => "created_at",
                    "pattern" => "/^[0-9]{4}[-\/](0[1-9]|1[12])[-\/](0[1-9]|1[12])[0-9]|3[01])"/,
                ]
            )
        );

        if ($this->validationHasFailed() == true) {
            return false;
        }
    }
}
```

```
}
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\StringLength

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Simply validates specified string length constraints

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php
use Phalcon\Mvc\Model\Validator\StringLength as StringLengthValidator;

class Subscribers extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new StringLengthValidator(
                [
                    "field"      => "name_last",
                    "max"        => 50,
                    "min"        => 2,
                    "messageMaximum" => "We don't like really long names",
                    "messageMinimum" => "We want more than just their initials",
                ]
            )
        );
    }
}
```

```
        ]
    )
);

if ($this->validationHasFailed() === true) {
    return false;
}
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (*array* \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (*string* \$message, [*string* | *array* \$field], [*string* \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public *array* **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (*mixed* \$option, [*mixed* \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (*mixed* \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\Uniqueness

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Validates that a field or a combination of a set of fields are not present more than once in the existing records of the related table

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php

use Phalcon\Mvc\Collection;
use Phalcon\Mvc\Model\Validator\Uniqueness;

class Subscribers extends Collection
{
    public function validation()
```

```

{
    $this->validate(
        new Uniqueness(
            [
                "field" => "email",
                "message" => "Value of field 'email' is already present in_
↪another record",
            ]
        )
    );

    if ($this->validationHasFailed() === true) {
        return false;
    }
}
}

```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (array \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (string \$message, [string | array \$field], [string \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public array **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (mixed \$option, [mixed \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (mixed \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Model\Validator\Url

extends abstract class *Phalcon\Mvc\Model\Validator*

implements *Phalcon\Mvc\Model\ValidatorInterface*

Allows to validate if a field has a url format

This validator is only for use with Phalcon\Mvc\Collection. If you are using Phalcon\Mvc\Model, please use the validators provided by Phalcon\Validation.

```
<?php

use Phalcon\Mvc\Model\Validator\Url as UrlValidator;

class Posts extends \Phalcon\Mvc\Collection
{
    public function validation()
    {
        $this->validate(
            new UrlValidator(
                [
                    "field" => "source_url",
                ]
            )
        );

        if ($this->validationHasFailed() === true) {
            return false;
        }
    }
}
```

Methods

public **validate** (*Phalcon\Mvc\EntityInterface* \$record)

Executes the validator

public **__construct** (array \$options) inherited from *Phalcon\Mvc\Model\Validator*

Phalcon\Mvc\Model\Validator constructor

protected **appendMessage** (string \$message, [string | array \$field], [string \$type]) inherited from *Phalcon\Mvc\Model\Validator*

Appends a message to the validator

public **getMessages** () inherited from *Phalcon\Mvc\Model\Validator*

Returns messages generated by the validator

public array **getOptions** () inherited from *Phalcon\Mvc\Model\Validator*

Returns all the options from the validator

public **getOption** (mixed \$option, [mixed \$defaultValue]) inherited from *Phalcon\Mvc\Model\Validator*

Returns an option

public **isSetOption** (mixed \$option) inherited from *Phalcon\Mvc\Model\Validator*

Check whether an option has been defined in the validator options

Class Phalcon\Mvc\Router

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Mvc\RouterInterface*, *Phalcon\Events\EventsAwareInterface*

Phalcon\MvcRouter is the standard framework router. Routing is the process of taking a URI endpoint (that part of the URI which comes after the base URL) and decomposing it into parameters to determine which module, controller, and action of that controller should receive the request

```
<?php

use Phalcon\MvcRouter;

$route = new Router();

$route->add(
    "/documentation/{chapter}/{name}\.{type:[a-z]+}",
    [
        "controller" => "documentation",
        "action"      => "show",
    ]
);

$route->handle();

echo $route->getControllerName();
```

Constants

integer **URI_SOURCE_GET_URL**

integer **URI_SOURCE_SERVER_REQUEST_URI**

integer **POSITION_FIRST**

integer **POSITION_LAST**

Methods

public **__construct** ([*mixed* \$defaultRoutes])

Phalcon\MvcRouter constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

Sets the events manager

public **getEventManager** ()

Returns the internal event manager

public **getRewriteUri** ()

Get rewrite info. This info is read from \$_GET["_url"]. This returns '/' if the rewrite information cannot be read

public **setUriSource** (*mixed* \$uriSource)

Sets the URI source. One of the URI_SOURCE_* constants

```
<?php

$router->setUriSource(
    Router::URI_SOURCE_SERVER_REQUEST_URI
);
```

public **removeExtraSlashes** (*mixed* \$remove)

Sets whether router must remove the extra slashes in the handled routes

public **setDefaultNamespace** (*mixed* \$namespaceName)

Sets the name of the default namespace

public **setDefaultModule** (*mixed* \$moduleName)

Sets the name of the default module

public **setDefaultController** (*mixed* \$controllerName)

Sets the default controller name

public **setDefaultAction** (*mixed* \$actionName)

Sets the default action name

public **setDefaults** (*array* \$defaults)

Sets an array of default paths. If a route is missing a path the router will use the defined here This method must not be used to set a 404 route

```
<?php

$router->setDefaults(
    [
        "module" => "common",
        "action" => "index",
    ]
);
```

public **getDefaults** ()

Returns an array of default parameters

public **handle** ([*mixed* \$uri])

Handles routing information received from the rewrite engine

```
<?php

// Read the info from the rewrite engine
$router->handle();

// Manually passing an URL
$router->handle("/posts/edit/1");
```

public **add** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods], [*mixed* \$position])

Adds a route to the router without any HTTP constraint

```
<?php

use Phalcon\Mvc\Router;
```

```
$router->add("/about", "About::index");
$router->add("/about", "About::index", ["GET", "POST"]);
$router->add("/about", "About::index", ["GET", "POST"], Router::POSITION_FIRST);
```

public **addGet** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is GET

public **addPost** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is POST

public **addPut** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is PUT

public **addPatch** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is PATCH

public **addDelete** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is DELETE

public **addOptions** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Add a route to the router that only match if the HTTP method is OPTIONS

public **addHead** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is HEAD

public **addPurge** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is PURGE (Squid and Varnish support)

public **addTrace** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is TRACE

public **addConnect** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position])

Adds a route to the router that only match if the HTTP method is CONNECT

public **mount** (*Phalcon\Mvc\Router\GroupInterface* \$group)

Mounts a group of routes in the router

public **notFound** (*mixed* \$paths)

Set a group of paths to be returned when none of the defined routes are matched

public **clear** ()

Removes all the pre-defined routes

public **getNamespaceName** ()

Returns the processed namespace name

public **getModuleName** ()

Returns the processed module name

public **getControllerName** ()

Returns the processed controller name

public **getActionName** ()

Returns the processed action name

public **getParams** ()

Returns the processed parameters

public **getMatchedRoute** ()

Returns the route that matches the handled URI

public **getMatches** ()

Returns the sub expressions in the regular expression matched

public **wasMatched** ()

Checks if the router matches any of the defined routes

public **getRoutes** ()

Returns all the routes defined in the router

public **getRouteById** (*mixed* \$id)

Returns a route object by its id

public **getRouteByName** (*mixed* \$name)

Returns a route object by its name

public **isExactControllerName** ()

Returns whether controller name should not be mangled

Class **Phalcon\Mvc\Router\Annotations**

extends class **Phalcon\Mvc\Router**

implements **Phalcon\Events\EventsAwareInterface**, **Phalcon\Mvc\RouterInterface**, **Phalcon\DI\InjectionAwareInterface**

A router that reads routes annotations from classes/resources

```
<?php
use Phalcon\Mvc\Router\Annotations;

$di->setShared(
    "router",
    function() {
        // Use the annotations router
        $router = new Annotations(false);

        // This will do the same as above but only if the handled uri starts with /
        ↪ robots
        $router->addResource("Robots", "/robots");

        return $router;
    }
);
```

Constants

integer **URI_SOURCE_GET_URL**

integer **URI_SOURCE_SERVER_REQUEST_URI**

integer **POSITION_FIRST**

integer **POSITION_LAST**

Methods

public **addResource** (*mixed* \$handler, [*mixed* \$prefix])

Adds a resource to the annotations handler A resource is a class that contains routing annotations

public **addModuleResource** (*mixed* \$module, *mixed* \$handler, [*mixed* \$prefix])

Adds a resource to the annotations handler A resource is a class that contains routing annotations The class is located in a module

public **handle** ([*mixed* \$uri])

Produce the routing parameters from the rewrite information

public **processControllerAnnotation** (*mixed* \$handler, *Phalcon\Annotations\Annotation* \$annotation)

Checks for annotations in the controller docblock

public **processActionAnnotation** (*mixed* \$module, *mixed* \$namespaceName, *mixed* \$controller, *mixed* \$action, *Phalcon\Annotations\Annotation* \$annotation)

Checks for annotations in the public methods of the controller

public **setControllerSuffix** (*mixed* \$controllerSuffix)

Changes the controller class suffix

public **setActionSuffix** (*mixed* \$actionSuffix)

Changes the action method suffix

public **getResources** ()

Return the registered resources

public **__construct** ([*mixed* \$defaultRoutes]) inherited from *Phalcon\Mvc\Router*

Phalcon\Mvc\Router constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Mvc\Router*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Mvc\Router*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Mvc\Router*

Sets the events manager

public **getEventManager** () inherited from *Phalcon\Mvc\Router*

Returns the internal event manager

public **getRewriteUri** () inherited from *Phalcon\Mvc\Router*

Get rewrite info. This info is read from `$_GET['_url']`. This returns `'/'` if the rewrite information cannot be read

public **setUriSource** (*mixed* \$uriSource) inherited from *Phalcon\Mvc\Router*

Sets the URI source. One of the `URI_SOURCE_*` constants

```
<?php

$router->setUriSource (
    Router::URI_SOURCE_SERVER_REQUEST_URI
);
```

public **removeExtraSlashes** (*mixed* \$remove) inherited from *Phalcon\Mvc\Router*

Set whether router must remove the extra slashes in the handled routes

public **setDefaultNamespace** (*mixed* \$namespaceName) inherited from *Phalcon\Mvc\Router*

Sets the name of the default namespace

public **setDefaultModule** (*mixed* \$moduleName) inherited from *Phalcon\Mvc\Router*

Sets the name of the default module

public **setDefaultController** (*mixed* \$controllerName) inherited from *Phalcon\Mvc\Router*

Sets the default controller name

public **setDefaultAction** (*mixed* \$actionName) inherited from *Phalcon\Mvc\Router*

Sets the default action name

public **setDefaults** (*array* \$defaults) inherited from *Phalcon\Mvc\Router*

Sets an array of default paths. If a route is missing a path the router will use the defined here This method must not be used to set a 404 route

```
<?php

$router->setDefaults (
    [
        "module" => "common",
        "action" => "index",
    ]
);
```

public **getDefaults** () inherited from *Phalcon\Mvc\Router*

Returns an array of default parameters

public **add** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*

Adds a route to the router without any HTTP constraint

```
<?php

use Phalcon\Mvc\Router;

$router->add("/about", "About::index");
$router->add("/about", "About::index", ["GET", "POST"]);
$router->add("/about", "About::index", ["GET", "POST"], Router::POSITION_FIRST);
```

public **addGet** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is GET

public **addPost** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is POST

public **addPut** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is PUT

public **addPatch** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is PATCH

public **addDelete** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is DELETE

public **addOptions** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Add a route to the router that only match if the HTTP method is OPTIONS

public **addHead** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is HEAD

public **addPurge** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is PURGE (Squid and Varnish support)

public **addTrace** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is TRACE

public **addConnect** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$position]) inherited from *Phalcon\Mvc\Router*
Adds a route to the router that only match if the HTTP method is CONNECT

public **mount** (*Phalcon\Mvc\Router\GroupInterface* \$group) inherited from *Phalcon\Mvc\Router*
Mounts a group of routes in the router

public **notFound** (*mixed* \$paths) inherited from *Phalcon\Mvc\Router*
Set a group of paths to be returned when none of the defined routes are matched

public **clear** () inherited from *Phalcon\Mvc\Router*
Removes all the pre-defined routes

public **getNamespaceName** () inherited from *Phalcon\Mvc\Router*
Returns the processed namespace name

public **getModuleName** () inherited from *Phalcon\Mvc\Router*
Returns the processed module name

public **getControllerName** () inherited from *Phalcon\Mvc\Router*
Returns the processed controller name

public **getActionName** () inherited from *Phalcon\Mvc\Router*
Returns the processed action name

public **getParams** () inherited from *Phalcon\Mvc\Router*
Returns the processed parameters

public **getMatchedRoute** () inherited from *Phalcon\Mvc\Router*

Returns the route that matches the handled URI

public **getMatches** () inherited from *Phalcon\Mvc\Router*

Returns the sub expressions in the regular expression matched

public **wasMatched** () inherited from *Phalcon\Mvc\Router*

Checks if the router matches any of the defined routes

public **getRoutes** () inherited from *Phalcon\Mvc\Router*

Returns all the routes defined in the router

public **getRouteById** (*mixed* \$id) inherited from *Phalcon\Mvc\Router*

Returns a route object by its id

public **getRouteByName** (*mixed* \$name) inherited from *Phalcon\Mvc\Router*

Returns a route object by its name

public **isExactControllerName** () inherited from *Phalcon\Mvc\Router*

Returns whether controller name should not be mangled

Class *Phalcon\Mvc\Router\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Mvc\Router\Group](#)

implements [Phalcon\Mvc\Router\GroupInterface](#)

Helper class to create a group of routes with common attributes

```
<?php

$router = new \Phalcon\Mvc\Router();

//Create a group with a common module and controller
$blog = new Group(
    [
        "module"      => "blog",
        "controller" => "index",
    ]
);

//All the routes start with /blog
$blog->setPrefix("/blog");

//Add a route to the group
$blog->add(
    "/save",
    [
        "action" => "save",
    ]
);

//Add another route to the group
$blog->add(
    "/edit/{id}",
    [
        "action" => "edit",
    ]
);

//This route maps to a controller different than the default
$blog->add(
    "/blog",
    [
        "controller" => "about",
        "action"      => "index",
    ]
);

//Add the group to the router
$router->mount($blog);
```

Methods

public **__construct** ([*mixed* \$paths])

Phalcon\Mvc\Router\Group constructor

public **setHostname** (*mixed* \$hostname)

Set a hostname restriction for all the routes in the group

public **getHostname** ()

Returns the hostname restriction

public **setPrefix** (*mixed* \$prefix)

Set a common uri prefix for all the routes in this group

public **getPrefix** ()

Returns the common prefix for all the routes

public **beforeMatch** (*mixed* \$beforeMatch)

Sets a callback that is called if the route is matched. The developer can implement any arbitrary conditions here If the callback returns false the route is treated as not matched

public **getBeforeMatch** ()

Returns the 'before match' callback if any

public **setPaths** (*mixed* \$paths)

Set common paths for all the routes in the group

public **getPaths** ()

Returns the common paths defined for this group

public **getRoutes** ()

Returns the routes added to the group

public **add** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods])

Adds a route to the router on any HTTP method

```
<?php
$router->add("/about", "About::index");
```

public *Phalcon\Mvc\Router\Route* **addGet** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is GET

public *Phalcon\Mvc\Router\Route* **addPost** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is POST

public *Phalcon\Mvc\Router\Route* **addPut** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is PUT

public *Phalcon\Mvc\Router\Route* **addPatch** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is PATCH

public *Phalcon\Mvc\Router\Route* **addDelete** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is DELETE

public *Phalcon\Mvc\Router\Route* **addOptions** (*string* \$pattern, [*string/array* \$paths])

Add a route to the router that only match if the HTTP method is OPTIONS

public *Phalcon\Mvc\Router\Route* **addHead** (*string* \$pattern, [*string/array* \$paths])

Adds a route to the router that only match if the HTTP method is HEAD

public **clear** ()

Removes all the pre-defined routes

protected **_addRoute** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods])

Adds a route applying the common attributes

Class *Phalcon\Mvc\Router\Route*

implements Phalcon\Mvc\Router\RouteInterface

This class represents every route added to the router

Methods

public **__construct** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods])

Phalcon\Mvc\Router\Route constructor

public **compilePattern** (*mixed* \$pattern)

Replaces placeholders from pattern returning a valid PCRE regular expression

public **via** (*mixed* \$httpMethods)

Set one or more HTTP methods that constraint the matching of the route

```
<?php
$route->via("GET");

$route->via(
    [
        "GET",
        "POST",
    ]
);
```

public **extractNamedParams** (*mixed* \$pattern)

Extracts parameters from a string

public **reConfigure** (*mixed* \$pattern, [*mixed* \$paths])

Reconfigure the route adding a new pattern and a set of paths

public static **getRoutePaths** ([*mixed* \$paths])

Returns routePaths

public **getName** ()

Returns the route's name

public **setName** (*mixed* \$name)

Sets the route's name

```
<?php

$router->add(
    "/about",
    [
        "controller" => "about",
    ]
)->setName("about");
```

public **beforeMatch** (*mixed* \$callback)

Sets a callback that is called if the route is matched. The developer can implement any arbitrary conditions here. If the callback returns false the route is treated as not matched.

```
<?php

$router->add(
    "/login",
    [
        "module"      => "admin",
        "controller" => "session",
    ]
)->beforeMatch(
    function ($uri, $route) {
        // Check if the request was made with Ajax
        if ($_SERVER["HTTP_X_REQUESTED_WITH"] === "xmlhttprequest") {
            return false;
        }

        return true;
    }
);
```

public **getBeforeMatch** ()

Returns the 'before match' callback if any

public **match** (*mixed* \$callback)

Allows to set a callback to handle the request directly in the route

```
<?php

$router->add(
    "/help",
    []
)->match(
    function () {
        return $this->getResponse()->redirect("https://support.google.com/", true);
    }
);
```

public **getMatch** ()

Returns the 'match' callback if any

public **getRouteId** ()

Returns the route's id

public **getPattern** ()

Returns the route's pattern

public **getCompiledPattern** ()

Returns the route's compiled pattern

public **getPaths** ()

Returns the paths

public **getReversedPaths** ()

Returns the paths using positions as keys and names as values

public **setHttpMethods** (*mixed* \$httpMethods)

Sets a set of HTTP methods that constraint the matching of the route (alias of via)

```
<?php
$route->setHttpMethods ("GET");
$route->setHttpMethods (["GET", "POST"]);
```

public **getHttpMethods** ()

Returns the HTTP methods that constraint matching the route

public **setHostname** (*mixed* \$hostname)

Sets a hostname restriction to the route

```
<?php
$route->setHostname ("localhost");
```

public **getHostname** ()

Returns the hostname restriction if any

public **setGroup** (*Phalcon\Mvc\Router\GroupInterface* \$group)

Sets the group associated with the route

public **getGroup** ()

Returns the group associated with the route

public **convert** (*mixed* \$name, *mixed* \$converter)

Adds a converter to perform an additional transformation for certain parameter

public **getConverters** ()

Returns the router converter

public static **reset** ()

Resets the internal route id generator

Class Phalcon\Mvc\Url

implements *Phalcon\Mvc\UrlInterface*, *Phalcon\Di\InjectionAwareInterface*

This components helps in the generation of: URIs, URLs and Paths

```
<?php

// Generate a URL appending the URI to the base URI
echo $url->get("products/edit/1");

// Generate a URL for a predefined route
echo $url->get(
    [
        "for"    => "blog-post",
        "title"  => "some-cool-stuff",
        "year"   => "2012",
    ]
);
```

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **setBaseUri** (*mixed* \$baseUri)

Sets a prefix for all the URIs to be generated

```
<?php

$url->setBaseUri("/invo/");

$url->setBaseUri("/invo/index.php/");
```

public **setStaticBaseUri** (*mixed* \$staticBaseUri)

Sets a prefix for all static URLs generated

```
<?php

$url->setStaticBaseUri("/invo/");
```

public **getBaseUri** ()

Returns the prefix for all the generated urls. By default /

public **getStaticBaseUri** ()

Returns the prefix for all the generated static urls. By default /

public **setBasePath** (*mixed* \$basePath)

Sets a base path for all the generated paths

```
<?php

$url->setBasePath("/var/www/htdocs/");
```

public **getBasePath** ()

Returns the base path

public **get** ([mixed \$uri], [mixed \$args], [mixed \$local], [mixed \$baseUri])

Generates a URL

```
<?php

// Generate a URL appending the URI to the base URI
echo $url->get("products/edit/1");

// Generate a URL for a predefined route
echo $url->get(
    [
        "for"    => "blog-post",
        "title"  => "some-cool-stuff",
        "year"   => "2015",
    ]
);

// Generate a URL with GET arguments (/show/products?id=1&name=Carrots)
echo $url->get(
    "show/products",
    [
        "id"     => 1,
        "name"   => "Carrots",
    ]
);

// Generate an absolute URL by setting the third parameter as false.
echo $url->get(
    "https://phalconphp.com/",
    null,
    false
);
```

public **getStatic** ([mixed \$uri])

Generates a URL for a static resource

```
<?php

// Generate a URL for a static resource
echo $url->getStatic("img/logo.png");

// Generate a URL for a static predefined route
echo $url->getStatic(
    [
        "for" => "logo-cdn",
    ]
);
```

public **path** ([mixed \$path])

Generates a local path

Class `Phalcon\Mvc\Url\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private `Exception` `__clone` () inherited from `Exception`

Clone the exception

public `__construct` ([*string* \$message], [*int* \$code], [`Exception` \$previous]) inherited from `Exception`

Exception constructor

public `__wakeup` () inherited from `Exception`

...

final public *string* `getMessage` () inherited from `Exception`

Gets the Exception message

final public *int* `getCode` () inherited from `Exception`

Gets the Exception code

final public *string* `getFile` () inherited from `Exception`

Gets the file in which the exception occurred

final public *int* `getLine` () inherited from `Exception`

Gets the line in which the exception occurred

final public *array* `getTrace` () inherited from `Exception`

Gets the stack trace

final public `Exception` `getPrevious` () inherited from `Exception`

Returns previous Exception

final public `Exception` `getTraceAsString` () inherited from `Exception`

Gets the stack trace as a string

public *string* `__toString` () inherited from `Exception`

String representation of the exception

Class `Phalcon\Mvc\User\Component`

extends abstract class `Phalcon\Di\Injectable`

implements `Phalcon\Events\EventsAwareInterface`, `Phalcon\Di\InjectionAwareInterface`

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class *Phalcon\Mvc\User\Module*

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class *Phalcon\Mvc\User\Plugin*

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*

Methods

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class Phalcon\Mvc\View

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Mvc\ViewInterface*, *Phalcon\Mvc\ViewBaseInterface*

Phalcon\Mvc\View is a class for working with the “view” portion of the model-view-controller pattern. That is, it exists to help keep the view script separate from the model and controller scripts. It provides a system of helpers, output filters, and variable escaping.

```
<?php
use Phalcon\Mvc\View;

$view = new View();

// Setting views directory
$view->setViewsDir("app/views/");

$view->start();

// Shows recent posts view (app/views/posts/recent.phtml)
$view->render("posts", "recent");
$view->finish();

// Printing views output
echo $view->getContent();
```

Constants

integer **LEVEL_MAIN_LAYOUT**

integer **LEVEL_AFTER_TEMPLATE**

integer **LEVEL_LAYOUT**

integer **LEVEL_BEFORE_TEMPLATE**

integer **LEVEL_ACTION_VIEW**

integer **LEVEL_NO_RENDER**

integer **CACHE_MODE_NONE**

integer **CACHE_MODE_INVERSE**

Methods

public **getRenderLevel** ()

...

public **getCurrentRenderLevel** ()

...

public **getRegisteredEngines** ()

public **__construct** ([array \$options])

Phalcon\Mvc\View constructor

final protected **_isAbsolutePath** (*mixed* \$path)

Checks if a path is absolute or not

public **setViewsDir** (*mixed* \$viewsDir)

Sets the views directory. Depending of your platform, always add a trailing slash or backslash

public **getViewsDir** ()

Gets views directory

public **setLayoutsDir** (*mixed* \$layoutsDir)

Sets the layouts sub-directory. Must be a directory under the views directory. Depending of your platform, always add a trailing slash or backslash

```
<?php
$view->setLayoutsDir("../common/layouts/");
```

public **getLayoutsDir** ()

Gets the current layouts sub-directory

public **setPartialsDir** (*mixed* \$partialsDir)

Sets a partials sub-directory. Must be a directory under the views directory. Depending of your platform, always add a trailing slash or backslash

```
<?php
$view->setPartialsDir("../common/partials/");
```

public **getPartialsDir** ()

Gets the current partials sub-directory

public **setBasePath** (*mixed* \$basePath)

Sets base path. Depending of your platform, always add a trailing slash or backslash

```
<?php

$view->setBasePath(__DIR__ . "/");
```

public **getBasePath** ()

Gets base path

public **setRenderLevel** (*mixed* \$level)

Sets the render level for the view

```
<?php

// Render the view related to the controller only
$this->view->setRenderLevel(
    View::LEVEL_LAYOUT
);
```

public **disableLevel** (*mixed* \$level)

Disables a specific level of rendering

```
<?php

// Render all levels except ACTION level
$this->view->disableLevel(
    View::LEVEL_ACTION_VIEW
);
```

public **setMainView** (*mixed* \$viewPath)

Sets default view name. Must be a file without extension in the views directory

```
<?php

// Renders as main view views-dir/base.phtml
$this->view->setMainView("base");
```

public **getMainView** ()

Returns the name of the main view

public **setLayout** (*mixed* \$layout)

Change the layout to be used instead of using the name of the latest controller name

```
<?php

$this->view->setLayout("main");
```

public **getLayout** ()

Returns the name of the main view

public **setTemplateBefore** (*mixed* \$templateBefore)

Sets a template before the controller layout

public **cleanTemplateBefore** ()

Resets any “template before” layouts

public **setTemplateAfter** (*mixed* \$templateAfter)

Sets a “template after” controller layout

public **cleanTemplateAfter** ()

Resets any template before layouts

public **setParamToView** (*mixed* \$key, *mixed* \$value)

Adds parameters to views (alias of setVar)

```
<?php
$this->view->setParamToView("products", $products);
```

public **setVars** (*array* \$params, [*mixed* \$merge])

Set all the render params

```
<?php
$this->view->setVars (
    [
        "products" => $products,
    ]
);
```

public **setVar** (*mixed* \$key, *mixed* \$value)

Set a single view parameter

```
<?php
$this->view->setVar("products", $products);
```

public **getVar** (*mixed* \$key)

Returns a parameter previously set in the view

public **getParamsToView** ()

Returns parameters to views

public **getControllerName** ()

Gets the name of the controller rendered

public **getActionName** ()

Gets the name of the action rendered

public **getParams** ()

Gets extra parameters of the action rendered

public **start** ()

Starts rendering process enabling the output buffering

protected **_loadTemplateEngines** ()

Loads registered template engines, if none is registered it will use Phalcon\Mvc\View\Engine\Php

protected **_engineRender** (*array* \$engines, *string* \$viewPath, *boolean* \$silence, *boolean* \$mustClean, [*Phalcon\Cache\BackendInterface* \$cache])

Checks whether view exists on registered extensions and render it

public **registerEngines** (*array* \$engines)

Register templating engines

```
<?php
$this->view->registerEngines(
    [
        ".phtml" => "Phalcon\\Mvc\\View\\Engine\\Php",
        ".volt"  => "Phalcon\\Mvc\\View\\Engine\\Volt",
        ".mhtml" => "MyCustomEngine",
    ]
);
```

public **exists** (*mixed* \$view)

Checks whether view exists

public **render** (*string* \$controllerName, *string* \$actionName, [*array* \$params])

Executes render process from dispatching data

```
<?php
// Shows recent posts view (app/views/posts/recent.phtml)
$view->start()->render("posts", "recent")->finish();
```

public **pick** (*mixed* \$renderView)

Choose a different view to render instead of last-controller/last-action

```
<?php
use Phalcon\Mvc\Controller;

class ProductsController extends Controller
{
    public function saveAction()
    {
        // Do some save stuff...

        // Then show the list view
        $this->view->pick("products/list");
    }
}
```

public **getPartial** (*mixed* \$partialPath, [*mixed* \$params])

Renders a partial view

```
<?php
// Retrieve the contents of a partial
echo $this->getPartial("shared/footer");
```

```
<?php

// Retrieve the contents of a partial with arguments
echo $this->getPartial(
    "shared/footer",
    [
        "content" => $html,
    ]
);
```

public **partial** (*mixed* \$partialPath, [*mixed* \$params])

Renders a partial view

```
<?php

// Show a partial inside another view
$this->partial("shared/footer");
```

```
<?php

// Show a partial inside another view with parameters
$this->partial(
    "shared/footer",
    [
        "content" => $html,
    ]
);
```

public *string* **getRender** (*string* \$controllerName, *string* \$actionName, [*array* \$params], [*mixed* \$configCallback])

Perform the automatic rendering returning the output as a string

```
<?php

$template = $this->view->getRender(
    "products",
    "show",
    [
        "products" => $products,
    ]
);
```

public **finish** ()

Finishes the render process by stopping the output buffering

protected **_createCache** ()

Create a Phalcon\Cache based on the internal cache options

public **isCaching** ()

Check if the component is currently caching the output content

public **getCache** ()

Returns the cache instance used to cache

public **cache** ([*mixed* \$options])

Cache the actual view render to certain level

```
<?php

$this->view->cache (
    [
        "key"      => "my-key",
        "lifetime" => 86400,
    ]
);
```

public **setContent** (*mixed* \$content)

Externally sets the view content

```
<?php

$this->view->setContent ("<h1>hello</h1>");
```

public **getContent** ()

Returns cached output from another view stage

public **getActiveRenderPath** ()

Returns the path (or paths) of the views that are currently rendered

public **disable** ()

Disables the auto-rendering process

public **enable** ()

Enables the auto-rendering process

public **reset** ()

Resets the view component to its factory default values

public **__set** (*mixed* \$key, *mixed* \$value)

Magic method to pass variables to the views

```
<?php

$this->view->products = $products;
```

public **__get** (*mixed* \$key)

Magic method to retrieve a variable passed to the view

```
<?php

echo $this->view->products;
```

public **isDisabled** ()

Whether automatic rendering is enabled

public **__isset** (*mixed* \$key)

Magic method to retrieve if a variable is set in the view

```
<?php

echo isset ($this->view->products);
```

protected **getViewsDirs** ()

Gets views directories

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\DiInjectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\DiInjectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\DiInjectable*

Returns the internal event manager

Abstract class **Phalcon\Mvc\View\Engine**

extends abstract class *Phalcon\DiInjectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\DiInjectionAwareInterface*, *Phalcon\Mvc\View\EngineInterface*

All the template engine adapters must inherit this class. This provides basic interfacing between the engine and the *Phalcon\Mvc\View* component.

Methods

public **__construct** (*Phalcon\Mvc\View\BaseInterface* \$view, [*Phalcon\DiInterface* \$dependencyInjector])

Phalcon\Mvc\View\Engine constructor

public **getContent** ()

Returns cached output on another view stage

public *string* **partial** (*string* \$partialPath, [*array* \$params])

Renders a partial inside another view

public **getView** ()

Returns the view component related to the adapter

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\DiInjectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\DiInjectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\DiInjectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\DiInjectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

abstract public **render** (*mixed* \$path, *mixed* \$params, [*mixed* \$mustClean]) inherited from *Phalcon\Mvc\View\EngineInterface*

...

Class *Phalcon\Mvc\View\Engine\Php*

extends abstract class *Phalcon\Mvc\View\Engine*

implements *Phalcon\Mvc\View\EngineInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Events\EventsAwareInterface*

Adapter to use PHP itself as templating engine

Methods

public **render** (*mixed* \$path, *mixed* \$params, [*mixed* \$mustClean])

Renders a view using the template engine

public **__construct** (*Phalcon\Mvc\ViewBaseInterface* \$view, [*Phalcon\DiInterface* \$dependencyInjector]) inherited from *Phalcon\Mvc\View\Engine*

Phalcon\Mvc\View\Engine constructor

public **getContent** () inherited from *Phalcon\Mvc\View\Engine*

Returns cached output on another view stage

public *string* **partial** (*string* \$partialPath, [*array* \$params]) inherited from *Phalcon\Mvc\View\Engine*

Renders a partial inside another view

public **getView** () inherited from *Phalcon\Mvc\View\Engine*

Returns the view component related to the adapter

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class `Phalcon\Mvc\View\Engine\Volt`

extends abstract class `Phalcon\Mvc\View\Engine`

implements `Phalcon\Mvc\View\EngineInterface`, `Phalcon\Di\InjectionAwareInterface`, `Phalcon\Events\EventsAwareInterface`

Designer friendly and fast template engine for PHP written in Zephir/C

Methods

public **setOptions** (*array* \$options)

Set Volt's options

public **getOptions** ()

Return Volt's options

public **getCompiler** ()

Returns the Volt's compiler

public **render** (*mixed* \$templatePath, *mixed* \$params, [*mixed* \$mustClean])

Renders a view using the template engine

public **length** (*mixed* \$item)

Length filter. If an array/object is passed a count is performed otherwise a strlen/mb_strlen

public **isIncluded** (*mixed* \$needle, *mixed* \$haystack)

Checks if the needle is included in the haystack

public **convertEncoding** (*mixed* \$text, *mixed* \$from, *mixed* \$to)

Performs a string conversion

public **slice** (*mixed* \$value, [*mixed* \$start], [*mixed* \$end])

Extracts a slice from a string/array/traversable object value

public **sort** (*array* \$value)

Sorts an array

public **callMacro** (*mixed* \$name, [*array* \$arguments])

Checks if a macro is defined and calls it

public **__construct** (*Phalcon\Mvc\ViewBaseInterface* \$view, [*Phalcon\DiInterface* \$dependencyInjector]) inherited from *Phalcon\Mvc\View\Engine*

Phalcon\Mvc\View\Engine constructor

public **getContent** () inherited from *Phalcon\Mvc\View\Engine*

Returns cached output on another view stage

public *string* **partial** (*string* \$partialPath, [*array* \$params]) inherited from *Phalcon\Mvc\View\Engine*

Renders a partial inside another view

public **getView** () inherited from *Phalcon\Mvc\View\Engine*

Returns the view component related to the adapter

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method **__get**

Class Phalcon\Mvc\View\Engine\Volt\Compiler

implements Phalcon\Di\InjectionAwareInterface

This class reads and compiles Volt templates into PHP plain code

```
<?php
$compiler = new \Phalcon\Mvc\View\Engine\Volt\Compiler();
$compiler->compile("views/partials/header.volt");
require $compiler->getCompiledTemplatePath();
```

Methods

public **__construct** ([*Phalcon\Mvc\ViewBaseInterface* \$view])

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setOptions** (array \$options)

Sets the compiler options

public **setOption** (string \$option, *mixed* \$value)

Sets a single compiler option

public string **getOption** (string \$option)

Returns a compiler's option

public **getOptions** ()

Returns the compiler options

final public *mixed* **fireExtensionEvent** (string \$name, [array \$arguments])

Fires an event to registered extensions

public **addExtension** (*mixed* \$extension)

Registers a Volt's extension

public **getExtensions** ()

Returns the list of extensions registered in Volt

public **addFunction** (*mixed* \$name, *mixed* \$definition)

Register a new function in the compiler

public **getFunctions** ()

Register the user registered functions

public **addFilter** (*mixed* \$name, *mixed* \$definition)

Register a new filter in the compiler

public **getFilters** ()

Register the user registered filters

public **setUniquePrefix** (*mixed* \$prefix)

Set a unique prefix to be used as prefix for compiled variables

public **getUniquePrefix** ()

Return a unique prefix to be used as prefix for compiled variables and contexts

public **attributeReader** (*array* \$expr)

Resolves attribute reading

public **functionCall** (*array* \$expr)

Resolves function intermediate code into PHP function calls

public **resolveTest** (*array* \$test, *mixed* \$left)

Resolves filter intermediate code into a valid PHP expression

final protected **resolveFilter** (*array* \$filter, *mixed* \$left)

Resolves filter intermediate code into PHP function calls

final public **expression** (*array* \$expr)

Resolves an expression node in an AST volt tree

final protected *string* | *array* **_statementListOrExtends** (*array* \$statements)

Compiles a block of statements

public **compileForeach** (*array* \$statement, [*mixed* \$extendsMode])

Compiles a "foreach" intermediate code representation into plain PHP code

public **compileForElse** ()

Generates a 'forelse' PHP code

public **compileIf** (*array* \$statement, [*mixed* \$extendsMode])

Compiles a 'if' statement returning PHP code

public **compileElseIf** (*array* \$statement)

Compiles a “elseif” statement returning PHP code

public **compileCache** (*array* \$statement, [*mixed* \$extendsMode])

Compiles a “cache” statement returning PHP code

public **compileSet** (*array* \$statement)

Compiles a “set” statement returning PHP code

public **compileDo** (*array* \$statement)

Compiles a “do” statement returning PHP code

public **compileReturn** (*array* \$statement)

Compiles a “return” statement returning PHP code

public **compileAutoEscape** (*array* \$statement, *mixed* \$extendsMode)

Compiles a “autoescape” statement returning PHP code

public *string* **compileEcho** (*array* \$statement)

Compiles a ‘{{ ‘ ’ }}’ statement returning PHP code

public **compileInclude** (*array* \$statement)

Compiles a ‘include’ statement returning PHP code

public **compileMacro** (*array* \$statement, *mixed* \$extendsMode)

Compiles macros

public *string* **compileCall** (*array* \$statement, *boolean* \$extendsMode)

Compiles calls to macros

final protected **_statementList** (*array* \$statements, [*mixed* \$extendsMode])

Traverses a statement list compiling each of its nodes

protected **_compileSource** (*mixed* \$viewCode, [*mixed* \$extendsMode])

Compiles a Volt source code returning a PHP plain version

public **compileString** (*mixed* \$viewCode, [*mixed* \$extendsMode])

Compiles a template into a string

```
<?php
echo $compiler->compileString('{{ "hello world" }}');
```

public *string* | *array* **compileFile** (*string* \$path, *string* \$compiledPath, [*boolean* \$extendsMode])

Compiles a template into a file forcing the destination path

```
<?php
$compiler->compile("views/layouts/main.volt", "views/layouts/main.volt.php");
```

public **compile** (*mixed* \$templatePath, [*mixed* \$extendsMode])

Compiles a template into a file applying the compiler options This method does not return the compiled path if the template was not compiled

```
<?php
$compiler->compile("views/layouts/main.volt");
require $compiler->getCompiledTemplatePath();
```

public **getTemplatePath** ()

Returns the path that is currently being compiled

public **getCompiledTemplatePath** ()

Returns the path to the last compiled template

public array **parse** (string \$viewCode)

Parses a Volt template returning its intermediate representation

```
<?php
print_r(
    $compiler->parse("{ 3 + 2 }")
);
```

protected **getFinalPath** (mixed \$path)

Gets the final path with VIEW

Class **Phalcon\Mvc\View\Engine\Volt\Exception**

*extends class **Phalcon\Mvc\View\Exception***

*implements **Throwable***

Methods

final private **Exception** **__clone** () inherited from **Exception**

Clone the exception

public **__construct** ([string \$message], [int \$code], [**Exception** \$previous]) inherited from **Exception**

Exception constructor

public **__wakeup** () inherited from **Exception**

...

final public string **getMessage** () inherited from **Exception**

Gets the Exception message

final public int **getCode** () inherited from **Exception**

Gets the Exception code

final public string **getFile** () inherited from **Exception**

Gets the file in which the exception occurred

final public int **getLine** () inherited from **Exception**

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Mvc\View\Exception](#)

extends class [Phalcon\Exception](#)

implements [Throwable](#)

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class Phalcon\Mvc\View\Simple

extends abstract class *Phalcon\DI\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\DI\InjectionAwareInterface*, *Phalcon\Mvc\View\ManagerInterface*

This component allows to render views without hierarchical levels

```

<?php

use Phalcon\Mvc\View\Simple as View;

$view = new View();

// Render a view
echo $view->render(
    "templates/my-view",
    [
        "some" => $param,
    ]
);

// Or with filename with extension
echo $view->render(
    "templates/my-view.volt",
    [
        "parameter" => $here,
    ]
);

```

Methods

public **getRegisteredEngines** ()

public **__construct** ([array \$options])

Phalcon\Mvc\View\Simple constructor

public **setViewsDir** (mixed \$viewsDir)

Sets views directory. Depending of your platform, always add a trailing slash or backslash

public **getViewsDir** ()

Gets views directory

public **registerEngines** (array \$engines)

Register templating engines

```

<?php

$this->view->registerEngines(
    [
        ".phtml" => "Phalcon\\Mvc\\View\\Engine\\Php",
        ".volt"  => "Phalcon\\Mvc\\View\\Engine\\Volt",
        ".mhtml" => "MyCustomEngine",
    ]
);

```

protected *array* **_loadTemplateEngines** ()

Loads registered template engines, if none is registered it will use Phalcon\Mvc\View\Engine\Php

final protected **_internalRender** (*string* \$path, *array* \$params)

Tries to render the view with every engine registered in the component

public **render** (*string* \$path, [*array* \$params])

Renders a view

public **partial** (*mixed* \$partialPath, [*mixed* \$params])

Renders a partial view

```
<?php
// Show a partial inside another view
$this->partial("shared/footer");
```

```
<?php
// Show a partial inside another view with parameters
$this->partial(
    "shared/footer",
    [
        "content" => $html,
    ]
);
```

public **setCacheOptions** (*array* \$options)

Sets the cache options

public *array* **getCacheOptions** ()

Returns the cache options

protected **_createCache** ()

Create a Phalcon\Cache based on the internal cache options

public **getCache** ()

Returns the cache instance used to cache

public **cache** ([*mixed* \$options])

Cache the actual view render to certain level

```
<?php
$this->view->cache(
    [
        "key"          => "my-key",
        "lifetime"     => 86400,
    ]
);
```

public **setParamToView** (*mixed* \$key, *mixed* \$value)

Adds parameters to views (alias of setVar)

```
<?php
$this->view->setParamToView("products", $products);
```

public **setVars** (array \$params, [*mixed* \$merge])

Set all the render params

```
<?php
$this->view->setVars (
    [
        "products" => $products,
    ]
);
```

public **setVar** (*mixed* \$key, *mixed* \$value)

Set a single view parameter

```
<?php
$this->view->setVar("products", $products);
```

public **getVar** (*mixed* \$key)

Returns a parameter previously set in the view

public array **getParamsToView** ()

Returns parameters to views

public **setContent** (*mixed* \$content)

Externally sets the view content

```
<?php
$this->view->setContent("<h1>hello</h1>");
```

public **getContent** ()

Returns cached output from another view stage

public string **getActiveRenderPath** ()

Returns the path of the view that is currently rendered

public **__set** (*mixed* \$key, *mixed* \$value)

Magic method to pass variables to the views

```
<?php
$this->view->products = $products;
```

public **__get** (*mixed* \$key)

Magic method to retrieve a variable passed to the view

```
<?php
echo $this->view->products;
```

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

Abstract class **Phalcon\Paginator\Adapter**

implements Phalcon\Paginator\AdapterInterface

Methods

public **setCurrentPage** (*mixed* \$page)

Set the current page number

public **setLimit** (*mixed* \$limitRows)

Set current rows limit

public **getLimit** ()

Get current rows limit

abstract public **getPaginate** () inherited from *Phalcon\Paginator\AdapterInterface*

...

Class **Phalcon\Paginator\Adapter\Model**

extends abstract class *Phalcon\Paginator\Adapter*

implements Phalcon\Paginator\AdapterInterface

This adapter allows to paginate data using a *Phalcon\Mvc\Model* resultset as a base.

```
<?php
use Phalcon\Paginator\Adapter\Model;

$paginator = new Model(
[
    "data" => Robots::find(),
    "limit" => 25,
    "page" => $currentPage,
]
);
```

```
$paginate = $paginator->getPaginate();
```

Methods

public **__construct** (array \$config)

Phalcon\Paginator\Adapter\Model constructor

public **getPaginate** ()

Returns a slice of the resultset to show in the pagination

public **setCurrentPage** (mixed \$page) inherited from *Phalcon\Paginator\Adapter*

Set the current page number

public **setLimit** (mixed \$limitRows) inherited from *Phalcon\Paginator\Adapter*

Set current rows limit

public **getLimit** () inherited from *Phalcon\Paginator\Adapter*

Get current rows limit

Class Phalcon\Paginator\Adapter\NativeArray

extends abstract class *Phalcon\Paginator\Adapter*

implements *Phalcon\Paginator\AdapterInterface*

Pagination using a PHP array as source of data

```
<?php

use Phalcon\Paginator\Adapter\NativeArray;

$paginator = new NativeArray(
    [
        "data" => [
            ["id" => 1, "name" => "Artichoke"],
            ["id" => 2, "name" => "Carrots"],
            ["id" => 3, "name" => "Beet"],
            ["id" => 4, "name" => "Lettuce"],
            ["id" => 5, "name" => ""],
        ],
        "limit" => 2,
        "page" => $currentPage,
    ]
);
```

Methods

public **__construct** (array \$config)

Phalcon\Paginator\Adapter\NativeArray constructor

public **getPaginate** ()

Returns a slice of the resultset to show in the pagination

public **setCurrentPage** (*mixed* \$page) inherited from *Phalcon\Paginator\Adapter*

Set the current page number

public **setLimit** (*mixed* \$limitRows) inherited from *Phalcon\Paginator\Adapter*

Set current rows limit

public **getLimit** () inherited from *Phalcon\Paginator\Adapter*

Get current rows limit

Class *Phalcon\Paginator\Adapter\QueryBuilder*

extends abstract class *Phalcon\Paginator\Adapter*

implements *Phalcon\Paginator\AdapterInterface*

Pagination using a PHQL query builder as source of data

```
<?php

use Phalcon\Paginator\Adapter\QueryBuilder;

$builder = $this->modelsManager->createBuilder()
    ->columns("id, name")
    ->from("Robots")
    ->orderBy("name");

$paginator = new QueryBuilder(
    [
        "builder" => $builder,
        "limit"   => 20,
        "page"    => 1,
    ]
);
```

Methods

public **__construct** (*array* \$config)

public **getCurrentPage** ()

Get the current page number

public **setQueryBuilder** (*Phalcon\Mvc\Model\Query\Builder* \$builder)

Set query builder object

public **getQueryBuilder** ()

Get query builder object

public **getPaginate** ()

Returns a slice of the resultset to show in the pagination

public **setCurrentPage** (*mixed* \$page) inherited from *Phalcon\Paginator\Adapter*

Set the current page number

public **setLimit** (*mixed* \$limitRows) inherited from *Phalcon\Paginator\Adapter*

Set current rows limit

public **getLimit** () inherited from *Phalcon\Paginator\Adapter*

Get current rows limit

Class *Phalcon\Paginator\Exception*

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Queue\Beanstalk

Class to access the beanstalk queue service. Partially implements the protocol version 1.2

```
<?php

use Phalcon\Queue\Beanstalk;

$queue = new Beanstalk(
    [
        "host"      => "127.0.0.1",
        "port"      => 11300,
        "persistent" => true,
    ]
);
```

Constants

integer **DEFAULT_DELAY**

integer **DEFAULT_PRIORITY**

integer **DEFAULT_TTR**

string **DEFAULT_TUBE**

string **DEFAULT_HOST**

integer **DEFAULT_PORT**

Methods

public **__construct** ([array \$parameters])

public **connect** ()

Makes a connection to the Beanstalkd server

public **put** (*mixed* \$data, [array \$options])

Puts a job on the queue using specified tube.

public **reserve** ([*mixed* \$timeout])

Reserves/locks a ready job from the specified tube.

public **choose** (*mixed* \$tube)

Change the active tube. By default the tube is “default”.

public **watch** (*mixed* \$tube)

The watch command adds the named tube to the watch list for the current connection.

public **ignore** (*mixed* \$tube)

It removes the named tube from the watch list for the current connection.

public **pauseTube** (*mixed* \$tube, *mixed* \$delay)

Can delay any new job being reserved for a given time.

public **kick** (*mixed* \$bound)

The kick command applies only to the currently used tube.

public **stats** ()

Gives statistical information about the system as a whole.

public **statsTube** (*mixed* \$tube)

Gives statistical information about the specified tube if it exists.

public **listTubes** ()

Returns a list of all existing tubes.

public **listTubeUsed** ()

Returns the tube currently being used by the client.

public **listTubesWatched** ()

Returns a list tubes currently being watched by the client.

public **peekReady** ()

Inspect the next ready job.

public **peekBuried** ()

Return the next job in the list of buried jobs.

public **peekDelayed** ()

Return the next job in the list of buried jobs.

public **jobPeek** (*mixed* \$id)

The peek commands let the client inspect a job in the system.

final public **readStatus** ()

Reads the latest status from the Beanstalkd server

final public **readYaml** ()

Fetch a YAML payload from the Beanstalkd server

public **read** (*mixed* \$length)

Reads a packet from the socket. Prior to reading from the socket will check for availability of the connection.

protected **write** (*mixed* \$data)

Writes data to the socket. Performs a connection if none is available

public **disconnect** ()

Closes the connection to the beanstalk server.

public **quit** ()

Simply closes the connection.

Class **Phalcon\Queue\Beanstalk\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Queue\Beanstalk\Job](#)

Represents a job in a beanstalk queue

Methods

public **getId** ()

public **getBody** ()

public **__construct** ([Phalcon\Queue\Beanstalk](#) \$queue, *mixed* \$id, *mixed* \$body)

public **delete** ()

Removes a job from the server entirely

public **release** ([*mixed* \$priority], [*mixed* \$delay])

The release command puts a reserved job back into the ready queue (and marks its state as “ready”) to be run by any client. It is normally used when the job fails because of a transitory error.

public **bury** ([mixed \$priority])

The bury command puts a job into the “buried” state. Buried jobs are put into a FIFO linked list and will not be touched by the server again until a client kicks them with the “kick” command.

public **touch** ()

The *touch* command allows a worker to request more time to work on a job. This is useful for jobs that potentially take a long time, but you still want the benefits of a TTR pulling a job away from an unresponsive worker. A worker may periodically tell the server that it’s still alive and processing a job (e.g. it may do this on *DEADLINE_SOON*). The command postpones the auto release of a reserved job until TTR seconds from when the command is issued.

public **kick** ()

Move the job to the ready queue if it is delayed or buried.

public **stats** ()

Gives statistical information about the specified job if it exists.

public **__wakeup** ()

Checks if the job has been modified after unserializing the object

Final class Phalcon\Registry

implements [ArrayAccess](#), [Countable](#), [Iterator](#), [Traversable](#)

A registry is a container for storing objects and values in the application space. By storing the value in a registry, the same object is always available throughout your application.

```
<?php

$registry = new \Phalcon\Registry();

// Set value
$registry->something = "something";
// or
$registry["something"] = "something";

// Get value
$value = $registry->something;
// or
$value = $registry["something"];

// Check if the key exists
$exists = isset($registry->something);
// or
$exists = isset($registry["something"]);

// Unset
unset($registry->something);
// or
unset($registry["something"]);
```

In addition to [ArrayAccess](#), [Phalcon\Registry](#) also implements [Countable](#) (`count($registry)` will return the number of elements in the registry), [Serializable](#) and [Iterator](#) (you can iterate over the registry using a `foreach` loop) interfaces. For PHP 5.4 and higher, [JsonSerializable](#) interface is implemented.

Phalcon\Registry is very fast (it is typically faster than any userspace implementation of the registry); however, this comes at a price: Phalcon\Registry is a final class and cannot be inherited from.

Though Phalcon\Registry exposes methods like `__get()`, `offsetGet()`, `count()` etc, it is not recommended to invoke them manually (these methods exist mainly to match the interfaces the registry implements): `$registry->__get("property")` is several times slower than `$registry->property`.

Internally all the magic methods (and interfaces except `JsonSerializable`) are implemented using object handlers or similar techniques: this allows to bypass relatively slow method calls.

Methods

final public **__construct** ()

Registry constructor

final public **offsetExists** (*mixed* \$offset)

Checks if the element is present in the registry

final public **offsetGet** (*mixed* \$offset)

Returns an index in the registry

final public **offsetSet** (*mixed* \$offset, *mixed* \$value)

Sets an element in the registry

final public **offsetUnset** (*mixed* \$offset)

Unsets an element in the registry

final public **count** ()

Checks how many elements are in the register

final public **next** ()

Moves cursor to next row in the registry

final public **key** ()

Gets pointer number of active row in the registry

final public **rewind** ()

Rewinds the registry cursor to its beginning

public **valid** ()

Checks if the iterator is valid

public **current** ()

Obtains the current value in the internal iterator

final public **__set** (*mixed* \$key, *mixed* \$value)

Sets an element in the registry

final public **__get** (*mixed* \$key)

Returns an index in the registry

final public **__isset** (*mixed* \$key)

...

```
final public __unset (mixed $key)
```

```
...
```

Class Phalcon\Security

implements Phalcon\Di\InjectionAwareInterface

This component provides a set of functions to improve the security in Phalcon applications

```
<?php

$login    = $this->request->getPost ("login");
$password = $this->request->getPost ("password");

$user = Users::findFirstByLogin($login);

if ($user) {
    if ($this->security->checkHash($password, $user->password)) {
        // The password is valid
    }
}
```

Constants

integer **CRYPT_DEFAULT**

integer **CRYPT_STD_DES**

integer **CRYPT_EXT_DES**

integer **CRYPT_MD5**

integer **CRYPT_BLOWFISH**

integer **CRYPT_BLOWFISH_A**

integer **CRYPT_BLOWFISH_X**

integer **CRYPT_BLOWFISH_Y**

integer **CRYPT_SHA256**

integer **CRYPT_SHA512**

Methods

```
public setWorkFactor (mixed $workFactor)
```

```
...
```

```
public getWorkFactor ()
```

```
...
```

```
public __construct ()
```

Phalcon\Security constructor

```
public setDI (Phalcon\DiInterface $dependencyInjector)
```

Sets the dependency injector

public **getDI** ()

Returns the internal dependency injector

public **setRandomBytes** (*mixed* \$randomBytes)

Sets a number of bytes to be generated by the openssl pseudo random generator

public **getRandomBytes** ()

Returns a number of bytes to be generated by the openssl pseudo random generator

public **getRandom** ()

Returns a secure random number generator instance

public **getSaltBytes** (*mixed* \$numberBytes)

Generate a >22-length pseudo random string to be used as salt for passwords

public **hash** (*mixed* \$password, [*mixed* \$workFactor])

Creates a password hash using bcrypt with a pseudo random salt

public **checkHash** (*mixed* \$password, *mixed* \$passwordHash, [*mixed* \$maxPassLength])

Checks a plain text password and its hash version to check if the password matches

public **isLegacyHash** (*mixed* \$passwordHash)

Checks if a password hash is a valid bcrypt's hash

public **getTokenKey** ()

Generates a pseudo random token key to be used as input's name in a CSRF check

public **getToken** ()

Generates a pseudo random token value to be used as input's value in a CSRF check

public **checkToken** ([*mixed* \$tokenKey], [*mixed* \$tokenValue], [*mixed* \$destroyIfValid])

Check if the CSRF token sent in the request is the same that the current in session

public **getSessionToken** ()

Returns the value of the CSRF token in session

public **destroyToken** ()

Removes the value of the CSRF token and key from session

public **computeHmac** (*mixed* \$data, *mixed* \$key, *mixed* \$algo, [*mixed* \$raw])

Computes a HMAC

public **setDefaultHash** (*mixed* \$defaultHash)

Sets the default hash

public **getDefaultHash** ()

Returns the default hash

public **hasLibreSsl** ()

Testing for LibreSSL

public **getSslVersionNumber** ()

Getting OpenSSL or LibreSSL version Parse OPENSSL_VERSION_TEXT because
OPENSSL_VERSION_NUMBER is no use for LibreSSL.

```
<?php

if ($security->getSslVersionNumber() >= 20105) {
    // ...
}
```

Class Phalcon\Security\Exception

extends class [Phalcon\Exception](#)

implements [Throwable](#)

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class Phalcon\Security\Random

Secure random number generator class.

Provides secure random number generator which is suitable for generating session key in HTTP cookies, etc.

It supports following secure random number generators:

- random_bytes (PHP 7)
- libsodium
- openssl, libressl
- /dev/urandom

Phalcon\Security\Random could be mainly useful for:

- Key generation (e.g. generation of complicated keys)
- Generating random passwords for new user accounts
- Encryption systems

```
<?php

$random = new \Phalcon\Security\Random();

// Random binary string
$bytes = $random->bytes();

// Random hex string
echo $random->hex(10); // a29f470508d5ccb8e289
echo $random->hex(10); // 533c2f08d5eee750e64a
echo $random->hex(11); // f362ef96cb9ffef150c9cd
echo $random->hex(12); // 95469d667475125208be45c4
echo $random->hex(13); // 05475e8af4a34f8f743ab48761

// Random base64 string
echo $random->base64(12); // XfIN81jGGuKkcE1E
echo $random->base64(12); // 3rcq39QzGK9fUqh8
echo $random->base64(); // DRcfbngL/iOo9hGGvy1TcQ==
echo $random->base64(16); // SvdhPcIHDZFad838Bb0Swg==

// Random URL-safe base64 string
echo $random->base64Safe(); // PcV6jGbJ6vfVw7hfKIFDGA
echo $random->base64Safe(); // GD8JojhzSTrqX7Q8J6uug
echo $random->base64Safe(8); // mGyy0evy3ok
echo $random->base64Safe(null, true); // DRrAgOFkS4rvRiVHFefcQ==

// Random UUID
echo $random->uuid(); // db082997-2572-4e2c-a046-5eefe97b1235
echo $random->uuid(); // da2aa0e2-b4d0-4e3c-99f5-f5ef62c57fe2
echo $random->uuid(); // 75e6b628-c562-4117-bb76-61c4153455a9
echo $random->uuid(); // dc446df1-0848-4d05-b501-4af3c220c13d

// Random number between 0 and $len
echo $random->number(256); // 84
echo $random->number(256); // 79
echo $random->number(100); // 29
echo $random->number(300); // 40
```



```
// Random base58 string
echo $random->base58(); // 4kUgL2pdQMSCQtjE
echo $random->base58(); // Umjxqf7ZPwh765yR
echo $random->base58(24); // qoXcgmw4A9dys26HaNEdCRj9
echo $random->base58(7); // 774SJD3vgP
```

This class partially borrows SecureRandom library from Ruby

Methods

public **bytes** ([mixed \$len])

Generates a random binary string The *Random::bytes* method returns a string and accepts as input an int representing the length in bytes to be returned. If \$len is not specified, 16 is assumed. It may be larger in future. The result may contain any byte: “x00” - “xFF”.

```
<?php

$random = new \Phalcon\Security\Random();

$bytes = $random->bytes();
var_dump(bin2hex($bytes));
// Possible output: string(32) "00f6c04b144b41fad6a59111c126e1ee"
```

public **hex** ([mixed \$len])

Generates a random hex string If \$len is not specified, 16 is assumed. It may be larger in future. The length of the result string is usually greater of \$len.

```
<?php

$random = new \Phalcon\Security\Random();

echo $random->hex(10); // a29f470508d5ccb8e289
```

public **base58** ([mixed \$n])

Generates a random base58 string If \$len is not specified, 16 is assumed. It may be larger in future. The result may contain alphanumeric characters except 0, O, I and l. It is similar to Base64 but has been modified to avoid both non-alphanumeric characters and letters which might look ambiguous when printed.

```
<?php

$random = new \Phalcon\Security\Random();

echo $random->base58(); // 4kUgL2pdQMSCQtjE
```

public **base64** ([mixed \$len])

Generates a random base64 string If \$len is not specified, 16 is assumed. It may be larger in future. The length of the result string is usually greater of \$len. Size formula: $4 * (\$len / 3)$ and this need to be rounded up to a multiple of 4.

```
<?php

$random = new \Phalcon\Security\Random();

echo $random->base64(12); // 3rcq39QzGK9fUqh8
```

public **base64Safe** (*mixed* \$len), (*mixed* \$padding)

Generates a random URL-safe base64 string If \$len is not specified, 16 is assumed. It may be larger in future. The length of the result string is usually greater of \$len. By default, padding is not generated because “=” may be used as a URL delimiter. The result may contain A-Z, a-z, 0-9, “-” and “_”. “=” is also used if \$padding is true. See RFC 3548 for the definition of URL-safe base64.

```
<?php
$random = new \Phalcon\Security\Random();
echo $random->base64Safe(); // GD8JojhzSTrqX7Q8J6uug
```

public **uuid** ()

Generates a v4 random UUID (Universally Unique Identifier) The version 4 UUID is purely random (except the version). It doesn’t contain meaningful information such as MAC address, time, etc. See RFC 4122 for details of UUID. This algorithm sets the version number (4 bits) as well as two reserved bits. All other bits (the remaining 122 bits) are set using a random or pseudorandom data source. Version 4 UUIDs have the form xxxxxxxx-xxxx-4xxx-xxxx-xxxxxxxxxxxx where x is any hexadecimal digit and y is one of 8, 9, A, or B (e.g., f47ac10b-58cc-4372-a567-0e02b2c3d479).

```
<?php
$random = new \Phalcon\Security\Random();
echo $random->uuid(); // 1378c906-64bb-4f81-a8d6-4ae1bfcdec22
```

public **number** (*mixed* \$len)

Generates a random number between 0 and \$len Returns an integer: 0 <= result <= \$len.

```
<?php
$random = new \Phalcon\Security\Random();
echo $random->number(16); // 8
```

Abstract class Phalcon\Session\Adapter

implements Phalcon\Session\AdapterInterface

Base class for Phalcon\Session adapters

Constants

integer **SESSION_ACTIVE**

integer **SESSION_NONE**

integer **SESSION_DISABLED**

Methods

public **__construct** ([*array* \$options])

Phalcon\Session\Adapter constructor

public **start** ()

Starts the session (if headers are already sent the session will not be started)

public **setOptions** (*array* \$options)

Sets session's options

```
<?php

$session->setOptions (
    [
        "uniqueId" => "my-private-app",
    ]
);
```

public **getOptions** ()

Get internal options

public **setName** (*mixed* \$name)

Set session name

public **getName** ()

Get session name

public **regenerateId** ([*mixed* \$deleteOldSession])

public **get** (*mixed* \$index, [*mixed* \$defaultValue], [*mixed* \$remove])

Gets a session variable from an application context

```
<?php

$session->get ("auth", "yes");
```

public **set** (*mixed* \$index, *mixed* \$value)

Sets a session variable in an application context

```
<?php

$session->set ("auth", "yes");
```

public **has** (*mixed* \$index)

Check whether a session variable is set in an application context

```
<?php

var_dump (
    $session->has ("auth")
);
```

public **remove** (*mixed* \$index)

Removes a session variable from an application context

```
<?php
$session->remove("auth");
```

public **getId** ()

Returns active session id

```
<?php
echo $session->getId();
```

public **setId** (mixed \$id)

Set the current session id

```
<?php
$session->setId($id);
```

public **isStarted** ()

Check whether the session has been started

```
<?php
var_dump (
    $session->isStarted()
);
```

public **destroy** ([mixed \$removeData])

Destroys the active session

```
<?php
var_dump (
    $session->destroy()
);

var_dump (
    $session->destroy(true)
);
```

public **status** ()

Returns the status of the current session.

```
<?php
var_dump (
    $session->status()
);

if ($session->status() !== $session::SESSION_ACTIVE) {
    $session->start();
}
```

public **__get** (mixed \$index)

Alias: Gets a session variable from an application context

public **__set** (*mixed* \$index, *mixed* \$value)

Alias: Sets a session variable in an application context

public **__isset** (*mixed* \$index)

Alias: Check whether a session variable is set in an application context

public **__unset** (*mixed* \$index)

Alias: Removes a session variable from an application context

public **__destruct** ()

...

Class `Phalcon\Session\Adapter\Files`

extends abstract class `Phalcon\Session\Adapter`

implements `Phalcon\Session\AdapterInterface`

Constants

integer **SESSION_ACTIVE**

integer **SESSION_NONE**

integer **SESSION_DISABLED**

Methods

public **__construct** ([*array* \$options]) inherited from `Phalcon\Session\Adapter`

Phalcon\Session\Adapter constructor

public **start** () inherited from `Phalcon\Session\Adapter`

Starts the session (if headers are already sent the session will not be started)

public **setOptions** (*array* \$options) inherited from `Phalcon\Session\Adapter`

Sets session's options

```
<?php
$session->setOptions (
    [
        "uniqueId" => "my-private-app",
    ]
);
```

public **getOptions** () inherited from `Phalcon\Session\Adapter`

Get internal options

public **setName** (*mixed* \$name) inherited from `Phalcon\Session\Adapter`

Set session name

public **getName** () inherited from *Phalcon\Session\Adapter*

Get session name

public **regenerateId** ([mixed \$deleteOldSession]) inherited from *Phalcon\Session\Adapter*

public **get** (mixed \$index, [mixed \$defaultValue], [mixed \$remove]) inherited from *Phalcon\Session\Adapter*

Gets a session variable from an application context

```
<?php
$session->get("auth", "yes");
```

public **set** (mixed \$index, mixed \$value) inherited from *Phalcon\Session\Adapter*

Sets a session variable in an application context

```
<?php
$session->set("auth", "yes");
```

public **has** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Check whether a session variable is set in an application context

```
<?php
var_dump(
    $session->has("auth")
);
```

public **remove** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Removes a session variable from an application context

```
<?php
$session->remove("auth");
```

public **getId** () inherited from *Phalcon\Session\Adapter*

Returns active session id

```
<?php
echo $session->getId();
```

public **setId** (mixed \$id) inherited from *Phalcon\Session\Adapter*

Set the current session id

```
<?php
$session->setId($id);
```

public **isStarted** () inherited from *Phalcon\Session\Adapter*

Check whether the session has been started

```
<?php
var_dump (
    $session->isStarted()
);
```

public **destroy** ([mixed \$removeData]) inherited from *Phalcon\Session\Adapter*

Destroys the active session

```
<?php
var_dump (
    $session->destroy()
);

var_dump (
    $session->destroy(true)
);
```

public **status** () inherited from *Phalcon\Session\Adapter*

Returns the status of the current session.

```
<?php
var_dump (
    $session->status()
);

if ($session->status() !== $session::SESSION_ACTIVE) {
    $session->start();
}
```

public **__get** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Gets a session variable from an application context

public **__set** (mixed \$index, mixed \$value) inherited from *Phalcon\Session\Adapter*

Alias: Sets a session variable in an application context

public **__isset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Check whether a session variable is set in an application context

public **__unset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Removes a session variable from an application context

public **__destruct** () inherited from *Phalcon\Session\Adapter*

...

Class *Phalcon\Session\Adapter\Libmemcached*

extends abstract class *Phalcon\Session\Adapter*

implements *Phalcon\Session\AdapterInterface*

This adapter store sessions in libmemcached

```
<?php

use Phalcon\Session\Adapter\Libmemcached;

$session = new Libmemcached(
    [
        "servers" => [
            [
                "host"    => "localhost",
                "port"    => 11211,
                "weight" => 1,
            ],
        ],
        "client" => [
            \Memcached::OPT_HASH           => \Memcached::HASH_MD5,
            \Memcached::OPT_PREFIX_KEY => "prefix.",
        ],
        "lifetime" => 3600,
        "prefix"   => "my_",
    ]
);

$session->start();

$session->set("var", "some-value");

echo $session->get("var");
```

Constants

integer **SESSION_ACTIVE**

integer **SESSION_NONE**

integer **SESSION_DISABLED**

Methods

public **getLibmemcached** ()

...

public **getLifetime** ()

...

public **__construct** (array \$options)

Phalcon\Session\Adapter\Libmemcached constructor

public **open** ()

...

public **close** ()

...

public **read** (mixed \$sessionId)

public **write** (*mixed* \$sessionId, *mixed* \$data)

public **destroy** ([*mixed* \$sessionId])

public **gc** ()

public **start** () inherited from *Phalcon\Session\Adapter*

Starts the session (if headers are already sent the session will not be started)

public **setOptions** (*array* \$options) inherited from *Phalcon\Session\Adapter*

Sets session's options

```
<?php
$session->setOptions (
    [
        "uniqueId" => "my-private-app",
    ]
);
```

public **getOptions** () inherited from *Phalcon\Session\Adapter*

Get internal options

public **setName** (*mixed* \$name) inherited from *Phalcon\Session\Adapter*

Set session name

public **getName** () inherited from *Phalcon\Session\Adapter*

Get session name

public **regenerateId** ([*mixed* \$deleteOldSession]) inherited from *Phalcon\Session\Adapter*

public **get** (*mixed* \$index, [*mixed* \$defaultValue], [*mixed* \$remove]) inherited from *Phalcon\Session\Adapter*

Gets a session variable from an application context

```
<?php
$session->get ("auth", "yes");
```

public **set** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Session\Adapter*

Sets a session variable in an application context

```
<?php
$session->set ("auth", "yes");
```

public **has** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Check whether a session variable is set in an application context

```
<?php
var_dump (
    $session->has ("auth")
);
```

public **remove** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Removes a session variable from an application context

```
<?php
$session->remove("auth");
```

public **getId** () inherited from *Phalcon\Session\Adapter*

Returns active session id

```
<?php
echo $session->getId();
```

public **setId** (mixed \$id) inherited from *Phalcon\Session\Adapter*

Set the current session id

```
<?php
$session->setId($id);
```

public **isStarted** () inherited from *Phalcon\Session\Adapter*

Check whether the session has been started

```
<?php
var_dump(
    $session->isStarted()
);
```

public **status** () inherited from *Phalcon\Session\Adapter*

Returns the status of the current session.

```
<?php
var_dump(
    $session->status()
);

if ($session->status() !== $session::SESSION_ACTIVE) {
    $session->start();
}
```

public **__get** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Gets a session variable from an application context

public **__set** (mixed \$index, mixed \$value) inherited from *Phalcon\Session\Adapter*

Alias: Sets a session variable in an application context

public **__isset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Check whether a session variable is set in an application context

public **__unset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Removes a session variable from an application context

public **__destruct** () inherited from *Phalcon\Session\Adapter*

...

Class Phalcon\Session\Adapter\Memcache

extends abstract class *Phalcon\Session\Adapter*

implements *Phalcon\Session\AdapterInterface*

This adapter store sessions in memcache

```

<?php

use Phalcon\Session\Adapter\Memcache;

$session = new Memcache (
    [
        "uniqueId" => "my-private-app",
        "host"      => "127.0.0.1",
        "port"      => 11211,
        "persistent" => true,
        "lifetime"  => 3600,
        "prefix"    => "my_",
    ]
);

$session->start ();

$session->set ("var", "some-value");

echo $session->get ("var");

```

Constants

integer **SESSION_ACTIVE**

integer **SESSION_NONE**

integer **SESSION_DISABLED**

Methods

public **getMemcache** ()

...

public **getLifetime** ()

...

public **__construct** ([array \$options])

Phalcon\Session\Adapter\Memcache constructor

public **open** ()

...

public **close** ()

...

public **read** (*mixed* \$sessionId)

public **write** (*mixed* \$sessionId, *mixed* \$data)

public **destroy** ([*mixed* \$sessionId])

public **gc** ()

public **start** () inherited from *Phalcon\Session\Adapter*

Starts the session (if headers are already sent the session will not be started)

public **setOptions** (array \$options) inherited from *Phalcon\Session\Adapter*

Sets session's options

```
<?php

$session->setOptions (
    [
        "uniqueId" => "my-private-app",
    ]
);
```

public **getOptions** () inherited from *Phalcon\Session\Adapter*

Get internal options

public **setName** (*mixed* \$name) inherited from *Phalcon\Session\Adapter*

Set session name

public **getName** () inherited from *Phalcon\Session\Adapter*

Get session name

public **regenerateId** ([*mixed* \$deleteOldSession]) inherited from *Phalcon\Session\Adapter*

public **get** (*mixed* \$index, [*mixed* \$defaultValue], [*mixed* \$remove]) inherited from *Phalcon\Session\Adapter*

Gets a session variable from an application context

```
<?php

$session->get ("auth", "yes");
```

public **set** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Session\Adapter*

Sets a session variable in an application context

```
<?php

$session->set ("auth", "yes");
```

public **has** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Check whether a session variable is set in an application context

```
<?php

var_dump (
    $session->has ("auth")
);
```

public **remove** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Removes a session variable from an application context

```
<?php
$session->remove("auth");
```

public **getId** () inherited from *Phalcon\Session\Adapter*

Returns active session id

```
<?php
echo $session->getId();
```

public **setId** (mixed \$id) inherited from *Phalcon\Session\Adapter*

Set the current session id

```
<?php
$session->setId($id);
```

public **isStarted** () inherited from *Phalcon\Session\Adapter*

Check whether the session has been started

```
<?php
var_dump(
    $session->isStarted()
);
```

public **status** () inherited from *Phalcon\Session\Adapter*

Returns the status of the current session.

```
<?php
var_dump(
    $session->status()
);

if ($session->status() !== $session::SESSION_ACTIVE) {
    $session->start();
}
```

public **__get** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Gets a session variable from an application context

public **__set** (mixed \$index, mixed \$value) inherited from *Phalcon\Session\Adapter*

Alias: Sets a session variable in an application context

public **__isset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Check whether a session variable is set in an application context

public **__unset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Removes a session variable from an application context

public **__destruct** () inherited from *Phalcon\Session\Adapter*

...

Class Phalcon\Session\Adapter\Redis

extends abstract class *Phalcon\Session\Adapter*

implements *Phalcon\Session\AdapterInterface*

This adapter store sessions in Redis

```
<?php

use Phalcon\Session\Adapter\Redis;

$session = new Redis (
    [
        "uniqueId"  => "my-private-app",
        "host"      => "localhost",
        "port"      => 6379,
        "auth"      => "foobared",
        "persistent" => false,
        "lifetime"  => 3600,
        "prefix"    => "my",
        "index"     => 1,
    ]
);

$session->start ();

$session->set ("var", "some-value");

echo $session->get ("var");
```

Constants

integer **SESSION_ACTIVE**

integer **SESSION_NONE**

integer **SESSION_DISABLED**

Methods

public **getRedis** ()

...

public **getLifetime** ()

...

public **__construct** ([array \$options])

Phalcon\Session\Adapter\Redis constructor

public **open** ()

public **close** ()

public **read** (*mixed* \$sessionId)

public **write** (*mixed* \$sessionId, *mixed* \$data)

public **destroy** ([*mixed* \$sessionId])

public **gc** ()

public **start** () inherited from *Phalcon\Session\Adapter*

Starts the session (if headers are already sent the session will not be started)

public **setOptions** (array \$options) inherited from *Phalcon\Session\Adapter*

Sets session's options

```
<?php
$session->setOptions (
    [
        "uniqueId" => "my-private-app",
    ]
);
```

public **getOptions** () inherited from *Phalcon\Session\Adapter*

Get internal options

public **setName** (*mixed* \$name) inherited from *Phalcon\Session\Adapter*

Set session name

public **getName** () inherited from *Phalcon\Session\Adapter*

Get session name

public **regenerateId** ([*mixed* \$deleteOldSession]) inherited from *Phalcon\Session\Adapter*

public **get** (*mixed* \$index, [*mixed* \$defaultValue], [*mixed* \$remove]) inherited from *Phalcon\Session\Adapter*

Gets a session variable from an application context

```
<?php
$session->get ("auth", "yes");
```

public **set** (*mixed* \$index, *mixed* \$value) inherited from *Phalcon\Session\Adapter*

Sets a session variable in an application context

```
<?php
$session->set ("auth", "yes");
```

public **has** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Check whether a session variable is set in an application context

```
<?php
var_dump (
    $session->has ("auth")
);
```

public **remove** (*mixed* \$index) inherited from *Phalcon\Session\Adapter*

Removes a session variable from an application context

```
<?php
$session->remove("auth");
```

public **getId** () inherited from *Phalcon\Session\Adapter*

Returns active session id

```
<?php
echo $session->getId();
```

public **setId** (mixed \$id) inherited from *Phalcon\Session\Adapter*

Set the current session id

```
<?php
$session->setId($id);
```

public **isStarted** () inherited from *Phalcon\Session\Adapter*

Check whether the session has been started

```
<?php
var_dump(
    $session->isStarted()
);
```

public **status** () inherited from *Phalcon\Session\Adapter*

Returns the status of the current session.

```
<?php
var_dump(
    $session->status()
);

if ($session->status() !== $session::SESSION_ACTIVE) {
    $session->start();
}
```

public **__get** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Gets a session variable from an application context

public **__set** (mixed \$index, mixed \$value) inherited from *Phalcon\Session\Adapter*

Alias: Sets a session variable in an application context

public **__isset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Check whether a session variable is set in an application context

public **__unset** (mixed \$index) inherited from *Phalcon\Session\Adapter*

Alias: Removes a session variable from an application context

public **__destruct** () inherited from *Phalcon\Session\Adapter*

...

Class Phalcon\Session\Bag

implements *Phalcon\Di\InjectionAwareInterface*, *Phalcon\Session\BagInterface*, *IteratorAggregate*, *Traversable*, *ArrayAccess*, *Countable*

This component helps to separate session data into “namespaces”. Working by this way you can easily create groups of session variables into the application

```
<?php
$user = new \Phalcon\Session\Bag("user");

$user->name = "Kimbra Johnson";
$user->age  = 22;
```

Methods

public **__construct** (*mixed* \$name)

Phalcon\Session\Bag constructor

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the DependencyInjector container

public **getDI** ()

Returns the DependencyInjector container

public **initialize** ()

Initializes the session bag. This method must not be called directly, the class calls it when its internal data is accessed

public **destroy** ()

Destroys the session bag

```
<?php
$user->destroy();
```

public **set** (*mixed* \$property, *mixed* \$value)

Sets a value in the session bag

```
<?php
$user->set("name", "Kimbra");
```

public **__set** (*mixed* \$property, *mixed* \$value)

Magic setter to assign values to the session bag

```
<?php
$user->name = "Kimbra";
```

public **get** (*mixed* \$property, [*mixed* \$defaultValue])

Obtains a value from the session bag optionally setting a default value

```
<?php
echo $user->get("name", "Kimbra");
```

public **__get** (*mixed* \$property)

Magic getter to obtain values from the session bag

```
<?php
echo $user->name;
```

public **has** (*mixed* \$property)

Check whether a property is defined in the internal bag

```
<?php
var_dump (
    $user->has("name")
);
```

public **__isset** (*mixed* \$property)

Magic isset to check whether a property is defined in the bag

```
<?php
var_dump (
    isset($user["name"])
);
```

public **remove** (*mixed* \$property)

Removes a property from the internal bag

```
<?php
$user->remove("name");
```

public **__unset** (*mixed* \$property)

Magic unset to remove items using the array syntax

```
<?php
unset($user["name"]);
```

final public **count** ()

Return length of bag

```
<?php
echo $user->count();
```

final public **getIterator** ()

Returns the bag iterator

final public **offsetSet** (*mixed* \$property, *mixed* \$value)

...

final public **offsetExists** (*mixed* \$property)

...

final public **offsetUnset** (*mixed* \$property)

...

final public **offsetGet** (*mixed* \$property)

...

Class **Phalcon\Session\Exception**

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public *Exception* **getPrevious** () inherited from *Exception*

Returns previous Exception

final public *Exception* **getTraceAsString** () inherited from *Exception*

Gets the stack trace as a string

public *string* **__toString** () inherited from *Exception*

String representation of the exception

Class Phalcon\Tag

Phalcon\Tag is designed to simplify building of HTML tags. It provides a set of helpers to generate HTML in a dynamic way. This component is an abstract class that you can extend to add more helpers.

Constants

integer **HTML32**

integer **HTML401_STRICT**

integer **HTML401_TRANSITIONAL**

integer **HTML401_FRAMESET**

integer **HTML5**

integer **XHTML10_STRICT**

integer **XHTML10_TRANSITIONAL**

integer **XHTML10_FRAMESET**

integer **XHTML11**

integer **XHTML20**

integer **XHTML5**

Methods

public static *EscaperInterface* **getEscaper** (*array* \$params)

Obtains the 'escaper' service if required

public static **renderAttributes** (*mixed* \$code, *array* \$attributes)

Renders parameters keeping order in their HTML attributes

public static **setDI** (*Phalcon\DiInterface* \$dependencyInjector)

Sets the dependency injector container.

public static **getDI** ()

Internally gets the request dispatcher

public static **getUrlService** ()

Returns a URL service from the default DI

public static **getEscaperService** ()

Returns an Escaper service from the default DI

public static **setAutoescape** (*mixed* \$autoescape)

Set autoescape mode in generated html

public static **setDefault** (*string* \$id, *string* \$value)

Assigns default values to generated tags by helpers

```
<?php

// Assigning "peter" to "name" component
Phalcon\Tag::setDefault("name", "peter");

// Later in the view
echo Phalcon\Tag::textField("name"); // Will have the value "peter" by default
```

public static **setDefault** (array \$values, [mixed \$merge])

Assigns default values to generated tags by helpers

```
<?php

// Assigning "peter" to "name" component
Phalcon\Tag::setDefault(
    [
        "name" => "peter",
    ]
);

// Later in the view
echo Phalcon\Tag::textField("name"); // Will have the value "peter" by default
```

public static **displayTo** (string \$id, string \$value)

Alias of Phalcon\Tag::setDefault

public static *boolean* **hasValue** (string \$name)

Check if a helper has a default value set using Phalcon\Tag::setDefault or value from \$_POST

public static *mixed* **getValue** (string \$name, [array \$params])

Every helper calls this function to check whether a component has a predefined value using Phalcon\Tag::setDefault or value from \$_POST

public static **resetInput** ()

Resets the request and internal values to avoid those fields will have any default value.

public static **linkTo** (array | string \$parameters, [string \$text], [boolean \$local])

Builds a HTML A tag using framework conventions

```
<?php

echo Phalcon\Tag::linkTo("signup/register", "Register Here!");

echo Phalcon\Tag::linkTo(
    [
        "signup/register",
        "Register Here!"
    ]
);

echo Phalcon\Tag::linkTo(
    [
        "signup/register",
        "Register Here!",
        "class" => "btn-primary",
    ]
);
```

```
    ]
);

echo Phalcon\Tag::linkTo("http://phalconphp.com/", "Phalcon", false);

echo Phalcon\Tag::linkTo(
    [
        "http://phalconphp.com/",
        "Phalcon Home",
        false,
    ]
);

echo Phalcon\Tag::linkTo(
    [
        "http://phalconphp.com/",
        "Phalcon Home",
        "local" => false,
    ]
);

echo Phalcon\Tag::linkTo(
    [
        "action" => "http://phalconphp.com/",
        "text"    => "Phalcon Home",
        "local"   => false,
        "target"  => "_new"
    ]
);
```

final protected static *string* **_inputField** (*string* \$type, *array* \$parameters, [*boolean* \$asValue])

Builds generic INPUT tags

final protected static *string* **_inputFieldChecked** (*string* \$type, *array* \$parameters)

Builds INPUT tags that implements the checked attribute

public static *string* **colorField** (*array* \$parameters)

Builds a HTML input[type="color"] tag

public static *string* **textField** (*array* \$parameters)

Builds a HTML input[type="text"] tag

```
<?php
echo Phalcon\Tag::textField(
    [
        "name",
        "size" => 30,
    ]
);
```

public static *string* **numericField** (*array* \$parameters)

Builds a HTML input[type="number"] tag

```
<?php
```

```

echo Phalcon\Tag::numericField(
    [
        "price",
        "min" => "1",
        "max" => "5",
    ]
);

```

public static *string* **rangeField** (*array* \$parameters)

Builds a HTML input[type="range"] tag

public static *string* **emailField** (*array* \$parameters)

Builds a HTML input[type="email"] tag

```

<?php
echo Phalcon\Tag::emailField("email");

```

public static *string* **dateField** (*array* \$parameters)

Builds a HTML input[type="date"] tag

```

<?php
echo Phalcon\Tag::dateField(
    [
        "born",
        "value" => "14-12-1980",
    ]
);

```

public static *string* **dateTimeField** (*array* \$parameters)

Builds a HTML input[type="datetime"] tag

public static *string* **dateTimeLocalField** (*array* \$parameters)

Builds a HTML input[type="datetime-local"] tag

public static *string* **monthField** (*array* \$parameters)

Builds a HTML input[type="month"] tag

public static *string* **timeField** (*array* \$parameters)

Builds a HTML input[type="time"] tag

public static *string* **weekField** (*array* \$parameters)

Builds a HTML input[type="week"] tag

public static *string* **passwordField** (*array* \$parameters)

Builds a HTML input[type="password"] tag

```

<?php
echo Phalcon\Tag::passwordField(
    [
        "name",
        "size" => 30,
    ]
);

```

```
    ]  
);
```

public static *string* **hiddenField** (*array* \$parameters)

Builds a HTML input[type="hidden"] tag

```
<?php  
  
echo Phalcon\Tag::hiddenField(  
    [  
        "name",  
        "value" => "mike",  
    ]  
);
```

public static *string* **fileField** (*array* \$parameters)

Builds a HTML input[type="file"] tag

```
<?php  
  
echo Phalcon\Tag::fileField("file");
```

public static *string* **searchField** (*array* \$parameters)

Builds a HTML input[type="search"] tag

public static *string* **telField** (*array* \$parameters)

Builds a HTML input[type="tel"] tag

public static *string* **urlField** (*array* \$parameters)

Builds a HTML input[type="url"] tag

public static *string* **checkField** (*array* \$parameters)

Builds a HTML input[type="check"] tag

```
<?php  
  
echo Phalcon\Tag::checkField(  
    [  
        "terms",  
        "value" => "Y",  
    ]  
);
```

Volt syntax:

```
<?php  
  
{{ check_field("terms") }}
```

public static *string* **radioField** (*array* \$parameters)

Builds a HTML input[type="radio"] tag

```
<?php
```



```

echo Phalcon\Tag::radioField(
    [
        "weather",
        "value" => "hot",
    ]
);

```

Volt syntax:

```

<?php
{{ radio_field("Save") }}

```

public static *string* **imageInput** (*array* \$parameters)

Builds a HTML input[type="image"] tag

```

<?php

echo Phalcon\Tag::imageInput(
    [
        "src" => "/img/button.png",
    ]
);

```

Volt syntax:

```

<?php
{{ image_input("src": "/img/button.png") }}

```

public static *string* **submitButton** (*array* \$parameters)

Builds a HTML input[type="submit"] tag

```

<?php

echo Phalcon\Tag::submitButton("Save")

```

Volt syntax:

```

<?php
{{ submit_button("Save") }}

```

public static *string* **selectStatic** (*array* \$parameters, [*array* \$data])

Builds a HTML SELECT tag using a PHP array for options

```

<?php

echo Phalcon\Tag::selectStatic(
    "status",
    [
        "A" => "Active",
        "I" => "Inactive",
    ]
);

```

public static *string* **select** (*array* \$parameters, [*array* \$data])

Builds a HTML SELECT tag using a Phalcon\Mvc\Model resultset as options

```
<?php
echo Phalcon\Tag::select (
    [
        "robotId",
        Robots::find("type = \"mechanical\""),
        "using" => ["id", "name"],
    ]
);
```

Volt syntax:

```
<?php
{{ select("robotId", robots, "using": ["id", "name"]) }}
```

public static *string* **textArea** (*array* \$parameters)

Builds a HTML TEXTAREA tag

```
<?php
echo Phalcon\Tag::textArea (
    [
        "comments",
        "cols" => 10,
        "rows" => 4,
    ]
);
```

Volt syntax:

```
<?php
{{ text_area("comments", "cols": 10, "rows": 4) }}
```

public static *string* **form** (*array* \$parameters)

Builds a HTML FORM tag

```
<?php
echo Phalcon\Tag::form("posts/save");

echo Phalcon\Tag::form (
    [
        "posts/save",
        "method" => "post",
    ]
);
```

Volt syntax:

```
<?php
```

```
{{ form("posts/save") }}
{{ form("posts/save", "method": "post") }}
```

public static **endForm** ()

Builds a HTML close FORM tag

public static **setTitle** (*mixed* \$title)

Set the title of view content

```
<?php
Phalcon\Tag::setTitle("Welcome to my Page");
```

public static **setTitleSeparator** (*mixed* \$titleSeparator)

Set the title separator of view content

```
<?php
Phalcon\Tag::setTitleSeparator("-");
```

public static **appendTitle** (*mixed* \$title)

Appends a text to current document title

public static **prependTitle** (*mixed* \$title)

Prepends a text to current document title

public static **getTitle** ([*mixed* \$tags])

Gets the current document title. The title will be automatically escaped.

```
<?php
echo Phalcon\Tag::getTitle();
```

```
<?php
{{ get_title() }}
```

public static **getTitleSeparator** ()

Gets the current document title separator

```
<?php
echo Phalcon\Tag::getTitleSeparator();
```

```
<?php
{{ get_title_separator() }}
```

public static *string* **stylesheetLink** ([*array* \$parameters], [*boolean* \$local])

Builds a LINK[rel="stylesheet"] tag

```
<?php

echo Phalcon\Tag::stylesheetLink("http://fonts.googleapis.com/css?family=Rosario",
↪false);
echo Phalcon\Tag::stylesheetLink("css/style.css");
```

Volt Syntax:

```
<?php

{{ stylesheet_link("http://fonts.googleapis.com/css?family=Rosario", false) }}
{{ stylesheet_link("css/style.css") }}
```

public static *string* **javascriptInclude** ([array \$parameters], [boolean \$local])

Builds a SCRIPT[type="javascript"] tag

```
<?php

echo Phalcon\Tag::javascriptInclude("http://ajax.googleapis.com/ajax/libs/jquery/2.2.
↪3/jquery.min.js", false);
echo Phalcon\Tag::javascriptInclude("javascript/jquery.js");
```

Volt syntax:

```
<?php

{{ javascript_include("http://ajax.googleapis.com/ajax/libs/jquery/2.2.3/jquery.min.js
↪", false) }}
{{ javascript_include("javascript/jquery.js") }}
```

public static *string* **image** ([array \$parameters], [boolean \$local])

Builds HTML IMG tags

```
<?php

echo Phalcon\Tag::image("img/bg.png");

echo Phalcon\Tag::image(
    [
        "img/photo.jpg",
        "alt" => "Some Photo",
    ]
);
```

Volt Syntax:

```
<?php

{{ image("img/bg.png") }}
{{ image("img/photo.jpg", "alt": "Some Photo") }}
{{ image("http://static.mywebsite.com/img/bg.png", false) }}
```

public static **friendlyTitle** (*mixed* \$text, [*mixed* \$separator], [*mixed* \$lowercase], [*mixed* \$replace])

Converts texts into URL-friendly titles

```
<?php
echo Phalcon\Tag::friendlyTitle("These are big important news", "-")
```

public static **setDocType** (*mixed* \$doctype)

Set the document type of content

public static **getDocType** ()

Get the document type declaration of content

public static **tagHtml** (*mixed* \$tagName, [*mixed* \$parameters], [*mixed* \$selfClose], [*mixed* \$onlyStart], [*mixed* \$useEol])

Builds a HTML tag

public static **tagHtmlClose** (*mixed* \$tagName, [*mixed* \$useEol])

Builds a HTML tag closing tag

```
<?php
echo Phalcon\Tag::tagHtmlClose("script", true);
```

Class Phalcon\Tag\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Abstract class [Phalcon\Tag\Select](#)

Generates a SELECT html tag using a static array of values or a [Phalcon\Mvc\Model](#) resultset

Methods

public static **selectField** (*array* \$parameters, [*array* \$data])

Generates a SELECT tag

private static **_optionsFromResultset** ([Phalcon\Mvc\Model\Resultset](#) \$resultset, *array* \$using, *mixed* \$value, *string* \$closeOption)

Generate the OPTION tags based on a resultset

private static **_optionsFromArray** (*array* \$data, *mixed* \$value, *string* \$closeOption)

Generate the OPTION tags based on an array

Abstract class [Phalcon\Text](#)

Provides utilities to work with texts

Constants

integer **RANDOM_ALNUM**

integer **RANDOM_ALPHA**

integer **RANDOM_HEXDEC**

integer **RANDOM_NUMERIC**

integer **RANDOM_NOZERO**

Methods

public static **camelize** (*mixed* \$str, [*mixed* \$delimiter])

Converts strings to camelize style

```
<?php

echo Phalcon\Text::camelize("coco_bongo"); // CocoBongo
echo Phalcon\Text::camelize("co_co-bon_go", "-"); // Co_coBon_go
echo Phalcon\Text::camelize("co_co-bon_go", "_-"); // CoCoBonGo
```

public static **uncamelize** (*mixed* \$str, [*mixed* \$delimiter])

Uncamelize strings which are camelized

```
<?php

echo Phalcon\Text::uncamelize("CocoBongo"); // coco_bongo
echo Phalcon\Text::uncamelize("CocoBongo", "-"); // coco-bongo
```

public static **increment** (*mixed* \$str, [*mixed* \$separator])

Adds a number to a string or increment that number if it already is defined

```
<?php

echo Phalcon\Text::increment("a"); // "a_1"
echo Phalcon\Text::increment("a_1"); // "a_2"
```

public static **random** ([*mixed* \$type], [*mixed* \$length])

Generates a random string based on the given type. Type is one of the RANDOM_* constants

```
<?php

// "aloiwkqz"
echo Phalcon\Text::random(
    Phalcon\Text::RANDOM_ALNUM
);
```

public static **startsWith** (*mixed* \$str, *mixed* \$start, [*mixed* \$ignoreCase])

Check if a string starts with a given string

```
<?php

echo Phalcon\Text::startsWith("Hello", "He"); // true
echo Phalcon\Text::startsWith("Hello", "he", false); // false
echo Phalcon\Text::startsWith("Hello", "he"); // true
```

public static **endsWith** (*mixed* \$str, *mixed* \$end, [*mixed* \$ignoreCase])

Check if a string ends with a given string

```
<?php

echo Phalcon\Text::endsWith("Hello", "llo"); // true
echo Phalcon\Text::endsWith("Hello", "LLO", false); // false
echo Phalcon\Text::endsWith("Hello", "LLO"); // true
```

public static **lower** (*mixed* \$str, [*mixed* \$encoding])

Lowercases a string, this function makes use of the mbstring extension if available

```
<?php
echo Phalcon\Text::lower("HELLO"); // hello
```

public static **upper** (*mixed* \$str, [*mixed* \$encoding])

Uppercases a string, this function makes use of the mbstring extension if available

```
<?php
echo Phalcon\Text::upper("hello"); // HELLO
```

public static **reduceSlashes** (*mixed* \$str)

Reduces multiple slashes in a string to single slashes

```
<?php
echo Phalcon\Text::reduceSlashes("foo//bar/baz"); // foo/bar/baz
echo Phalcon\Text::reduceSlashes("http://foo.bar//baz/buz"); // http://foo.bar/baz/
↪buz
```

public static **concat** ()

Concatenates strings using the separator only once without duplication in places concatenation

```
<?php
$str = Phalcon\Text::concat(
    "/",
    "/tmp/",
    "/folder_1/",
    "/folder_2",
    "folder_3/"
);

// /tmp/folder_1/folder_2/folder_3/
echo $str;
```

public static **dynamic** (*mixed* \$text, [*mixed* \$leftDelimiter], [*mixed* \$rightDelimiter], [*mixed* \$separator])

Generates random text in accordance with the template

```
<?php

// Hi my name is a Bob
echo Phalcon\Text::dynamic("{Hi|Hello}, my name is a {Bob|Mark|Jon}!");

// Hi my name is a Jon
echo Phalcon\Text::dynamic("{Hi|Hello}, my name is a {Bob|Mark|Jon}!");

// Hello my name is a Bob
echo Phalcon\Text::dynamic("{Hi|Hello}, my name is a {Bob|Mark|Jon}!");

// Hello my name is a Zykep
echo Phalcon\Text::dynamic("[Hi|Hello], my name is a [Zykep|Mark]!", "[", "]", "/");
```

public static **underscore** (*mixed* \$text)

Makes a phrase underscored instead of spaced


```
<?php

echo Phalcon\Text::underscore("look behind"); // "look_behind"
echo Phalcon\Text::underscore("Awesome Phalcon"); // "Awesome_Phalcon"
```

public static **humanize** (*mixed* \$text)

Makes an underscored or dashed phrase human-readable

```
<?php

echo Phalcon\Text::humanize("start-a-horse"); // "start a horse"
echo Phalcon\Text::humanize("five_cats"); // "five cats"
```

Abstract class Phalcon\Translate

Abstract class Phalcon\Translate\Adapter

implements Phalcon\Translate\AdapterInterface

Base class for Phalcon\Translate adapters

Methods

public **__construct** (*array* \$options)

...

public **setInterpolator** (*Phalcon\Translate\InterpolatorInterface* \$interpolator)

...

public *string* **t** (*string* \$translateKey, [*array* \$placeholders])

Returns the translation string of the given key

public *string* **_** (*string* \$translateKey, [*array* \$placeholders])

Returns the translation string of the given key (alias of method 't')

public **offsetSet** (*string* \$offset, *string* \$value)

Sets a translation value

public **offsetExists** (*mixed* \$translateKey)

Check whether a translation key exists

public **offsetUnset** (*string* \$offset)

Unsets a translation from the dictionary

public *string* **offsetGet** (*string* \$translateKey)

Returns the translation related to the given key

protected **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders])

Replaces placeholders by the values passed

abstract public **query** (*mixed* \$index, [*mixed* \$placeholders]) inherited from *Phalcon\Translate\AdapterInterface*

...

abstract public **exists** (*mixed* \$index) inherited from *Phalcon\Translate\AdapterInterface*

...

Class *Phalcon\Translate\Adapter\Csv*

extends abstract class *Phalcon\Translate\Adapter*

implements *Phalcon\Translate\AdapterInterface*, *ArrayAccess*

Allows to define translation lists using CSV file

Methods

public **__construct** (*array* \$options)

Phalcon\Translate\Adapter\Csv constructor

private **_load** (*string* \$file, *int* \$length, *string* \$delimiter, *string* \$enclosure)

Load translates from file

public **query** (*mixed* \$index, [*mixed* \$placeholders])

Returns the translation related to the given key

public **exists** (*mixed* \$index)

Check whether is defined a translation key in the internal array

public **setInterpolator** (*Phalcon\Translate\InterpolatorInterface* \$interpolator) inherited from *Phalcon\Translate\Adapter*

...

public *string* **t** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key

public *string* **_** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key (alias of method 't')

public **offsetSet** (*string* \$offset, *string* \$value) inherited from *Phalcon\Translate\Adapter*

Sets a translation value

public **offsetExists** (*mixed* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Check whether a translation key exists

public **offsetUnset** (*string* \$offset) inherited from *Phalcon\Translate\Adapter*

Unsets a translation from the dictionary

public *string* **offsetGet** (*string* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Returns the translation related to the given key

protected **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Replaces placeholders by the values passed

Class Phalcon\Translate\Adapter\Gettext

extends abstract class *Phalcon\Translate\Adapter*

implements *Phalcon\Translate\AdapterInterface*, *ArrayAccess*

```

<?php

use Phalcon\Translate\Adapter\Gettext;

$adapter = new Gettext(
    [
        "locale"           => "de_DE.UTF-8",
        "defaultDomain"    => "translations",
        "directory"        => "/path/to/application/locales",
        "category"         => LC_MESSAGES,
    ]
);

```

Allows translate using gettext

Methods

public **getDirectory** ()

public **getDefaultDomain** ()

public **getLocale** ()

public **getCategory** ()

public **__construct** (array \$options)

Phalcon\Translate\Adapter\Gettext constructor

public **query** (mixed \$index, [mixed \$placeholders])

Returns the translation related to the given key.

```

<?php

$translator->query(" %name%", ["name" => "Phalcon"]);

```

public **exists** (mixed \$index)

Check whether is defined a translation key in the internal array

public **nquery** (mixed \$msgid1, mixed \$msgid2, mixed \$count, [mixed \$placeholders], [mixed \$domain])

The plural version of gettext(). Some languages have more than one form for plural messages dependent on the count.

public **setDomain** (mixed \$domain)

Changes the current domain (i.e. the translation file)

public **resetDomain** ()

Sets the default domain

public **setDefaultDomain** (mixed \$domain)

Sets the domain default to search within when calls are made to gettext()

public **setDirectory** (mixed \$directory)

Sets the path for a domain

```
<?php

// Set the directory path
$gettext->setDirectory("/path/to/the/messages");

// Set the domains and directories path
$gettext->setDirectory(
    [
        "messages" => "/path/to/the/messages",
        "another"   => "/path/to/the/another",
    ]
);
```

public **setLocale** (*mixed* \$category, *mixed* \$locale)

Sets locale information

```
<?php

// Set locale to Dutch
$gettext->setLocale(LC_ALL, "nl_NL");

// Try different possible locale names for german
$gettext->setLocale(LC_ALL, "de_DE@euro", "de_DE", "de", "ge");
```

protected **prepareOptions** (*array* \$options)

Validator for constructor

protected **getOptionsDefault** ()

Gets default options

public **setInterpolator** (*Phalcon\Translate\InterpolatorInterface* \$interpolator) inherited from *Phalcon\Translate\Adapter*

...

public *string* **t** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key

public *string* **_** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key (alias of method 't')

public **offsetSet** (*string* \$offset, *string* \$value) inherited from *Phalcon\Translate\Adapter*

Sets a translation value

public **offsetExists** (*mixed* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Check whether a translation key exists

public **offsetUnset** (*string* \$offset) inherited from *Phalcon\Translate\Adapter*

Unsets a translation from the dictionary

public *string* **offsetGet** (*string* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Returns the translation related to the given key

protected **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Replaces placeholders by the values passed

Class `Phalcon\Translate\Adapter\NativeArray`

extends abstract class `Phalcon\Translate\Adapter`

implements `Phalcon\Translate\AdapterInterface`, `ArrayAccess`

Allows to define translation lists using PHP arrays

Methods

public **__construct** (*array* \$options)

`Phalcon\Translate\Adapter\NativeArray` constructor

public **query** (*mixed* \$index, [*mixed* \$placeholders])

Returns the translation related to the given key

public **exists** (*mixed* \$index)

Check whether is defined a translation key in the internal array

public **setInterpolator** (*Phalcon\Translate\InterpolatorInterface* \$interpolator) inherited from *Phalcon\Translate\Adapter*

...

public *string* **t** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key

public *string* **_** (*string* \$translateKey, [*array* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Returns the translation string of the given key (alias of method 't')

public **offsetSet** (*string* \$offset, *string* \$value) inherited from *Phalcon\Translate\Adapter*

Sets a translation value

public **offsetExists** (*mixed* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Check whether a translation key exists

public **offsetUnset** (*string* \$offset) inherited from *Phalcon\Translate\Adapter*

Unsets a translation from the dictionary

public *string* **offsetGet** (*string* \$translateKey) inherited from *Phalcon\Translate\Adapter*

Returns the translation related to the given key

protected **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders]) inherited from *Phalcon\Translate\Adapter*

Replaces placeholders by the values passed

Class `Phalcon\Translate\Exception`

extends class `Phalcon\Exception`

implements `Throwable`

Methods

final private [Exception](#) **__clone** () inherited from [Exception](#)

Clone the exception

public **__construct** ([*string* \$message], [*int* \$code], [[Exception](#) \$previous]) inherited from [Exception](#)

Exception constructor

public **__wakeup** () inherited from [Exception](#)

...

final public *string* **getMessage** () inherited from [Exception](#)

Gets the Exception message

final public *int* **getCode** () inherited from [Exception](#)

Gets the Exception code

final public *string* **getFile** () inherited from [Exception](#)

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from [Exception](#)

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from [Exception](#)

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Translate\Interpolator\AssociativeArray](#)

implements [Phalcon\Translate\InterpolatorInterface](#)

Methods

public **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders])

Replaces placeholders by the values passed

Class [Phalcon\Translate\Interpolator\IndexedArray](#)

implements [Phalcon\Translate\InterpolatorInterface](#)

Methods

public **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders])

Replaces placeholders by the values passed

Class **Phalcon\Validation**

extends abstract class *Phalcon\Di\Injectable*

implements *Phalcon\Events\EventsAwareInterface*, *Phalcon\Di\InjectionAwareInterface*, *Phalcon\ValidationInterface*

Allows to validate data using custom or built-in validators

Methods

public **getData** ()

...

public **setValidators** (*mixed* \$validators)

...

public **__construct** ([*array* \$validators])

Phalcon\Validation constructor

public *Phalcon\Validation\Message\Group* **validate** ([*array* | *object* \$data], [*object* \$entity])

Validate a set of data according to a set of rules

public **add** (*mixed* \$field, *Phalcon\Validation\ValidatorInterface* \$validator)

Adds a validator to a field

public **rule** (*mixed* \$field, *Phalcon\Validation\ValidatorInterface* \$validator)

Alias of *add* method

public **rules** (*mixed* \$field, *array* \$validators)

Adds the validators to a field

public *Phalcon\Validation* **setFilters** (*string* \$field, *array* | *string* \$filters)

Adds filters to the field

public *mixed* **getFilters** ([*string* \$field])

Returns all the filters or a specific one

public **getValidators** ()

Returns the validators added to the validation

public **setEntity** (*object* \$entity)

Sets the bound entity

public *object* **getEntity** ()

Returns the bound entity

public **setDefaultMessages** ([*array* \$messages])

Adds default messages to validators

public **getDefaultMessage** (*mixed* \$type)

Get default message for validator type

public **getMessages** ()

Returns the registered validators

public **setLabels** (*array* \$labels)

Adds labels for fields

public *string* **getLabel** (*string* \$field)

Get label for field

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message)

Appends a message to the messages list

public *Phalcon\Validation* **bind** (*object* \$entity, *array* | *object* \$data)

Assigns the data to an entity The entity is used to obtain the validation values

public *mixed* **getValue** (*string* \$field)

Gets the a value to validate in the array/object data source

protected **preChecking** (*mixed* \$field, *Phalcon\Validation\ValidatorInterface* \$validator)

Internal validations, if it returns true, then skip the current validator

public **setDI** (*Phalcon\DiInterface* \$dependencyInjector) inherited from *Phalcon\Di\Injectable*

Sets the dependency injector

public **getDI** () inherited from *Phalcon\Di\Injectable*

Returns the internal dependency injector

public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager) inherited from *Phalcon\Di\Injectable*

Sets the event manager

public **getEventManager** () inherited from *Phalcon\Di\Injectable*

Returns the internal event manager

public **__get** (*mixed* \$propertyName) inherited from *Phalcon\Di\Injectable*

Magic method __get

Abstract class **Phalcon\Validation\CombinedFieldsValidator**

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Methods

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (mixed \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (mixed \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (mixed \$key, [mixed \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (mixed \$key, mixed \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

abstract public **validate** (*Phalcon\Validation* \$validation, mixed \$attribute) inherited from *Phalcon\Validation\Validator*

Executes the validation

Class Phalcon\Validation\Exception

extends class *Phalcon\Exception*

implements *Throwable*

Methods

final private *Exception* **__clone** () inherited from *Exception*

Clone the exception

public **__construct** ([string \$message], [int \$code], [*Exception* \$previous]) inherited from *Exception*

Exception constructor

public **__wakeup** () inherited from *Exception*

...

final public *string* **getMessage** () inherited from *Exception*

Gets the Exception message

final public *int* **getCode** () inherited from *Exception*

Gets the Exception code

final public *string* **getFile** () inherited from *Exception*

Gets the file in which the exception occurred

final public *int* **getLine** () inherited from *Exception*

Gets the line in which the exception occurred

final public *array* **getTrace** () inherited from *Exception*

Gets the stack trace

final public [Exception](#) **getPrevious** () inherited from [Exception](#)

Returns previous Exception

final public [Exception](#) **getTraceAsString** () inherited from [Exception](#)

Gets the stack trace as a string

public *string* **__toString** () inherited from [Exception](#)

String representation of the exception

Class [Phalcon\Validation\Message](#)

implements [Phalcon\Validation\MessageInterface](#)

Encapsulates validation info generated in the validation process

Methods

public **__construct** (*mixed* \$message, [*mixed* \$field], [*mixed* \$type], [*mixed* \$code])

[Phalcon\Validation\Message](#) constructor

public **setType** (*mixed* \$type)

Sets message type

public **getType** ()

Returns message type

public **setMessage** (*mixed* \$message)

Sets verbose message

public **getMessage** ()

Returns verbose message

public **setField** (*mixed* \$field)

Sets field name related to message

public *mixed* **getField** ()

Returns field name related to message

public **setCode** (*mixed* \$code)

Sets code for the message

public **getCode** ()

Returns the message code

public **__toString** ()

Magic **__toString** method returns verbose message

public static **__set_state** (*array* \$message)

Magic **__set_state** helps to recover messages from serialization

Class `Phalcon\Validation\Message\Group`

implements `Countable`, `ArrayAccess`, `Iterator`, `Traversable`

Represents a group of validation messages

Methods

public **__construct** ([array \$messages])

Phalcon\Validation\Message\Group constructor

public *Phalcon\Validation\Message* **offsetGet** (int \$index)

Gets an attribute a message using the array syntax

```
<?php

print_r(
    $messages[0]
);
```

public **offsetSet** (int \$index, *Phalcon\Validation\Message* \$message)

Sets an attribute using the array-syntax

```
<?php

$messages[0] = new \Phalcon\Validation\Message("This is a message");
```

public *boolean* **offsetExists** (int \$index)

Checks if an index exists

```
<?php

var_dump(
    isset($message["database"])
);
```

public **offsetUnset** (*mixed* \$index)

Removes a message from the list

```
<?php

unset($message["database"]);
```

public **appendMessage** (*Phalcon\Validation\MessageInterface* \$message)

Appends a message to the group

```
<?php

$messages->appendMessage(
    new \Phalcon\Validation\Message("This is a message")
);
```

public **appendMessages** (*Phalcon\Validation\MessageInterface*[] \$messages)

Appends an array of messages to the group

```
<?php
$messages->appendMessages ($messagesArray) ;
```

public array **filter** (*string* \$fieldName)

Filters the message group by field name

public **count** ()

Returns the number of messages in the list

public **rewind** ()

Rewinds the internal iterator

public **current** ()

Returns the current message in the iterator

public **key** ()

Returns the current position/key in the iterator

public **next** ()

Moves the internal iteration pointer to the next position

public **valid** ()

Check if the current message in the iterator is valid

public static *Phalcon\Validation\Message\Group* **__set_state** (*array* \$group)

Magic __set_state helps to re-build messages variable when exporting

Abstract class *Phalcon\Validation\Validator*

implements Phalcon\Validation\ValidatorInterface

This is a base class for validators

Methods

public **__construct** ([*array* \$options])

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key)

Checks if an option has been defined

public **hasOption** (*mixed* \$key)

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue])

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value)

Sets an option in the validator

abstract public **validate** (*Phalcon\Validation* \$validation, *mixed* \$attribute)

Executes the validation

Class `Phalcon\Validation\Validator\Alnum`

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Check for alphanumeric character(s)

```
<?php

use Phalcon\Validation\Validator\Alnum as AlnumValidator;

$validator->add(
    "username",
    new AlnumValidator(
        [
            "message" => ":field must contain only alphanumeric characters",
        ]
    )
);

$validator->add(
    [
        "username",
        "name",
    ],
    new AlnumValidator(
        [
            "message" => [
                "username" => "username must contain only alphanumeric characters",
                "name"      => "name must contain only alphanumeric characters",
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\Alpha*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Check for alphabetic character(s)

```
<?php

use Phalcon\Validation\Validator\Alpha as AlphaValidator;

$validator->add(
    "username",
    new AlphaValidator(
        [
            "message" => ":field must contain only letters",
        ]
    )
);

$validator->add(
    [
        "username",
        "name",
    ],
    new AlphaValidator(
        [
            "message" => [
                "username" => "username must contain only letters",
                "name"      => "name must contain only letters",
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\Between*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Validates that a value is between an inclusive range of two values. For a value x, the test is passed if minimum<=x<=maximum.

```
<?php

use Phalcon\Validation\Validator\Between;

$validator->add(
    "price",
    new Between(
        [
            "minimum" => 0,
            "maximum" => 100,
            "message" => "The price must be between 0 and 100",
        ]
    )
);

$validator->add(
    [
        "price",
        "amount",
    ],
    new Between(
        [
            "minimum" => [
                "price" => 0,
                "amount" => 0,
            ],
            "maximum" => [
                "price" => 100,
                "amount" => 50,
            ],
            "message" => [
                "price" => "The price must be between 0 and 100",
                "amount" => "The amount must be between 0 and 50",
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\Confirmation

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks that two values have the same value

```
<?php
use Phalcon\Validation\Validator\Confirmation;

$validator->add(
    "password",
    new Confirmation(
        [
            "message" => "Password doesn't match confirmation",
            "with"     => "confirmPassword",
        ]
    )
);

$validator->add(
    [
        "password",
        "email",
    ],
    new Confirmation(
        [
            "message" => [
                "password" => "Password doesn't match confirmation",
                "email"     => "Email doesn't match confirmation",
            ],
            "with" => [
                "password" => "confirmPassword",
                "email"     => "confirmEmail",
            ]
        ]
    )
);
```



```

        ],
    ]
)
);

```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

final protected **compare** (*mixed* \$a, *mixed* \$b)

Compare strings

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\CreditCard

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value has a valid credit card number

```

<?php

use Phalcon\Validation\Validator\CreditCard as CreditCardValidator;

$validator->add(
    "creditCard",
    new CreditCardValidator(
        [
            "message" => "The credit card number is not valid",
        ]
    )
);

$validator->add(
    [
        "creditCard",
        "secondCreditCard",
    ]
);

```

```
],
new CreditCardValidator(
    [
        "message" => [
            "creditCard" => "The credit card number is not valid",
            "secondCreditCard" => "The second credit card number is not valid",
        ],
    ]
)
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

private *boolean* **verifyByLuhnAlgorithm** (*string* \$number)

is a simple checksum formula used to validate a variety of identification numbers

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\Date

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value is a valid date

```
<?php
use Phalcon\Validation\Validator\Date as DateValidator;

$validator->add(
    "date",
    new DateValidator(
        [
            "format" => "d-m-Y",
            "message" => "The date is invalid",
        ]
    )
);
```

```

    )
);

$validator->add(
    [
        "date",
        "anotherDate",
    ],
    new DateValidator(
        [
            "format" => [
                "date" => "d-m-Y",
                "anotherDate" => "Y-m-d",
            ],
            "message" => [
                "date" => "The date is invalid",
                "anotherDate" => "The another date is invalid",
            ],
        ]
    )
);

```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

private **checkDate** (*mixed* \$value, *mixed* \$format)

...

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\Digit*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Check for numeric character(s)

```
<?php

use Phalcon\Validation\Validator\Digit as DigitValidator;

$validator->add(
    "height",
    new DigitValidator(
        [
            "message" => ":field must be numeric",
        ]
    )
);

$validator->add(
    [
        "height",
        "width",
    ],
    new DigitValidator(
        [
            "message" => [
                "height" => "height must be numeric",
                "width" => "width must be numeric",
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\Email

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value has a correct e-mail format

```
<?php

use Phalcon\Validation\Validator\Email as EmailValidator;

$validator->add(
    "email",
    new EmailValidator(
        [
            "message" => "The e-mail is not valid",
        ]
    )
);

$validator->add(
    [
        "email",
        "anotherEmail",
    ],
    new EmailValidator(
        [
            "message" => [
                "email" => "The e-mail is not valid",
                "anotherEmail" => "The another e-mail is not valid",
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\ExclusionIn

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Check if a value is not included into a list of values

```
<?php

use Phalcon\Validation\Validator\ExclusionIn;

$validator->add(
    "status",
    new ExclusionIn(
        [
            "message" => "The status must not be A or B",
            "domain" => [
                "A",
                "B",
            ],
        ]
    )
);

$validator->add(
    [
        "status",
        "type",
    ],
    new ExclusionIn(
        [
            "message" => [
                "status" => "The status must not be A or B",
                "type" => "The type must not be 1 or "
            ],
            "domain" => [
                "status" => [
                    "A",
                    "B",
                ],
                "type" => [1, 2],
            ],
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\File

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value has a correct file

```
<?php

use Phalcon\Validation\Validator\File as FileValidator;

$validator->add(
    "file",
    new FileValidator(
        [
            "maxSize"           => "2M",
            "messageSize"       => ":field exceeds the max filesize (:max)",
            "allowedTypes"      => [
                "image/jpeg",
                "image/png",
            ],
            "messageType"       => "Allowed file types are :types",
            "maxResolution"     => "800x600",
            "messageMaxResolution" => "Max resolution of :field is :max",
        ]
    )
);

$validator->add(
    [
        "file",
        "anotherFile",
    ],
    new FileValidator(
        [
            "maxSize" => [
                "file"       => "2M",
                "anotherFile" => "4M",
            ],
            "messageSize" => [
                "file"       => "file exceeds the max filesize 2M",
                "anotherFile" => "anotherFile exceeds the max filesize 4M",
            ],
            "allowedTypes" => [
                "file"       => [
                    "image/jpeg",
                    "image/png",
                ],
                "anotherFile" => [
                    "image/gif",
                    "image/bmp",
                ],
            ],
        ]
    )
);
```

```
        ],
    ],
    "messageType" => [
        "file"      => "Allowed file types are image/jpeg and image/png",
        "anotherFile" => "Allowed file types are image/gif and image/bmp",
    ],
    "maxResolution" => [
        "file"      => "800x600",
        "anotherFile" => "1024x768",
    ],
    "messageMaxResolution" => [
        "file"      => "Max resolution of file is 800x600",
        "anotherFile" => "Max resolution of file is 1024x768",
    ],
]
)
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **isEmpty** (*Phalcon\Validation* \$validation, *mixed* \$field)

Check on empty

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\Identical

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value is identical to other

```
<?php
use Phalcon\Validation\Validator\Identical;
```



```

$validator->add(
    "terms",
    new Identical(
        [
            "accepted" => "yes",
            "message" => "Terms and conditions must be accepted",
        ]
    )
);

$validator->add(
    [
        "terms",
        "anotherTerms",
    ],
    new Identical(
        [
            "accepted" => [
                "terms" => "yes",
                "anotherTerms" => "yes",
            ],
            "message" => [
                "terms" => "Terms and conditions must be accepted",
                "anotherTerms" => "Another terms must be accepted",
            ],
        ]
    )
);

```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\InclusionIn

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Check if a value is included into a list of values

```
<?php

use Phalcon\Validation\Validator\InclusionIn;

$validator->add(
    "status",
    new InclusionIn(
        [
            "message" => "The status must be A or B",
            "domain"  => ["A", "B"],
        ]
    )
);

$validator->add(
    [
        "status",
        "type",
    ],
    new InclusionIn(
        [
            "message" => [
                "status" => "The status must be A or B",
                "type"   => "The status must be 1 or 2",
            ],
            "domain" => [
                "status" => ["A", "B"],
                "type"   => [1, 2],
            ]
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class `Phalcon\Validation\Validator\Numericality`

extends abstract class `Phalcon\Validation\Validator`

implements `Phalcon\Validation\ValidatorInterface`

Check for a valid numeric value

```
<?php

use Phalcon\Validation\Validator\Numericality;

$validator->add(
    "price",
    new Numericality(
        [
            "message" => ":field is not numeric",
        ]
    )
);

$validator->add(
    [
        "price",
        "amount",
    ],
    new Numericality(
        [
            "message" => [
                "price" => "price is not numeric",
                "amount" => "amount is not numeric",
            ]
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from `Phalcon\Validation\Validator`

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from `Phalcon\Validation\Validator`

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from `Phalcon\Validation\Validator`

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from `Phalcon\Validation\Validator`

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\PresenceOf

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Validates that a value is not null or empty string

```
<?php

use Phalcon\Validation\Validator\PresenceOf;

$validator->add(
    "name",
    new PresenceOf (
        [
            "message" => "The name is required",
        ]
    )
);

$validator->add(
    [
        "name",
        "email",
    ],
    new PresenceOf (
        [
            "message" => [
                "name" => "The name is required",
                "email" => "The email is required",
            ],
        ],
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\Regex*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Allows validate if the value of a field matches a regular expression

```
<?php

use Phalcon\Validation\Validator\Regex as RegexValidator;

$validator->add(
    "created_at",
    new RegexValidator(
        [
            "pattern" => "/^[0-9]{4}[-\/](0[1-9]|1[12])[-\/](0[1-9]|[12][0-9]|3[01])$/",
            "message" => "The creation date is invalid",
        ]
    )
);

$validator->add(
    [
        "created_at",
        "name",
    ],
    new RegexValidator(
        [
            "pattern" => [
                "created_at" => "/^[0-9]{4}[-\/](0[1-9]|1[12])[-\/](0[1-9]|[12][0-9]|3[01])$/",
                "name" => "/^[a-z]$/",
            ],
            "message" => [
                "created_at" => "The creation date is invalid",
                "name" => "The name is invalid",
            ]
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\StringLength*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Validates that a string has the specified maximum and minimum constraints The test is passed if for a string's length L , $\min \leq L \leq \max$, i.e. L must be at least \min , and at most \max .

```
<?php

use Phalcon\Validation\Validator\StringLength as StringLength;

$validation->add(
    "name_last",
    new StringLength(
        [
            "max"           => 50,
            "min"           => 2,
            "messageMaximum" => "We don't like really long names",
            "messageMinimum" => "We want more than just their initials",
        ]
    )
);

$validation->add(
    [
        "name_last",
        "name_first",
    ],
    new StringLength(
        [
            "max" => [
                "name_last" => 50,
                "name_first" => 40,
            ],
            "min" => [
                "name_last" => 2,
                "name_first" => 4,
            ],
            "messageMaximum" => [
                "name_last" => "We don't like really long last names",
                "name_first" => "We don't like really long first names",
            ],
            "messageMinimum" => [
```

```

        "name_last" => "We don't like too short last names",
        "name_first" => "We don't like too short first names",
    ]
}
)
);

```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Validation\Validator\Uniqueness

extends abstract class *Phalcon\Validation\CombinedFieldsValidator*

implements *Phalcon\Validation\ValidatorInterface*

Check that a field is unique in the related table

```

<?php

use Phalcon\Validation\Validator\Uniqueness as UniquenessValidator;

$validator->add(
    "username",
    new UniquenessValidator(
        [
            "model" => new Users(),
            "message" => ":field must be unique",
        ]
    )
);

```

Different attribute from the field:

```
<?php

$validator->add(
    "username",
    new UniquenessValidator(
        [
            "model" => new Users(),
            "attribute" => "nick",
        ]
    )
);
```

In model:

```
<?php

$validator->add(
    "username",
    new UniquenessValidator()
);
```

Combination of fields in model:

```
<?php

$validator->add(
    [
        "firstName",
        "lastName",
    ],
    new UniquenessValidator()
);
```

It is possible to convert values before validation. This is useful in situations where values need to be converted to do the database lookup:

```
<?php

$validator->add(
    "username",
    new UniquenessValidator(
        [
            "convert" => function (array $values) {
                $values["username"] = strtolower($values["username"]);

                return $values;
            }
        ]
    )
);
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

protected **isUniqueness** (*Phalcon\Validation* \$validation, *mixed* \$field)

...

protected **getColumnNameReal** (*mixed* \$record, *mixed* \$field)

The column map is used in the case to get real column name

protected **isUniquenessModel** (*mixed* \$record, *array* \$field, *array* \$values)

Uniqueness method used for model

protected **isUniquenessCollection** (*mixed* \$record, *array* \$field, *array* \$values)

Uniqueness method used for collection

public **__construct** ([*array* \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class *Phalcon\Validation\Validator\Url*

extends abstract class *Phalcon\Validation\Validator*

implements *Phalcon\Validation\ValidatorInterface*

Checks if a value has a url format

```
<?php

use Phalcon\Validation\Validator\Url as UrlValidator;

$validator->add(
    "url",
    new UrlValidator(
        [
            "message" => ":field must be a url",
        ]
    )
);

$validator->add(
    [
        "url",
        "homepage",
    ],
    new UrlValidator(
        [
```

```
        "message" => [
            "url"      => "url must be a url",
            "homepage" => "homepage must be a url",
        ]
    )
};
```

Methods

public **validate** (*Phalcon\Validation* \$validation, *mixed* \$field)

Executes the validation

public **__construct** ([array \$options]) inherited from *Phalcon\Validation\Validator*

Phalcon\Validation\Validator constructor

public **isSetOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option has been defined

public **hasOption** (*mixed* \$key) inherited from *Phalcon\Validation\Validator*

Checks if an option is defined

public **getOption** (*mixed* \$key, [*mixed* \$defaultValue]) inherited from *Phalcon\Validation\Validator*

Returns an option in the validator's options Returns null if the option hasn't set

public **setOption** (*mixed* \$key, *mixed* \$value) inherited from *Phalcon\Validation\Validator*

Sets an option in the validator

Class Phalcon\Version

This class allows to get the installed version of the framework

Constants

integer **VERSION_MAJOR**

integer **VERSION_MEDIUM**

integer **VERSION_MINOR**

integer **VERSION_SPECIAL**

integer **VERSION_SPECIAL_NUMBER**

Methods

protected static **__getVersion** ()

Area where the version number is set. The format is as follows: ABBCCDE A - Major version B - Med version (two digits) C - Min version (two digits) D - Special release: 1 = Alpha, 2 = Beta, 3 = RC, 4 = Stable E - Special release version i.e. RC1, Beta2 etc.

final protected static **_getSpecial** (*mixed* \$special)

Translates a number to a special release If Special release = 1 this function will return ALPHA

public static **get** ()

Returns the active version (string)

```
<?php
echo Phalcon\Version::get();
```

public static **getId** ()

Returns the numeric active version

```
<?php
echo Phalcon\Version::getId();
```

public static **getPart** (*mixed* \$part)

Returns a specific part of the version. If the wrong parameter is passed it will return the full version

```
<?php
echo Phalcon\Version::getPart(
    Phalcon\Version::VERSION_MAJOR
);
```

Interface Phalcon\Acl\AdapterInterface

Methods

abstract public **setDefaultAction** (*mixed* \$defaultAccess)

...

abstract public **getDefaultAction** ()

...

abstract public **setNoArgumentsDefaultAction** (*mixed* \$defaultAccess)

...

abstract public **getNoArgumentsDefaultAction** ()

...

abstract public **addRole** (*mixed* \$role, [*mixed* \$accessInherits])

...

abstract public **addInherit** (*mixed* \$roleName, *mixed* \$roleToInherit)

...

abstract public **isRole** (*mixed* \$roleName)

...

abstract public **isResource** (*mixed* \$resourceName)

```
...
abstract public addResource (mixed $resourceObject, mixed $accessList)
...
abstract public addResourceAccess (mixed $resourceName, mixed $accessList)
...
abstract public dropResourceAccess (mixed $resourceName, mixed $accessList)
...
abstract public allow (mixed $roleName, mixed $resourceName, mixed $access, [mixed $func])
...
abstract public deny (mixed $roleName, mixed $resourceName, mixed $access, [mixed $func])
...
abstract public isAllowed (mixed $roleName, mixed $resourceName, mixed $access, [array $parameters])
...
abstract public getActiveRole ()
...
abstract public getActiveResource ()
...
abstract public getActiveAccess ()
...
abstract public getRoles ()
...
abstract public getResources ()
...
```

Interface Phalcon\Acl\ResourceAware

Methods

```
abstract public getResourceName ()
...
```

Interface Phalcon\Acl\ResourceInterface

Methods

```
abstract public getName ()
...
abstract public getDescription ()
...
```

abstract public **__toString** ()

...

Interface Phalcon\Acl\RoleAware

Methods

abstract public **getRoleName** ()

...

Interface Phalcon\Acl\RoleInterface

Methods

abstract public **getName** ()

...

abstract public **getDescription** ()

...

abstract public **__toString** ()

...

Interface Phalcon\Annotations\AdapterInterface

Methods

abstract public **setReader** (*Phalcon\Annotations\ReaderInterface* \$reader)

...

abstract public **getReader** ()

...

abstract public **get** (*mixed* \$className)

...

abstract public **getMethods** (*mixed* \$className)

...

abstract public **getMethod** (*mixed* \$className, *mixed* \$methodName)

...

abstract public **getProperties** (*mixed* \$className)

...

abstract public **getProperty** (*mixed* \$className, *mixed* \$propertyName)

...

Interface Phalcon\Annotations\ReaderInterface

Methods

abstract public **parse** (*mixed* \$className)
...
abstract public static **parseDocBlock** (*mixed* \$docBlock, [*mixed* \$file], [*mixed* \$line])
...

Interface Phalcon\Assets\FilterInterface

Methods

abstract public **filter** (*mixed* \$content)
...

Interface Phalcon\Cache\BackendInterface

Methods

abstract public **start** (*mixed* \$keyName, [*mixed* \$lifetime])
...
abstract public **stop** ([*mixed* \$stopBuffer])
...
abstract public **getFrontend** ()
...
abstract public **getOptions** ()
...
abstract public **isFresh** ()
...
abstract public **isStarted** ()
...
abstract public **setLastKey** (*mixed* \$lastKey)
...
abstract public **getLastKey** ()
...
abstract public **get** (*mixed* \$keyName, [*mixed* \$lifetime])
...
abstract public **save** ([*mixed* \$keyName], [*mixed* \$content], [*mixed* \$lifetime], [*mixed* \$stopBuffer])
...

```
abstract public delete (mixed $keyName)
...
abstract public queryKeys ([mixed $prefix])
...
abstract public exists ([mixed $keyName], [mixed $lifetime])
...
```

Interface Phalcon\Cache\FrontendInterface

Methods

```
abstract public getLifetime ()
...
abstract public isBuffering ()
...
abstract public start ()
...
abstract public getContent ()
...
abstract public stop ()
...
abstract public beforeStore (mixed $data)
...
abstract public afterRetrieve (mixed $data)
...
```

Interface Phalcon\Cli\DispatcherInterface

implements Phalcon\DispatcherInterface

Methods

```
abstract public setTaskSuffix (mixed $taskSuffix)
...
abstract public setDefaultTask (mixed $taskName)
...
abstract public setTaskName (mixed $taskName)
...
abstract public getTaskName ()
```

```
...
abstract public getLastTask ()
...
abstract public getActiveTask ()
...
abstract public setActionSuffix (mixed $actionSuffix) inherited from Phalcon\DispatcherInterface
...
abstract public getActionSuffix () inherited from Phalcon\DispatcherInterface
...
abstract public setDefaultNamespace (mixed $defaultNamespace) inherited from Phalcon\DispatcherInterface
...
abstract public setDefaultAction (mixed $actionName) inherited from Phalcon\DispatcherInterface
...
abstract public setNamespaceName (mixed $namespaceName) inherited from Phalcon\DispatcherInterface
...
abstract public setModuleName (mixed $moduleName) inherited from Phalcon\DispatcherInterface
...
abstract public setActionName (mixed $actionName) inherited from Phalcon\DispatcherInterface
...
abstract public getActionName () inherited from Phalcon\DispatcherInterface
...
abstract public setParams (mixed $params) inherited from Phalcon\DispatcherInterface
...
abstract public getParams () inherited from Phalcon\DispatcherInterface
...
abstract public setParam (mixed $param, mixed $value) inherited from Phalcon\DispatcherInterface
...
abstract public getParam (mixed $param, [mixed $filters]) inherited from Phalcon\DispatcherInterface
...
abstract public hasParam (mixed $param) inherited from Phalcon\DispatcherInterface
...
abstract public isFinished () inherited from Phalcon\DispatcherInterface
...
abstract public getReturnedValue () inherited from Phalcon\DispatcherInterface
...
abstract public dispatch () inherited from Phalcon\DispatcherInterface
```


...

abstract public **forward** (*mixed* \$forward) inherited from *Phalcon\DispatcherInterface*

...

Interface Phalcon\Cli\RouterInterface

Methods

abstract public **setDefaultModule** (*mixed* \$moduleName)

...

abstract public **setDefaultTask** (*mixed* \$taskName)

...

abstract public **setDefaultAction** (*mixed* \$actionName)

...

abstract public **setDefaults** (*array* \$defaults)

...

abstract public **handle** ([*mixed* \$arguments])

...

abstract public **add** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **getModuleName** ()

...

abstract public **getTaskName** ()

...

abstract public **getActionName** ()

...

abstract public **getParams** ()

...

abstract public **getMatchedRoute** ()

...

abstract public **getMatches** ()

...

abstract public **wasMatched** ()

...

abstract public **getRoutes** ()

...

abstract public **getRouteById** (*mixed* \$id)

...

abstract public **getRouteByName** (*mixed* \$name)

...

Interface Phalcon\Cli\Router\RouteInterface

Methods

abstract public **compilePattern** (*mixed* \$pattern)

...

abstract public **reConfigure** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **getName** ()

...

abstract public **setName** (*mixed* \$name)

...

abstract public **getRouteId** ()

...

abstract public **getPattern** ()

...

abstract public **getCompiledPattern** ()

...

abstract public **getPaths** ()

...

abstract public **getReversedPaths** ()

...

abstract public static **reset** ()

...

Interface Phalcon\Cli\TaskInterface

Interface Phalcon\CryptInterface

Methods

abstract public **setCipher** (*mixed* \$cipher)

...

abstract public **getCipher** ()

...

```
abstract public setKey (mixed $key)
...
abstract public getKey ()
...
abstract public encrypt (mixed $text, [mixed $key])
...
abstract public decrypt (mixed $text, [mixed $key])
...
abstract public encryptBase64 (mixed $text, [mixed $key])
...
abstract public decryptBase64 (mixed $text, [mixed $key])
...
abstract public getAvailableCiphers ()
...
```

Interface Phalcon\Db\AdapterInterface

Methods

```
abstract public fetchOne (mixed $sqlQuery, [mixed $fetchMode], [mixed $placeholders])
...
abstract public fetchAll (mixed $sqlQuery, [mixed $fetchMode], [mixed $placeholders])
...
abstract public insert (mixed $table, array $values, [mixed $fields], [mixed $dataTypes])
...
abstract public update (mixed $table, mixed $fields, mixed $values, [mixed $whereCondition], [mixed $dataTypes])
...
abstract public delete (mixed $table, [mixed $whereCondition], [mixed $placeholders], [mixed $dataTypes])
...
abstract public getColumnList (mixed $columnList)
...
abstract public limit (mixed $sqlQuery, mixed $number)
...
abstract public tableExists (mixed $tableName, [mixed $schemaName])
...
abstract public viewExists (mixed $viewName, [mixed $schemaName])
...
```

```
abstract public forUpdate (mixed $sqlQuery)
...
abstract public sharedLock (mixed $sqlQuery)
...
abstract public createTable (mixed $tableName, mixed $schemaName, array $definition)
...
abstract public dropTable (mixed $tableName, [mixed $schemaName], [mixed $ifExists])
...
abstract public createView (mixed $viewName, array $definition, [mixed $schemaName])
...
abstract public dropView (mixed $viewName, [mixed $schemaName], [mixed $ifExists])
...
abstract public addColumn (mixed $tableName, mixed $schemaName, Phalcon\Db\ColumnInterface $column)
...
abstract public modifyColumn (mixed $tableName, mixed $schemaName, Phalcon\Db\ColumnInterface $column,
[Phalcon\Db\ColumnInterface $currentColumn])
...
abstract public dropColumn (mixed $tableName, mixed $schemaName, mixed $columnName)
...
abstract public addIndex (mixed $tableName, mixed $schemaName, Phalcon\Db/IndexInterface $index)
...
abstract public dropIndex (mixed $tableName, mixed $schemaName, mixed $indexName)
...
abstract public addPrimaryKey (mixed $tableName, mixed $schemaName, Phalcon\Db/IndexInterface $index)
...
abstract public dropPrimaryKey (mixed $tableName, mixed $schemaName)
...
abstract public addForeignKey (mixed $tableName, mixed $schemaName, Phalcon\Db\ReferenceInterface $reference)
...
abstract public dropForeignKey (mixed $tableName, mixed $schemaName, mixed $referenceName)
...
abstract public getColumnDefinition (Phalcon\Db\ColumnInterface $column)
...
abstract public listTables ([mixed $schemaName])
...
abstract public listViews ([mixed $schemaName])
```

```
...
abstract public getDescriptor ()
...
abstract public getConnectionId ()
...
abstract public getSQLStatement ()
...
abstract public getRealSQLStatement ()
...
abstract public getSQLVariables ()
...
abstract public getSQLBindTypes ()
...
abstract public getType ()
...
abstract public getDialectType ()
...
abstract public getDialect ()
...
abstract public connect ([array $descriptor])
...
abstract public query (mixed $sqlStatement, [mixed $placeholders], [mixed $dataTypes])
...
abstract public execute (mixed $sqlStatement, [mixed $placeholders], [mixed $dataTypes])
...
abstract public affectedRows ()
...
abstract public close ()
...
abstract public escapeIdentifier (mixed $identifier)
...
abstract public escapeString (mixed $str)
...
abstract public lastInsertId ([mixed $sequenceName])
...
abstract public begin ([mixed $nesting])
```

```
...
abstract public rollback ([mixed $nesting])
...
abstract public commit ([mixed $nesting])
...
abstract public isUnderTransaction ()
...
abstract public getInternalHandler ()
...
abstract public describeIndexes (mixed $table, [mixed $schema])
...
abstract public describeReferences (mixed $table, [mixed $schema])
...
abstract public tableOptions (mixed $tableName, [mixed $schemaName])
...
abstract public useExplicitIdValue ()
...
abstract public getDefaultIdValue ()
...
abstract public supportSequences ()
...
abstract public createSavepoint (mixed $name)
...
abstract public releaseSavepoint (mixed $name)
...
abstract public rollbackSavepoint (mixed $name)
...
abstract public setNestedTransactionsWithSavepoints (mixed $nestedTransactionsWithSavepoints)
...
abstract public isNestedTransactionsWithSavepoints ()
...
abstract public getNestedTransactionSavepointName ()
...
abstract public describeColumns (mixed $table, [mixed $schema])
...
```

Interface Phalcon\Db\ColumnInterface

Methods

abstract public **getSchemaName** ()

...

abstract public **getName** ()

...

abstract public **getType** ()

...

abstract public **getTypeReference** ()

...

abstract public **getTypeValues** ()

...

abstract public **getSize** ()

...

abstract public **getScale** ()

...

abstract public **isUnsigned** ()

...

abstract public **isNotNull** ()

...

abstract public **isPrimary** ()

...

abstract public **isAutoIncrement** ()

...

abstract public **isNumeric** ()

...

abstract public **isFirst** ()

...

abstract public **getAfterPosition** ()

...

abstract public **getBindType** ()

...

abstract public **getDefault** ()

...

abstract public **hasDefault** ()

...

abstract public static **__set_state** (*array* \$data)

...

Interface `Phalcon\Db\DialectInterface`

Methods

abstract public **limit** (*mixed* \$sqlQuery, *mixed* \$number)

...

abstract public **forUpdate** (*mixed* \$sqlQuery)

...

abstract public **sharedLock** (*mixed* \$sqlQuery)

...

abstract public **select** (*array* \$definition)

...

abstract public **getColumnList** (*array* \$columnList)

...

abstract public **getColumnDefinition** (*Phalcon\Db\ColumnInterface* \$column)

...

abstract public **addColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column)

...

abstract public **modifyColumn** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ColumnInterface* \$column, [*Phalcon\Db\ColumnInterface* \$currentColumn])

...

abstract public **dropColumn** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$columnName)

...

abstract public **addIndex** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

...

abstract public **dropIndex** (*mixed* \$tableName, *mixed* \$schemaName, *mixed* \$indexName)

...

abstract public **addPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db/IndexInterface* \$index)

...

abstract public **dropPrimaryKey** (*mixed* \$tableName, *mixed* \$schemaName)

...

abstract public **addForeignKey** (*mixed* \$tableName, *mixed* \$schemaName, *Phalcon\Db\ReferenceInterface* \$reference)

...


```

abstract public dropForeignKey (mixed $tableName, mixed $schemaName, mixed $referenceName)
...
abstract public createTable (mixed $tableName, mixed $schemaName, array $definition)
...
abstract public createView (mixed $viewName, array $definition, [mixed $schemaName])
...
abstract public dropTable (mixed $tableName, mixed $schemaName)
...
abstract public dropView (mixed $viewName, [mixed $schemaName], [mixed $ifExists])
...
abstract public tableExists (mixed $tableName, [mixed $schemaName])
...
abstract public viewExists (mixed $viewName, [mixed $schemaName])
...
abstract public describeColumns (mixed $table, [mixed $schema])
...
abstract public listTables ([mixed $schemaName])
...
abstract public describeIndexes (mixed $table, [mixed $schema])
...
abstract public describeReferences (mixed $table, [mixed $schema])
...
abstract public tableOptions (mixed $table, [mixed $schema])
...
abstract public supportsSavepoints ()
...
abstract public supportsReleaseSavepoints ()
...
abstract public createSavepoint (mixed $name)
...
abstract public releaseSavepoint (mixed $name)
...
abstract public rollbackSavepoint (mixed $name)
...

```

Interface Phalcon\Db\IndexInterface

Methods

```
abstract public getName ()  
...  
abstract public getColumns ()  
...  
abstract public getType ()  
...  
abstract public static __set_state (array $data)  
...
```

Interface Phalcon\Db\ReferenceInterface

Methods

```
abstract public getName ()  
...  
abstract public getSchemaName ()  
...  
abstract public getReferencedSchema ()  
...  
abstract public getColumns ()  
...  
abstract public getReferencedTable ()  
...  
abstract public getReferencedColumns ()  
...  
abstract public getOnDelete ()  
...  
abstract public getOnUpdate ()  
...  
abstract public static __set_state (array $data)  
...
```

Interface Phalcon\Db\ResultInterface

Methods

abstract public **execute** ()

...

abstract public **fetch** ()

...

abstract public **fetchArray** ()

...

abstract public **fetchAll** ()

...

abstract public **numRows** ()

...

abstract public **dataSeek** (*mixed* \$number)

...

abstract public **setFetchMode** (*mixed* \$fetchMode)

...

abstract public **getInternalResult** ()

...

Interface Phalcon\DiInterface

implements [ArrayAccess](#)

Methods

abstract public **set** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared])

...

abstract public **setShared** (*mixed* \$name, *mixed* \$definition)

...

abstract public **remove** (*mixed* \$name)

...

abstract public **attempt** (*mixed* \$name, *mixed* \$definition, [*mixed* \$shared])

...

abstract public **get** (*mixed* \$name, [*mixed* \$parameters])

...

abstract public **getShared** (*mixed* \$name, [*mixed* \$parameters])

...

```
abstract public setRaw (mixed $name, Phalcon\Di\ServiceInterface $rawDefinition)
...
abstract public getRaw (mixed $name)
...
abstract public getService (mixed $name)
...
abstract public has (mixed $name)
...
abstract public wasFreshInstance ()
...
abstract public getServices ()
...
abstract public static setDefault (Phalcon\DiInterface $dependencyInjector)
...
abstract public static getDefault ()
...
abstract public static reset ()
...
abstract public offsetExists (mixed $offset) inherited from ArrayAccess
...
abstract public offsetGet (mixed $offset) inherited from ArrayAccess
...
abstract public offsetSet (mixed $offset, mixed $value) inherited from ArrayAccess
...
abstract public offsetUnset (mixed $offset) inherited from ArrayAccess
...
```

Interface *Phalcon\Di\InjectionAwareInterface*

Methods

```
abstract public setDI (Phalcon\DiInterface $dependencyInjector)
...
abstract public getDI ()
...
```

Interface Phalcon\Di\ServiceInterface

Methods

```
abstract public getName ()
...
abstract public setShared (mixed $shared)
...
abstract public isShared ()
...
abstract public setDefinition (mixed $definition)
...
abstract public getDefinition ()
...
abstract public resolve ([mixed $parameters], [Phalcon\DiInterface $dependencyInjector])
...
abstract public setParameter (mixed $position, array $parameter)
...
abstract public static __set_state (array $attributes)
...
```

Interface Phalcon\DispatcherInterface

Methods

```
abstract public setActionSuffix (mixed $actionSuffix)
...
abstract public getActionSuffix ()
...
abstract public setDefaultNamespace (mixed $defaultNamespace)
...
abstract public setDefaultAction (mixed $actionName)
...
abstract public setNamespaceName (mixed $namespaceName)
...
abstract public setModuleName (mixed $moduleName)
...
abstract public setActionName (mixed $actionName)
```

```
...
abstract public getActionName ()
...
abstract public setParams (mixed $params)
...
abstract public getParams ()
...
abstract public setParam (mixed $param, mixed $value)
...
abstract public getParam (mixed $param, [mixed $filters])
...
abstract public hasParam (mixed $param)
...
abstract public isFinished ()
...
abstract public getReturnedValue ()
...
abstract public dispatch ()
...
abstract public forward (mixed $forward)
...
```

Interface Phalcon\EscaperInterface

Methods

```
abstract public setEncoding (mixed $encoding)
...
abstract public getEncoding ()
...
abstract public setHtmlQuoteType (mixed $quoteType)
...
abstract public escapeHtml (mixed $text)
...
abstract public escapeHtmlAttr (mixed $text)
...
abstract public escapeCss (mixed $css)
```

...

abstract public **escapeJs** (*mixed* \$js)

...

abstract public **escapeUrl** (*mixed* \$url)

...

Interface Phalcon\Events\EventInterface

Methods

abstract public **getData** ()

...

abstract public **setData** (*mixed* \$data)

...

abstract public **getType** ()

...

abstract public **setType** (*mixed* \$type)

...

abstract public **stop** ()

...

abstract public **isStopped** ()

...

abstract public **isCancelable** ()

...

Interface Phalcon\Events\EventsAwareInterface

Methods

abstract public **setEventManager** (*Phalcon\Events\ManagerInterface* \$eventsManager)

...

abstract public **getEventManager** ()

...

Interface Phalcon\Events\ManagerInterface

Methods

abstract public **attach** (*mixed* \$eventType, *mixed* \$handler)

...

```
abstract public detach (mixed $eventType, mixed $handler)
...
abstract public detachAll ([mixed $type])
...
abstract public fire (mixed $eventType, mixed $source, [mixed $data])
...
abstract public getListeners (mixed $type)
...
```

Interface Phalcon\FilterInterface

Methods

```
abstract public add (mixed $name, mixed $handler)
...
abstract public sanitize (mixed $value, mixed $filters)
...
abstract public getFilters ()
...
```

Interface Phalcon\Filter\UserFilterInterface

Methods

```
abstract public filter (mixed $value)
...
```

Interface Phalcon\FlashInterface

Methods

```
abstract public error (mixed $message)
...
abstract public notice (mixed $message)
...
abstract public success (mixed $message)
...
abstract public warning (mixed $message)
...
abstract public message (mixed $type, mixed $message)
```


...

Interface `Phalcon\Forms\ElementInterface`

Methods

abstract public **setForm** (*Phalcon\Forms\Form* \$form)

...

abstract public **getForm** ()

...

abstract public **setName** (*mixed* \$name)

...

abstract public **getName** ()

...

abstract public **setFilters** (*mixed* \$filters)

...

abstract public **addFilter** (*mixed* \$filter)

...

abstract public **getFilters** ()

...

abstract public **addValidators** (*array* \$validators, [*mixed* \$merge])

...

abstract public **addValidator** (*Phalcon\Validation\ValidatorInterface* \$validator)

...

abstract public **getValidators** ()

...

abstract public **prepareAttributes** ([*array* \$attributes], [*mixed* \$useChecked])

...

abstract public **setAttribute** (*mixed* \$attribute, *mixed* \$value)

...

abstract public **getAttribute** (*mixed* \$attribute, [*mixed* \$defaultValue])

...

abstract public **setAttributes** (*array* \$attributes)

...

abstract public **getAttributes** ()

...

abstract public **setUserOption** (*mixed* \$option, *mixed* \$value)

```
...
abstract public getUserOption (mixed $option, [mixed $defaultValue])
...
abstract public setUserOptions (array $options)
...
abstract public getUserOptions ()
...
abstract public setLabel (mixed $label)
...
abstract public getLabel ()
...
abstract public label ()
...
abstract public setDefault (mixed $value)
...
abstract public getDefault ()
...
abstract public getValue ()
...
abstract public getMessages ()
...
abstract public hasMessages ()
...
abstract public setMessages (Phalcon\Validation\Message\Group $group)
...
abstract public appendMessage (Phalcon\Validation\MessageInterface $message)
...
abstract public clear ()
...
abstract public render ([mixed $attributes])
...
```

Interface **Phalcon\Http\CookieInterface**

Methods

```
abstract public setValue (mixed $value)
```

```
...
abstract public getValue ([mixed $filters], [mixed $defaultValue])
...
abstract public send ()
...
abstract public delete ()
...
abstract public useEncryption (mixed $useEncryption)
...
abstract public isUsingEncryption ()
...
abstract public setExpiration (mixed $expire)
...
abstract public getExpiration ()
...
abstract public setPath (mixed $path)
...
abstract public getName ()
...
abstract public getPath ()
...
abstract public setDomain (mixed $domain)
...
abstract public getDomain ()
...
abstract public setSecure (mixed $secure)
...
abstract public getSecure ()
...
abstract public setHttpOnly (mixed $httpOnly)
...
abstract public getHttpOnly ()
...
```

Interface Phalcon\Http\RequestInterface

Methods

abstract public **get** ([*mixed* \$name], [*mixed* \$filters], [*mixed* \$defaultValue])

...

abstract public **getPost** ([*mixed* \$name], [*mixed* \$filters], [*mixed* \$defaultValue])

...

abstract public **getQuery** ([*mixed* \$name], [*mixed* \$filters], [*mixed* \$defaultValue])

...

abstract public **getServer** (*mixed* \$name)

...

abstract public **has** (*mixed* \$name)

...

abstract public **hasPost** (*mixed* \$name)

...

abstract public **hasPut** (*mixed* \$name)

...

abstract public **hasQuery** (*mixed* \$name)

...

abstract public **hasServer** (*mixed* \$name)

...

abstract public **getHeader** (*mixed* \$header)

...

abstract public **getScheme** ()

...

abstract public **isAjax** ()

...

abstract public **isSoapRequested** ()

...

abstract public **isSecureRequest** ()

...

abstract public **getRawBody** ()

...

abstract public **getServerAddress** ()

...

abstract public **getServerName** ()

```
...
abstract public getHttpHost ()
...
abstract public getPort ()
...
abstract public getClientAddress ([mixed $trustForwardedHeader])
...
abstract public getMethod ()
...
abstract public getUserAgent ()
...
abstract public isMethod (mixed $methods, [mixed $strict])
...
abstract public isPost ()
...
abstract public isGet ()
...
abstract public isPut ()
...
abstract public isHead ()
...
abstract public isDelete ()
...
abstract public isOptions ()
...
abstract public isPurge ()
...
abstract public isTrace ()
...
abstract public isConnect ()
...
abstract public hasFiles ([mixed $onlySuccessful])
...
abstract public getUploadedFiles ([mixed $onlySuccessful])
...
abstract public getHTTPReferer ()
```

```
...
abstract public getAcceptableContent ()
...
abstract public getBestAccept ()
...
abstract public getClientCharsets ()
...
abstract public getBestCharset ()
...
abstract public getLanguages ()
...
abstract public getBestLanguage ()
...
abstract public getBasicAuth ()
...
abstract public getDigestAuth ()
...
```

Interface Phalcon\Http\Request\FileInterface

Methods

```
abstract public getSize ()
...
abstract public getName ()
...
abstract public getTempName ()
...
abstract public getType ()
...
abstract public getRealType ()
...
abstract public moveTo (mixed $destination)
...
```

Interface Phalcon\Http\ResponseInterface

Methods

abstract public **setStatusCode** (*mixed* \$code, [*mixed* \$message])

...

abstract public **getHeaders** ()

...

abstract public **setHeader** (*mixed* \$name, *mixed* \$value)

...

abstract public **setRawHeader** (*mixed* \$header)

...

abstract public **resetHeaders** ()

...

abstract public **setExpires** ([DateTime](#) \$datetime)

...

abstract public **setNotModified** ()

...

abstract public **setContentType** (*mixed* \$contentType, [*mixed* \$charset])

...

abstract public **setContentLength** (*mixed* \$contentLength)

...

abstract public **redirect** ([*mixed* \$location], [*mixed* \$externalRedirect], [*mixed* \$statusCode])

...

abstract public **setContent** (*mixed* \$content)

...

abstract public **setJsonContent** (*mixed* \$content)

...

abstract public **appendContent** (*mixed* \$content)

...

abstract public **getContent** ()

...

abstract public **sendHeaders** ()

...

abstract public **sendCookies** ()

...

abstract public **send** ()

...

abstract public **setFileToSend** (*mixed* \$filePath, [*mixed* \$attachmentName])

...

Interface Phalcon\Http\Response\CookiesInterface

Methods

abstract public **useEncryption** (*mixed* \$useEncryption)

...

abstract public **isUsingEncryption** ()

...

abstract public **set** (*mixed* \$name, [*mixed* \$value], [*mixed* \$expire], [*mixed* \$path], [*mixed* \$secure], [*mixed* \$domain], [*mixed* \$httpOnly])

...

abstract public **get** (*mixed* \$name)

...

abstract public **has** (*mixed* \$name)

...

abstract public **delete** (*mixed* \$name)

...

abstract public **send** ()

...

abstract public **reset** ()

...

Interface Phalcon\Http\Response\HeadersInterface

Methods

abstract public **set** (*mixed* \$name, *mixed* \$value)

...

abstract public **get** (*mixed* \$name)

...

abstract public **setRaw** (*mixed* \$header)

...

abstract public **send** ()

...

abstract public **reset** ()

...

abstract public static **__set_state** (*array* \$data)

...

Interface `Phalcon\Image\AdapterInterface`

Methods

abstract public **resize** (*mixed* \$width, *mixed* \$height, *mixed* \$master)

...

abstract public **crop** (*mixed* \$width, *mixed* \$height, *mixed* \$offsetX, *mixed* \$offsetY)

...

abstract public **rotate** (*mixed* \$degrees)

...

abstract public **flip** (*mixed* \$direction)

...

abstract public **sharpen** (*mixed* \$amount)

...

abstract public **reflection** (*mixed* \$height, *mixed* \$opacity, *mixed* \$fadeIn)

...

abstract public **watermark** (*Phalcon\Image\Adapter* \$watermark, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity)

...

abstract public **text** (*mixed* \$text, *mixed* \$offsetX, *mixed* \$offsetY, *mixed* \$opacity, *mixed* \$color, *mixed* \$size, *mixed* \$fontfile)

...

abstract public **mask** (*Phalcon\Image\Adapter* \$watermark)

...

abstract public **background** (*mixed* \$color, *mixed* \$opacity)

...

abstract public **blur** (*mixed* \$radius)

...

abstract public **pixelate** (*mixed* \$amount)

...

abstract public **save** (*mixed* \$file, *mixed* \$quality)

...

abstract public **render** (*mixed* \$ext, *mixed* \$quality)

...

Interface Phalcon\Logger\AdapterInterface

Methods

abstract public **setFormatter** (*Phalcon\Logger\FormatterInterface* \$formatter)

...

abstract public **getFormatter** ()

...

abstract public **setLogLevel** (*mixed* \$level)

...

abstract public **getLogLevel** ()

...

abstract public **log** (*mixed* \$type, [*mixed* \$message], [*array* \$context])

...

abstract public **begin** ()

...

abstract public **commit** ()

...

abstract public **rollback** ()

...

abstract public **close** ()

...

abstract public **debug** (*mixed* \$message, [*array* \$context])

...

abstract public **error** (*mixed* \$message, [*array* \$context])

...

abstract public **info** (*mixed* \$message, [*array* \$context])

...

abstract public **notice** (*mixed* \$message, [*array* \$context])

...

abstract public **warning** (*mixed* \$message, [*array* \$context])

...

abstract public **alert** (*mixed* \$message, [*array* \$context])

...

abstract public **emergency** (*mixed* \$message, [*array* \$context])

...

Interface Phalcon\Logger\FormatterInterface

Methods

abstract public **format** (*mixed* \$message, *mixed* \$type, *mixed* \$timestamp, [*mixed* \$context])

...

Interface Phalcon\Mvc\CollectionInterface

Methods

abstract public **setId** (*mixed* \$id)

...

abstract public **getId** ()

...

abstract public **getReservedAttributes** ()

...

abstract public **getSource** ()

...

abstract public **setConnectionService** (*mixed* \$connectionService)

...

abstract public **getConnection** ()

...

abstract public **setDirtyState** (*mixed* \$dirtyState)

...

abstract public **getDirtyState** ()

...

abstract public static **cloneResult** (*Phalcon\Mvc\CollectionInterface* \$collection, *array* \$document)

...

abstract public **fireEvent** (*mixed* \$eventName)

...

abstract public **fireEventCancel** (*mixed* \$eventName)

...

abstract public **validationHasFailed** ()

...

abstract public **getMessages** ()

...

abstract public **appendMessage** (*Phalcon\Mvc\Model\MessageInterface* \$message)

```
...
abstract public save ()
...
abstract public static findById (mixed $id)
...
abstract public static findFirst ([array $parameters])
...
abstract public static find ([array $parameters])
...
abstract public static count ([array $parameters])
...
abstract public delete ()
...
```

Interface Phalcon\Mvc\Collection\BehaviorInterface

Methods

```
abstract public notify (mixed $type, Phalcon\Mvc\CollectionInterface $collection)
...
abstract public missingMethod (Phalcon\Mvc\CollectionInterface $collection, mixed $method, [mixed $arguments])
...
```

Interface Phalcon\Mvc\Collection\ManagerInterface

Methods

```
abstract public setCustomEventManager (Phalcon\Mvc\CollectionInterface $model, Phalcon\Events\ManagerInterface $eventsManager)
...
abstract public getCustomEventManager (Phalcon\Mvc\CollectionInterface $model)
...
abstract public initialize (Phalcon\Mvc\CollectionInterface $model)
...
abstract public isInitialized (mixed $modelName)
...
abstract public getLastInitialized ()
...
abstract public setConnectionService (Phalcon\Mvc\CollectionInterface $model, mixed $connectionService)
```

...

abstract public **useImplicitObjectIds** (*Phalcon\Mvc\CollectionInterface* \$model, *mixed* \$useImplicitObjectIds)

...

abstract public **isUsingImplicitObjectIds** (*Phalcon\Mvc\CollectionInterface* \$model)

...

abstract public **getConnection** (*Phalcon\Mvc\CollectionInterface* \$model)

...

abstract public **notifyEvent** (*mixed* \$eventName, *Phalcon\Mvc\CollectionInterface* \$model)

...

abstract public **addBehavior** (*Phalcon\Mvc\CollectionInterface* \$model, *Phalcon\Mvc\Collection\BehaviorInterface* \$behavior)

...

Interface Phalcon\Mvc\ControllerInterface

Interface Phalcon\Mvc\Controller\BindModelInterface

Methods

abstract public static **getModelName** ()

...

Interface Phalcon\Mvc\DispatcherInterface

implements Phalcon\DispatcherInterface

Methods

abstract public **setControllerSuffix** (*mixed* \$controllerSuffix)

...

abstract public **setDefaultController** (*mixed* \$controllerName)

...

abstract public **setControllerName** (*mixed* \$controllerName)

...

abstract public **getControllerName** ()

...

abstract public **getLastController** ()

...

abstract public **getActiveController** ()

...

abstract public **setActionSuffix** (*mixed* \$actionSuffix) inherited from *Phalcon\DispatcherInterface*
...
abstract public **getActionSuffix** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **setDefaultNamespace** (*mixed* \$defaultNamespace) inherited from *Phalcon\DispatcherInterface*
...
abstract public **setDefaultAction** (*mixed* \$actionName) inherited from *Phalcon\DispatcherInterface*
...
abstract public **setNamespaceName** (*mixed* \$namespaceName) inherited from *Phalcon\DispatcherInterface*
...
abstract public **setModuleName** (*mixed* \$moduleName) inherited from *Phalcon\DispatcherInterface*
...
abstract public **setActionName** (*mixed* \$actionName) inherited from *Phalcon\DispatcherInterface*
...
abstract public **getActionName** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **setParams** (*mixed* \$params) inherited from *Phalcon\DispatcherInterface*
...
abstract public **getParams** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **setParam** (*mixed* \$param, *mixed* \$value) inherited from *Phalcon\DispatcherInterface*
...
abstract public **getParam** (*mixed* \$param, [*mixed* \$filters]) inherited from *Phalcon\DispatcherInterface*
...
abstract public **hasParam** (*mixed* \$param) inherited from *Phalcon\DispatcherInterface*
...
abstract public **isFinished** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **getReturnedValue** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **dispatch** () inherited from *Phalcon\DispatcherInterface*
...
abstract public **forward** (*mixed* \$forward) inherited from *Phalcon\DispatcherInterface*
...

Interface Phalcon\Mvc\EntityInterface

Methods

abstract public **readAttribute** (*mixed* \$attribute)
...
abstract public **writeAttribute** (*mixed* \$attribute, *mixed* \$value)
...

Interface Phalcon\Mvc\Micro\CollectionInterface

Methods

abstract public **setPrefix** (*mixed* \$prefix)
...
abstract public **getPrefix** ()
...
abstract public **getHandlers** ()
...
abstract public **setHandler** (*mixed* \$handler, [*mixed* \$lazy])
...
abstract public **setLazy** (*mixed* \$lazy)
...
abstract public **isLazy** ()
...
abstract public **getHandler** ()
...
abstract public **map** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])
...
abstract public **get** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])
...
abstract public **post** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])
...
abstract public **put** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])
...
abstract public **patch** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])
...
abstract public **head** (*mixed* \$routeProvider, *mixed* \$handler, [*mixed* \$name])

...

abstract public **delete** (*mixed* \$routePattern, *mixed* \$handler, [*mixed* \$name])

...

abstract public **options** (*mixed* \$routePattern, *mixed* \$handler, [*mixed* \$name])

...

Interface `Phalcon\Mvc\Micro\MiddlewareInterface`

Methods

abstract public **call** (*Phalcon\Mvc\Micro* \$application)

...

Interface `Phalcon\Mvc\ModelInterface`

Methods

abstract public **setTransaction** (*Phalcon\Mvc\Model\TransactionInterface* \$transaction)

...

abstract public **getSource** ()

...

abstract public **getSchema** ()

...

abstract public **setConnectionService** (*mixed* \$connectionService)

...

abstract public **setWriteConnectionService** (*mixed* \$connectionService)

...

abstract public **setReadConnectionService** (*mixed* \$connectionService)

...

abstract public **getReadConnectionService** ()

...

abstract public **getWriteConnectionService** ()

...

abstract public **getReadConnection** ()

...

abstract public **getWriteConnection** ()

...

abstract public **setDirtyState** (*mixed* \$dirtyState)

...


```
abstract public getDirtyState ()
...
abstract public assign (array $data, [mixed $dataColumnMap], [mixed $whiteList])
...
abstract public static cloneResultMap (mixed $base, array $data, mixed $columnMap, [mixed $dirtyState], [mixed $keepSnapshots])
...
abstract public static cloneResult (Phalcon\Mvc\ModelInterface $base, array $data, [mixed $dirtyState])
...
abstract public static cloneResultMapHydrate (array $data, mixed $columnMap, mixed $hydrationMode)
...
abstract public static find ([mixed $parameters])
...
abstract public static findFirst ([mixed $parameters])
...
abstract public static query ([Phalcon\DiInterface $dependencyInjector])
...
abstract public static count ([mixed $parameters])
...
abstract public static sum ([mixed $parameters])
...
abstract public static maximum ([mixed $parameters])
...
abstract public static minimum ([mixed $parameters])
...
abstract public static average ([mixed $parameters])
...
abstract public fireEvent (mixed $eventName)
...
abstract public fireEventCancel (mixed $eventName)
...
abstract public appendMessage (Phalcon\Mvc\Model\MessageInterface $message)
...
abstract public validationHasFailed ()
...
abstract public getMessages ()
```

```
...
abstract public save ([mixed $data], [mixed $whiteList])
...
abstract public create ([mixed $data], [mixed $whiteList])
...
abstract public update ([mixed $data], [mixed $whiteList])
...
abstract public delete ()
...
abstract public getOperationMade ()
...
abstract public refresh ()
...
abstract public skipOperation (mixed $skip)
...
abstract public getRelated (mixed $alias, [mixed $arguments])
...
abstract public setSnapshotData (array $data, [mixed $columnMap])
...
abstract public reset ()
...
```

Interface `Phalcon\Mvc\Model\BehaviorInterface`

Methods

```
abstract public notify (mixed $type, Phalcon\Mvc\ModelInterface $model)
...
abstract public missingMethod (Phalcon\Mvc\ModelInterface $model, mixed $method, [mixed $arguments])
...
```

Interface `Phalcon\Mvc\Model\CriteriaInterface`

Methods

```
abstract public setModelName (mixed $modelName)
...
abstract public getModelName ()
...
```

```
abstract public bind (array $bindParams)
...
abstract public bindTypes (array $bindTypes)
...
abstract public where (mixed $conditions)
...
abstract public conditions (mixed $conditions)
...
abstract public orderBy (mixed $orderColumns)
...
abstract public limit (mixed $limit, [mixed $offset])
...
abstract public forUpdate ([mixed $forUpdate])
...
abstract public sharedLock ([mixed $sharedLock])
...
abstract public andWhere (mixed $conditions, [mixed $bindParams], [mixed $bindTypes])
...
abstract public orWhere (mixed $conditions, [mixed $bindParams], [mixed $bindTypes])
...
abstract public betweenWhere (mixed $expr, mixed $minimum, mixed $maximum)
...
abstract public notBetweenWhere (mixed $expr, mixed $minimum, mixed $maximum)
...
abstract public inWhere (mixed $expr, array $values)
...
abstract public notInWhere (mixed $expr, array $values)
...
abstract public getWhere ()
...
abstract public getConditions ()
...
abstract public getLimit ()
...
abstract public getOrderBy ()
...
```

abstract public **getParams** ()

...

abstract public **execute** ()

...

Interface **Phalcon\Mvc\Model\ManagerInterface**

Methods

abstract public **initialize** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **setModelSource** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$source)

...

abstract public **getModelSource** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **setModelSchema** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$schema)

...

abstract public **getModelSchema** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **setConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

...

abstract public **setReadConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

...

abstract public **getReadConnectionService** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **setWriteConnectionService** (*Phalcon\Mvc\ModelInterface* \$model, *mixed* \$connectionService)

...

abstract public **getWriteConnectionService** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **getReadConnection** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **getWriteConnection** (*Phalcon\Mvc\ModelInterface* \$model)

...

abstract public **isInitialized** (*mixed* \$modelName)

...

abstract public **getLastInitialized** ()

...

```
abstract public load (mixed $modelName, [mixed $newInstance])
...
abstract public addHasOne (Phalcon\Mvc\ModelInterface $model, mixed $fields, mixed $referencedModel, mixed
$referencedFields, [mixed $options])
...
abstract public addBelongsTo (Phalcon\Mvc\ModelInterface $model, mixed $fields, mixed $referencedModel, mixed
$referencedFields, [mixed $options])
...
abstract public addHasMany (Phalcon\Mvc\ModelInterface $model, mixed $fields, mixed $referencedModel, mixed
$referencedFields, [mixed $options])
...
abstract public existsBelongsTo (mixed $modelName, mixed $modelRelation)
...
abstract public existsHasMany (mixed $modelName, mixed $modelRelation)
...
abstract public existsHasOne (mixed $modelName, mixed $modelRelation)
...
abstract public getBelongsToRecords (mixed $method, mixed $modelName, mixed $modelRelation, Phal-
con\Mvc\ModelInterface $record, [mixed $parameters])
...
abstract public getHasManyRecords (mixed $method, mixed $modelName, mixed $modelRelation, Phal-
con\Mvc\ModelInterface $record, [mixed $parameters])
...
abstract public getHasOneRecords (mixed $method, mixed $modelName, mixed $modelRelation, Phal-
con\Mvc\ModelInterface $record, [mixed $parameters])
...
abstract public getBelongsTo (Phalcon\Mvc\ModelInterface $model)
...
abstract public getHasMany (Phalcon\Mvc\ModelInterface $model)
...
abstract public getHasOne (Phalcon\Mvc\ModelInterface $model)
...
abstract public getHasOneAndHasMany (Phalcon\Mvc\ModelInterface $model)
...
abstract public getRelations (mixed $modelName)
...
abstract public getRelationsBetween (mixed $first, mixed $second)
...
```

```
abstract public createQuery (mixed $sql)
...
abstract public executeQuery (mixed $sql, [mixed $placeholders])
...
abstract public createBuilder ([mixed $params])
...
abstract public addBehavior (Phalcon\Mvc\ModelInterface $model, Phalcon\Mvc\Model\BehaviorInterface $behavior)
...
abstract public notifyEvent (mixed $eventName, Phalcon\Mvc\ModelInterface $model)
...
abstract public missingMethod (Phalcon\Mvc\ModelInterface $model, mixed $eventName, mixed $data)
...
abstract public getLastQuery ()
...
abstract public getRelationByAlias (mixed $modelName, mixed $alias)
...
```

Interface **Phalcon\Mvc\Model\MessageInterface**

Methods

```
abstract public setType (mixed $type)
...
abstract public getType ()
...
abstract public setMessage (mixed $message)
...
abstract public getMessage ()
...
abstract public setField (mixed $field)
...
abstract public getField ()
...
abstract public __toString ()
...
abstract public static __set_state (array $message)
...
```

Interface Phalcon\Mvc\Model\MetaDataInterface

Methods

```
abstract public setStrategy (Phalcon\Mvc\Model\MetaData\StrategyInterface $strategy)
...
abstract public getStrategy ()
...
abstract public readMetaData (Phalcon\Mvc\ModelInterface $model)
...
abstract public readMetaDataIndex (Phalcon\Mvc\ModelInterface $model, mixed $index)
...
abstract public writeMetaDataIndex (Phalcon\Mvc\ModelInterface $model, mixed $index, mixed $data)
...
abstract public readColumnMap (Phalcon\Mvc\ModelInterface $model)
...
abstract public readColumnMapIndex (Phalcon\Mvc\ModelInterface $model, mixed $index)
...
abstract public getAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getPrimaryKeyAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getNonPrimaryKeyAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getNotNullAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getDataTypes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getDataTypesNumeric (Phalcon\Mvc\ModelInterface $model)
...
abstract public getIdentityField (Phalcon\Mvc\ModelInterface $model)
...
abstract public getBindTypes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getAutomaticCreateAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getAutomaticUpdateAttributes (Phalcon\Mvc\ModelInterface $model)
```

```
...
abstract public setAutomaticCreateAttributes (Phalcon\Mvc\ModelInterface $model, array $attributes)
...
abstract public setAutomaticUpdateAttributes (Phalcon\Mvc\ModelInterface $model, array $attributes)
...
abstract public setEmptyStringAttributes (Phalcon\Mvc\ModelInterface $model, array $attributes)
...
abstract public getEmptyStringAttributes (Phalcon\Mvc\ModelInterface $model)
...
abstract public getDefaultValues (Phalcon\Mvc\ModelInterface $model)
...
abstract public getColumnMap (Phalcon\Mvc\ModelInterface $model)
...
abstract public getReverseColumnMap (Phalcon\Mvc\ModelInterface $model)
...
abstract public hasAttribute (Phalcon\Mvc\ModelInterface $model, mixed $attribute)
...
abstract public isEmpty ()
...
abstract public reset ()
...
abstract public read (mixed $key)
...
abstract public write (mixed $key, mixed $data)
...
```

Interface *Phalcon\Mvc\Model\MetaData\StrategyInterface*

Methods

```
abstract public getMetaData (Phalcon\Mvc\ModelInterface $model, Phalcon\DiInterface $dependencyInjector)
...
abstract public getColumnMaps (Phalcon\Mvc\ModelInterface $model, Phalcon\DiInterface $dependencyInjector)
...
```


Interface Phalcon\Mvc\Model\QueryInterface

Methods

```
abstract public parse ()
...
abstract public cache (mixed $cacheOptions)
...
abstract public getCacheOptions ()
...
abstract public setUniqueRow (mixed $uniqueRow)
...
abstract public getUniqueRow ()
...
abstract public execute ([mixed $bindParam], [mixed $bindTypes])
...
```

Interface Phalcon\Mvc\Model\Query\BuilderInterface

Constants

```
string OPERATOR_OR
string OPERATOR_AND
```

Methods

```
abstract public columns (mixed $columns)
...
abstract public getColumns ()
...
abstract public from (mixed $models)
...
abstract public addFrom (mixed $model, [mixed $alias])
...
abstract public getFrom ()
...
abstract public join (mixed $model, [mixed $conditions], [mixed $alias])
...
abstract public innerJoin (mixed $model, [mixed $conditions], [mixed $alias])
```

```
...
abstract public leftJoin (mixed $model, [mixed $conditions], [mixed $alias])
...
abstract public rightJoin (mixed $model, [mixed $conditions], [mixed $alias])
...
abstract public getJoins ()
...
abstract public where (mixed $conditions, [mixed $bindParam], [mixed $bindTypes])
...
abstract public andWhere (mixed $conditions, [mixed $bindParam], [mixed $bindTypes])
...
abstract public orWhere (mixed $conditions, [mixed $bindParam], [mixed $bindTypes])
...
abstract public betweenWhere (mixed $expr, mixed $minimum, mixed $maximum, [mixed $operator])
...
abstract public notBetweenWhere (mixed $expr, mixed $minimum, mixed $maximum, [mixed $operator])
...
abstract public inWhere (mixed $expr, array $values, [mixed $operator])
...
abstract public notInWhere (mixed $expr, array $values, [mixed $operator])
...
abstract public getWhere ()
...
abstract public orderBy (mixed $orderBy)
...
abstract public getOrderBy ()
...
abstract public having (mixed $having)
...
abstract public getHaving ()
...
abstract public limit (mixed $limit, [mixed $offset])
...
abstract public getLimit ()
...
abstract public groupBy (mixed $group)
```

...

abstract public **getGroupBy** ()

...

abstract public **getPhql** ()

...

abstract public **getQuery** ()

...

Interface Phalcon\Mvc\Model\Query\StatusInterface

Methods

abstract public **getModel** ()

...

abstract public **getMessages** ()

...

abstract public **success** ()

...

Interface Phalcon\Mvc\Model\RelationInterface

Methods

abstract public **setIntermediateRelation** (*mixed* \$intermediateFields, *mixed* \$intermediateModel, *mixed* \$intermediateReferencedFields)

...

abstract public **isReusable** ()

...

abstract public **getType** ()

...

abstract public **getReferencedModel** ()

...

abstract public **getFields** ()

...

abstract public **getReferencedFields** ()

...

abstract public **getOptions** ()

...

abstract public **getOption** (*mixed* \$name)

```
...
abstract public isForeignKey ()
...
abstract public getForeignKey ()
...
abstract public isThrough ()
...
abstract public getIntermediateFields ()
...
abstract public getIntermediateModel ()
...
abstract public getIntermediateReferencedFields ()
...
```

Interface Phalcon\Mvc\Model\ResultInterface

Methods

```
abstract public setDirtyState (mixed $dirtyState)
...
```

Interface Phalcon\Mvc\Model\ResultsetInterface

Methods

```
abstract public getType ()
...
abstract public getFirst ()
...
abstract public getLast ()
...
abstract public setIsFresh (mixed $isFresh)
...
abstract public isFresh ()
...
abstract public getCache ()
...
abstract public toArray ()
...
```

Interface Phalcon\Mvc\Model\TransactionInterface

Methods

abstract public **setTransactionManager** (*Phalcon\Mvc\Model\Transaction\ManagerInterface* \$manager)

...

abstract public **begin** ()

...

abstract public **commit** ()

...

abstract public **rollback** ([*mixed* \$rollbackMessage], [*mixed* \$rollbackRecord])

...

abstract public **getConnection** ()

...

abstract public **setIsNewTransaction** (*mixed* \$isNew)

...

abstract public **setRollbackOnAbort** (*mixed* \$rollbackOnAbort)

...

abstract public **isManaged** ()

...

abstract public **getMessages** ()

...

abstract public **isValid** ()

...

abstract public **setRollbackedRecord** (*Phalcon\Mvc\ModelInterface* \$record)

...

Interface Phalcon\Mvc\Model\Transaction\ManagerInterface

Methods

abstract public **has** ()

...

abstract public **get** ([*mixed* \$autoBegin])

...

abstract public **rollbackPendent** ()

...

abstract public **commit** ()

```
...
abstract public rollback ([mixed $collect])
...
abstract public notifyRollback (Phalcon\Mvc\Model\TransactionInterface $transaction)
...
abstract public notifyCommit (Phalcon\Mvc\Model\TransactionInterface $transaction)
...
abstract public collectTransactions ()
...
```

Interface *Phalcon\Mvc\Model\ValidatorInterface*

Methods

```
abstract public getMessages ()
...
abstract public validate (Phalcon\Mvc\EntityInterface $record)
...
```

Interface *Phalcon\Mvc\ModuleDefinitionInterface*

Methods

```
abstract public registerAutoloaders ([Phalcon\DiInterface $dependencyInjector])
...
abstract public registerServices (Phalcon\DiInterface $dependencyInjector)
...
```

Interface *Phalcon\Mvc\RouterInterface*

Methods

```
abstract public setDefaultModule (mixed $moduleName)
...
abstract public setDefaultController (mixed $controllerName)
...
abstract public setDefaultAction (mixed $actionName)
...
abstract public setDefaults (array $defaults)
...
```

```
abstract public handle ([mixed $uri])
...
abstract public add (mixed $pattern, [mixed $paths], [mixed $httpMethods])
...
abstract public addGet (mixed $pattern, [mixed $paths])
...
abstract public addPost (mixed $pattern, [mixed $paths])
...
abstract public addPut (mixed $pattern, [mixed $paths])
...
abstract public addPatch (mixed $pattern, [mixed $paths])
...
abstract public addDelete (mixed $pattern, [mixed $paths])
...
abstract public addOptions (mixed $pattern, [mixed $paths])
...
abstract public addHead (mixed $pattern, [mixed $paths])
...
abstract public addPurge (mixed $pattern, [mixed $paths])
...
abstract public addTrace (mixed $pattern, [mixed $paths])
...
abstract public addConnect (mixed $pattern, [mixed $paths])
...
abstract public mount (Phalcon\Mvc\Router\GroupInterface $group)
...
abstract public clear ()
...
abstract public getModuleName ()
...
abstract public getNamespaceName ()
...
abstract public getControllerName ()
...
abstract public getActionName ()
...
```

```
abstract public getParams ()
...
abstract public getMatchedRoute ()
...
abstract public getMatches ()
...
abstract public wasMatched ()
...
abstract public getRoutes ()
...
abstract public getRouteById (mixed $id)
...
abstract public getRouteByName (mixed $name)
...
```

Interface Phalcon\Mvc\Router\GroupInterface

Methods

```
abstract public setHostname (mixed $hostname)
...
abstract public getHostname ()
...
abstract public setPrefix (mixed $prefix)
...
abstract public getPrefix ()
...
abstract public beforeMatch (mixed $beforeMatch)
...
abstract public getBeforeMatch ()
...
abstract public setPaths (mixed $paths)
...
abstract public getPaths ()
...
abstract public getRoutes ()
...
```


abstract public **add** (*mixed* \$pattern, [*mixed* \$paths], [*mixed* \$httpMethods])

...

abstract public **addGet** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addPost** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addPut** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addPatch** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addDelete** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addOptions** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **addHead** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **clear** ()

...

Interface Phalcon\Mvc\Router\RouteInterface

Methods

abstract public **setHostname** (*mixed* \$hostname)

...

abstract public **getHostname** ()

...

abstract public **compilePattern** (*mixed* \$pattern)

...

abstract public **via** (*mixed* \$httpMethods)

...

abstract public **reConfigure** (*mixed* \$pattern, [*mixed* \$paths])

...

abstract public **getName** ()

...

abstract public **setName** (*mixed* \$name)

...

abstract public **setHttpMethods** (*mixed* \$httpMethods)

...

abstract public **getRouteId** ()

...

abstract public **getPattern** ()

...

abstract public **getCompiledPattern** ()

...

abstract public **getPaths** ()

...

abstract public **getReversedPaths** ()

...

abstract public **getHttpMethods** ()

...

abstract public static **reset** ()

...

Interface Phalcon\Mvc\UrlInterface

Methods

abstract public **setBaseUri** (*mixed* \$baseUri)

...

abstract public **getBaseUri** ()

...

abstract public **setBasePath** (*mixed* \$basePath)

...

abstract public **getBasePath** ()

...

abstract public **get** ([*mixed* \$uri], [*mixed* \$args], [*mixed* \$local])

...

abstract public **path** ([*mixed* \$path])

...

Interface Phalcon\Mvc\ViewBaseInterface

Methods

abstract public **setViewsDir** (*mixed* \$viewsDir)
...
abstract public **getViewsDir** ()
...
abstract public **setParamToView** (*mixed* \$key, *mixed* \$value)
...
abstract public **setVar** (*mixed* \$key, *mixed* \$value)
...
abstract public **getParamsToView** ()
...
abstract public **getCache** ()
...
abstract public **cache** ([*mixed* \$options])
...
abstract public **setContent** (*mixed* \$content)
...
abstract public **getContent** ()
...
abstract public **partial** (*mixed* \$partialPath, [*mixed* \$params])
...

Interface Phalcon\Mvc\ViewInterface

implements [Phalcon\Mvc\ViewBaseInterface](#)

Methods

abstract public **setLayoutsDir** (*mixed* \$layoutsDir)
...
abstract public **getLayoutsDir** ()
...
abstract public **setPartialsDir** (*mixed* \$partialsDir)
...
abstract public **getPartialsDir** ()
...

```
abstract public setBasePath (mixed $basePath)
...
abstract public getBasePath ()
...
abstract public setRenderLevel (mixed $level)
...
abstract public setMainView (mixed $viewPath)
...
abstract public getMainView ()
...
abstract public setLayout (mixed $layout)
...
abstract public getLayout ()
...
abstract public setTemplateBefore (mixed $templateBefore)
...
abstract public cleanTemplateBefore ()
...
abstract public setTemplateAfter (mixed $templateAfter)
...
abstract public cleanTemplateAfter ()
...
abstract public getControllerName ()
...
abstract public getActionName ()
...
abstract public getParams ()
...
abstract public start ()
...
abstract public registerEngines (array $engines)
...
abstract public render (mixed $controllerName, mixed $actionName, [mixed $params])
...
abstract public pick (mixed $renderView)
...
```

```
abstract public finish ()
...
abstract public getActiveRenderPath ()
...
abstract public disable ()
...
abstract public enable ()
...
abstract public reset ()
...
abstract public isDisabled ()
...
abstract public setViewsDir (mixed $viewsDir) inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public getViewsDir () inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public setParamToView (mixed $key, mixed $value) inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public setVar (mixed $key, mixed $value) inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public getParamsToView () inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public getCache () inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public cache ([mixed $options]) inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public setContent (mixed $content) inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public getContent () inherited from Phalcon\Mvc\ViewBaseInterface
...
abstract public partial (mixed $partialPath, [mixed $params]) inherited from Phalcon\Mvc\ViewBaseInterface
...
```

Interface Phalcon\Mvc\View\EngineInterface

Methods

abstract public **getContent** ()

...

abstract public **partial** (*mixed* \$partialPath, [*mixed* \$params])

...

abstract public **render** (*mixed* \$path, *mixed* \$params, [*mixed* \$mustClean])

...

Interface Phalcon\Paginator\AdapterInterface

Methods

abstract public **setCurrentPage** (*mixed* \$page)

...

abstract public **getPaginate** ()

...

abstract public **setLimit** (*mixed* \$limit)

...

abstract public **getLimit** ()

...

Interface Phalcon\Session\AdapterInterface

Methods

abstract public **start** ()

...

abstract public **setOptions** (*array* \$options)

...

abstract public **getOptions** ()

...

abstract public **get** (*mixed* \$index, [*mixed* \$defaultValue])

...

abstract public **set** (*mixed* \$index, *mixed* \$value)

...

abstract public **has** (*mixed* \$index)

...

```
abstract public remove (mixed $index)
...
abstract public getId ()
...
abstract public isStarted ()
...
abstract public destroy ([mixed $removeData])
...
abstract public regenerateId ([mixed $deleteOldSession])
...
abstract public setName (mixed $name)
...
abstract public getName ()
...
```

Interface Phalcon\Session\BagInterface

Methods

```
abstract public initialize ()
...
abstract public destroy ()
...
abstract public set (mixed $property, mixed $value)
...
abstract public get (mixed $property, [mixed $defaultValue])
...
abstract public has (mixed $property)
...
abstract public __set (mixed $property, mixed $value)
...
abstract public __get (mixed $property)
...
abstract public __isset (mixed $property)
...
```

Interface Phalcon\Translate\AdapterInterface

Methods

abstract public **t** (*mixed* \$translateKey, [*mixed* \$placeholders])

...

abstract public **query** (*mixed* \$index, [*mixed* \$placeholders])

...

abstract public **exists** (*mixed* \$index)

...

Interface Phalcon\Translate\InterpolatorInterface

Methods

abstract public **replacePlaceholders** (*mixed* \$translation, [*mixed* \$placeholders])

...

Interface Phalcon\ValidationInterface

Methods

abstract public **validate** ([*mixed* \$data], [*mixed* \$entity])

...

abstract public **add** (*mixed* \$field, *Phalcon\Validation\ValidatorInterface* \$validator)

...

abstract public **rule** (*mixed* \$field, *Phalcon\Validation\ValidatorInterface* \$validator)

...

abstract public **rules** (*mixed* \$field, array \$validators)

...

abstract public **setFilters** (*mixed* \$field, *mixed* \$filters)

...

abstract public **getFilters** ([*mixed* \$field])

...

abstract public **getValidators** ()

...

abstract public **getEntity** ()

...

abstract public **setDefaultMessages** ([array \$messages])

...


```
abstract public getDefaultMessage (mixed $type)
...
abstract public getMessages ()
...
abstract public setLabels (array $labels)
...
abstract public getLabel (mixed $field)
...
abstract public appendMessage (Phalcon\Validation\MessageInterface $message)
...
abstract public bind (mixed $entity, mixed $data)
...
abstract public getValue (mixed $field)
...
```

Interface **Phalcon\Validation\MessageInterface**

Methods

```
abstract public setType (mixed $type)
...
abstract public getType ()
...
abstract public setMessage (mixed $message)
...
abstract public getMessage ()
...
abstract public setField (mixed $field)
...
abstract public getField ()
...
abstract public __toString ()
...
abstract public static __set_state (array $message)
...
```

Interface Phalcon\Validation\ValidatorInterface

Methods

abstract public **hasOption** (*mixed* \$key)

...

abstract public **getOption** (*mixed* \$key, [*mixed* \$defaultValue])

...

abstract public **validate** (*Phalcon\Validation* \$validation, *mixed* \$attribute)

...

Legal

License

Phalcon is brought to you by the Phalcon Team! [[Twitter](#) - [Google Plus](#) - [Github](#)]

The Phalcon PHP Framework is released under the [new BSD license](#). Except where otherwise noted, content on this site is licensed under the [Creative Commons Attribution 3.0 License](#).

If you love Phalcon please return something to the community! :)

CHAPTER 3

Previous Versions

- 2.0.0 <<https://docs.phalconphp.com/id/2.0.0/>>

CHAPTER 4

Format lain

- PDF
- HTML in one Zip
- ePub